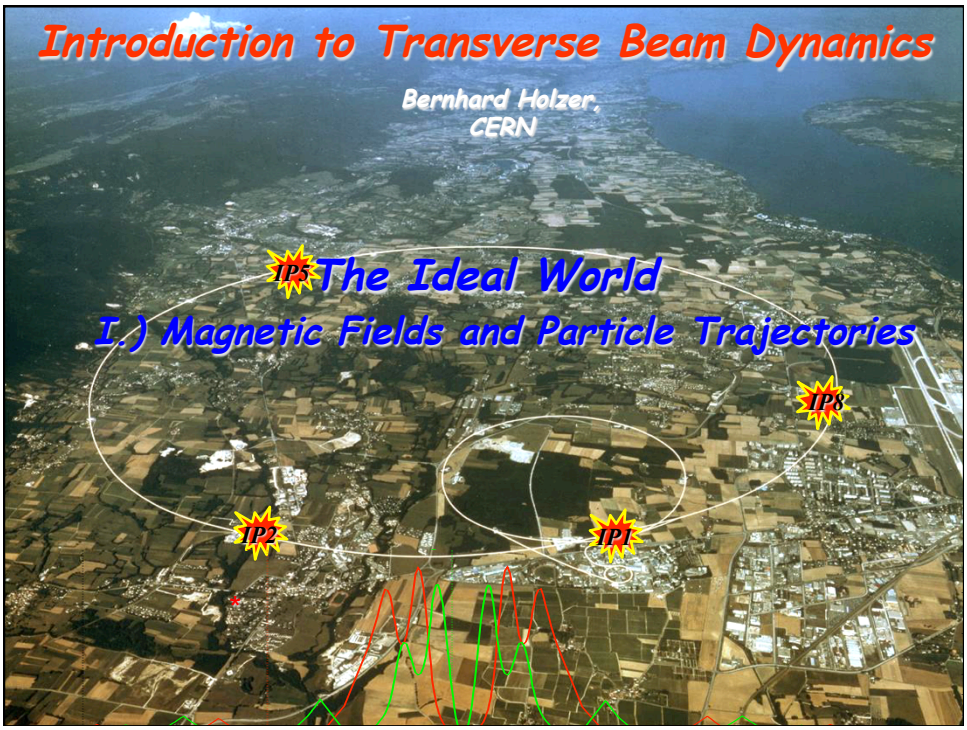

Luminosity Run of a typical storage ring:

LHC Storage Ring: Protons accelerated and stored for 12 hours
distance of particles travelling at about $v \approx c$
$L = 10^{10}$-10^{11} km
... several times Sun - Pluto and back ♪

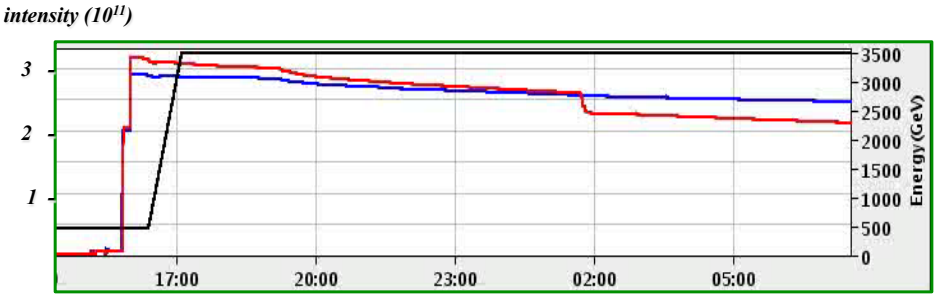

→ *guide the particles on a well defined orbit („design orbit")*
→ *focus the particles to keep each single particle trajectory within the vacuum chamber of the storage ring, i.e. close to the design orbit.*

1.) Introduction and Basic Ideas

„ ... in the end and after all it should be a kind of circular machine"

→ *need transverse deflecting force*

Lorentz force $\vec{F} = q * (\cancel{\vec{E}} + \vec{v} \times \vec{B})$

typical velocity in high energy machines: $v \approx c \approx 3*10^8 \, m/s$

Example:

$$B = 1\,T \quad \rightarrow \quad F = q * 3*10^8 \frac{m}{s} * 1 \frac{Vs}{m^2}$$

$$F = q * \underbrace{300 \frac{MV}{m}}_{E}$$

equivalent el. field E

technical limit for el. field

$$E \leq 1 \frac{MV}{m}$$

remember what you learned before p12 SuSh:

In accelerator physics we ask: "What are the particles' generalized coordinates when they reach a certain point in space?"

First, we convert to a non-inertial reference frame.
We use the 'Frenet-Serret' co-ordinate system



Particle motion is described with respect to a **reference orbit** in the non-inertial frame (x, y, s). This co-ordinate system is known as *Frenet-Serret*

The ideal circular orbit

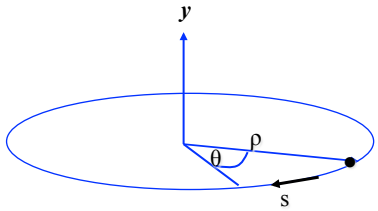

circular coordinate system

condition for circular orbit:

Lorentz force $F_L = e\,v\,B$

centrifugal force $F_{centr} = \dfrac{\gamma\, m_0\, v^2}{\rho}$

$$\frac{\gamma\, m_0\, v^{\cancel{2}}}{\rho} = e\,\cancel{v}\,B$$

$$\frac{p}{e} = B\,\rho$$

$B\,\rho$ = "beam rigidity"

1.) The Magnetic Guide Field

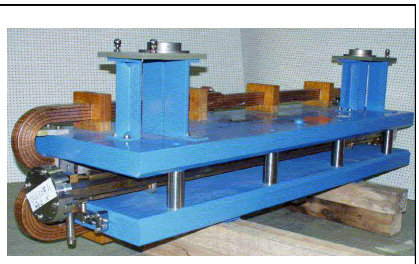

Dipole Magnets:

define the ideal orbit
homogeneous field created
by two flat pole shoes

$$B = \frac{\mu_0\, n\, I}{h}$$

Define the Geometry of the Ring:

$$\theta = \frac{l}{\rho} \approx \frac{B l_B}{B\rho} = \frac{\int B\,dl}{p/q} = 2\pi$$

convenient units:

$$B = [T] = \left[\frac{Vs}{m^2}\right] \qquad p = \left[\frac{GeV}{c}\right]$$

Example LHC:

$$B = 8.3\,T$$

$$p = 7000\,\frac{GeV}{c}$$

$$\rho = 2.8\ km$$

$$2\pi\rho = 17.6\ km$$

$$\approx 66\ \%$$

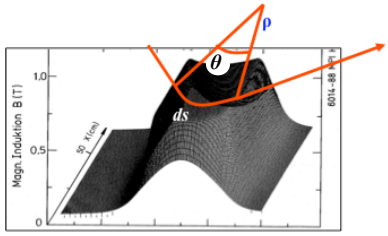

field map of a storage ring dipole magnet

7000 GeV Proton storage ring
dipole magnets N = 1232
l = 15 m
q = +1 e

$$\int B\,dl \approx N\,l\,B = 2\pi\,p/e$$

$$B \approx \frac{2\pi\;7000\;10^9 eV}{1232\;15\,m\;3\;10^8\,\frac{m}{s}\;e} = 8.3\;Tesla$$

2.) Focusing Properties – Transverse Beam Optics

Classical Mechanics: pendulum



there is a restoring force, proportional to the elongation x:

$$F = m * \frac{d^2x}{dt^2} = -k * x$$

Ansatz $x(t) = A * \cos(\omega t + \varphi)$

$$\dot{x} = -A\omega * \sin(\omega t + \varphi)$$

$$\ddot{x} = -A\omega^2 * \cos(\omega t + \varphi)$$

general solution: free harmonic oszillation

Solution $\omega = \sqrt{k/m}, \quad x(t) = x_0 * \cos(\sqrt{\tfrac{k}{m}}t + \varphi)$

Storage Ring: ***we need a Lorentz force that rises as a function of the distance to ..... ?***

..... the design orbit

$$F(x) = q * v * B(x)$$

remember what you learned before p14 SuSh:

- *Next, we change the independent variable from t to s*

The new conjugate phase space variables are $x, p_x; y, p_y; t, -H$

And the new Hamiltonian (s-dependent) is $\tilde{H} = -p_s$

$$\tilde{H} = -(1+x/\rho)\left[\frac{(H-e\phi)^2}{c^2} - m^2c^2 - (p_x - eA_x)^2 - (p_y - eA_y)^2\right]^{1/2} - eA_s$$

Which is time-independent (if also ϕ, A are time-independent)

Expanding the Hamiltonian to second order in p_x, p_y

$$\tilde{H} \approx -p(1+x/\rho) + \frac{1+x/\rho}{2p}\left[(p_x - eA_x)^2 + (p_y - eA_y)^2\right]^{1/2} - eA_s$$

$H - e\phi = E$ is the total particle energy

$p = \sqrt{E^2/c^2 - m^2c^2}$ is the total particle momentum

Quadrupole Magnets:

required: ***focusing forces to keep trajectories in vicinity of the ideal orbit***

linear increasing Lorentz force → linear increasing magnetic field

$$B_y = g\,x \qquad B_x = g\,y$$

normalised quadrupole field:

gradient of a quadrupole magnet: $g = \dfrac{2\mu_0 nI}{r^2}$

$$k = \frac{g}{p/e}$$

simple rule: $k = 0.3\dfrac{g(T/m)}{p(GeV/c)}$

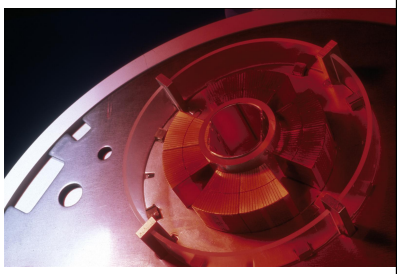

LHC main quadrupole magnet

$g \approx 25 \ldots 220\ T/m$

what about the vertical plane: ... Maxwell

$$\vec{\nabla}\times\vec{B} = \cancel{\vec{j}} + \cancel{\frac{\partial\vec{E}}{\partial t}} = 0 \quad \Rightarrow \quad \frac{\partial B_y}{\partial x} = \frac{\partial B_x}{\partial y}$$

Equation of Motion:

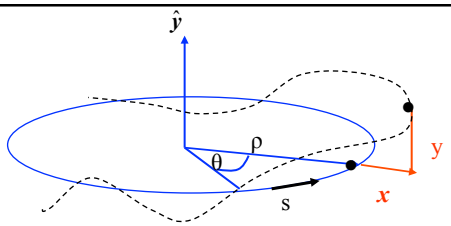

Consider local segment of a particle trajectory
... and remember the old days:
(Goldstein page 27)

radial acceleration:

$$a_r = \frac{d^2\rho}{dt^2} - \rho\left(\frac{d\theta}{dt}\right)^2$$

Ideal orbit: $\rho = const, \quad \frac{d\rho}{dt} = 0$

Force: $F = m\rho\left(\frac{d\theta}{dt}\right)^2 = m\rho\omega^2$

$$F = mv^2/\rho$$

general trajectory: $\rho \rightarrow \rho + x$

$$\boldsymbol{F = m\frac{d^2}{dt^2}(x+\rho) - \frac{mv^2}{x+\rho} = e\,B_y\,v}$$

$$\boldsymbol{F = m\frac{d^2}{dt^2}(x+\rho) - \frac{mv^2}{x+\rho} = e\,B_y\,v}$$

1 2



1 $\boldsymbol{\frac{d^2}{dt^2}(x+\rho) = \frac{d^2}{dt^2}x}$ ***... as ρ = const***

2 ***remember: x ≈ mm , ρ ≈ m ... → develop for small x***

$$\frac{1}{x+\rho} \approx \frac{1}{\rho}\left(1 - \frac{x}{\rho}\right)$$

Taylor Expansion

$$f(x) = f(x_0) + \frac{(x-x_0)}{1!}f'(x_0) + \frac{(x-x_0)^2}{2!}f''(x_0) +$$

$$\boldsymbol{m\frac{d^2x}{dt^2} - \frac{mv^2}{\rho}\left(1 - \frac{x}{\rho}\right) = eB_y v}$$

... ==> see appendix for the details

independent variable: $t \rightarrow s$

$$\frac{dx}{dt} = \frac{dx}{ds}\frac{ds}{dt} = x' * v$$

x = amplitude,
x ' = angle

Equation of Motion
in horizontal plane

$$x'' + x\left(\frac{1}{\rho^2} - k\right) = 0$$

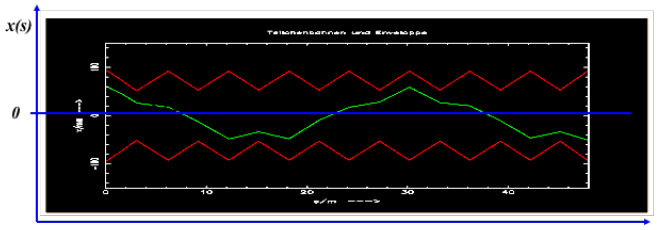

* *Equation for the vertical motion:*

$$\frac{1}{\rho^2} = 0$$ *no dipoles … in general …*

$$k \leftrightarrow -k$$ *quadrupole field changes sign*

$$y'' + k\ y = 0$$



remember p18 SuSh multipole expansion

Multipole fields

In the usual notation:

$$B_y + iB_x = B_{ref}\sum_{n=1}^{\infty}(b_n + ia_n)\left(\frac{x+iy}{R_{ref}}\right)^{n-1}$$

b_n are "normal multipole coefficients" (LEFT)
and a_n are "skew multipole coefficients" (RIGHT)
'ref' means some reference value

n=1, dipole field
n=2, quadrupole field
n=3, sextupole field

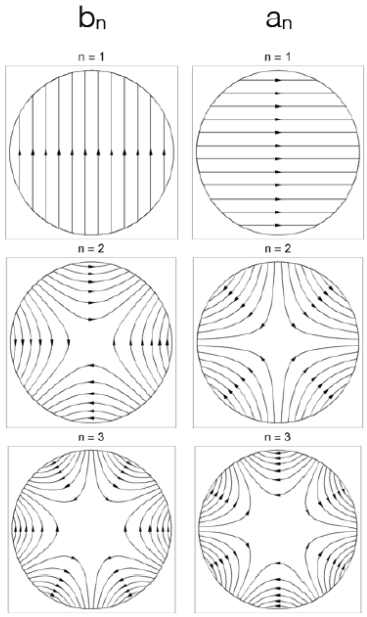

Images: A. Wolski, https://cds.cern.ch/record/1333874

Remarks:

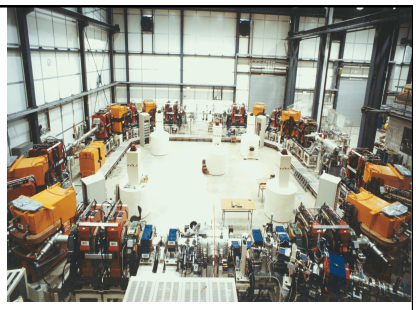

Example: heavy ion storage ring TSR

* *Multipoles in linear approximation*
dipole & quadrupole

* *Separate Function Machines:*

Split the magnets and optimise them according to their job: bending, focusing, correction, etc

* *Weak Focusing:*

… there seems to be a focusing even without a quadrupole gradient „weak focusing of dipole magnets“

$$k = 0 \quad \Rightarrow \quad x'' = -\frac{1}{\rho^2}\, x$$



Mass spectrometer: particles are separated according to their energy and focused due to the 1/ρ effect of the dipole

* *Hard Edge Model:*

$$x'' + \left\{ \frac{1}{\rho^2} - k \right\} x = 0$$

… this equation is not correct !!!

$$x''(s) + \left\{ \frac{1}{\rho^2(s)} - k(s) \right\} x(s) = 0$$

bending and focusing fields … are functions of the independent variable „s“

!

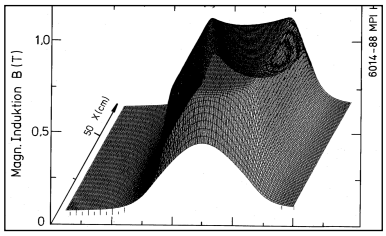

Inside a magnet we assume constant focusing properties !

$$\frac{1}{\rho} = const \qquad k = const$$

$$B\, l_{eff} = \int_0^{l_{mag}} B\, ds$$

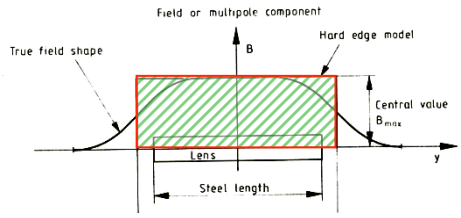

4.) Solution of Trajectory Equations

remember p25 SuSh:

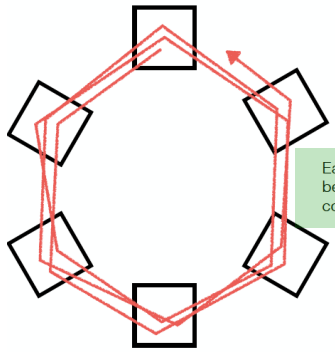

Each of these 'elements' (and drifts) can be thought of as transforming the particle co-ordinates

$$\vec{x} = (x, p_x, y, p_y, z, \delta)$$

$$\vec{x}(s_1) = \overrightarrow{M}(\vec{x}(s_0))$$

Mathematically, they are 'maps'

… c'est quoi ca ??

(engl. version: WHAT ???)

it just means that we would like to calculate the trajectories of a partivle while it is traveling through our machine (or to Pluto, if you donm't mind).

4.) Solution of Trajectory Equations

Define … hor. plane: $K = 1/\rho^2 - k$

… vert. Plane: $K = k$

$$x'' + K\,x = 0$$

Differential Equation of harmonic oscillator … with spring constant K

Ansatz: $x(s) = a_1 \cdot \cos(\omega s) + a_2 \cdot \sin(\omega s)$

general solution: linear combination of two independent solutions

$$x'(s) = -a_1\omega \sin(\omega s) + a_2\omega \cos(\omega s)$$

$$x''(s) = -a_1\omega^2 \cos(\omega s) - a_2\omega^2 \sin(\omega s) = -\omega^2 x(s) \longrightarrow \omega = \sqrt{K}$$

general solution:

$$x(s) = a_1 \cos(\sqrt{K}s) + a_2 \sin(\sqrt{K}s)$$

determine a_1 , a_2 by boundary conditions:

$$s = 0 \longrightarrow \begin{cases} x(0) = x_0 \quad , \quad a_1 = x_0 \\ x'(0) = x'_0 \quad , \quad a_2 = \dfrac{x'_0}{\sqrt{K}} \end{cases}$$

Hor. Focusing Quadrupole K > 0:

$$x(s) = x_0 \cdot \cos(\sqrt{|K|}s) + x'_0 \cdot \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s)$$

$$x'(s) = -x_0 \cdot \sqrt{|K|} \cdot \sin(\sqrt{|K|}s) + x'_0 \cdot \cos(\sqrt{|K|}s)$$

For convenience expressed in matrix formalism:

$$\begin{pmatrix} x \\ x' \end{pmatrix}_{s1} = M_{foc} * \begin{pmatrix} x \\ x' \end{pmatrix}_{s0}$$



$$M_{foc} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s \\ -\sqrt{|K|} \sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix}_0$$

hor. defocusing quadrupole:

$$x'' - K\, x = 0$$

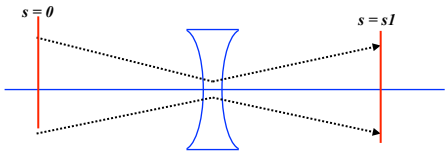

Remember from school:

$$f(s) = \cosh(s) \quad , \quad f'(s) = \sinh(s)$$

Ansatz: $x(s) = a_1 \cdot \cosh(\omega s) + a_2 \cdot \sinh(\omega s)$

$$M_{defoc} = \begin{pmatrix} \cosh\sqrt{|K|}l & \frac{1}{\sqrt{|K|}} \sinh\sqrt{|K|}l \\ \sqrt{|K|} \sinh\sqrt{|K|}l & \cosh\sqrt{|K|}l \end{pmatrix}$$

drift space:

K = 0

$$M_{drift} = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix}$$



! with the assumptions made, the motion in the horizontal and vertical planes are independent „ ... the particle motion in x & y is uncoupled“

Thin Lens Approximation:

matrix of a quadrupole lens

$$M = \begin{pmatrix} \cos\sqrt{|k|}l & \frac{1}{\sqrt{|k|}}\sin\sqrt{|k|}l \\ -\sqrt{|k|}\sin\sqrt{|k|}l & \cos\sqrt{|k|}l \end{pmatrix}$$

in many practical cases we have the situation:

$f = \frac{1}{kl_q} >> l_q$ *... focal length of the lens is much bigger than the length of the magnet*

limes: $l_q \rightarrow 0$ *while keeping* $k\, l_q = const$

$$M_x = \begin{pmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{pmatrix} \qquad M_z = \begin{pmatrix} 1 & 0 \\ \frac{-1}{f} & 1 \end{pmatrix}$$

... useful for fast (and in large machines still quite accurate) „back on the envelope calculations" ... and for the guided studies !

Combining the two planes:

Clear enough (hopefully ... ?) : a quadrupole magnet that is focussing o-in one plane acts as defocusing lens in the other plane ... et vice versa.

hor foc. quadrupole lens

$$M_{foc} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \frac{1}{\sqrt{|K|}}\sin(\sqrt{|K|}s) \\ -\sqrt{|K|}\sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix}$$

matrix of the same magnet in the vert. plane:

$$M_{defoc} = \begin{pmatrix} \cosh\sqrt{|K|}l & \frac{1}{\sqrt{|K|}}\sinh\sqrt{|K|}l \\ \sqrt{|K|}\sinh\sqrt{|K|}l & \cosh\sqrt{|K|}l \end{pmatrix}$$

$$\begin{pmatrix} x \\ x' \\ y \\ y' \end{pmatrix}_f = \begin{pmatrix} \cos(\sqrt{|k|}s) & \frac{1}{\sqrt{|k|}}\sin(\sqrt{|k|}s) & 0 & 0 \\ -\sqrt{|k|}\sin(\sqrt{|k|}s) & \cos(\sqrt{|k|}s) & 0 & 0 \\ 0 & 0 & \cosh(\sqrt{|k|}s) & \frac{1}{\sqrt{|k|}}\sinh(\sqrt{|k|}s) \\ 0 & 0 & \sqrt{|k|}\sinh(\sqrt{|k|}s) & \cosh(\sqrt{|k|}s) \end{pmatrix} * \begin{pmatrix} x \\ x' \\ y \\ y' \end{pmatrix}_i$$

! with the assumptions made, the motion in the horizontal and vertical planes are independent „ ... the particle motion in x & y is uncoupled"

Transformation through a system of lattice elements

combine the single element solutions by multiplication of the matrices

$$M_{total} = M_{QF} * M_D * M_{QD} * M_{Bend} * M_{D*.....}$$

$$\begin{pmatrix} x \\ x' \end{pmatrix}_{s2} = M(s_2, s_1) * \begin{pmatrix} x \\ x' \end{pmatrix}_{s1}$$

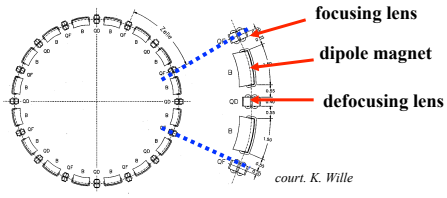

in each accelerator element the particle trajectory corresponds to the movement of a harmonic oscillator „

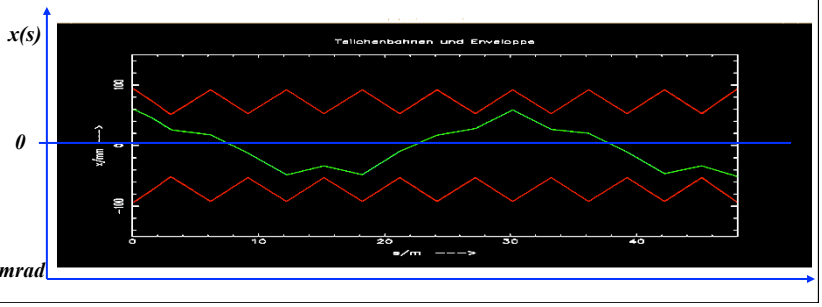

typical values in a strong foc. machine:
x ≈ mm, x´ ≤ mrad

5.) Orbit & Tune:

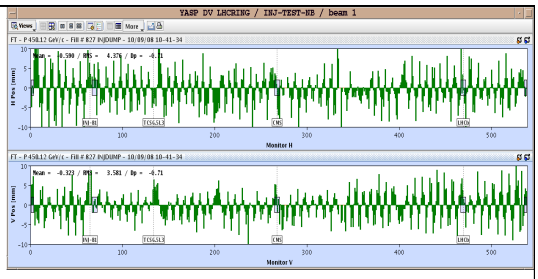

Tune: number of oscillations per turn

64.31
59.32

Relevant for beam stability:
non integer part

LHC revolution frequency: *11.3 kHz* 0.31*11.3 = 3.5***kHz***

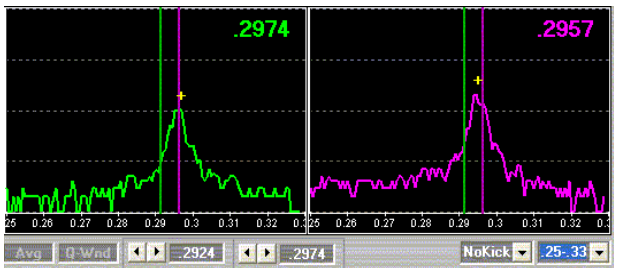

LHC Operation: Beam Commissioning

First turn steering "by sector:"

- One beam at the time
- Beam through 1 sector (1/8 ring),

correct trajectory, open collimator and move on.



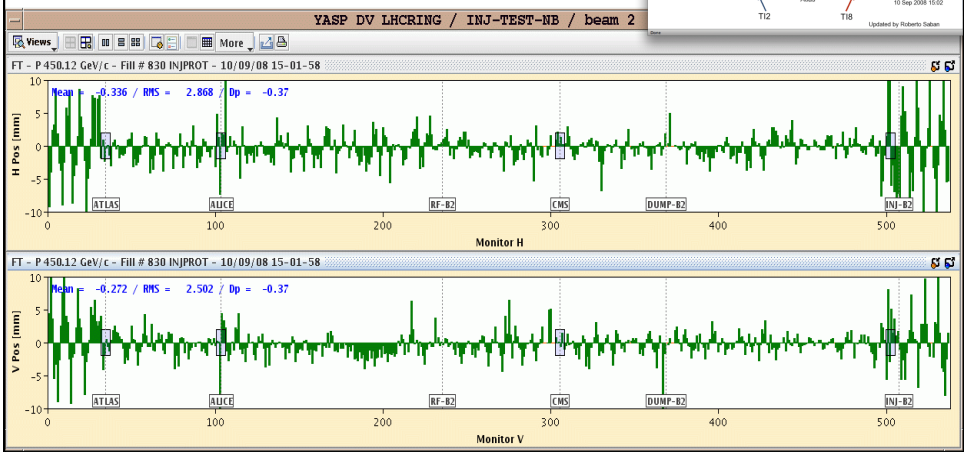

LHC Operation: the First Beam

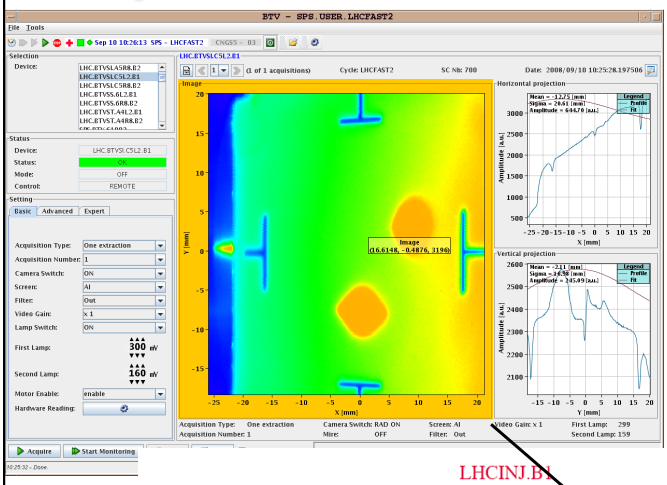

Beam 1 on OTR screen
1st and 2nd turn

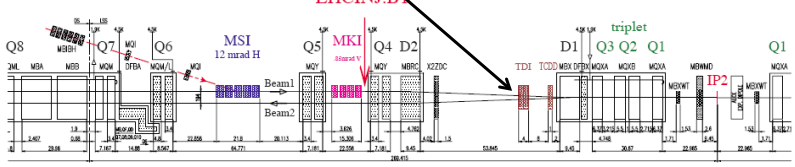

Question: ***what will happen, if the particle performs a second turn ?***

... or a third one or ... 10^{10} turns

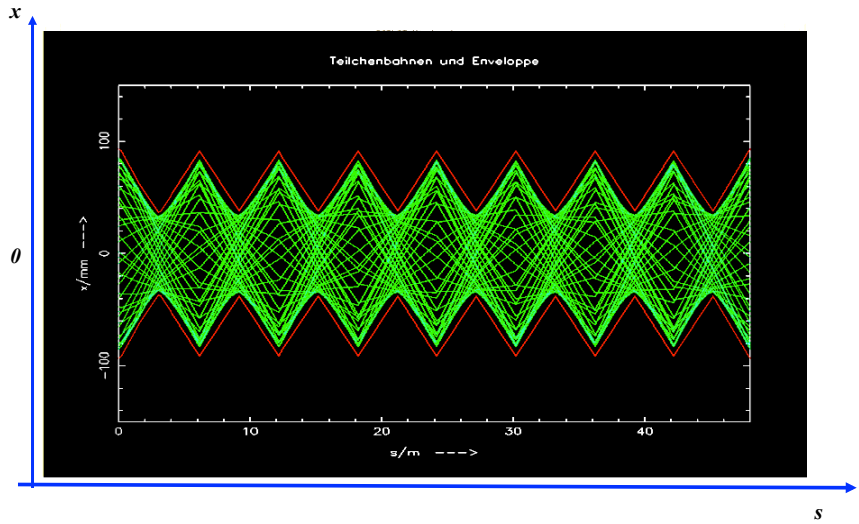

Astronomer Hill:

differential equation for motions with periodic focusing properties
„Hill's equation"

Example: particle motion with periodic coefficient

equation of motion: $x''(s) - k(s)x(s) = 0$

restoring force $\neq$ const,
k(s) = depending on the position s
k(s+L) = k(s), periodic function

we expect a kind of quasi harmonic oscillation: amplitude & phase will depend on the position s in the ring.

6.) The Beta Function

General solution of Hill´s equation:

(i) $$x(s) = \sqrt{\varepsilon}\sqrt{\beta(s)} \cdot \cos(\psi(s) + \phi)$$

ε, Φ = integration constants determined by initial conditions

β(s) periodic function given by focusing properties of the lattice ↔ quadrupoles

$$\beta(s + L) = \beta(s)$$

Inserting (i) into the equation of motion …

$$\psi(s) = \int_0^s \frac{ds}{\beta(s)}$$

Ψ(s) = „phase advance" of the oscillation between point „0" and „s" in the lattice.
For one complete revolution: number of oscillations per turn „Tune"

$$Q_y = \frac{1}{2\pi}\oint \frac{ds}{\beta(s)}$$

The Beta Function

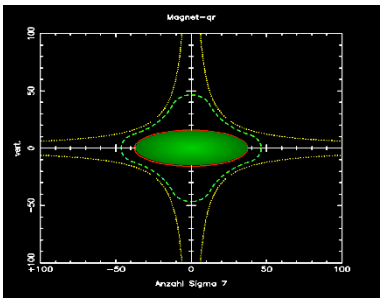

Amplitude of a particle trajectory:

$$x(s) = \sqrt{\varepsilon} * \sqrt{\beta(s)} * \cos(\psi(s) + \varphi)$$

Maximum size of a particle amplitude

$$\hat{x}(s) = \sqrt{\varepsilon}\sqrt{\beta(s)}$$

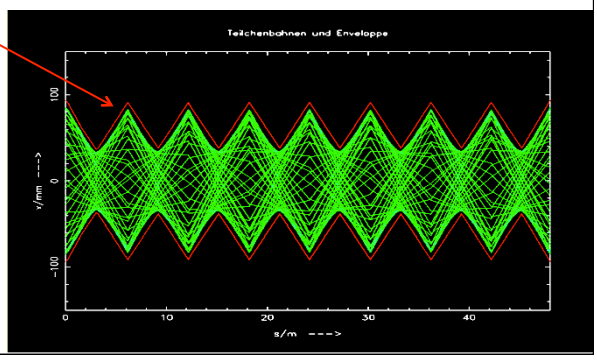

β determines the beam size
(… the envelope of all particle trajectories at a given position "s" in the storage ring.

It reflects the periodicity of the magnet structure.

7.) Beam Emittance and Phase Space Ellipse

general solution of Hill equation

$$\begin{cases} (1) \quad x(s) = \sqrt{\varepsilon}\,\sqrt{\beta(s)}\,\cos(\psi(s)+\phi) \\ (2) \quad x'(s) = -\dfrac{\sqrt{\varepsilon}}{\sqrt{\beta(s)}}\,\{\alpha(s)\cos(\psi(s)+\phi)+\sin(\psi(s)+\phi)\} \end{cases}$$

from (1) we get

$$\cos(\psi(s)+\phi) = \frac{x(s)}{\sqrt{\varepsilon}\,\sqrt{\beta(s)}}$$

$$\alpha(s) = \frac{-1}{2}\beta'(s)$$

$$\gamma(s) = \frac{1+\alpha(s)^2}{\beta(s)}$$

Insert into (2) and solve for ε

$$\varepsilon = \gamma(s)\,x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s)\,x'^2(s)$$

**** ε is a constant of the motion … it is independent of „s"***
**** parametric representation of an ellipse in the x x ' space***
**** shape and orientation of ellipse are given by α, β, γ***

Beam Emittance and Phase Space Ellipse

$$\varepsilon = \gamma(s)\,x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s)\,x'^2(s)$$

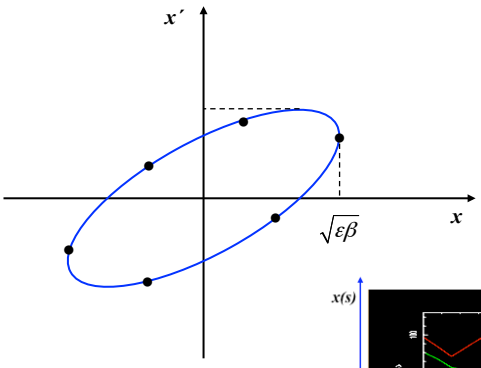

***Liouville:** in reasonable storage rings area in phase space is constant.*

A = π*ε=const

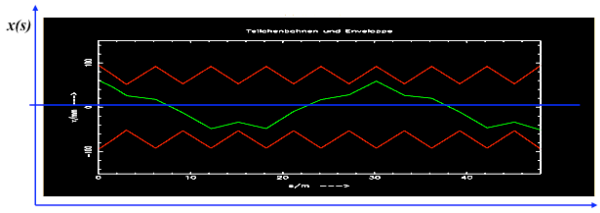

***ε beam emittance** = **woozilycity** of the particle ensemble, **intrinsic beam parameter**, cannot be changed by the foc. properties.*
***Scientifiquely speaking:** area covered **in transverse x, x´ phase space** … and it is constant !!!*

Particle Tracking in a Storage Ring

Calculate x, x´ for each linear accelerator element according to matrix formalism

plot x, x´as a function of „s"

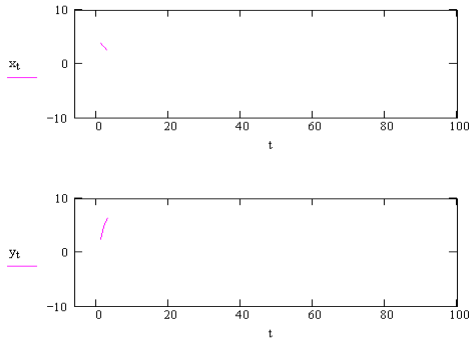



… and now the ellipse:

note for each turn x, x´at a given position „s_1" and plot in the phase space diagram

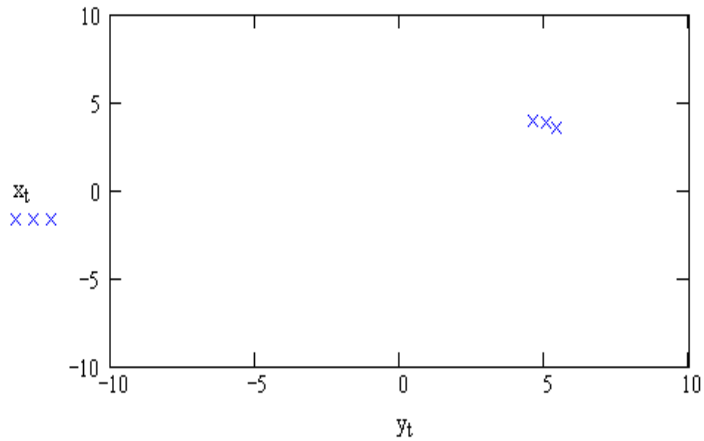

Résumé:

beam rigidity: $B \cdot \rho = p/q$

bending strength of a dipole: $\frac{1}{\rho}\left[m^{-1}\right] = \frac{0.2998 \cdot B_0(T)}{p(GeV/c)}$

focusing strength of a quadrupole: $k\left[m^{-2}\right] = \frac{0.2998 \cdot g}{p(GeV/c)}$

focal length of a quadrupole: $f = \frac{1}{k \cdot l_q}$

equation of motion: $x'' + Kx = \frac{1}{\rho}\frac{\Delta p}{p}$

matrix of a foc. quadrupole: $x_{s2} = M \cdot x_{s1}$

$$M = \begin{pmatrix} \cos\sqrt{|K|}l & \frac{1}{\sqrt{|K|}}\sin\sqrt{|K|}l \\ -\sqrt{|K|}\sin\sqrt{|K|}l & \cos\sqrt{|K|}l \end{pmatrix}, \qquad M = \begin{pmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{pmatrix}$$

Bibliography:

1.) P. Bryant, K. Johnsen: The Principles of Circular Accelerators and Storage Rings Cambridge Univ. Press

2.) Klaus Wille: Physics of Particle Accelerators and Synchrotron Radiation Facilicties, Teubner, Stuttgart 1992

3.) Peter Schmüser: Basic Course on Accelerator Optics, CERN Acc. School: 5th general acc. phys. course CERN 94-01

4.) Bernhard Holzer: Lattice Design, CERN Acc. School: Interm.Acc.phys course, http://cas.web.cern.ch/cas/ZEUTHEN/lectures-zeuthen.htm cern report: CERN-2006-002

5.) A.Chao, M.Tigner: Handbook of Accelerator Physics and Engineering, Singapore : World Scientific, 1999.

6.) Martin Reiser: Theory and Design of Chargged Particle Beams Wiley-VCH, 2008

7.) Frank Hinterberger: Physik der Teilchenbeschleuniger, Springer Verlag 1997

8.) Mathew Sands: The Physics of e+ e- Storage Rings, SLAC report 121, 1970

9.) D. Edwards, M. Syphers : An Introduction to the Physics of Particle Accelerators, SSC Lab 1990

3.) The equation of motion:

Linear approximation:

* ideal particle → design orbit

* any other particle → coordinates x, y small quantities
  $x,y \ll \rho$

  → magnetic guide field: only linear terms in x & y of B have to be taken into account

Taylor Expansion of the B field:

$$B_y(x) = B_{y0} + \frac{dB_y}{dx}x + \frac{1}{2!}\frac{d^2B_y}{dx^2}x^2 + \frac{1}{3!}\frac{eg''}{dx^3} + \ldots$$

normalise to momentum
$p/e = B\rho$

$$\frac{B(x)}{p/e} = \frac{B_0}{B_0\rho} + \frac{g*x}{p/e} + \frac{1}{2!}\frac{eg'}{p/e} + \frac{1}{3!}\frac{eg''}{p/e} + \ldots$$

The Equation of Motion:

$$\frac{B(x)}{p/e} = \frac{1}{\rho} + k\,x + \cancel{\frac{1}{2!}m\,x^2} + \cancel{\frac{1}{3!}n\,x^3} + \ldots$$

only terms linear in x, y taken into account dipole fields
quadrupole fields

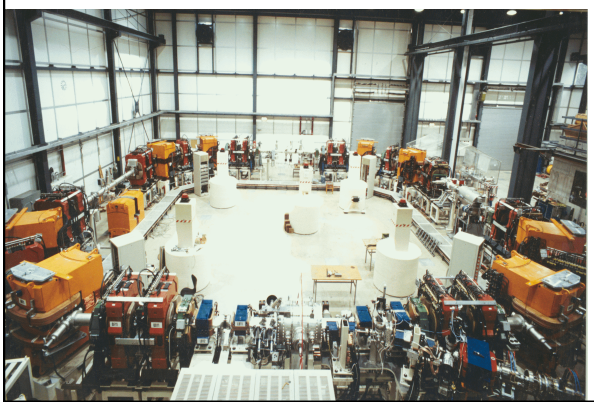

Separate Function Machines:

Split the magnets and optimise them according to their job:

bending, focusing etc

Example:
heavy ion storage ring TSR

* man sieht nur dipole und quads → linear

Equation of Motion:

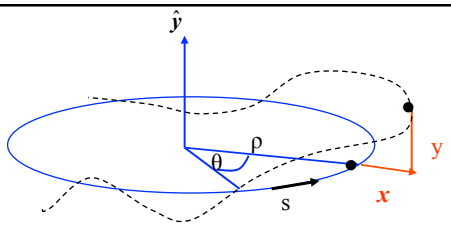

Consider local segment of a particle trajectory
... and remember the old days:
(Goldstein page 27)

radial acceleration:

$$a_r = \frac{d^2\rho}{dt^2} - \rho\left(\frac{d\theta}{dt}\right)^2$$

Ideal orbit: $\rho = const, \quad \frac{d\rho}{dt} = 0$

Force: $F = m\rho\left(\frac{d\theta}{dt}\right)^2 = m\rho\omega^2$

$$F = mv^2/\rho$$

general trajectory: $\rho \rightarrow \rho + x$

$$\boldsymbol{F = m\frac{d^2}{dt^2}(x+\rho) - \frac{mv^2}{x+\rho} = e\,B_y\,v}$$

$$\boldsymbol{F = m\frac{d^2}{dt^2}(x+\rho) - \frac{mv^2}{x+\rho} = e\,B_y\,v}$$

1 2



1 $\boldsymbol{\frac{d^2}{dt^2}(x+\rho) = \frac{d^2}{dt^2}x}$ ***... as ρ = const***

2 ***remember: x ≈ mm , ρ ≈ m ... → develop for small x***

$$\frac{1}{x+\rho} \approx \frac{1}{\rho}\left(1 - \frac{x}{\rho}\right)$$

Taylor Expansion

$$f(x) = f(x_0) + \frac{(x-x_0)}{1!}f'(x_0) + \frac{(x-x_0)^2}{2!}f''(x_0) +$$

$$\boldsymbol{m\frac{d^2x}{dt^2} - \frac{mv^2}{\rho}\left(1 - \frac{x}{\rho}\right) = eB_y v}$$

guide field in linear approx.

$$B_y = B_0 + x\frac{\partial B_y}{\partial x} \qquad m\frac{d^2x}{dt^2} - \frac{mv^2}{\rho}(1-\frac{x}{\rho}) = ev\left\{B_0 + x\frac{\partial B_y}{\partial x}\right\} \qquad : m$$

$$\frac{d^2x}{dt^2} - \frac{v^2}{\rho}(1-\frac{x}{\rho}) = \frac{e\,v\,B_0}{m} + \frac{e\,v\,x\,g}{m}$$

independent variable: $t \rightarrow s$

$$\frac{dx}{dt} = \frac{dx}{ds}\frac{ds}{dt}$$

$$\frac{d^2x}{dt^2} = \frac{d}{dt}\left(\frac{dx}{ds}\frac{ds}{dt}\right) = \frac{d}{ds}\left(\underbrace{\frac{dx}{ds}}_{x'}\underbrace{\frac{ds}{dt}}_{v}\right)\frac{ds}{dt}$$

$$\frac{d^2x}{dt^2} = x''\,v^2 + \cancel{\frac{dx}{ds}\frac{dv}{ds}}\,v$$

$$x''v^2 - \frac{v^2}{\rho}(1-\frac{x}{\rho}) = \frac{e\,v\,B_0}{m} + \frac{e\,v\,x\,g}{m} \qquad : v^2$$

$$x'' - \frac{1}{\rho}(1-\frac{x}{\rho}) = \frac{e\;B_0}{mv} + \frac{e\;x\,g}{mv} \qquad m\,v = p$$

$$x'' - \frac{1}{\rho} + \frac{x}{\rho^2} = \frac{B_0}{p/e} + \frac{x\,g}{p/e}$$

normalize to momentum of particle

$$\frac{B_0}{p/e} = -\frac{1}{\rho}$$

$$\frac{g}{p/e} = k$$

$$x'' - \cancel{\frac{1}{\rho}} + \frac{x}{\rho^2} = -\cancel{\frac{1}{\rho}} + k\,x$$

$$x'' + x\,(\frac{1}{\rho^2} - k) = 0$$

✲ *Equation for the vertical motion:*

$$\frac{1}{\rho^2} = 0 \qquad \textit{no dipoles … in general …}$$

$$k \;\leftrightarrow\; -k \qquad \textit{quadrupole field changes sign}$$

$$y'' + k\;y = 0$$