


# Introduction to Transverse Beam Optics

## II.) Particle Trajectories, Beams & Bunch

$\epsilon$  &  $\beta$


... don't worry: it's still the "ideal world"

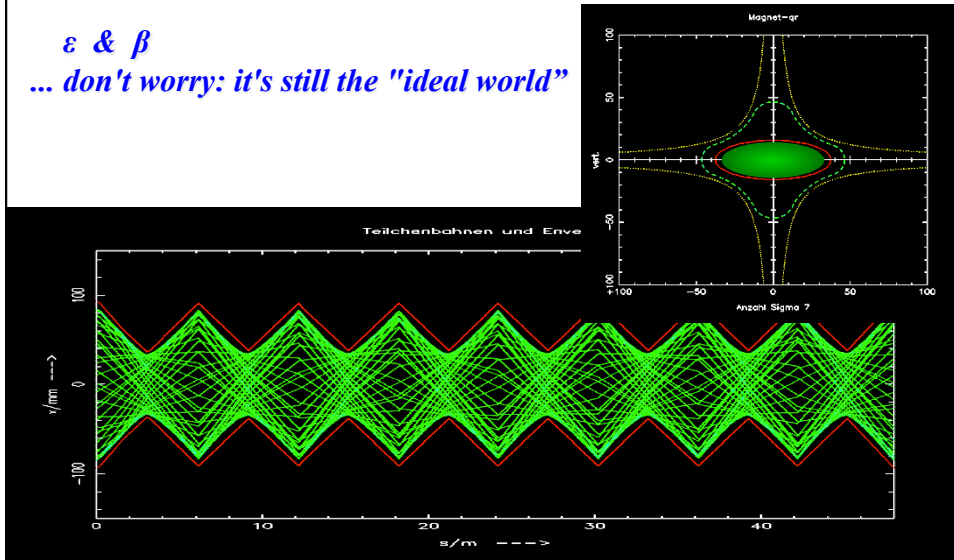

### Phase Space Ellipse

particle trajectory:  $x(s) = \sqrt{\epsilon} \sqrt{\beta(s)} \cos\{\psi(s) + \phi\}$

max. Amplitude:  $\hat{x}(s) = \sqrt{\epsilon\beta}$   $\rightarrow$   $x'$  at that position ...



... put  $\hat{x}(s)$  into  $\epsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s) x'^2(s)$  and solve for  $x'$

$$\epsilon = \gamma \cdot \epsilon\beta + 2\alpha\sqrt{\epsilon\beta} \cdot x' + \beta x'^2$$

$\rightarrow$   $x' = -\alpha \cdot \sqrt{\epsilon / \beta}$

\* A high  $\beta$ -function means a large beam size and a small beam divergence. !  
... et vice versa !!!

\* In the middle of a quadrupole  $\beta = \text{maximum}$ ,  
 $\alpha = \text{zero}$  }  $x' = 0$  ... and the ellipse is flat

### Phase Space Ellipse

$$\epsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s) x'^2(s)$$

$$\alpha(s) = -\frac{1}{2}\beta'(s)$$

$$\gamma(s) = \frac{1+\alpha(s)^2}{\beta(s)}$$


$$\rightarrow \epsilon = \frac{x^2}{\beta} + \frac{\alpha^2 x^2}{\beta} + 2\alpha \cdot x x' + \beta \cdot x'^2$$

... solve for  $x'$   $x'_{1,2} = \frac{-\alpha \cdot x \pm \sqrt{\epsilon\beta - x^2}}{\beta}$

... and determine  $\hat{x}'$  via:  $\frac{dx'}{dx} = 0$


$$\rightarrow \hat{x}' = \sqrt{\epsilon\gamma}$$

$$\rightarrow \hat{x} = \pm\alpha\sqrt{\frac{\epsilon}{\gamma}}$$

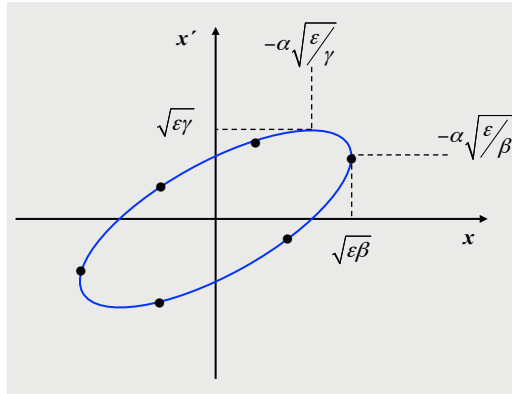


shape and orientation of the phase space ellipse depend on the Twiss parameters  $\beta$  a  $\gamma$

### Emittance of the Particle Ensemble:

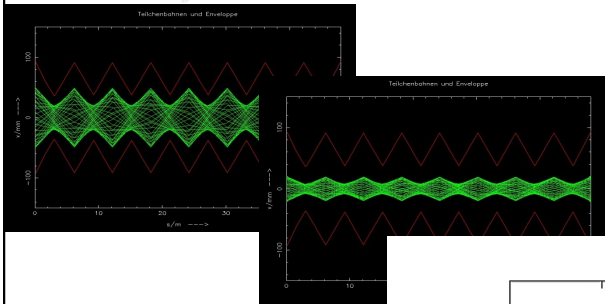

A particle ensemble consisting of particles with small amplitudes and angles will occupy in phase space only a small area and is called a "cold" or "high quality beam"


Pn,1  
Pn,2  
Pn,3  
Pn,4  
+ + + +

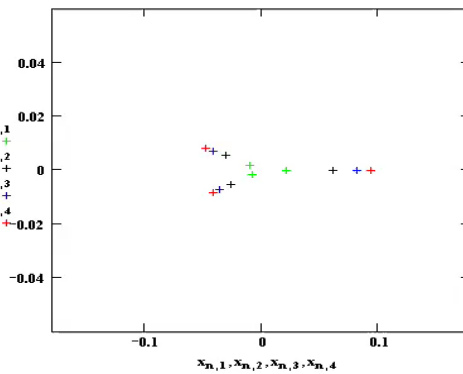

### Emittance of the Particle Ensemble:

$$x(s) = \sqrt{\varepsilon} \sqrt{\beta(s)} \cdot \cos(\Psi(s) + \phi)$$

$$\hat{x}(s) = \sqrt{\varepsilon} \sqrt{\beta(s)}$$

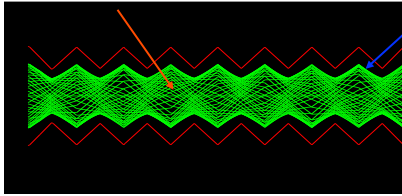

single particle trajectories,  $N \approx 10^{11}$  per bunch



Gauß Particle Distribution: 
$$\rho(x) = \frac{N \cdot e}{\sqrt{2\pi}\sigma_x} \cdot e^{-\frac{1}{2}\frac{x^2}{\sigma_x^2}}$$

particle at distance  $1 \sigma$  from centre  
 $\leftrightarrow$  68.3 % of all beam particles

LHC:  $\beta = 180 \text{ m}$

$$\varepsilon = 5 \cdot 10^{-10} \text{ m rad}$$

$$\sigma = \sqrt{\varepsilon \cdot \beta} = \sqrt{5 \cdot 10^{-10} \text{ m} \cdot 180 \text{ m}} = 0.3 \text{ mm}$$

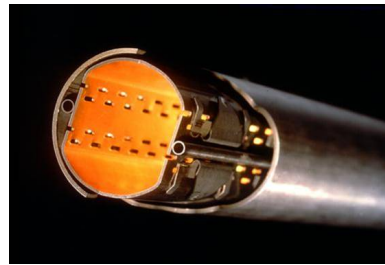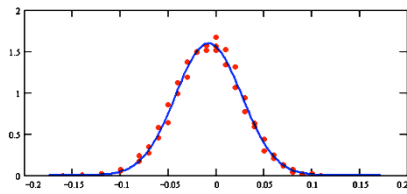

aperture requirements:  $r_0 = 12 \cdot \sigma$

### 9.) Transfer Matrix M ... yes we had the topic already

general solution of Hill's equation 
$$\left\{ \begin{array}{l} x(s) = \sqrt{\varepsilon} \sqrt{\beta(s)} \cos\{\psi(s) + \phi\} \\ x'(s) = \frac{-\sqrt{\varepsilon}}{\sqrt{\beta(s)}} [\alpha(s) \cos\{\psi(s) + \phi\} + \sin\{\psi(s) + \phi\}] \end{array} \right.$$

remember the trigonometrical gymnastics:  $\sin(a + b) = \dots$  etc

$$x(s) = \sqrt{\varepsilon} \sqrt{\beta_s} (\cos \psi_s \cos \phi - \sin \psi_s \sin \phi)$$

$$x'(s) = \frac{-\sqrt{\varepsilon}}{\sqrt{\beta_s}} [\alpha_s \cos \psi_s \cos \phi - \alpha_s \sin \psi_s \sin \phi + \sin \psi_s \cos \phi + \cos \psi_s \sin \phi]$$

starting at point  $s(0) = s_0$ , where we put  $\Psi(0) = 0$

$$\left. \begin{array}{l} \cos \phi = \frac{x_0}{\sqrt{\varepsilon \beta_0}} \\ \sin \phi = -\frac{1}{\sqrt{\varepsilon}} \left( x'_0 \sqrt{\beta_0} + \frac{\alpha_0 x_0}{\sqrt{\beta_0}} \right) \end{array} \right\} \text{inserting above ...}$$

$$\underline{x(s)} = \sqrt{\frac{\beta_s}{\beta_0}} \{ \cos \psi_s + \alpha_0 \sin \psi_s \} \underline{x_0} + \{ \sqrt{\beta_s \beta_0} \sin \psi_s \} \underline{x'_0}$$

$$\underline{x'(s)} = \frac{1}{\sqrt{\beta_s \beta_0}} \{ (\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s \} \underline{x_0} + \sqrt{\frac{\beta_0}{\beta_s}} \{ \cos \psi_s - \alpha_s \sin \psi_s \} \underline{x'_0}$$

which can be expressed ... for convenience ... in matrix form  $\begin{pmatrix} x \\ x' \end{pmatrix}_s = M \begin{pmatrix} x \\ x' \end{pmatrix}_0$

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$

\* we can calculate the single particle trajectories between two locations in the ring, if we know the  $\alpha \beta \gamma$  at these positions.


\* and nothing but the  $\alpha \beta \gamma$  at these positions.

\* ... !

\* Äquivalenz der Matrizen

## 10.) Periodic Lattices

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$

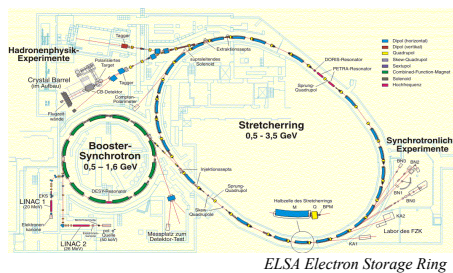

„This rather formidable looking matrix simplifies considerably if we consider one complete revolution ...“

$$M(s) = \begin{pmatrix} \cos \psi_{turn} + \alpha_s \sin \psi_{turn} & \beta_s \sin \psi_{turn} \\ -\gamma_s \sin \psi_{turn} & \cos \psi_{turn} - \alpha_s \sin \psi_{turn} \end{pmatrix}$$

$$\psi_{turn} = \int_s^{s+L} \frac{ds}{\beta(s)} \quad \psi_{turn} = \text{phase advance per period}$$

Tune: Phase advance per turn in units of  $2\pi$

$$Q = \frac{1}{2\pi} \int \frac{ds}{\beta(s)}$$

## Stability Criterion:

**Question:** what will happen, if we do not make too many mistakes and your particle performs one complete turn ?



**Matrix for 1 turn:**

$$M = \begin{pmatrix} \cos\psi_{turn} + \alpha_s \sin\psi_{turn} & \beta_s \sin\psi_{turn} \\ -\gamma_s \sin\psi_{turn} & \cos\psi_{turn} - \alpha_s \sin\psi_{turn} \end{pmatrix} = \underbrace{\cos\psi}_{\mathbf{I}} \cdot \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} + \underbrace{\sin\psi}_{\mathbf{J}} \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix}$$

**Matrix for N turns:**

$$M^N = (1 \cdot \cos\psi + J \cdot \sin\psi)^N = 1 \cdot \cos N\psi + J \cdot \sin N\psi$$

The motion for N turns remains bounded, if the elements of  $M^N$  remain bounded

$$\psi = \text{real} \quad \Leftrightarrow \quad |\cos\psi| \leq 1 \quad \Leftrightarrow \quad \text{Tr}(M) \leq 2$$

stability criterion .... proof for the disbelieving colleagues !!

**Matrix for 1 turn:** 
$$M = \begin{pmatrix} \cos\psi_{turn} + \alpha_s \sin\psi_{turn} & \beta_s \sin\psi_{turn} \\ -\gamma_s \sin\psi_{turn} & \cos\psi_{turn} - \alpha_s \sin\psi_{turn} \end{pmatrix} = \underbrace{\cos\psi}_{\mathbf{I}} \cdot \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} + \underbrace{\sin\psi}_{\mathbf{J}} \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix}$$

**Matrix for 2 turns:**

$$M^2 = (\mathbf{I} \cos\psi_1 + \mathbf{J} \sin\psi_1)(\mathbf{I} \cos\psi_2 + \mathbf{J} \sin\psi_2)$$

$$= \mathbf{I}^2 \cos\psi_1 \cos\psi_2 + \mathbf{I}\mathbf{J} \cos\psi_1 \sin\psi_2 + \mathbf{J}\mathbf{I} \sin\psi_1 \cos\psi_2 + \mathbf{J}^2 \sin\psi_1 \sin\psi_2$$

now ...

$$\mathbf{I}^2 = \mathbf{I}$$

$$\left. \begin{aligned} \mathbf{I}\mathbf{J} &= \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} * \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} \\ \mathbf{J}\mathbf{I} &= \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} * \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} \end{aligned} \right\} \mathbf{I}\mathbf{J} = \mathbf{J}\mathbf{I}$$

$$\mathbf{J}^2 = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} * \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} = \begin{pmatrix} \alpha^2 - \gamma\beta & \alpha\beta - \beta\alpha \\ -\gamma\alpha + \alpha\gamma & \alpha^2 - \gamma\beta \end{pmatrix} = \begin{pmatrix} -1 & 0 \\ 0 & -1 \end{pmatrix} = -\mathbf{I}$$

$$M^2 = \mathbf{I} \cos(\psi_1 + \psi_2) + \mathbf{J} \sin(\psi_1 + \psi_2)$$


$$M^2 = \mathbf{I} \cos(2\psi) + \mathbf{J} \sin(2\psi)$$

## 11.) Transformation of $\alpha, \beta, \gamma$

consider two positions in the storage ring:  $s_0, s$

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = M * \begin{pmatrix} x \\ x' \end{pmatrix}_{s_0}$$

$$M = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix}$$

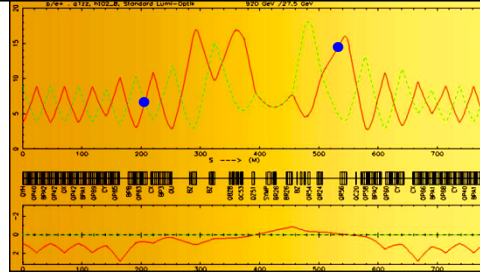

Betafunction in a storage ring

since  $\epsilon = \text{const}$  (Liouville):

$$\epsilon = \beta_s x'^2 + 2\alpha_s x x' + \gamma_s x^2$$

$$\epsilon = \beta_0 x_0'^2 + 2\alpha_0 x_0 x_0' + \gamma_0 x_0^2$$

... remember  $W = CS' - SC' = 1$

$$\left. \begin{aligned} \begin{pmatrix} x \\ x' \end{pmatrix}_0 &= M^{-1} * \begin{pmatrix} x \\ x' \end{pmatrix}_s \\ M^{-1} &= \begin{pmatrix} S' & -S \\ -C' & C \end{pmatrix} \end{aligned} \right\} \rightarrow \begin{aligned} x_0 &= S'x - Sx' \\ x_0' &= -C'x + Cx' \end{aligned} \quad \dots \text{inserting into } \epsilon$$

$$\epsilon = \beta_0 (Cx' - C'x)^2 + 2\alpha_0 (S'x - Sx')(Cx' - C'x) + \gamma_0 (S'x - Sx')^2$$

sort via  $x, x'$  and compare the coefficients to get ....

$$\beta(s) = C^2 \beta_0 - 2SC\alpha_0 + S^2 \gamma_0$$

$$\alpha(s) = -CC' \beta_0 + (SC' + S'C)\alpha_0 - SS' \gamma_0$$

$$\gamma(s) = C'^2 \beta_0 - 2S'C'\alpha_0 + S'^2 \gamma_0$$

in matrix notation:

$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_s = \begin{pmatrix} C^2 & -2SC & S^2 \\ -CC' & SC' + S'C & -SS' \\ C'^2 & -2S'C' & S'^2 \end{pmatrix} \cdot \begin{pmatrix} \beta_0 \\ \alpha_0 \\ \gamma_0 \end{pmatrix}$$




- 1.) this expression is important
- 2.) given the twiss parameters  $\alpha, \beta, \gamma$  at any point in the lattice we can transform them and calculate their values at any other point in the ring.
- 3.) the transfer matrix is given by the focusing properties of the lattice elements, the elements of  $M$  are just those that we used to calculate single particle trajectories.
- 4.) go back to point 1.)

# Introduction to Transverse Beam Dynamics

Bernhard Holzer, CERN


The „ not so ideal world “

III.) Errors in Field and Gradient

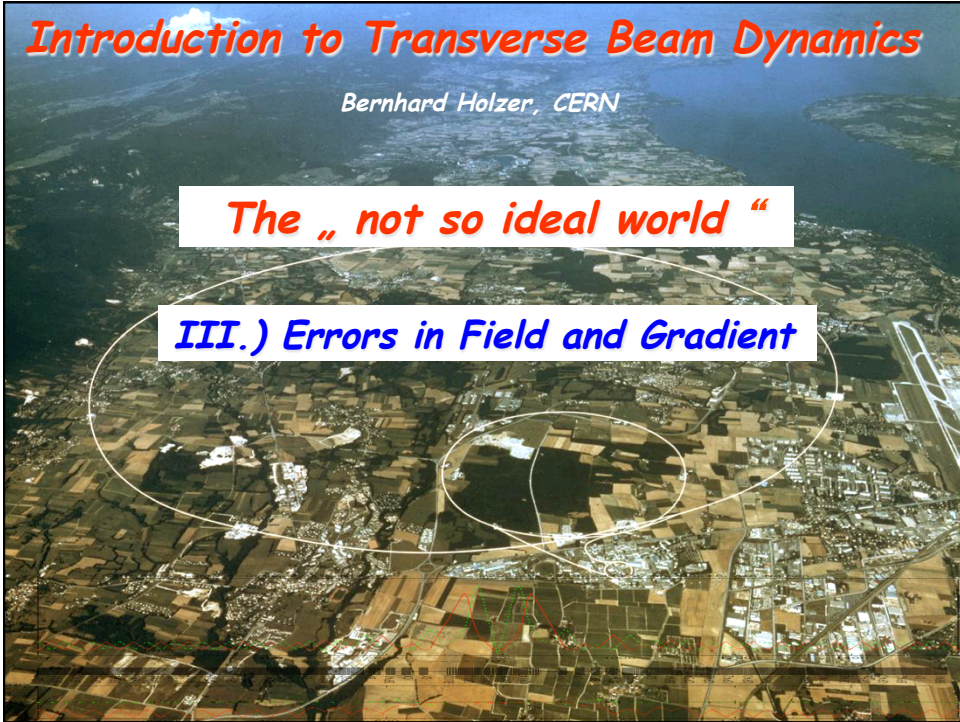


## Remember: Beam Emittance and Phase Space Ellipse

$$\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s) x'^2(s)$$

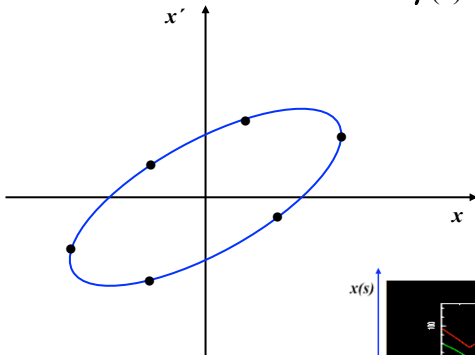

Liouville: in reasonable storage rings  
area in phase space is constant.

$$A = \pi \cdot \varepsilon = \text{const}$$

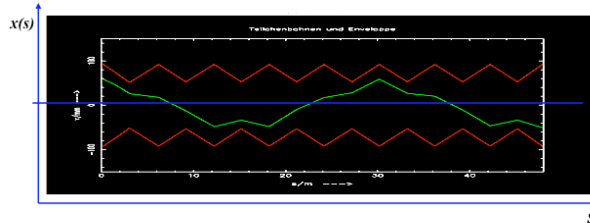

$\varepsilon$  beam emittance = *woozilycity* of the particle ensemble, *intrinsic beam parameter*,  
cannot be changed by the foc. properties.


Scientifquely spoken: area covered in transverse  $x, x'$  phase space ... and it is constant !!!

### 13.) Liouville during Acceleration

$$\varepsilon = \gamma(s) x^2(s) + 2\alpha(s)x(s)x'(s) + \beta(s) x'^2(s)$$

Beam Emittance corresponds to the area covered in the  $x, x'$  Phase Space Ellipse

Liouville: Area in phase space is constant.



**But so sorry ...  $\varepsilon \neq \text{const}!$**

Classical Mechanics:

phase space = diagram of the two canonical variables

position & momentum  
 $x$   $p_x$

$$p_j = \frac{\partial L}{\partial \dot{q}_j} ; L = T - V = \text{kin. Energy} - \text{pot. Energy}$$

According to Hamiltonian mechanics:

phase space diagram relates the variables  $q$  and  $p$

$$q = \text{position} = x$$

$$p = \text{momentum} = \gamma m v = m c \gamma \beta_x$$

$$\gamma = \frac{1}{\sqrt{1 - \frac{v^2}{c^2}}} ; \beta_x = \frac{\dot{x}}{c}$$

Liouville's Theorem:  $\int p dq = \text{const}$

for convenience (i.e. because we are lazy bones) we use in accelerator theory:

$$x' = \frac{dx}{ds} = \frac{dx}{dt} \frac{dt}{ds} = \frac{\beta_x}{\beta} \quad \text{where } \beta_x = v_x / c$$

$$\int p dq = m c \int \gamma \beta_x dx$$

$$\int p dq = m c \gamma \beta \int x' dx$$

$\underbrace{\hspace{1.5cm}}_{\varepsilon}$

$$\Rightarrow \varepsilon = \int x' dx \propto \frac{1}{\beta \gamma}$$

the beam emittance  
shrinks during  
acceleration  $\varepsilon \sim 1/\gamma$




**Nota bene:**

1.) A proton machine ... or an electron linac ... needs the highest aperture at injection energy !!!  
 as soon as we start to accelerate the **beam size shrinks as  $\gamma^{-1/2}$**  in both planes.


$$\sigma = \sqrt{\epsilon\beta}$$

2.) At lowest energy the machine will have the major aperture problems,  
 $\hat{\beta} \rightarrow$  here we have to **minimise**

3.) we need **different beam optics** at  
 A Mini Beta concept will only be

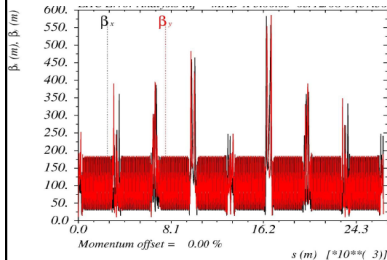

LHC injection optics at 450 GeV


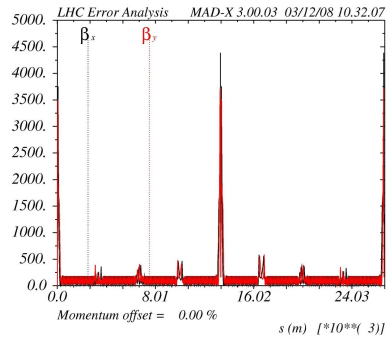


LHC mini beta optics at 7000 GeV

**Example: HERA proton ring**

injection energy: 40 GeV  $\gamma = 43$   
 flat top energy: 920 GeV  $\gamma = 980$

emittance  $\epsilon$  (40GeV) =  $1.2 \times 10^{-7}$   
 $\epsilon$  (920GeV) =  $5.1 \times 10^{-9}$

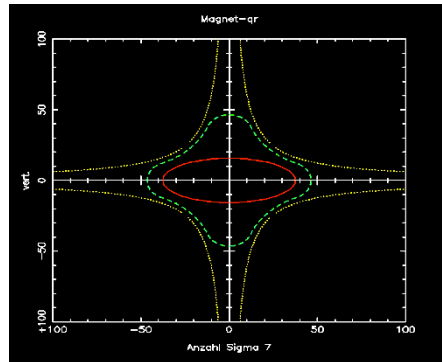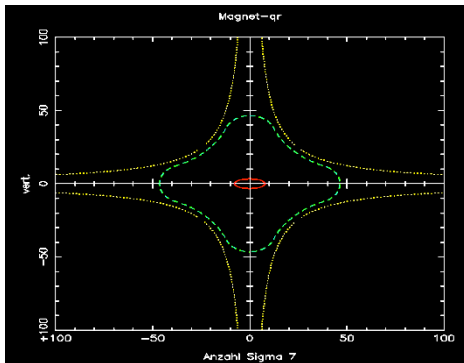

7  $\sigma$  beam envelope at E = 40 GeV

... and at E = 920 GeV


The „not so ideal world“

## 14.) The „ $\Delta p / p \neq 0$ “ Problem

ideal accelerator: all particles will see the same accelerating voltage.  
 $\rightarrow \Delta p / p = 0$

„nearly ideal“ accelerator: Cockroft Walton or van de Graaf

$$\Delta p / p \approx 10^{-5}$$



Vitron, Straßbourg, inner structure of the acc. section




MP Tandem van de Graaf Accelerator at MPI for Nucl. Phys. Heidelberg

## RF Acceleration


Energy Gain per „Gap“:

$$W = q U_0 \sin \omega_{RF} t$$


1928, Wideroe

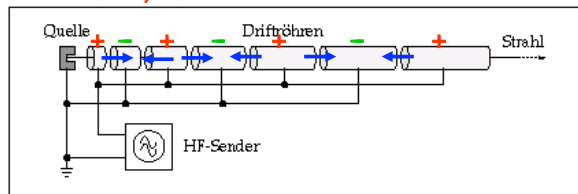

drift tube structure at a proton linac (GSI Unilac)

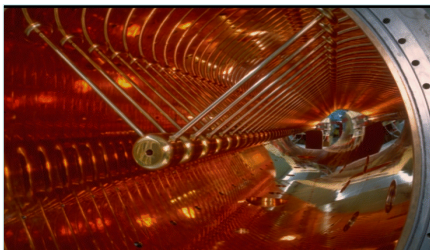


500 MHz cavities in an electron storage ring

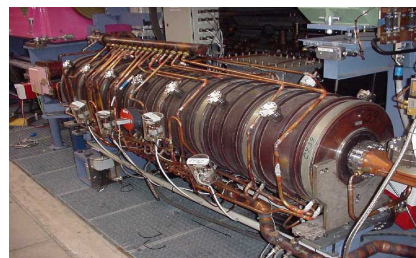

\* RF Acceleration: multiple application of the same acceleration voltage; brilliant idea to gain higher energies


**Problem: panta rhei !!!**

(Heraklit: 540-480 v. Chr.)



Example: HERA RF:

Bunch length of Electrons  $\approx 1\text{ cm}$



$$\left. \begin{aligned} \nu &= 500\text{ MHz} \\ c &= \lambda \nu \end{aligned} \right\} \lambda = 60\text{ cm}$$

$$\lambda = 60\text{ cm}$$

$$\sin(90^\circ) = 1$$


$$\sin(84^\circ) = 0.994$$

$$\frac{\Delta U}{U} = 6.0 \cdot 10^{-3}$$

typical momentum spread of an electron bunch:

$$\frac{\Delta p}{p} \approx 1.0 \cdot 10^{-3}$$

**Dispersive and Chromatic Effects:  $\Delta p/p \neq 0$**

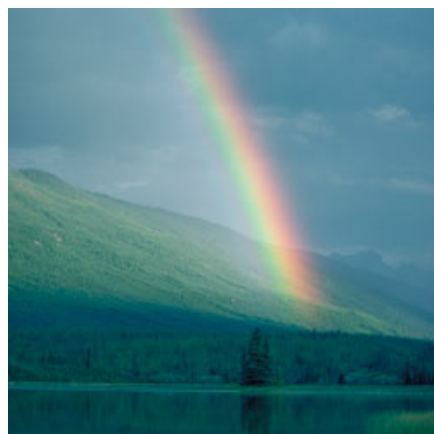

Are there any Problems ???  
Sure there are !!!

font colors due to pedagogical reasons

### 15.) Dispersion: trajectories for $\Delta p / p \neq 0$

**Question:** do you remember last session, page 12 ? ... sure you do

Force acting on the particle

$$F = m \frac{d^2}{dt^2} (x + \rho) - \frac{mv^2}{x + \rho} = e B_y v$$

remember:  $x \approx mm, \rho \approx m \dots \rightarrow$  develop for small  $x$


$$m \frac{d^2 x}{dt^2} - \frac{mv^2}{\rho} \left(1 - \frac{x}{\rho}\right) = e B_y v$$

consider only linear fields, and change independent variable:  $t \rightarrow s$        $B_y = B_0 + x \frac{\partial B_y}{\partial x}$

$$x'' - \frac{1}{\rho} \left(1 - \frac{x}{\rho}\right) = \frac{e B_0}{mv} + \frac{e x g}{mv}$$

$p = p_0 + \Delta p$

... but now take a small momentum error into account !!!



### Dispersion:

develop for small momentum error       $\Delta p \ll p_0 \Rightarrow \frac{1}{p_0 + \Delta p} \approx \frac{1}{p_0} - \frac{\Delta p}{p_0^2}$

$$x'' - \frac{1}{\rho} + \frac{x}{\rho^2} \approx \underbrace{\frac{e B_0}{p_0}}_{-\frac{1}{\rho}} - \frac{\Delta p}{p_0^2} e B_0 + \underbrace{\frac{x e g}{p_0}}_{k * x} - \underbrace{x e g \frac{\Delta p}{p_0^2}}_{\approx 0}$$

$$x'' + \frac{x}{\rho^2} \approx \frac{\Delta p}{p_0} * \underbrace{\frac{(-e B_0)}{p_0}}_{\frac{1}{\rho}} + k * x = \frac{\Delta p}{p_0} * \frac{1}{\rho} + k * x$$

$$x'' + \frac{x}{\rho^2} - kx = \frac{\Delta p}{p_0} \frac{1}{\rho} \quad \rightarrow \quad x'' + x \left( \frac{1}{\rho^2} - k \right) = \frac{\Delta p}{p_0} \frac{1}{\rho}$$

Momentum spread of the beam adds a term on the r.h.s. of the equation of motion.  
 $\rightarrow$  inhomogeneous differential equation.

**Dispersion:**

$$x'' + x\left(\frac{1}{\rho^2} - k\right) = \frac{\Delta p}{p} \cdot \frac{1}{\rho}$$

**general solution:**

$$x(s) = x_h(s) + x_i(s)$$

$$\begin{cases} x_h''(s) + K(s) \cdot x_h(s) = 0 \\ x_i''(s) + K(s) \cdot x_i(s) = \frac{1}{\rho} \cdot \frac{\Delta p}{p} \end{cases}$$

**Normalise with respect to  $\Delta p/p$ :**

$$D(s) = \frac{x_i(s)}{\frac{\Delta p}{p}}$$

**Dispersion function  $D(s)$**


\* is that special orbit, an ideal particle would have for  $\Delta p/p = 1$

\* the orbit of any particle is the sum of the well known  $x_i$  and the dispersion

\* as  $D(s)$  is just another orbit it will be subject to the focusing properties of the lattice

**Dispersion**

Example: homogeneous dipole field

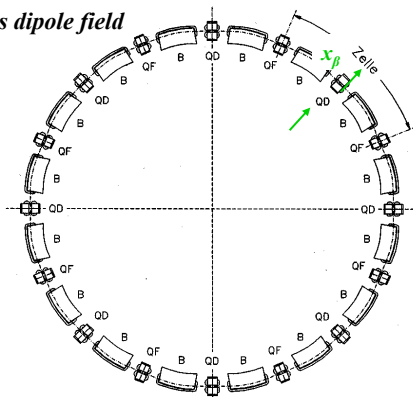

it for  $\Delta p/p > 0$

$$D(s) \cdot \frac{\Delta p}{p}$$

**Matrix formalism:**

$$\begin{cases} x(s) = x_\beta(s) + D(s) \cdot \frac{\Delta p}{p} \\ x(s) = C(s) \cdot x_0 + S(s) \cdot x'_0 + D(s) \cdot \frac{\Delta p}{p} \end{cases}$$

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} \begin{pmatrix} x \\ x' \end{pmatrix}_0 + \frac{\Delta p}{p} \begin{pmatrix} D \\ D' \end{pmatrix}$$

$$C = \cos(\sqrt{|k|}s) \quad S = \frac{1}{\sqrt{|k|}} \sin(\sqrt{|k|}s)$$

$$C' = \frac{dC}{ds} \quad S' = \frac{dS}{ds}$$

or expressed as 3x3 matrix

$$\begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_s = \begin{pmatrix} C & S & D \\ C' & S' & D' \\ 0 & 0 & 1 \end{pmatrix} \cdot \begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_0$$

Example

$$\left. \begin{aligned} x_\beta &= 1 \dots 2 \text{ mm} \\ D(s) &\approx 1 \dots 2 \text{ m} \\ \Delta p/p &\approx 1 \cdot 10^{-3} \end{aligned} \right\}$$


Amplitude of Orbit oscillation  
contribution due to Dispersion  $\approx$  beam size  
 $\rightarrow$  Dispersion must vanish at the collision point



Calculate  $D, D'$ : ... takes a couple of sunny Sunday evenings !

$$D(s) = S(s) \int_{s_0}^{s_1} \frac{1}{\rho} C(\tilde{s}) d\tilde{s} - C(s) \int_{s_0}^{s_1} \frac{1}{\rho} S(\tilde{s}) d\tilde{s}$$

(proof see appendix)

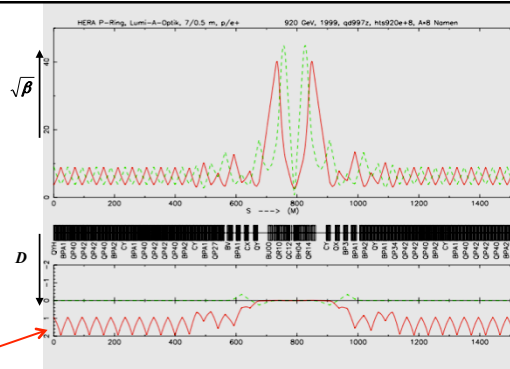

Example: Drift

$$M_{\text{Drift}} = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix}$$

$$D(s) = S(s) \underbrace{\int_{s_0}^{s_1} \frac{1}{\rho} C(\tilde{s}) d\tilde{s}}_{=0} - C(s) \underbrace{\int_{s_0}^{s_1} \frac{1}{\rho} S(\tilde{s}) d\tilde{s}}_{=0}$$

Example: Dipole

$$M_{\text{foc}} = \begin{pmatrix} \cos(\sqrt{|K|}s) & \frac{1}{\sqrt{|K|}} \sin(\sqrt{|K|}s) \\ -\sqrt{|K|} \sin(\sqrt{|K|}s) & \cos(\sqrt{|K|}s) \end{pmatrix}_0$$

$$\left. \begin{aligned} K &= \frac{1}{\rho^2} \\ s &= l_B \end{aligned} \right\}$$

$$M_{\text{Dipole}} = \begin{pmatrix} \cos \frac{l}{\rho} & \rho \sin \frac{l}{\rho} \\ -\frac{1}{\rho} \sin \frac{l}{\rho} & \cos \frac{l}{\rho} \end{pmatrix}$$

$\rightarrow$


$$D(s) = \rho \cdot (1 - \cos \frac{l}{\rho})$$

$$D'(s) = \sin \frac{l}{\rho}$$

Example: Dispersion, calculated by an optics code for a real machine

$$x_D = D(s) \frac{\Delta p}{p}$$


\*  $D(s)$  is created by the dipole magnets  
... and afterwards focused by the quadrupole fields

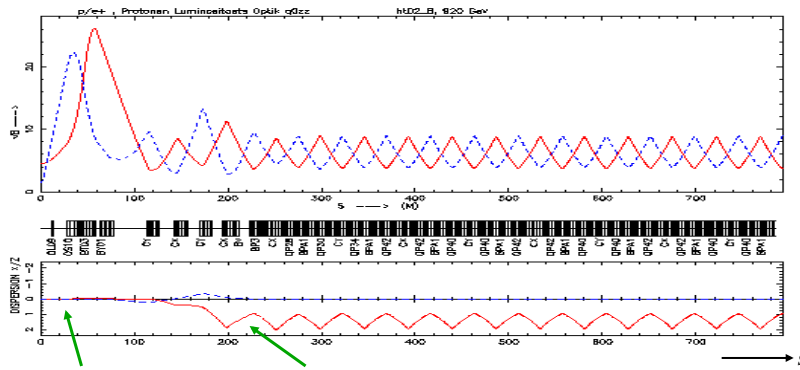

Mini Beta Section,  
→ no dipoles !!!

$D(s) \approx 1 \dots 2 \text{ m}$

Dispersion is visible

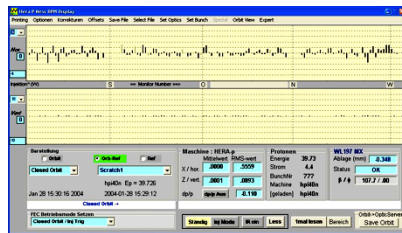

HERA Standard Orbit


dedicated energy change of the stored beam

→ closed orbit is moved to a  
dispersions trajectory

$$x_D = D(s) * \frac{\Delta p}{p}$$

Attention: at the Interaction Points  
we require  $D=D' = 0$

HERA Dispersion Orbit

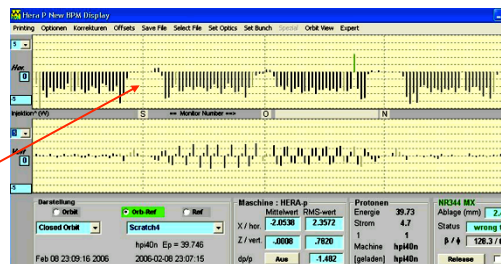


## 16.) Momentum Compaction Factor: $\alpha_p$

particle with a displacement  $x$  to the design orbit  
 → path length  $dl$  ...

$$\frac{dl}{ds} = \frac{\rho + x}{\rho}$$

$$\rightarrow dl = \left(1 + \frac{x}{\rho(s)}\right) ds$$

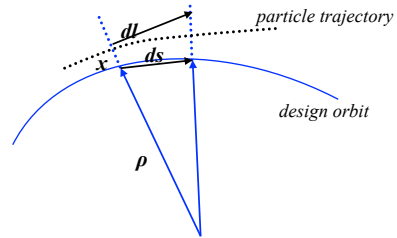

circumference of an off-energy closed orbit

$$l_{\Delta E} = \oint dl = \oint \left(1 + \frac{x_{\Delta E}}{\rho(s)}\right) ds$$

remember:

$$x_{\Delta E}(s) = D(s) \frac{\Delta p}{p}$$

$$\delta l_{\Delta E} = \frac{\Delta p}{p} \oint \left(\frac{D(s)}{\rho(s)}\right) ds$$

\* The lengthening of the orbit for off-momentum particles is given by the dispersion function and the bending radius.

**Definition:**  $\frac{\delta l_{\epsilon}}{L} = \alpha_p \frac{\Delta p}{p}$

$$\rightarrow \alpha_p = \frac{1}{L} \oint \left(\frac{D(s)}{\rho(s)}\right) ds$$

**For first estimates assume:**  $\frac{1}{\rho} = \text{const.}$

$$\int_{\text{dipoles}} D(s) ds \approx l_{\Sigma(\text{dipoles})} \cdot \langle D \rangle_{\text{dipole}}$$

$$\alpha_p = \frac{1}{L} l_{\Sigma(\text{dipoles})} \cdot \langle D \rangle \frac{1}{\rho} = \frac{1}{L} 2\pi\rho \cdot \langle D \rangle \frac{1}{\rho} \rightarrow \alpha_p \approx \frac{2\pi}{L} \langle D \rangle \approx \frac{\langle D \rangle}{R}$$

**Assume:**  $v \approx c$

$$\rightarrow \frac{\delta T}{T} = \frac{\delta l_{\epsilon}}{L} = \alpha_p \frac{\Delta p}{p}$$

$\alpha_p$  combines via the dispersion function the momentum spread with the longitudinal motion of the particle.



**Resume':**

*transfer matrix in Twiss form*  $\begin{pmatrix} x \\ x' \end{pmatrix}_s = M \begin{pmatrix} x \\ x' \end{pmatrix}_0$

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$

*... and for the periodic case*

$$M(s) = \begin{pmatrix} \cos \psi_{turn} + \alpha_s \sin \psi_{turn} & \beta_s \sin \psi_{turn} \\ -\gamma_s \sin \psi_{turn} & \cos \psi_{turn} - \alpha_s \sin \psi_{turn} \end{pmatrix}$$

*beam emittance during acceleration*  $\varepsilon \propto \frac{1}{\beta \gamma}$

*dispersion*  $D(s) = \frac{x_f(s)}{\Delta p / p}$

and as it is independent of the variable „s“  $\frac{dW}{ds} = \frac{d}{ds} (CS' - SC') = CS'' - SC'' = -K(CS - SC) = 0$

we get for the initial conditions that we had chosen ...  $\left. \begin{matrix} C_0 = 1, & C'_0 = 0 \\ S_0 = 0, & S'_0 = 1 \end{matrix} \right\} W = \begin{vmatrix} C & S \\ C' & S' \end{vmatrix} = 1$

$$D'' = S'' * \int \frac{C}{\rho} d\tilde{s} - C'' * \int \frac{S}{\rho} d\tilde{s} + \frac{1}{\rho}$$

**remember: S & C are solutions of the homog. equation of motion:**  $S'' + K * S = 0$   
 $C'' + K * C = 0$

$$D'' = -K * S * \int \frac{C}{\rho} d\tilde{s} + K * C * \int \frac{S}{\rho} d\tilde{s} + \frac{1}{\rho}$$

$$D'' = -K * \underbrace{\left\{ S \int \frac{C}{\rho} d\tilde{s} + C \int \frac{S}{\rho} d\tilde{s} \right\}}_{=D(s)} + \frac{1}{\rho}$$

$$D'' = -K * D + \frac{1}{\rho} \quad \dots \text{ or} \quad \underline{\underline{D'' + K * D = \frac{1}{\rho}}} \quad \text{qed}$$