MUonE

A high precision measurement of a_μ^{HLO} with a 150 GeV μ beam on e^- target at CERN

G. Venanzoni,
INFN-Pisa
on behalf of the proponents

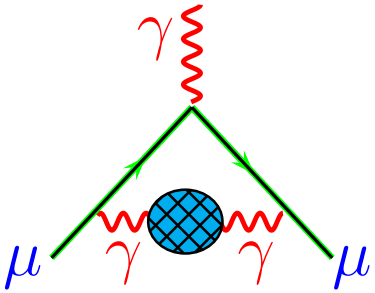

"The closer you look the more there is to see" (F. Jegerlehner)

PBC Workshop, CERN 14 June 2018

Outline

- Reminder on MUonE proposal
- Some recent progress
- Plans
- Conclusions

a_μ^{HLO} calculation, traditional way: time-like data

[C. Bouchiat, L. Michel,'61; N. Cabibbo, R. Gatto 61;
L. Durand '62-'63; M. Gourdin, E. De Rafael, ' 69;
S. Eidelman F. Jegerlehner ' 95,. . . .]

- Optical theorem and analyticity:

$$\sigma(s)_{(e^+e^-\to had)} = \frac{4\pi}{s}\,\mathrm{Im}\,\Pi_{hadron}(s)$$

$$a_\mu^{HLO} = \frac{1}{4\pi^3}\int_{4m_\pi^2}^{\infty} ds\, K(s)\cdot\sigma(s)_{(e^+e^-\to had)}$$

- The main contribution is in the highly fluctuating low energy

$$K(s) = \int_0^1 dx\,\frac{x^2(1-x)}{x^2+(1-x)(s/m^2)} \sim \frac{1}{s}$$

The enhancement at low energy implies that the $\rho \to \pi^+\pi^-$ resonance is dominating the dispersion integral (~ 75 %). Current precision **~0.5%**→ need to be reduced by a factor **~2**

Collection of many experimental results

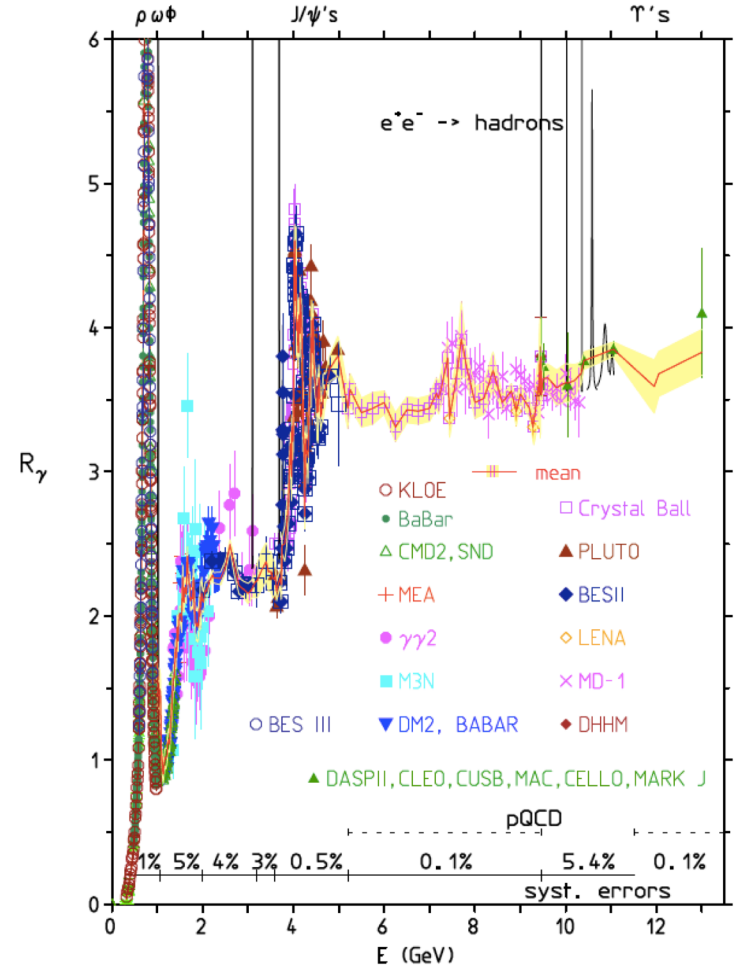

The high-energy tail of the integral is calculated using pQCD

$\Delta^{SM\text{-}BNL}$~ 4% of a_μ^{HLO}

Alternative approach: a_μ^{HLO} from space-like region

[C.M. C. Calame et al, Phys. Lett. B 746 (2015) 325]

$$a_\mu^{HLO} = \frac{\alpha}{\pi}\int_0^1 dx\,(1-x)\cdot\Delta\alpha_{had}\left(-\frac{x^2 m_\mu^2}{1-x}\right)$$

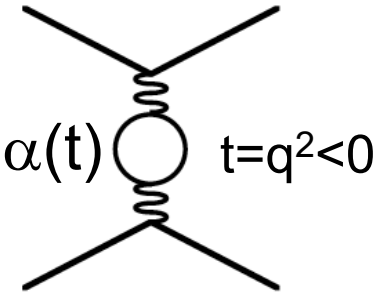

$$t = \frac{x^2 m_\mu^2}{x-1} \qquad 0 \le -t < +\infty$$

$$x = \frac{t}{2m_\mu^2}\left(1-\sqrt{1-\frac{4m_\mu^2}{t}}\right); \qquad 0 \le x < 1;$$

- **a_μ^{HLO} is given by the integral of the curve** (smooth behaviour)
- **It requires a measurement of** the hadronic contribution to the effective electromagnetic coupling in the space-like region **$\Delta\alpha_{had}$(t) (t=q²<o)**
- **It enhances** the contribution from **low** q² region (below 0.11 GeV²)
- **Its precision** is determined by the **uncertainty** on $\Delta\alpha_{had}$ (t) in this region

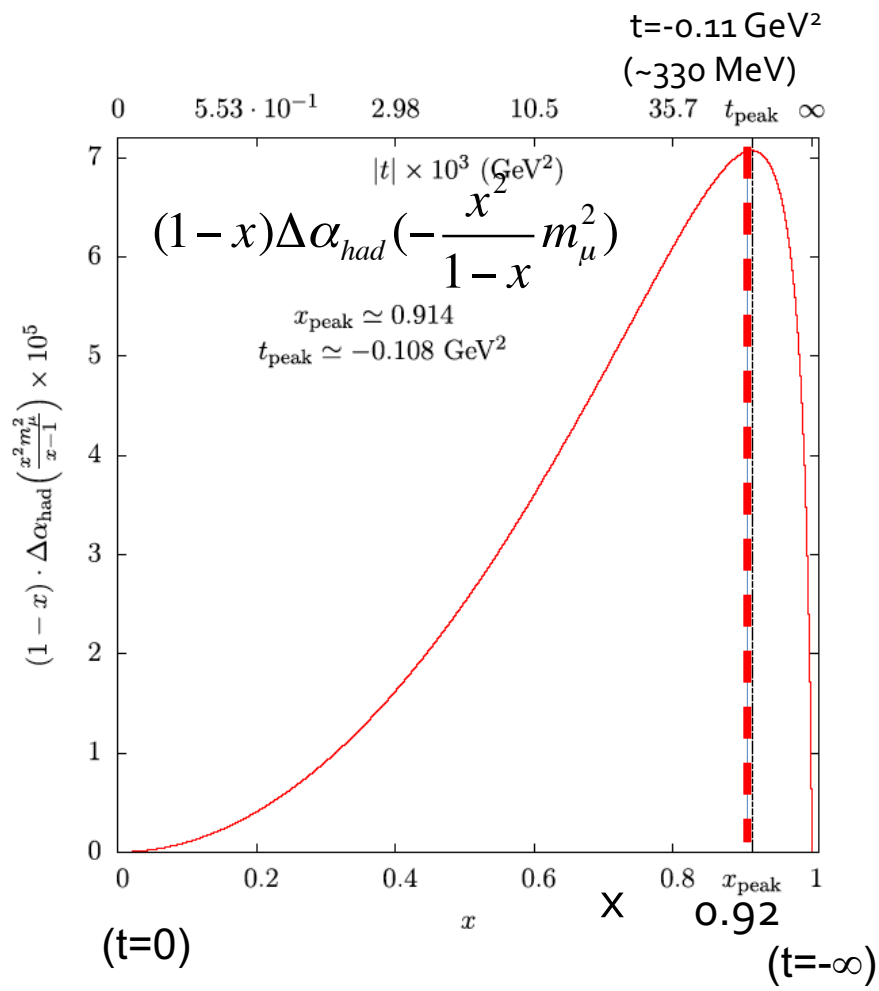

Experimental approach

Use of a 150 GeV μ beam on Be target at CERN (elastic scattering μe → μ e)

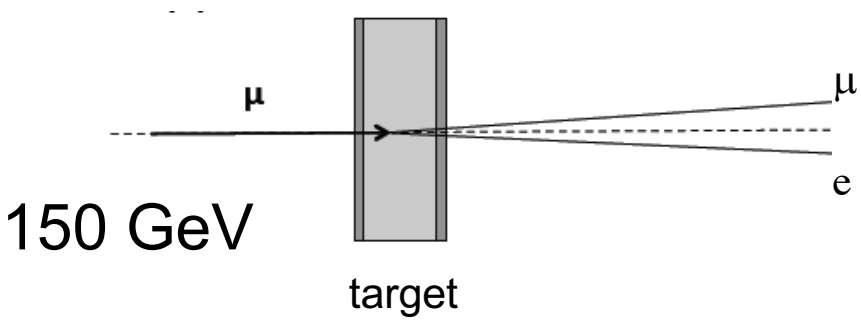

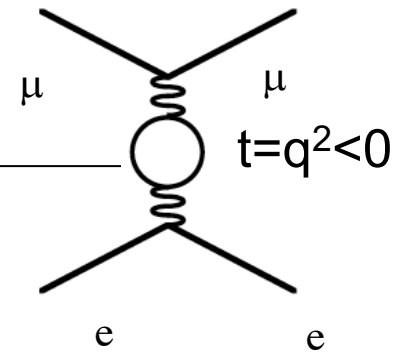

$$\left|\frac{\alpha(t)}{\alpha_0}\right|^2 = \left|\frac{1}{1-\Delta\alpha(t)}\right|^2 \qquad \Delta\alpha = \Delta\alpha_{lep} + \Delta\alpha_{had}$$

Measuring the leading hadronic contribution to the muon g-2 via μe **scattering,** G. Abbiendi *et al*, Eur.Phys.J. C77 (2017) no.3, 139

Statistical reach of MUonE on a_μ^{HLO}

(2 years of data taking at $1.3 \times 10^7 \mu/s$)

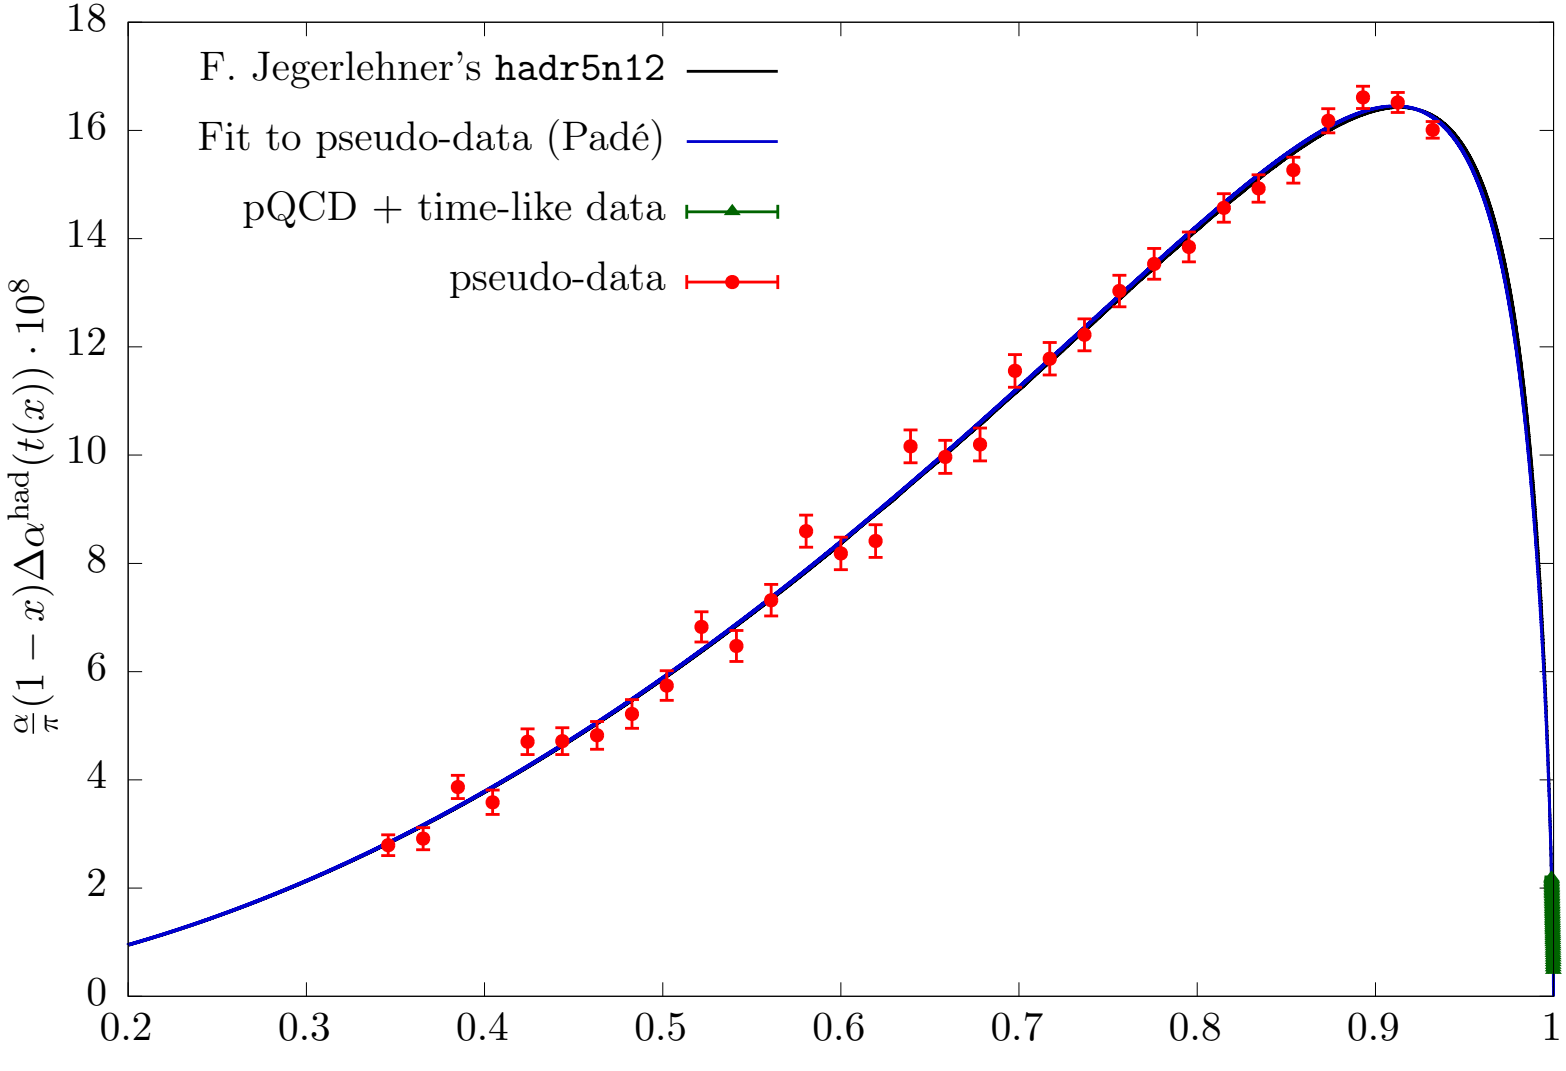

$a_\mu^{HLO} = 686.9 \pm 2.3 \times 10^{-10}$ (from fit to pseudo data)

TBC with input $a_\mu^{HLO} = 688.54 \pm 5.03 \times 10^{-10}$

Detector concept

Repetition (x60) of this single module

(~ 40-45 m total length)

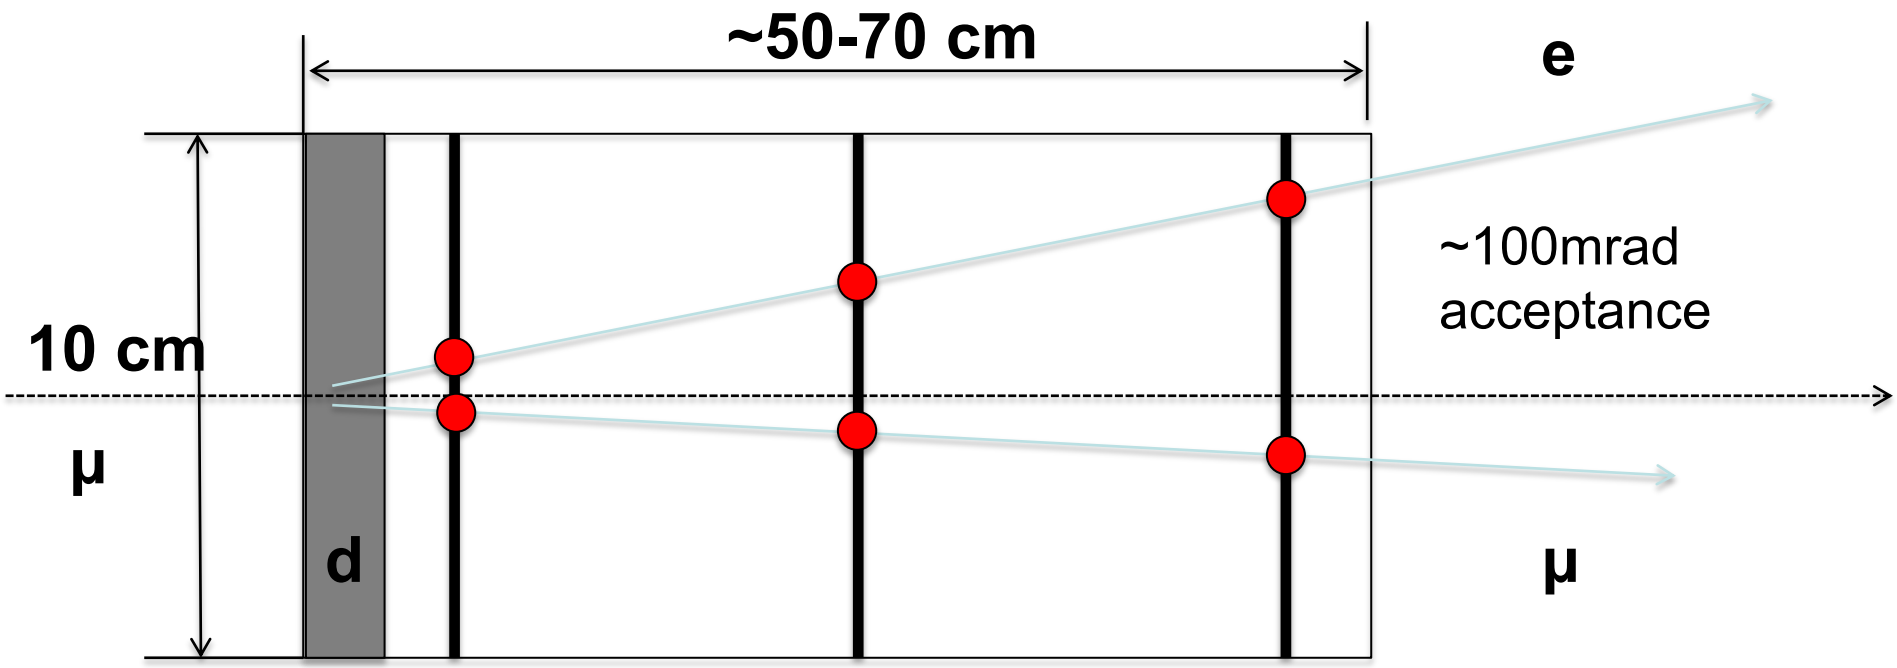

~1cm
Be Target

State-of-art Silicon detectors

hit resolution ~10 μm

Angular measurement $t=f(\theta_e; \theta_\mu)$

Expected angular resolution ~ 10 μm / 0.5 m = 0.02 mrad

At the end ECAL and Muon Filter for PID

MUonE : signal/normalization region

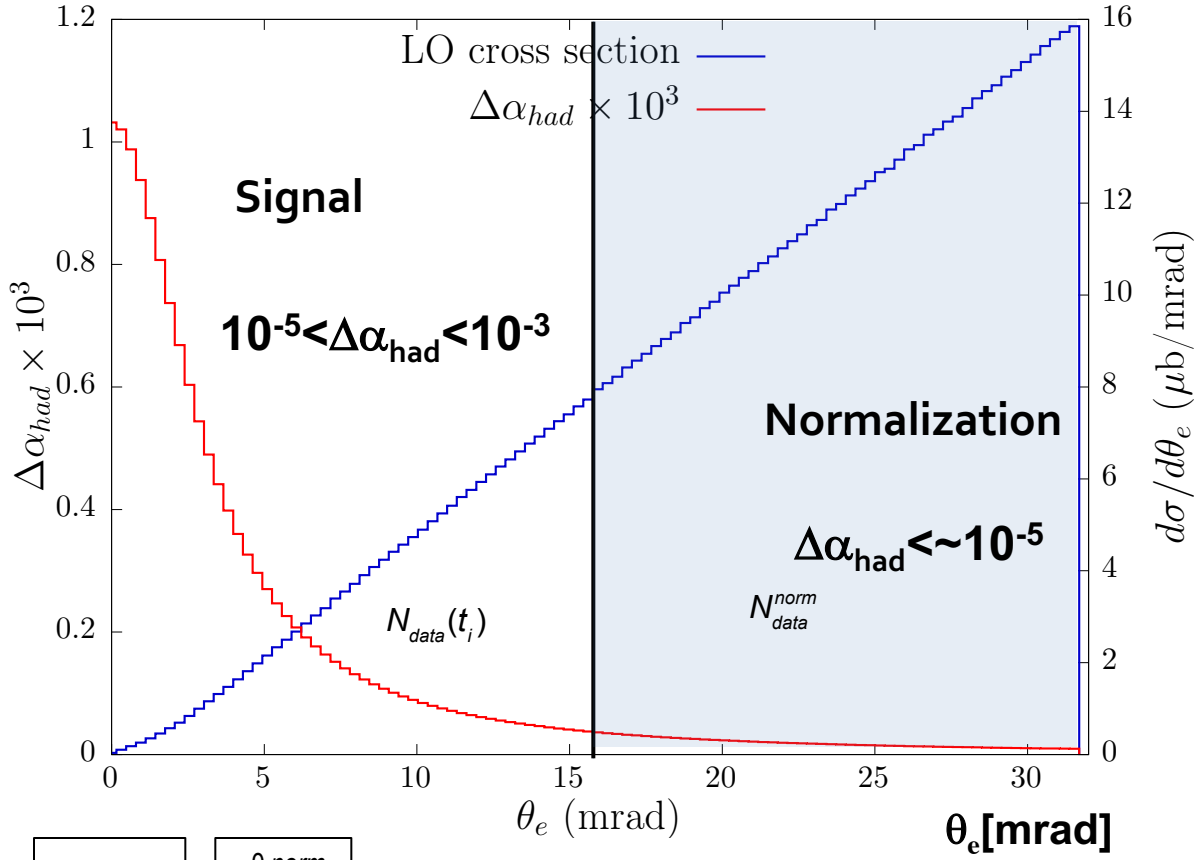

$$\frac{N_{data}(t_i)}{N^0_{MC}(t_i)} = \boxed{\frac{N_{data}(t_i)}{N^{norm}_{data}}} \times \boxed{\frac{\sigma^{0,norm}_{MC}}{\sigma^0_{MC}(t_i)}} \sim 1 - 2(\Delta\alpha_{lep}(t_i) + \Delta\alpha_{had}(t_i))$$

Ratio of the theoretical cross section (with no VP)

Ratio of data $N_{signal}(t)/N_{normalization}$

a_μ^{HLO} at 0.3% → These two ratios should be known at 10^{-5}

Elastic scattering in the (θ_e , θ_μ) plane

Coplanarity of the momentum vectors and angular kinematical constraint

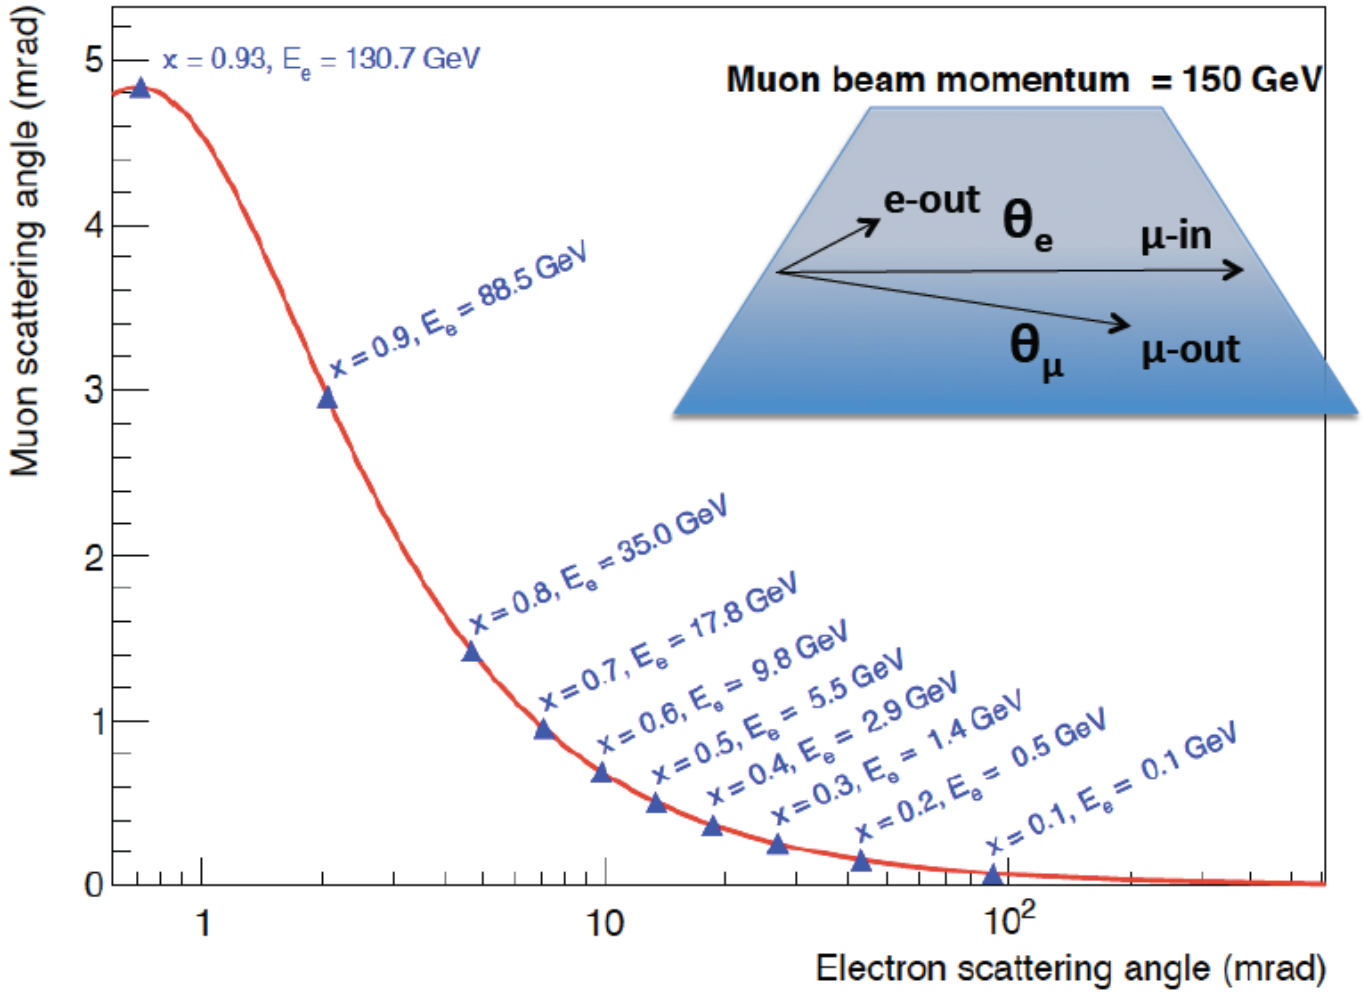

(Preliminary) Analysis of Test Beam data

First μ-e elastic events!

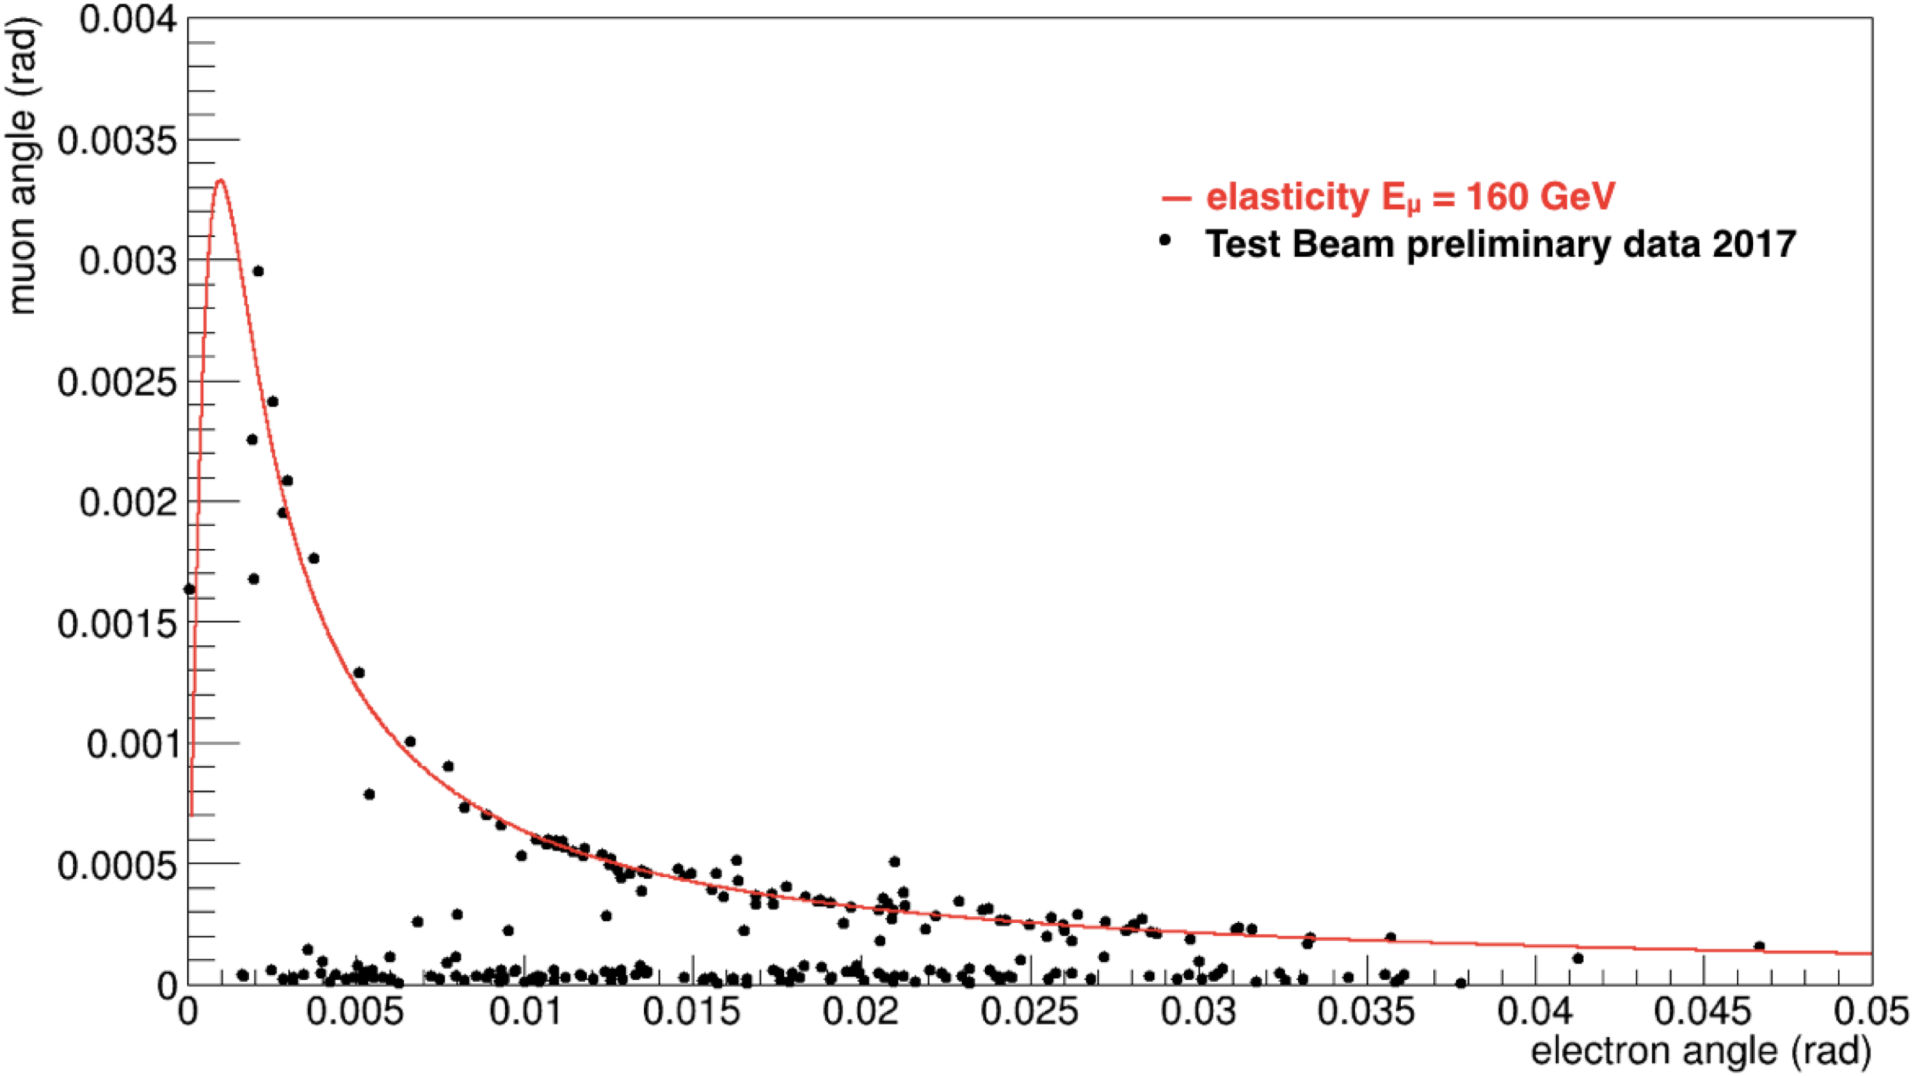

Systematics

1. Multiple scattering
2. Tracking (alignment & misreconstruction)
3. PID
4. Knowledge of muon momentum distribution
5. Background
6. Theoretical uncertainty on the μ-e cross section (see later)
7. …

Must be precisely known to keep the error on the cross section < 10ppm (breakdown of these contributions to a_μ^{HLO} in progress)

Multiple Scattering studies: Results from Test Beam

- 27 Sep-3 October 2017 at CERN "H8 Beam Line"
- Adapted UA9 Apparatus
- Beam energy: e- of 12/20 GeV; μ of 160 GeV
- 10^7 events with C targets of different thickness (2,4,8,-20mm)

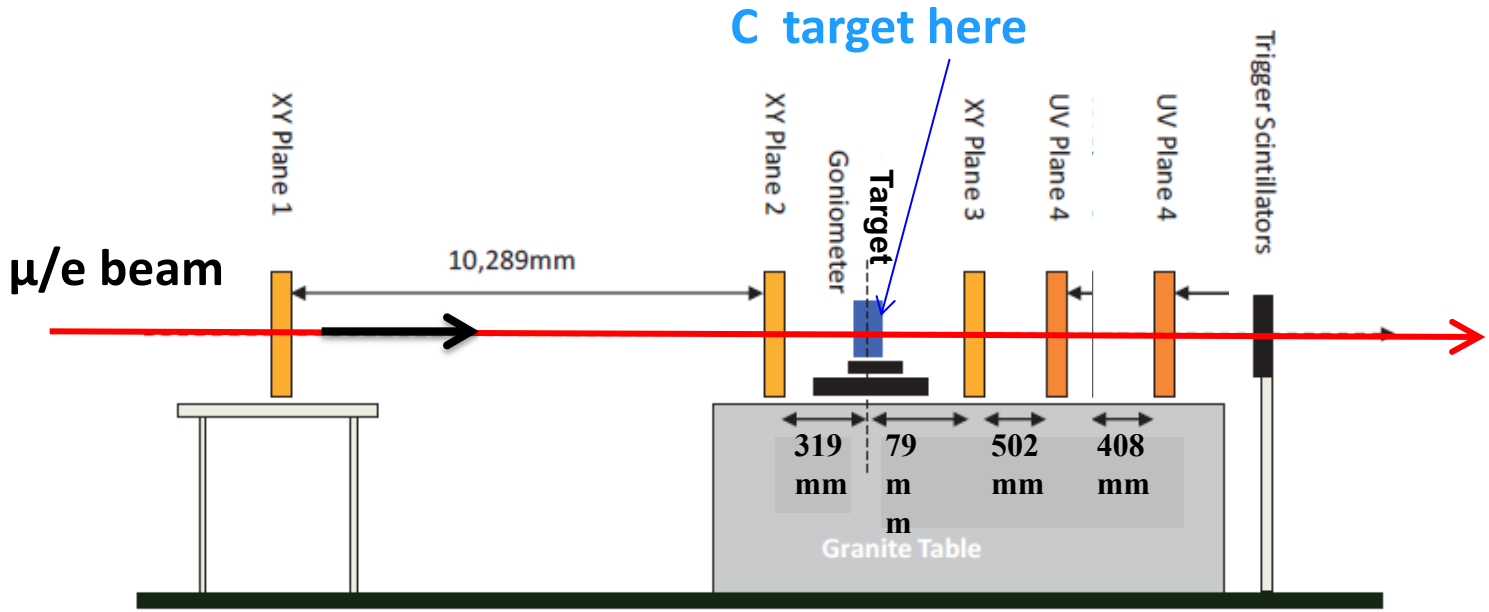

Adapted UA9 apparatus

5 Si planes: 2 before and 3 after the target, 3.8x3.8 cm2 intrinsic resolution ~**100**μrad

8mm, 12 GeV

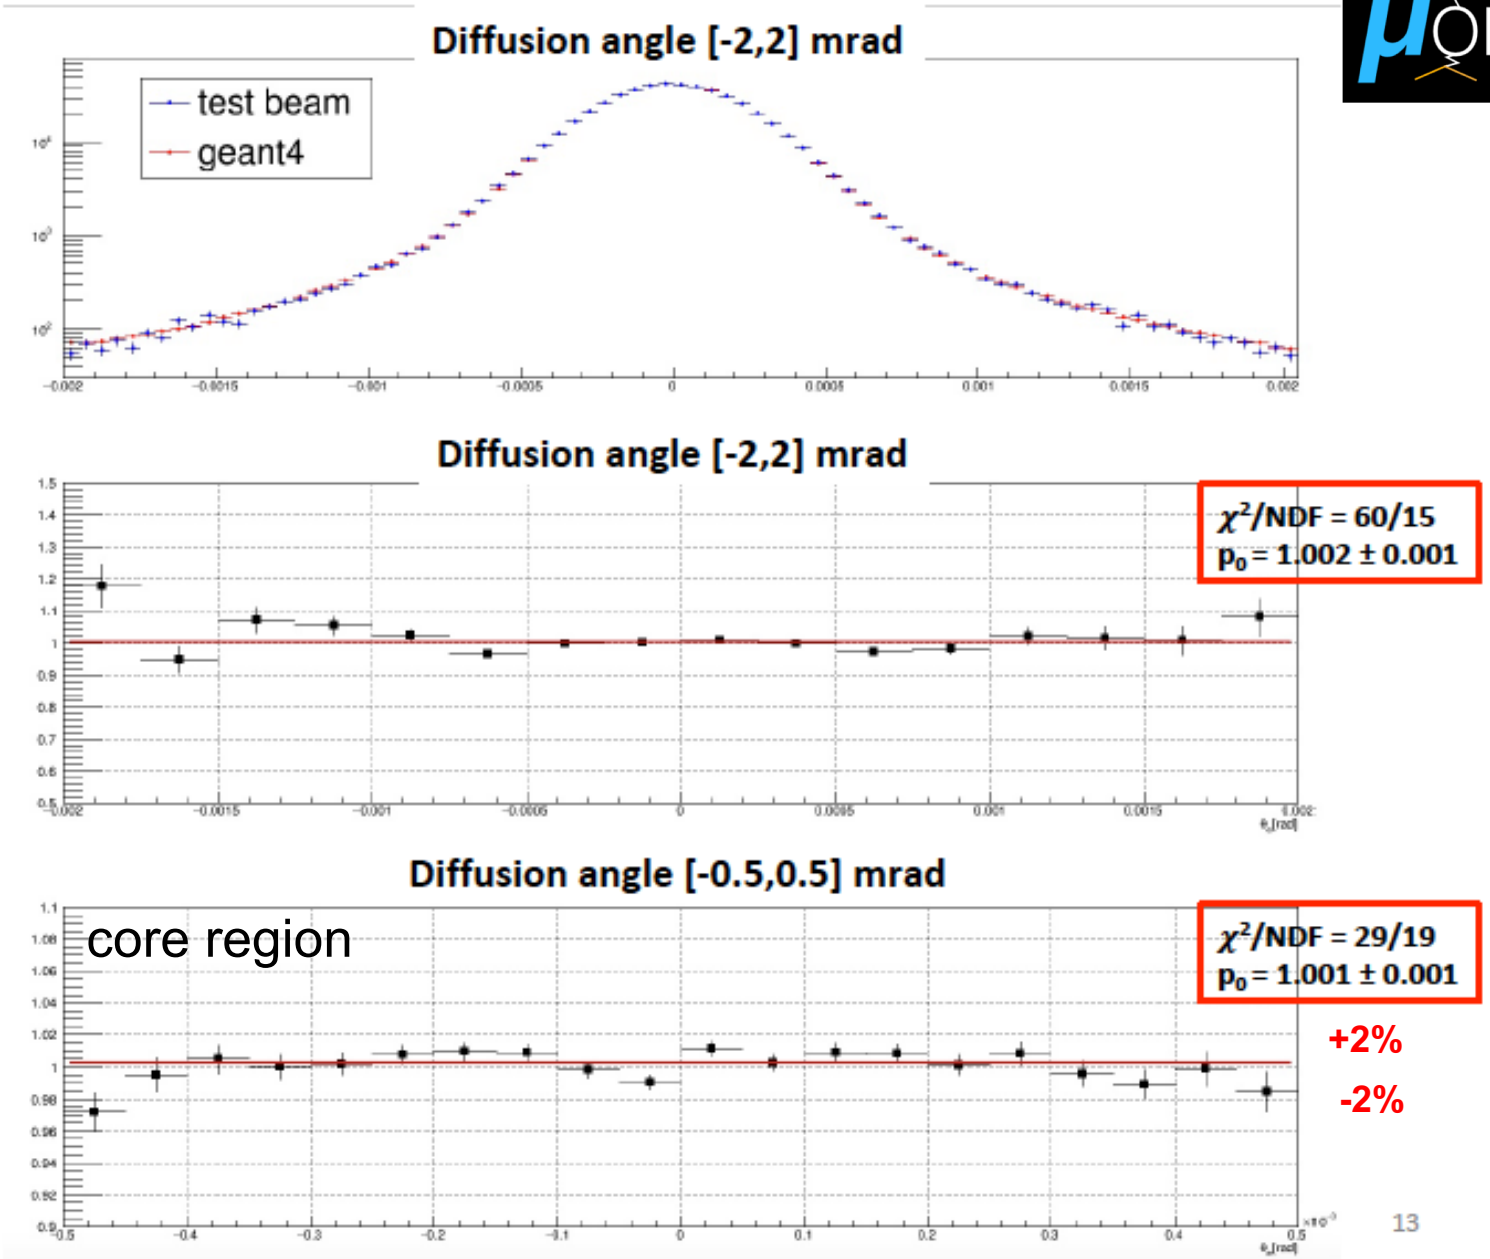

Agreement in the core region (90% of events) ~ 1%; outside few %

20mm, 12 GeV

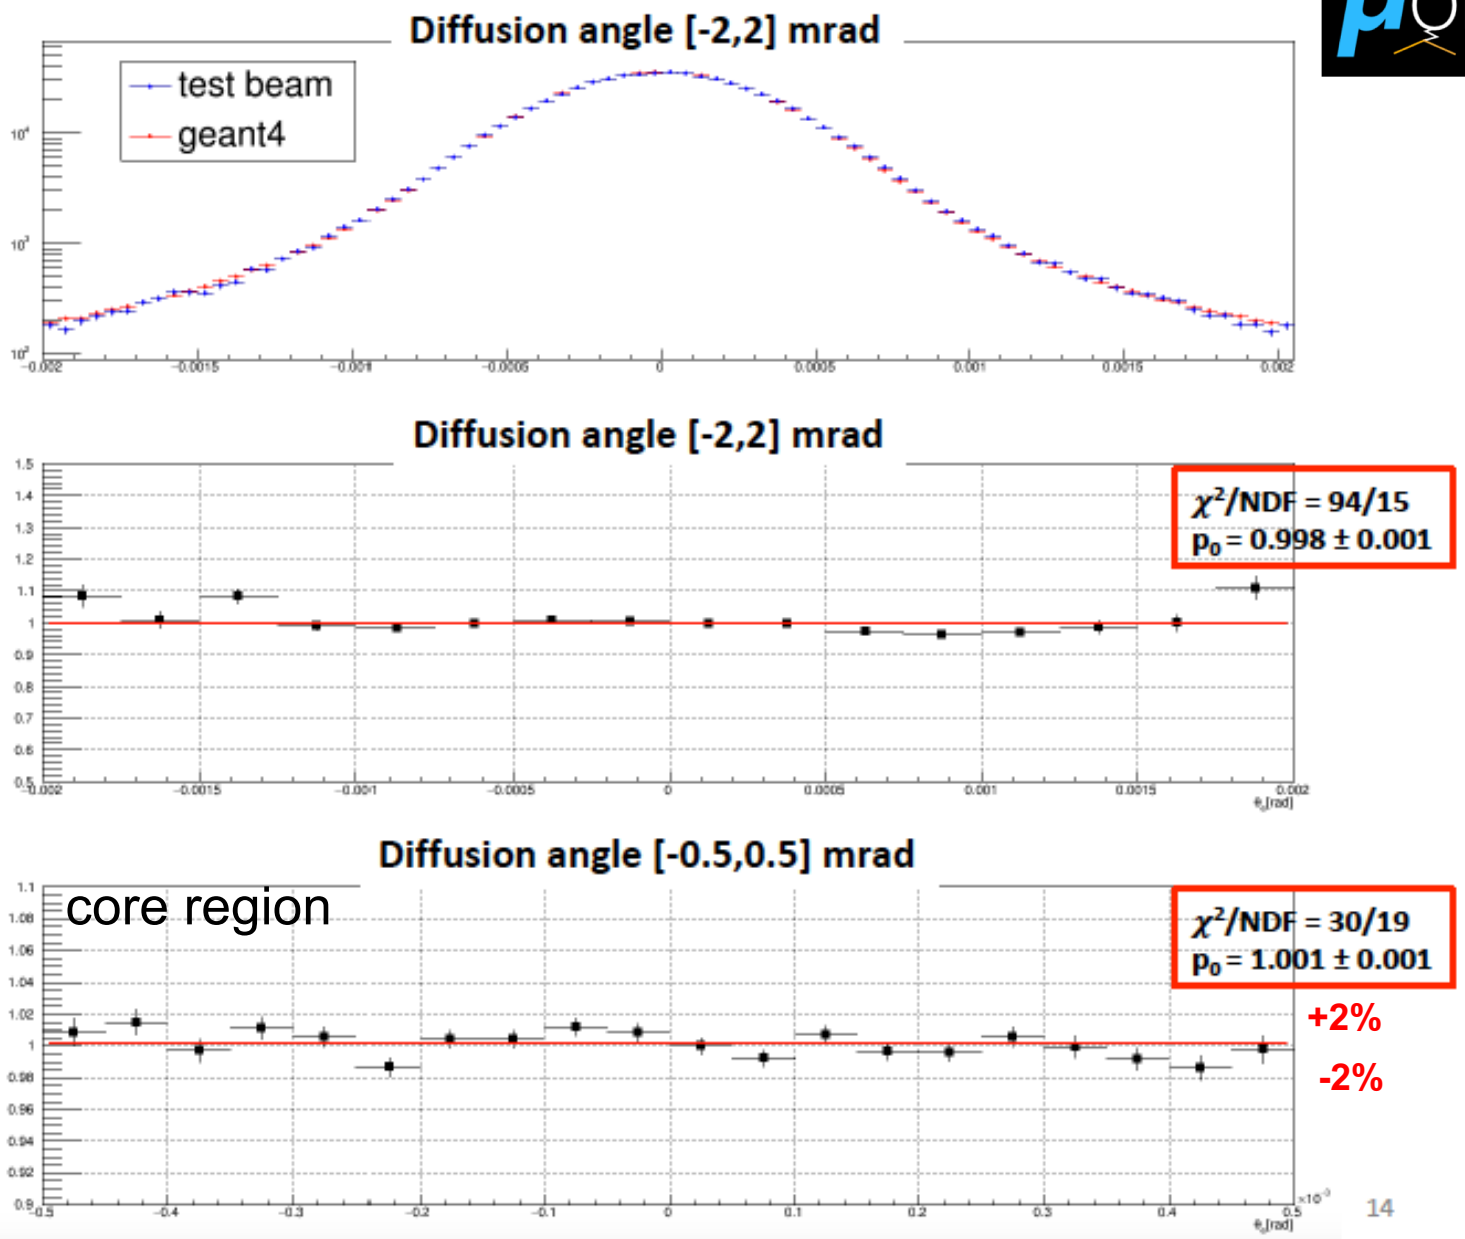

Agreement in the core region (90% of events) ~ 1%; outside few %

8mm, 20 GeV

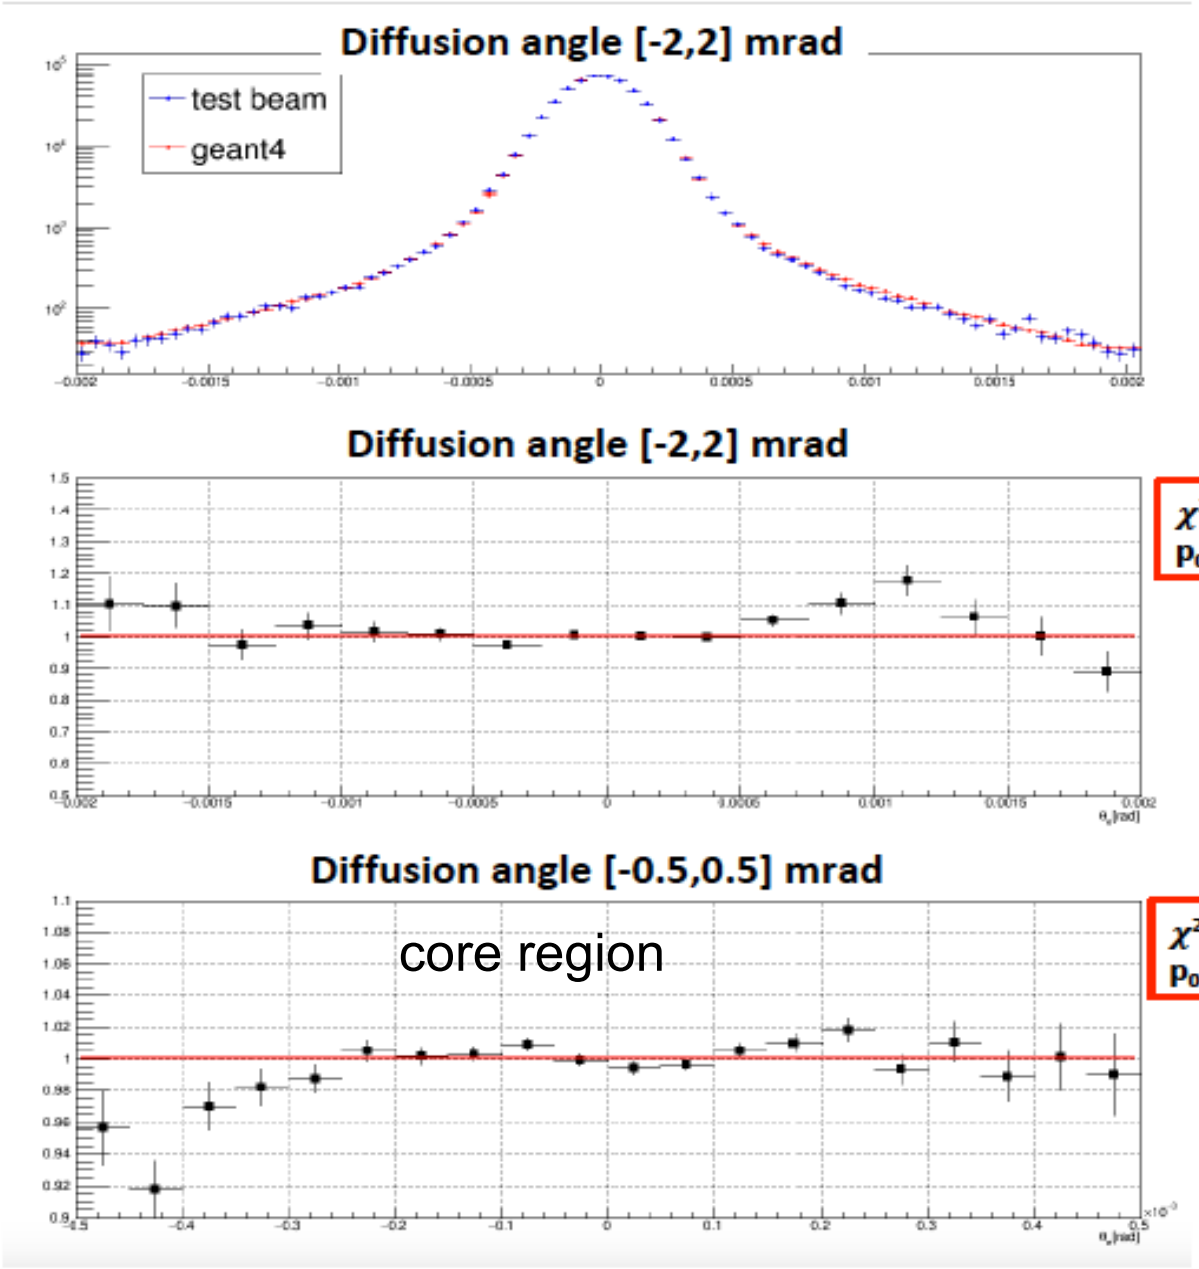

Agreement in the core region (90% of events) ~ 1%; outside few %

Detector optimization

- Target thickness (10mm Be default)
- Silicon sensors (type, material)
- Number of tracking stations per unit (3-4)
- Dimension of apparatus
- Calorimetry/PID
- Trigger/DAQ
- …

Some numbers:

- 60 cm total Be target ($2X_0$) segmented in 60 stations with 1 cm target ($0.03\ X_0$)
- ~40 m total detector length
- 10x10 cm^2 silicon detectors
- Resolve each μ,e track with uniform efficiency
- Best possible resolution on θμ (in the range<5mrad),θe (in the range <50 mrad)
- μ rate: ~60 MHz (peak) → 15 MHz (averaged)
- μ separation: 17 ns (peak) → 68 ns (averaged)
- Collect $4x10^{12}$ events with E_e>1GeV in ~2 years
- Scattering probability (E_e>1GeV): $1.7x10^{-4}$/cm
- Scattering event rate (E_e>1GeV): ~10 kHz per station (peak); 2.5 (avg)
- Scattering separation (E_e>1GeV): 100 μs per station

Silicon detectors survey

	ALICE Upg Inner	**ALICE** Upg Outer	**CMS** Upg 2S	2×**CMS** Upg 2S	**CMS** Upg PS	**CMS** Upg Pixel	2×**CMS** Current	**Mimosa26**	**LHCb** VELO-pix
Technology	MAPS	MAPS	Hybrid strip	Hybrid strip	Hybrid strip/px	Hybrid pixel	Hybrid strip	MAPS	Hybrid pixel
active x [cm]	27	21	10	10	10	33	10	1.06	4.246
active y [cm]	1.5	3	10	10	5	44.2	10	2.12	1.408
pixel size x [µm]	30	30	90	90	100	50	90	18.4	55
pixel size y [µm]	30	30	50000	90	1400	50	50000	18.4	55
σx [µm]	2	2	26	26	29	7	18	3.2	12
σy [µm]	2	2	14434	26	404	7	18	3.2	12
Material [x/X_0]	0.3%	0.8%	2.3%	4.5%	3.8%	2.0%	4.5%	0.10%	0.94%
Sensor mat. [x/X_0]	0.3%	0.8%	0.3%	0.6%	3.8%	2.0%	0.6%	0.10%	0.94%

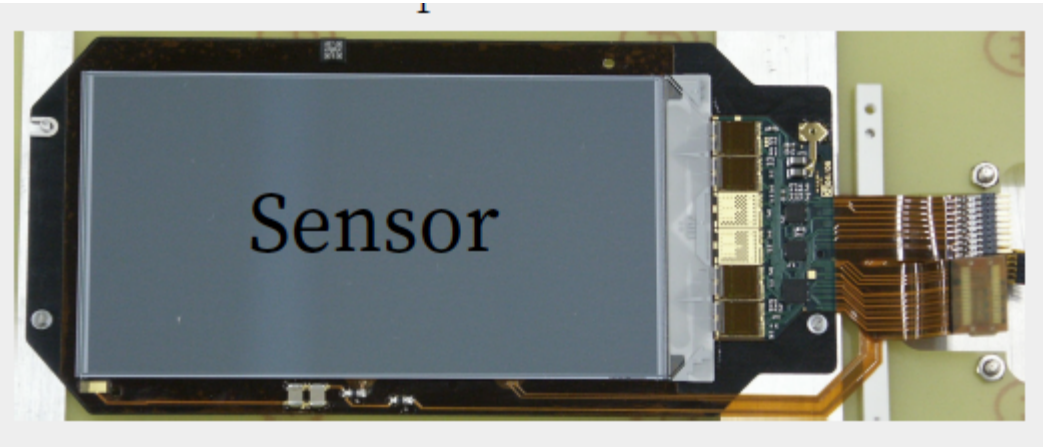

Test Beam 2018

Build up and test a full scale prototype (2 modules).

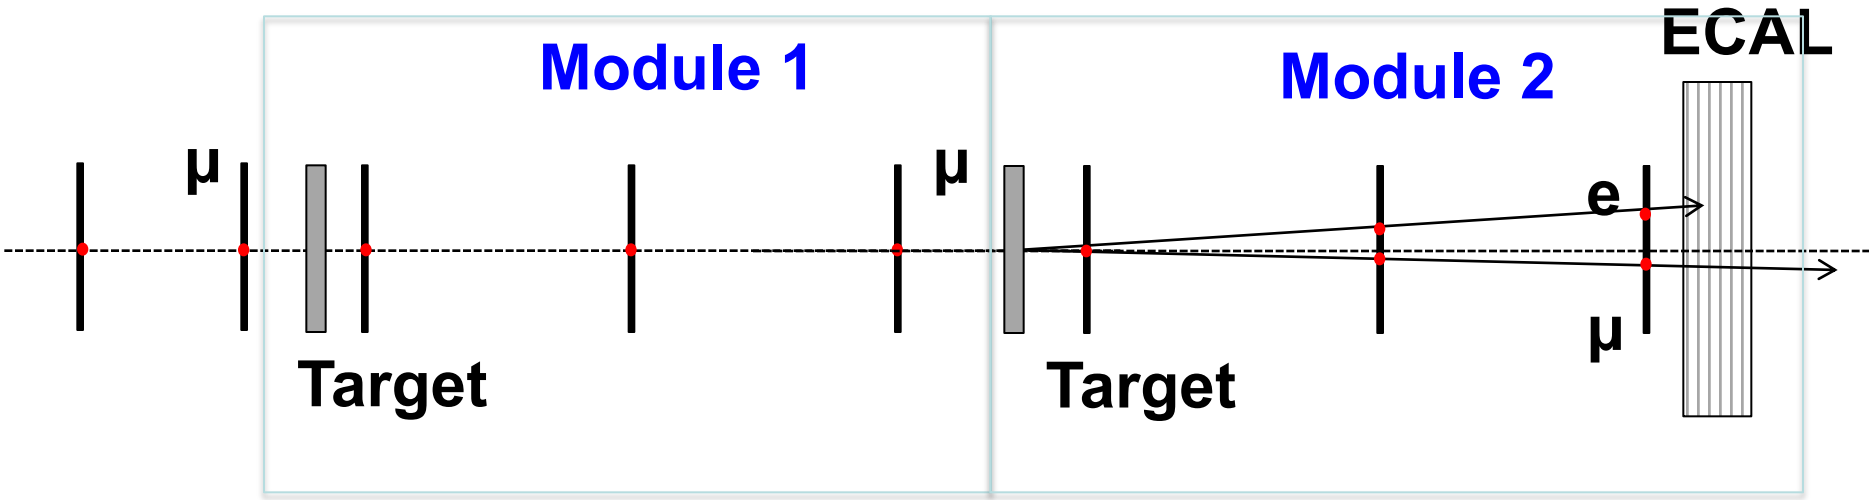

- Run of a 2 full scale modules on a muon beam on M2 (behind COMPASS) from April/May
- Study of the detector performance: signal/background; tracking efficiency; understand the systematics
- Data taking is going on!

EXPERIMENTAL SETUP

Picture taken on 8/4/18

Test Beam 2018

- Setup mounted in April 3-9;
- It take data since April 9
- 220M events already collected (~700GB);
- Rate: 7Mev/day (20GB/day)

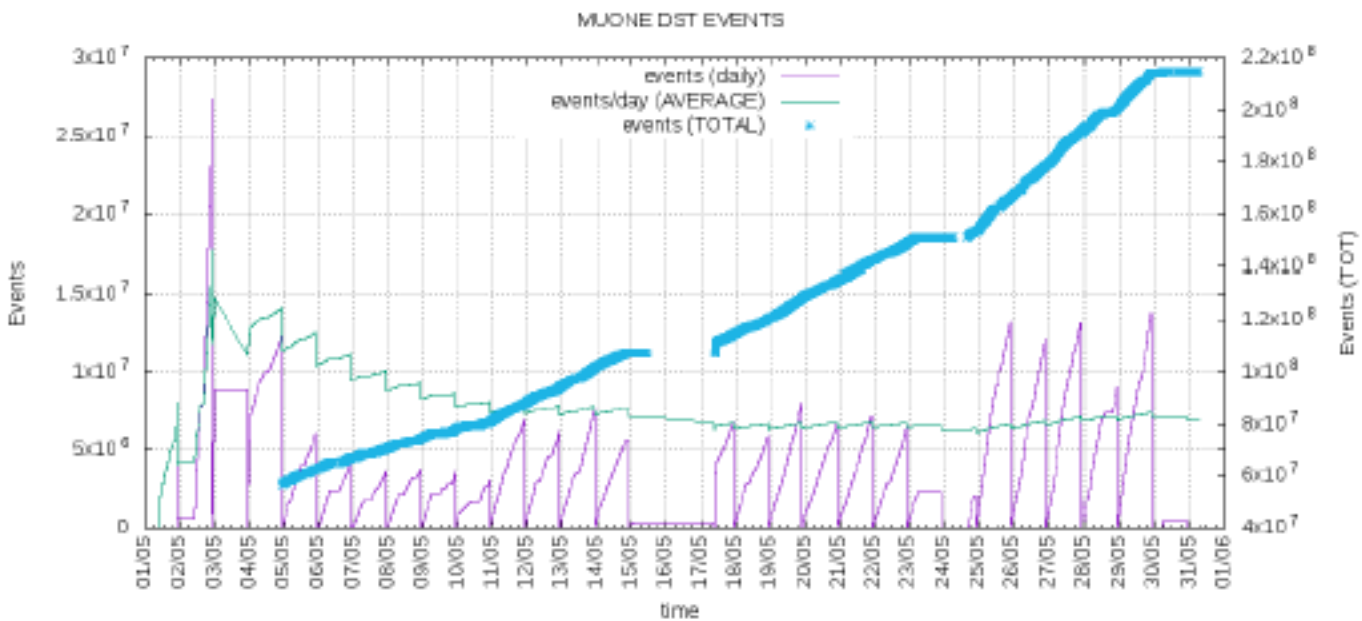

Theory

- QED NLO MC generator with full mass dependence has been developed and is currently under use (Pavia group)

- First results obtained for the NNLO box diagrams contributing to mu-e scattering in QED (Padova group)

1709.07435

Master integrals for the NNLO virtual corrections to μe scattering in QED: the planar graphs

Pierpaolo Mastrolia,[a,b] Massimo Passera,[b] Amedeo Primo,[a,b] Ulrich Schubert[c]

[a] *Dipartimento di Fisica ed Astronomia, Università di Padova, Via Marzolo 8, 35131 Padova, It*

[b] *INFN, Sezione di Padova, Via Marzolo 8, 35131 Padova, Italy*

[c] *High Energy Physics Division, Argonne National Laboratory, Argonne, IL 60439, USA*

E-mail: pierpaolo.mastrolia@pd.infn.it, massimo.passera@pd.infn.it, amedeo.primo@pd.infn.it, schubertmielnik@anl.gov

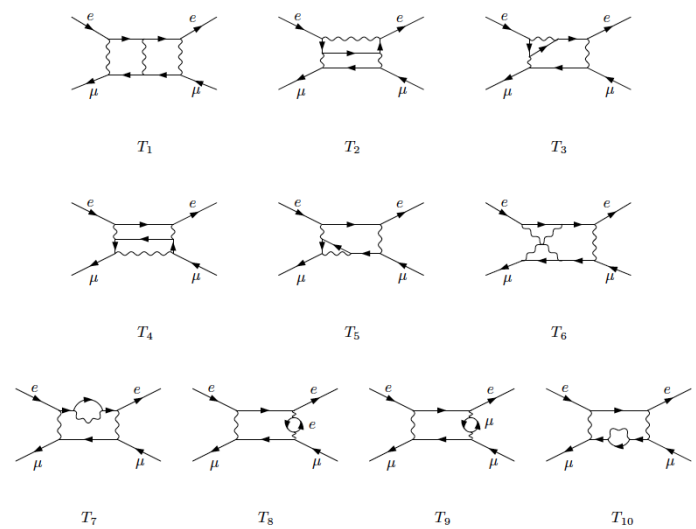

- An unprecedented precision challenge for theory: a full NNLO MC generator for μ-e scattering (10^{-5} accuracy)

Theory: international community!

- 2017: Sept 4-5: A kick-off theory meeting in Padova: https://agenda.infn.it/internalPage.py?pageId=0&confId=13774 .

Muon-electron scattering:
Theory kickoff workshop

4-5 September 2017
Padova

Europe/Rome timezone

- 2018, Feb 19-23: A Topical workshop at MIPT, Mainz https://indico.mitp.uni-mainz.de/event/128/

JOHANNES GUTENBERG UNIVERSITÄT MAINZ

mitp Mainz Institute for Theoretical Physics

The Evaluation of the Leading Hadronic Contribution to the Muon Anomalous Magnetic Moment

- 2019, Feb 4-7: Workshop on "Theory for muon-electron scattering @ 10ppm" in Zurich

Status of the Collaboration

- Collaboration is growing and interest from International groups from CERN, Poland (Kracow), Russia (Novosibirsk), UK (Liverpool, UCL), USA (Virginia) has been expressed.

- Results so far encouraging; we are working hard toward a formal LoI (2019).

Report of A. Magnon, PBC meet, 2 March 18

- Concerning the final project for High precision measurement of a_μ^{HLO}

  Certainly very challenging

  I (Alain Magnon) DO NOT SEE a priori showstopper(s)

14

Plans

- **2018-2019**
  - Detector optimization studies: simulation; Test Run at CERN (2018); Mainz/Desy with few GeV e- (2019); Fermilab with 60 GeV μ (TBC)
  - Theoretical studies
  - Set up a collaboration
  - Letter of Intent to the SPSC
- **2020-2021**
  - Detector construction and installation

    2021–2024
  - Data taking: staged detector for a first (pilot) run +2 years with full detector

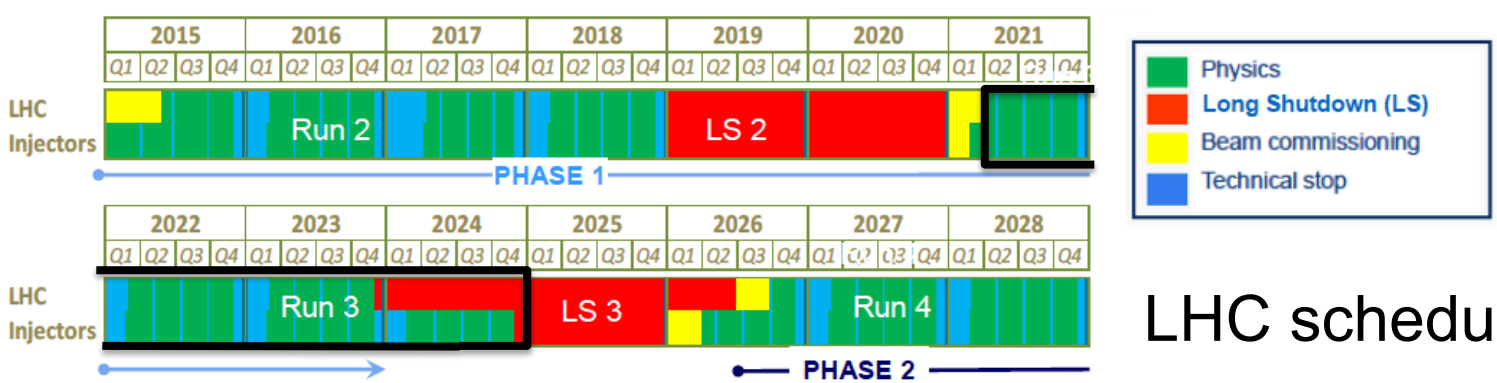

LHC schedule

Beam considerations

Requirements for the experiment:

1. The **beam** must be:
   - "Parallel" (divergence <0.5 mrad) and "large" (σ~2-2.5cm)
   - Highest energy/intensity as possible (~150 GeV) and O(10^8 μ/spill)
   - Pure (π contamination < 10^{-6})
   - Need to know the incoming p_μ at <1%
2. The final **apparatus** is small in transverse dimension but long along the beam axis (~40m for trackers+targets, 0.8 m for calo, ~3m for μ filter (passive material)+ a couple of active chambers) → needs a space of ~ 40-45 m (total extension)

Final detector should go wherever these conditions can be satisfied (and in agreement with all the users!)

Conclusion

- Exciting times for the muon g-2!
- Alternative/competitive determinations of a_μ^{HLO} are essential:
  - Time-like (dispersive) approach
  - Lattice
  - Space-like approach (MUonE)

- Progress on **MUonE**:
  - Analysis of MS 2017 TB data
  - Detector optimization, Si sensors survey
  - Compatibility studies/implementation in EHN2
  - Progress on the Theory side
  - Test run in 2018; planned tests for 2019 (MS)
  - Growing interest from both experiment and theory community
  - LoI planned for 2019

MUonE Collaboration (in progress…)

G. Abbiendi, M. Alacevich, M. Baszczyk, M. Bonomi, C. Brizzolari, A. Broggio, C.M.Carloni Calame, E. Conti, P. Dorosz, D. Galli, M. Fael, A. Ferroglia, F.V. Ignatov, M. Incagli, A. Keshavarzi, Kucewicz, W. M. Kucharczyk, F. Ligabue, U. Marconi, M.K. Marinković, V. Mascagna, P. Mastrolia, C. Matteuzzi, S. Mersi, G. Montagna, O. Nicrosini, G. Ossola, L. Pagani, M. Passera, P. Paradisi, C. Patrignani, F. Piccinini, F. Pisani, M. Prest, A. Primo, A. Principe, M. Rocco, U. Schubert, F. Simonetto, R. Stroili, L. Tranchedi, R. Tenchini, W. Torres-Bodabilla, L. Trentadue, E. Vallazza, G. Venanzoni, M. Witek,…

THE END

(Thanks to J. Berhnard, L. Gatignon and A. Magnon for many useful discussions)

SPARE

Report of A. Magnon (MUonE referee in PBC) 2 March 2018

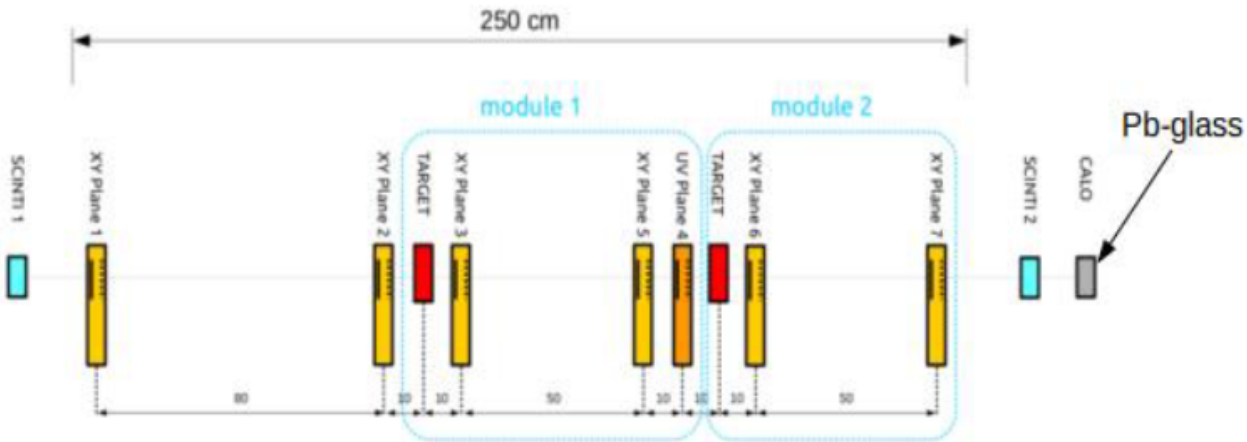

- Expect a lot of physics Input from these tests
  Hope we can run at (close) to nominal μ Flux

- Concerning the final project for High precision measurement of a_μ^{HLO}
  Certainly very challenging
  I (Alain Magnon) DO NOT SEE a priori showstopper(s)

Detector optimization

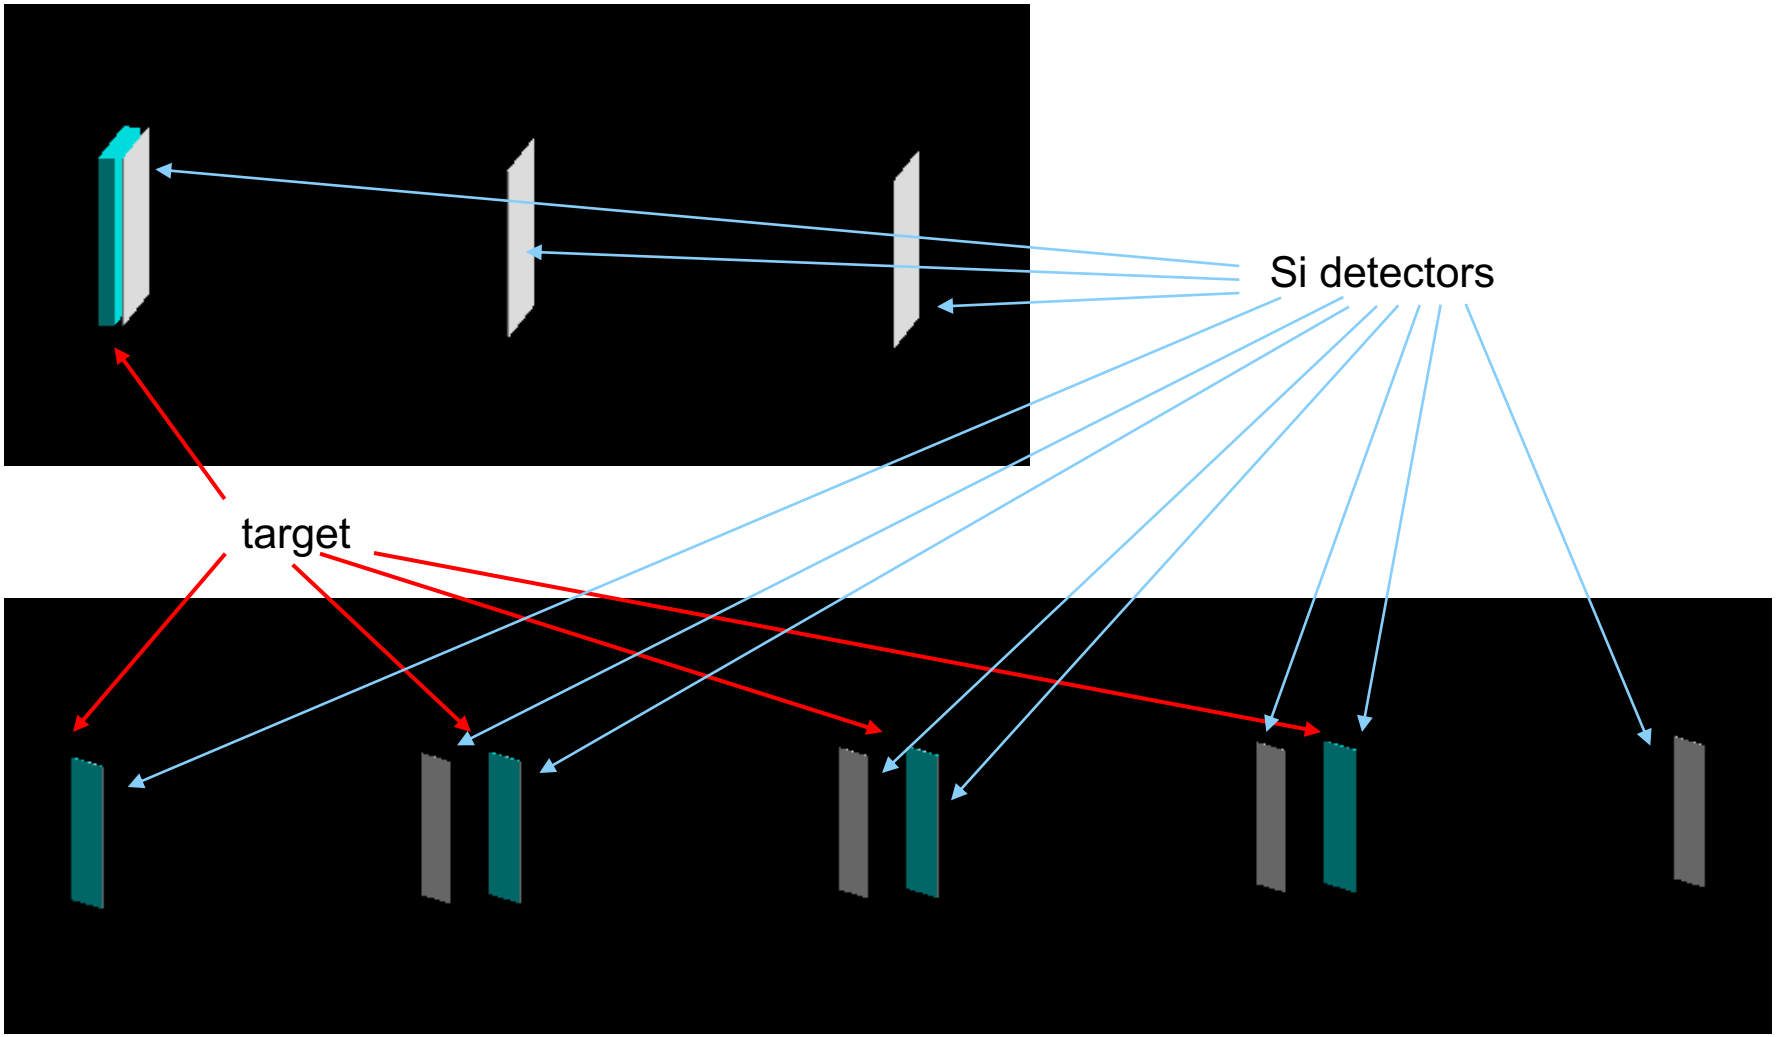

G. Venanzoni, PBC Workshop, CERN, 14 Jun 2018

Reference papers

A new approach to evaluate the leading hadronic corrections to the muon g-2 ☆

C. M. Carloni Calame[a], M. Passera[b], L. Trentadue[c], G. Venanzoni[d]

[a] *Dipartimento di Fisica, Università di Pavia, Pavia, Italy*
[b] *INFN, Sezione di Padova, Padova, Italy*
[c] *Dipartimento di Fisica e Scienze della Terra "M. Melloni" Università di Parma, Parma, Italy and INFN, Sezione di Milano Bicocca, Milano, Italy*
[d] *INFN, Laboratori Nazionali di Frascati, Frascati, Italy*

Phys. Lett. B 746 (2015) 325

Measuring the leading hadronic contribution to the muon g-2 via μe scattering

G. Abbiendi[1], C. M. Carloni Calame[2], U. Marconi[1], C. Matteuzzi[3], G. Montagna[4,2], O. Nicrosini[2], M. Passera[5], F. Piccinini[2], R. Tenchini[6], L. Trentadue[7,3], and G. Venanzoni[8]

[1] *INFN, Sezione di Bologna, Bologna, Italy*
[2] *INFN, Sezione di Pavia, Pavia, Italy*
[3] *INFN, Sezione di Milano Bicocca, Milano, Italy*
[4] *Dipartimento di Fisica, Università di Pavia, Pavia, Italy*
[5] *INFN, Sezione di Padova, Padova, Italy*
[6] *INFN, Sezione di Pisa, Pisa, Italy*
[7] *Dipartimento di Fisica e Scienze della Terra "M. Melloni", Università di Parma, Parma, Italy*
[8] *INFN, Laboratori Nazionali di Frascati, Frascati, Italy*

Eur. Phys. J. C (2017) 77: 139.

Plans: detector considerations

Final detector is a sequence of 60 modules, each acting as a stand-alone detector to measure the outcoming angles of μ and e

Plan to use state of the art silicon detectors developed for the HL-LHC or Belle2 *(possibly already funded by INFN)*

Calorimeter and muon filter at the end of the 60 elements

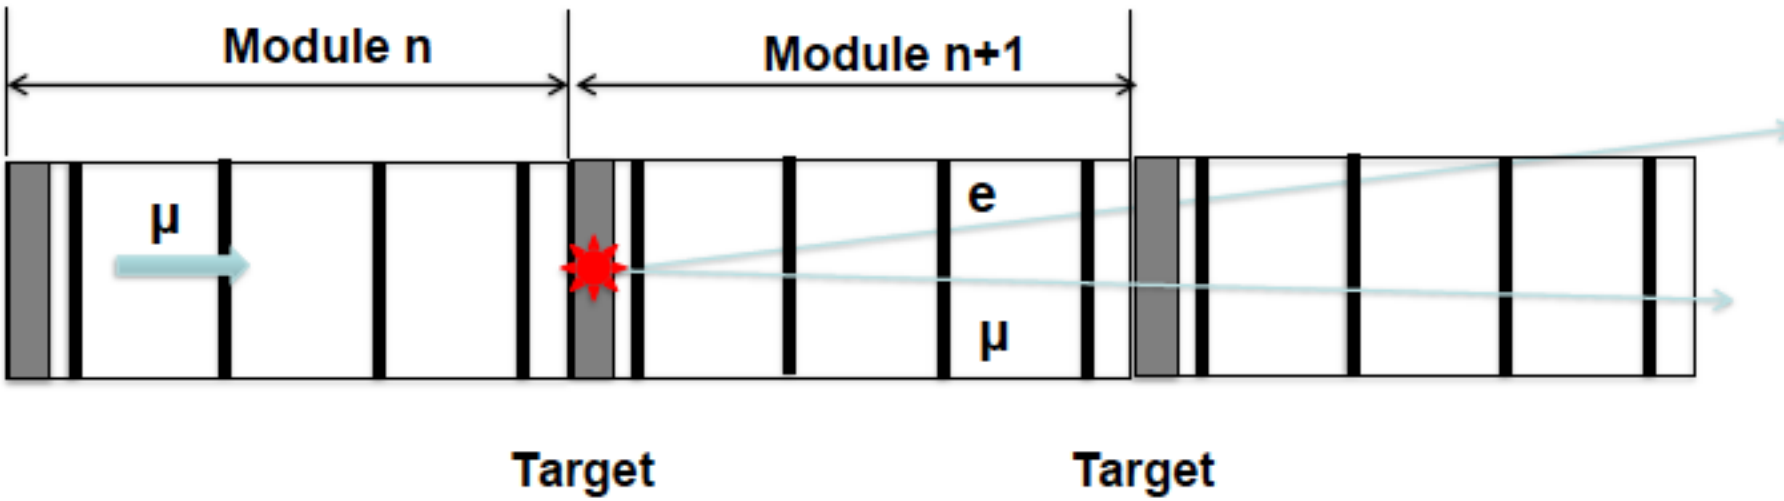

Testbeam in 2018

The setup was mounted during: April 3rd - 9th

It has been running since: April 9th

TB in 2018

Calorimeters installed:

shashlik from April 9th to May 1st
replaced with PbWO crystal from May 1st to May 23rd
replaced with BGO crystal (calibrated in EA)
(installed in the setup on the 5th June 2018)

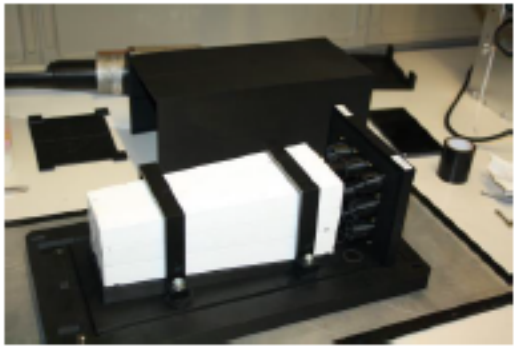

9 x BGO (~7x7 cm^2, 22 X_o)

3x3 array (no dead zones)
Calibrated in the 1-15 GeV range at the East Hall (T9) May 2018
PMT readout

Testbeam in 2018: *the beam*

Running behind COMPASS

Take μ 's from M2 when requested by COMPASS

Take μ 's from π decays when COMPASS use π 's beam

Hadron beam in COMPASS

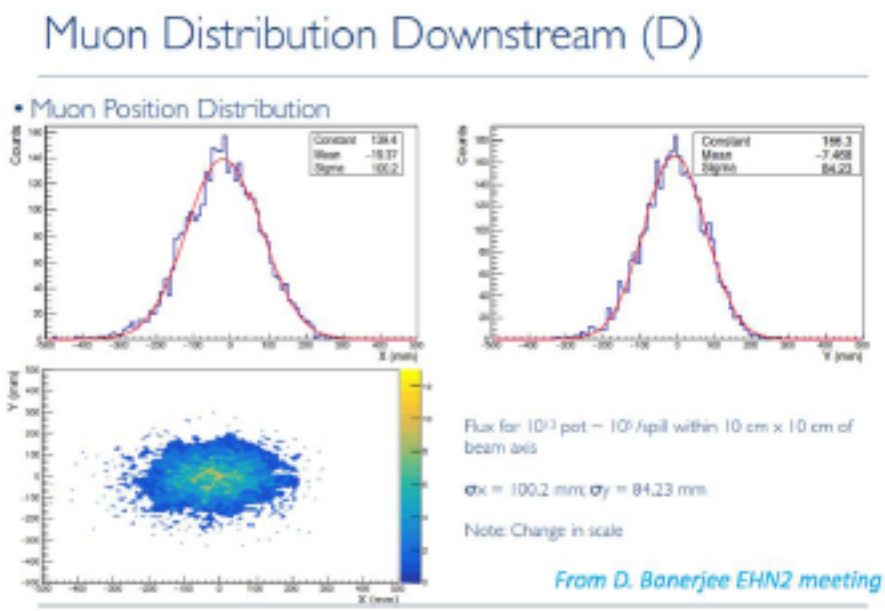

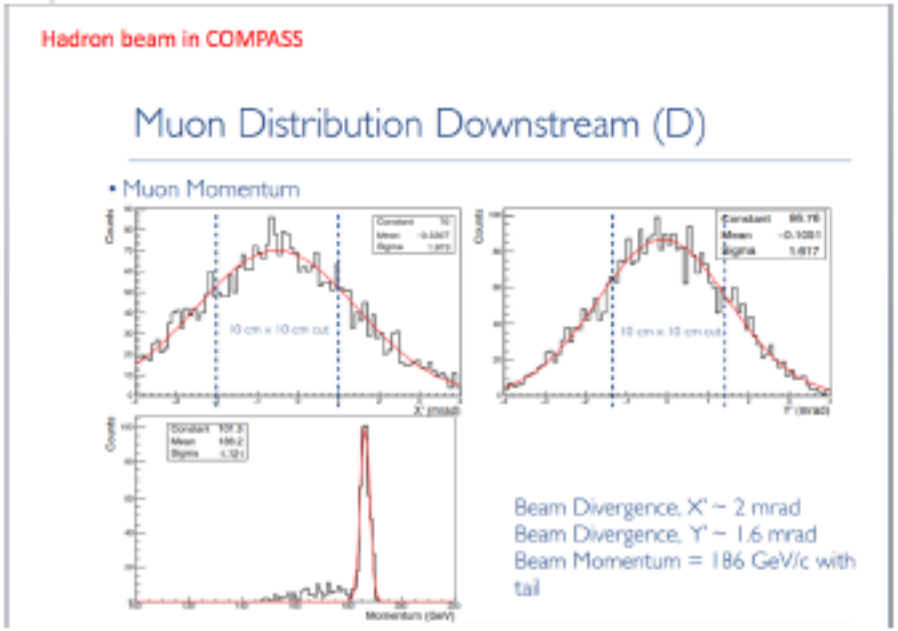

μ momentum 186 GeV/c

Testbeam in 2018

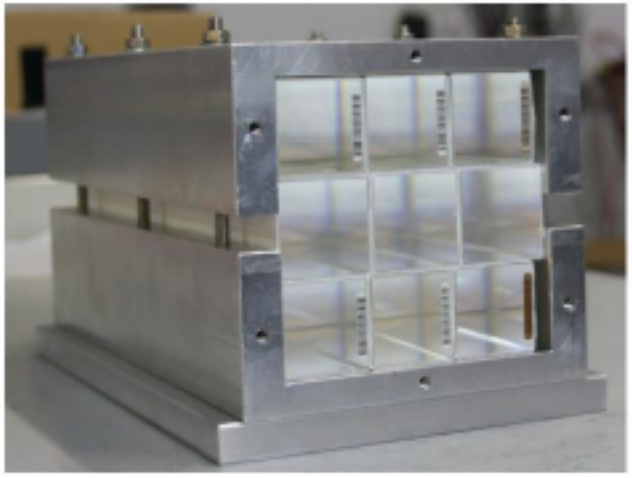

9 x PbWO (CMS) [25 X_0] [9x9 cm^2]

3x3 array (small air gap between crystals), 2017 calibration
SiPM readout, already integrated in the DAQ, self equalization (leds on the SiPM board)
Not available in August (will be re-calibrated)

Test Beam setup and target

Thanks to the UA9 Collaboration (particularly M. Garattini, R. Iaconageli, M. Pesaresi), J. Bernhard

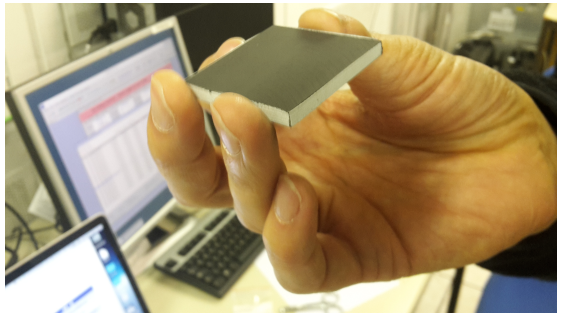

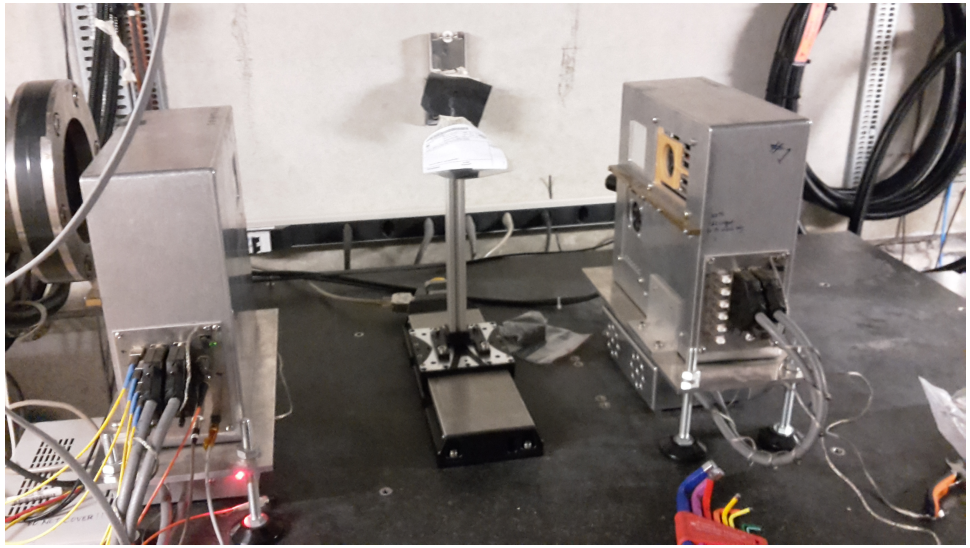

Resolution dominated by MS up to 10~100 GeV/c

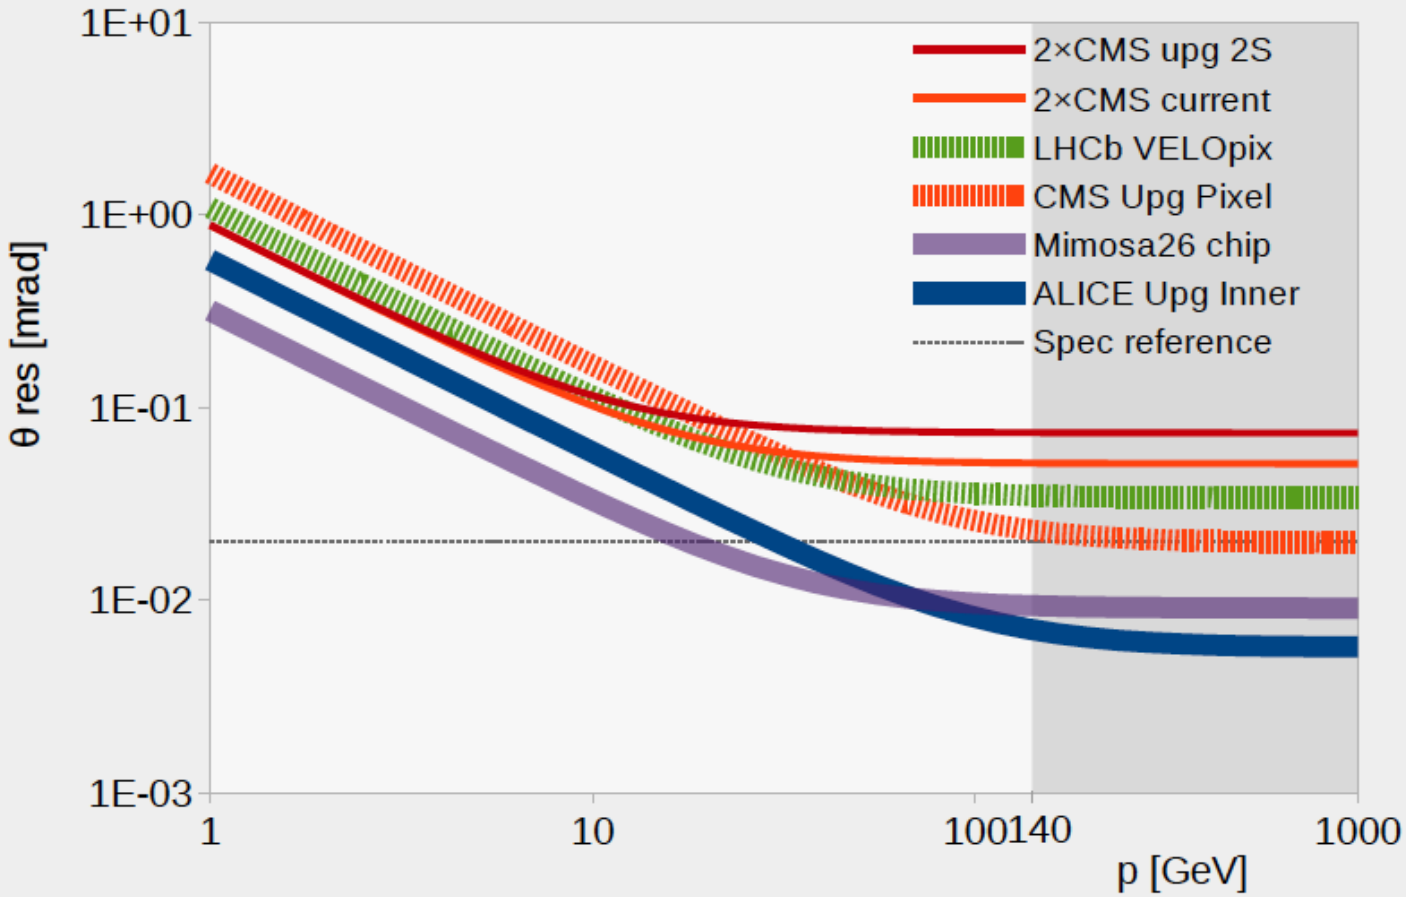

Angle resolution:

$$\Delta\theta^2 = \Delta\theta_I^2 + \Delta\theta_{MS}^2$$

Angle intrinsic resolution:

$$\Delta\theta_I = \frac{\Delta x \sqrt{2}}{0.5\,\mathrm{m}}$$

MS angle:

$$\Delta\theta_{MS} = \frac{13.6}{p/\mathrm{MeV}} \sqrt{m} \times (1 + 0.038 \ln m)$$

Scattering material: first layer only

$$m = \left(\frac{x}{X_0}\right)_{\mathrm{det}}$$

- Resolution on scattering angle assumptions:
- 2 measurement plane 0.5 m apart
- Scattering on:
  - No plane (ideal resolution)
  - First detector plane (pure tracker resolution)
  - First plane + ½ Be target (includes “average” MS in target)
- Core of MS only considered (no tails)

Detector integration time

- Hybrid pixels & strips for (HL-)LHC: 25 ns
- ALPIDE: 1 µs
- Mimosa26: 112 µs

Expected pile-up events
(per 40MHz)

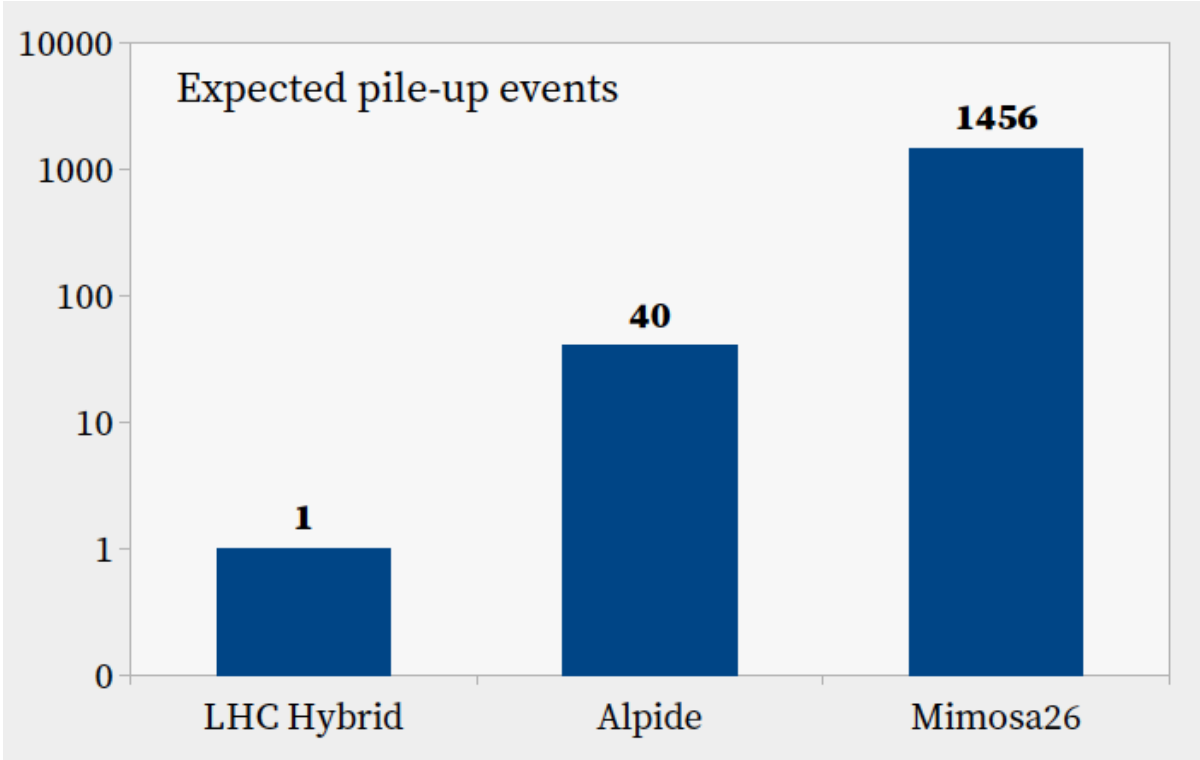

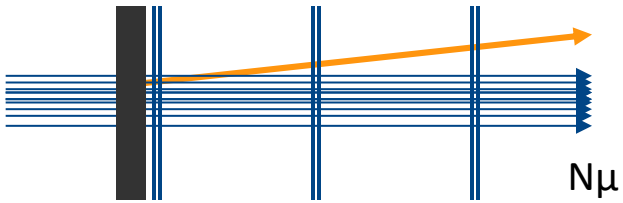

$N\mu = r \times \tau$

e.g. $N\mu = 40\ \text{MHz} \times 25\ \text{ns} = 1$

e.g. $N\mu = 40\ \text{MHz} \times 1\ \mu\text{s} = 40$

Why measuring $\Delta\alpha_{had}(t)$ with a 150 GeV μ beam on e^- target ?

It looks an ideal process!

- $\mu\, e \rightarrow \mu\, e$ is pure t-channel (at LO)

- **Simple** kinematics (2 body process, $t=-2m_eE_e<0$) allows to span the region **$0<-t<0.143$** GeV² (**$0<x<0.93$**); 87% of total a_μ^{HLO} (the rest can be computed by pQCD/time-like data)

- Angular measurement: high boosted system gives access to all angles (t) in the cms region θ_e^{LAB}**<32 mrad (E_e>1 GeV)**
  θ_μ^{LAB}**<5 mrad**

- It allows using the same detector for signal and normalization (**$x<0.3$, $\Delta\alpha_{had}(t)<10^{-5}$**) → cancellation of detector effects at first order

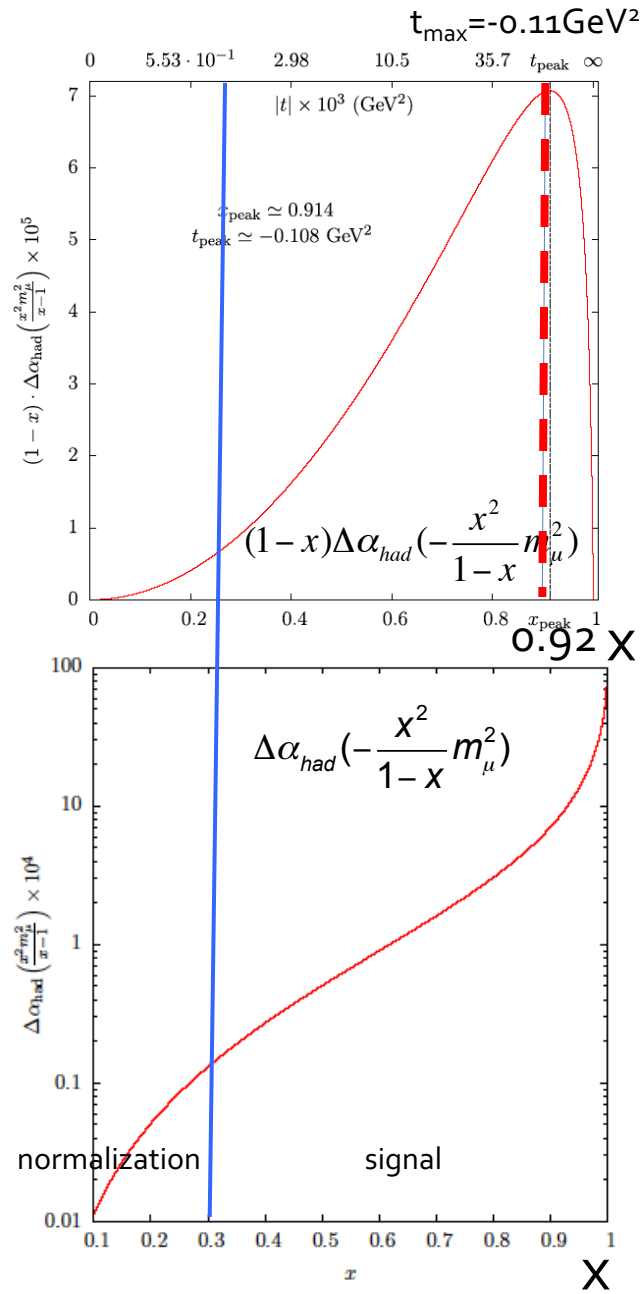

Muon beam M2 at CERN

"Forty years ago, on 7 May 1977, CERN inaugurated the world's largest accelerator at the time – the Super Proton Synchrotron".

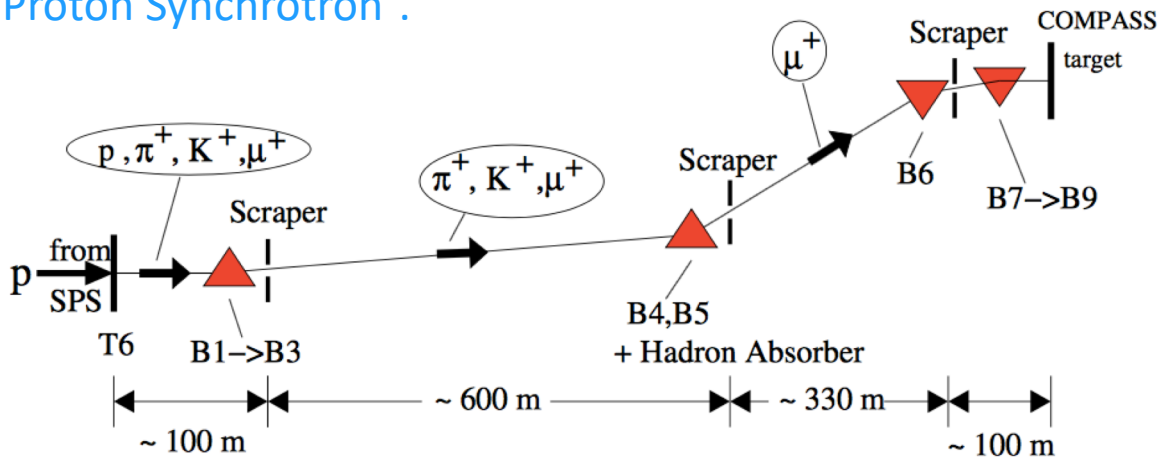

Table 3
Parameters and performance of the 160 GeV/c muon beam.

Beam parameters	**Measured**
Beam momentum $(p_\mu)/(p_\pi)$	(160 GeV/c)/(172 GeV/c)
Proton flux on T6 per SPS cycle	$1.2 \cdot 10^{13}$
Focussed muon flux per SPS cycle	$2 \cdot 10^{8}$
Beam polarisation	$(-80 \pm 4)\%$
Spot size at COMPASS target $(\sigma_x \times \sigma_y)$	$8 \times 8\,\mathrm{mm}^2$
Divergence at COMPASS target $(\sigma_x \times \sigma_y)$	0.4×0.8 mrad
Muon halo within 15 cm from beam axis	16%
Halo in experiment $(3.2 \times 2.5\,\mathrm{m}^2)$ at $\lvert x, y\rvert > 15$ cm	7%

$I_{beam} > 10^7$ muon/s, $E_\mu = 150$ GeV

https://arxiv.org/pdf/hep-ex/0703049.pdf

Detector considerations

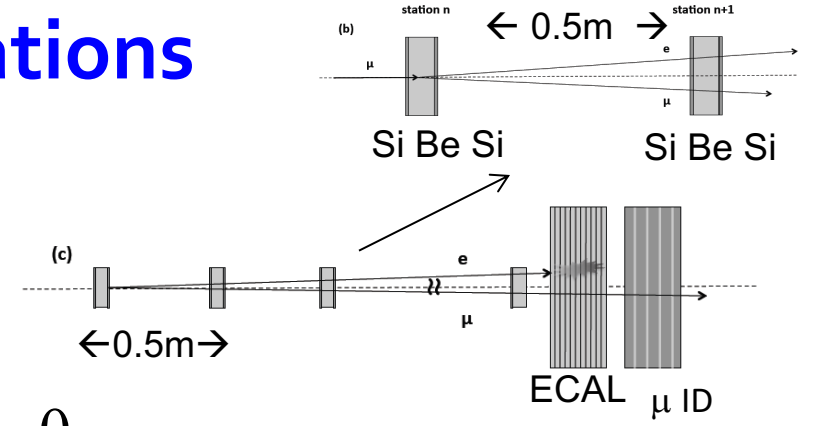

- Modular apparatus: 60 layers of ~1 cm Be (target), each coupled to ~0.5 m distant Si (0.3 mm) planes. It provides a 0.02 mrad resolution on the scattering angle

- The $t=q^2<0$ of the interaction is determined by the electron (or muon) scattering angle (a` la NA7)

- ECAL and μ Detector located downstream to solve PID ambiguity below 5 mrad. Above that, angular measurement gives correct PID

- It provides uniform full acceptance, with the potential to keep the systematic errors at 10^{-5} (main effect is the multiple scattering for normalization which can be studied by data)

- Statistical considerations show that a **0.3%** error can be achieved on a_μ^{HLO} in 2 years of data taking with ~10^7 μ/s (4×10^{14}μ total)

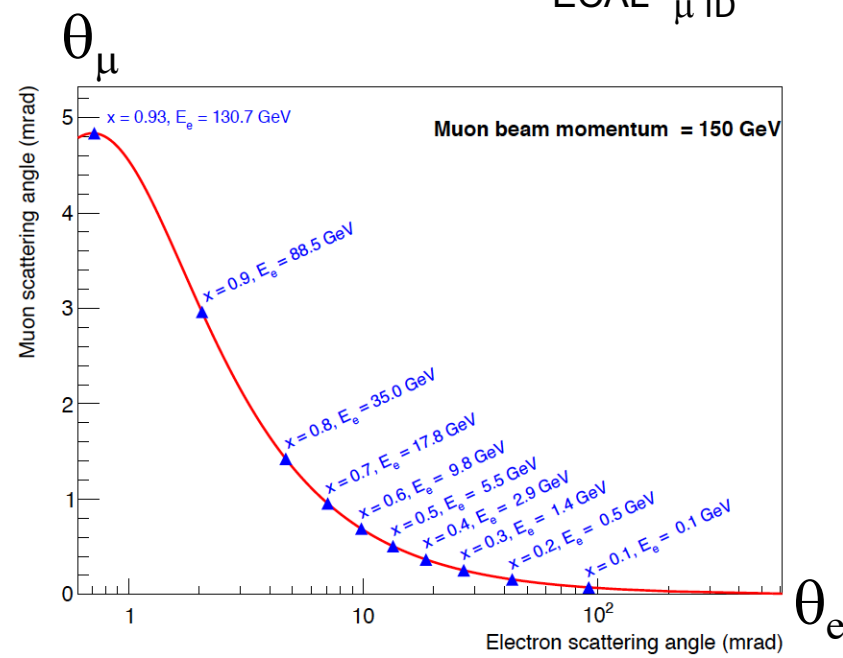

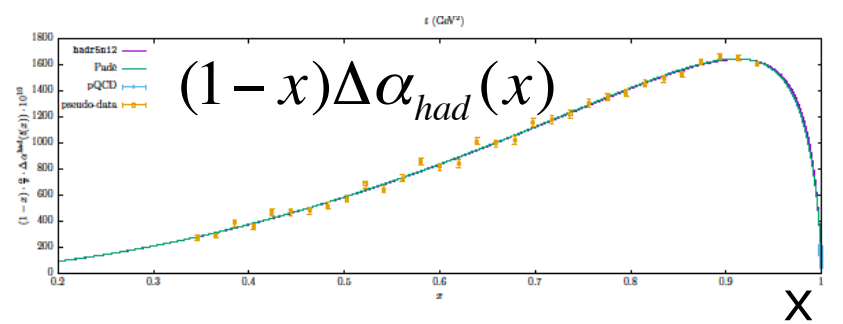

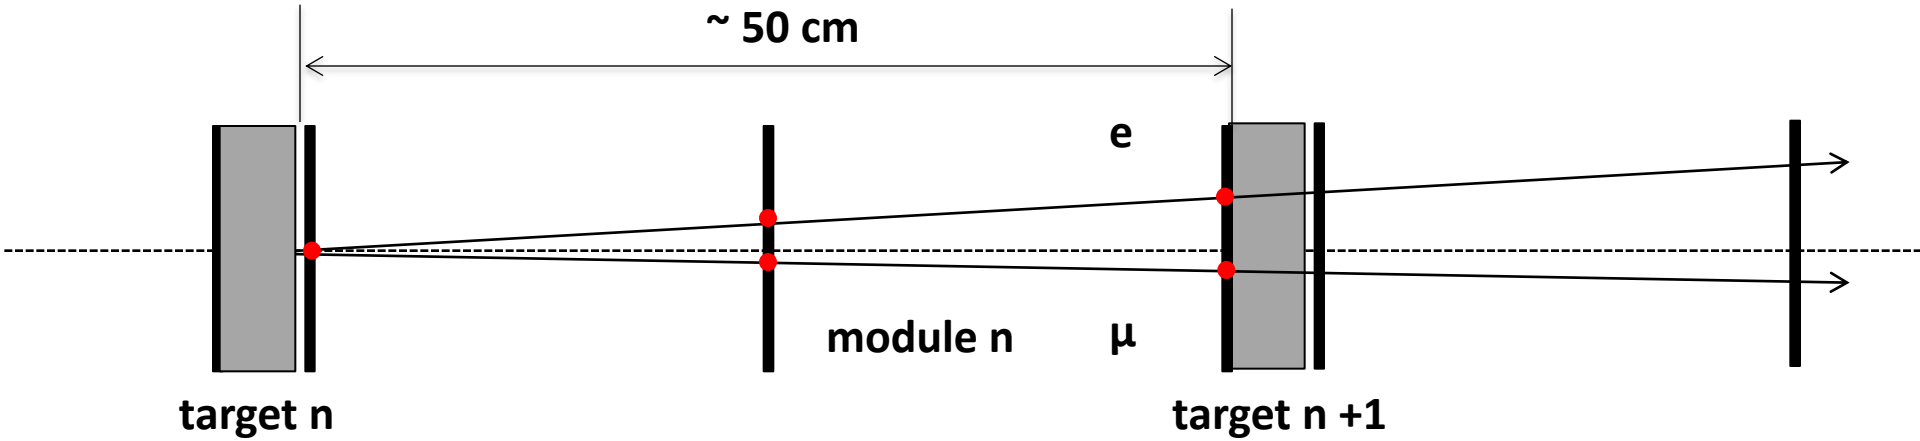

Last module of the detector

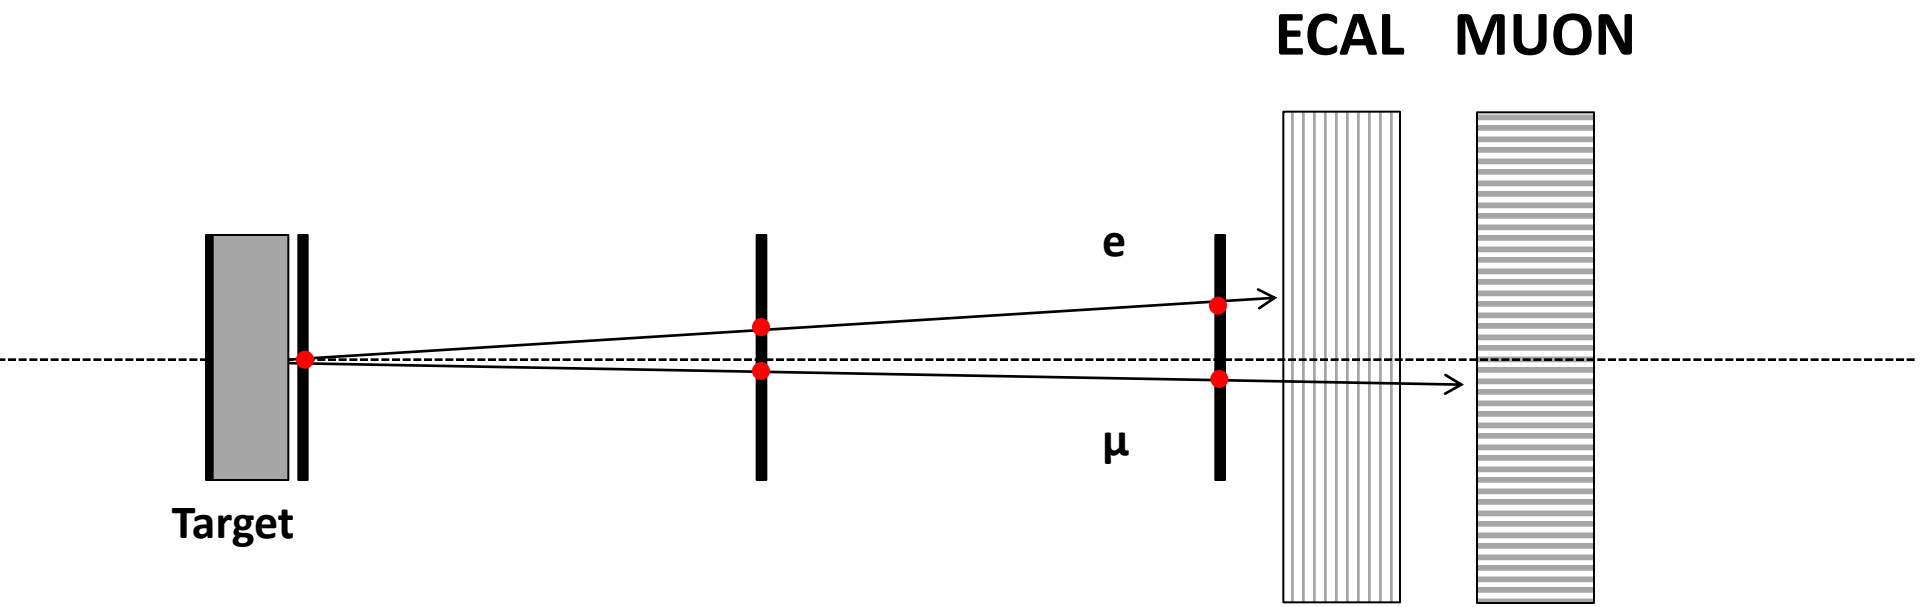

Measure both the electron angle and E_e to define the reference, calibration curve. Detailed check of GEANT predictions.

Fraction of a_μ^{HLO} covered

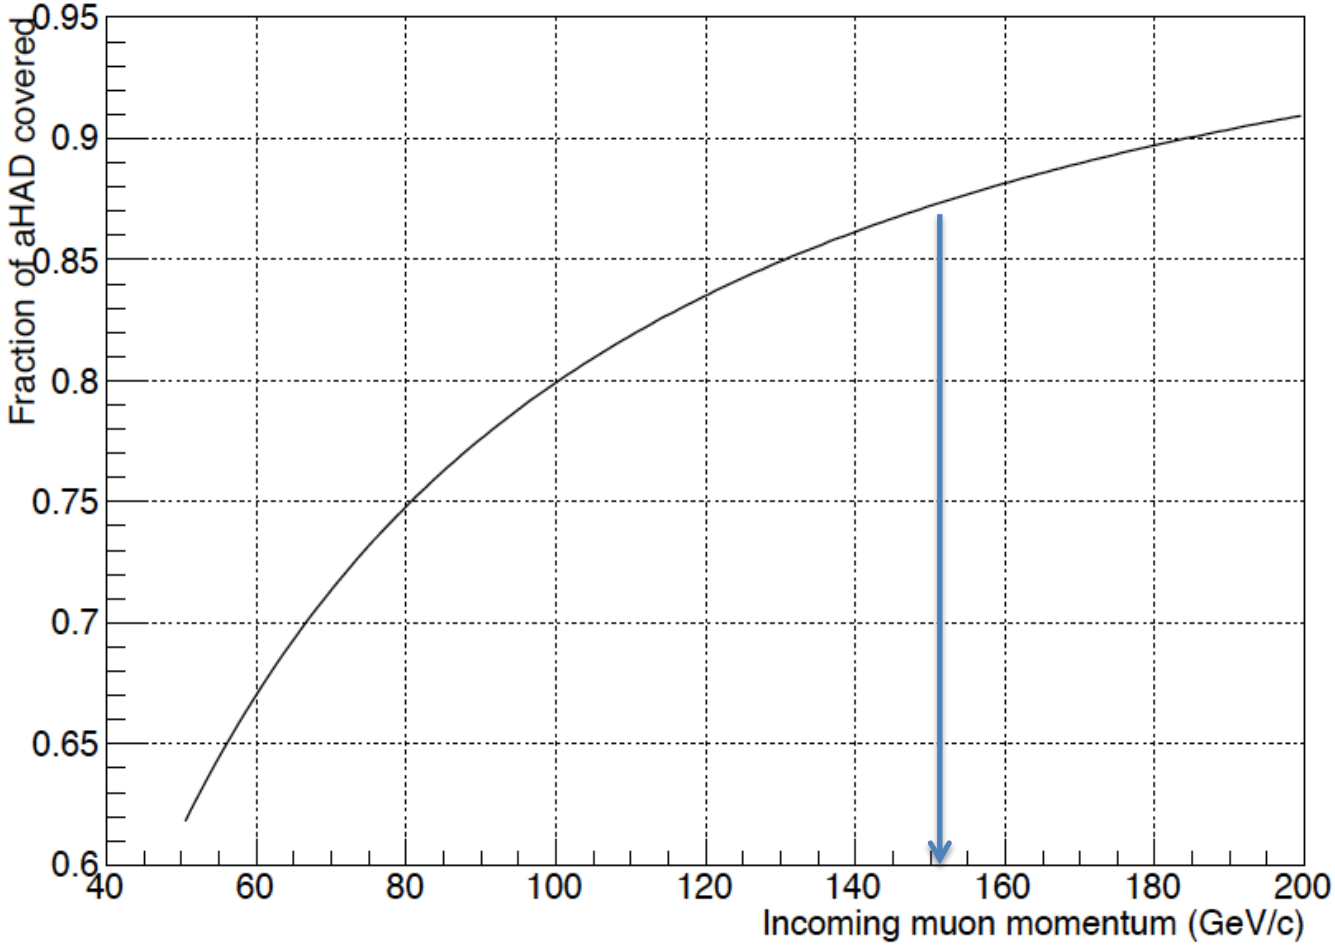

87% of a_μ^{HLO} covered with $P\mu$=150 GeV

Fraction of a_μ^{HLO} covered

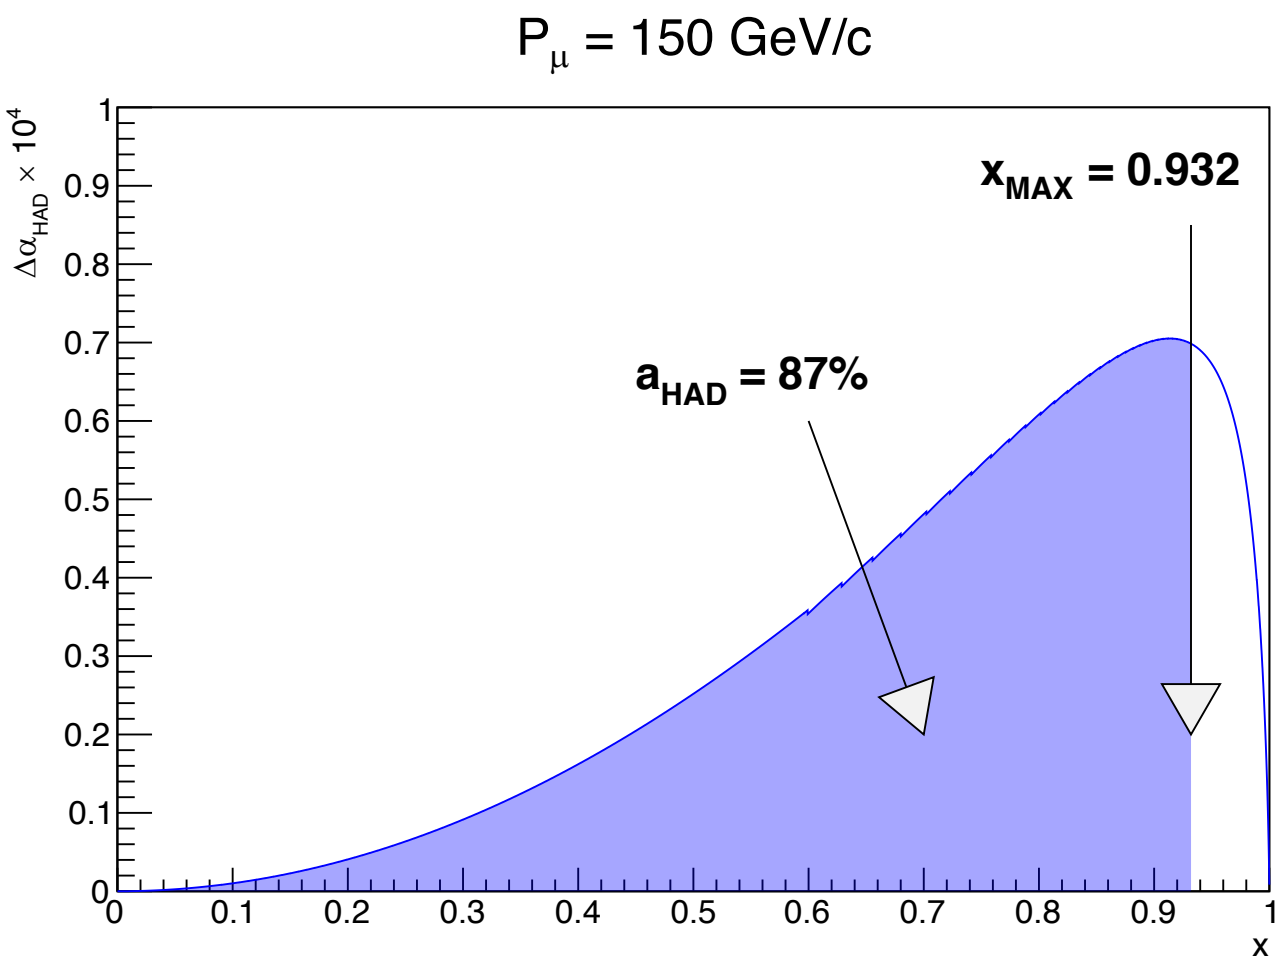

87% of a_μ^{HLO} covered with $P\mu$=150 GeV

(courtesy of M. Incagli)

Muon g-2: summary of the present status

- E821 experiment at BNL has generated enormous interest:

$$a_\mu^{E821} = 11659208.9(6.3)\times 10^{-10} \quad \text{(0.54 ppm)}$$

- Tantalizing ~3σ deviation with SM (persistent since >10 years):

$$a_\mu^{SM} = 11659180.2(4.9)\times 10^{-10}(DHMZ)$$

M. Davier, A. Hoecker, B. Malaescu and Z. Zhang, Eur. Phys. J. C71 (2011)

$$\boxed{a_\mu^{E821} - a_\mu^{SM} \sim (28\pm 8)\times 10^{-10}}$$

- Current discrepancy limited by:
  - Experimental uncertainty→ New experiments at FNAL and J-PARC **x4** accuracy
  - Theoretical uncertanty→ limited by hadronic effects

$$a_\mu^{SM} = a_\mu^{QED} + \boxed{a_\mu^{HAD}} + a_\mu^{Weak}$$

Hadronic Vacuum polarization (HLO)



$a_\mu^{HLO} = (692.3\pm 4.2)10^{-10}$

$\delta a_\mu^{HLO}/a_\mu^{HLO} \sim 0.6\%$

The silicon detectors

Sensors developed for AGILE, being used by LEMMA

Table 1
Main features of the AGILE silicon detector

Item	Value
Dimension (cm^2)	9.5×9.5
Thickness (μm)	410
Readout strips	384
Readout pitch (μm)	242
Physical pitch (μm)	121
Bias resistor (MΩ)	40
AC coupling Al resistance (Ω/cm)	4.5
Coupling capacitance (pF)	527
Leakage current (nA/cm^2)	1.5

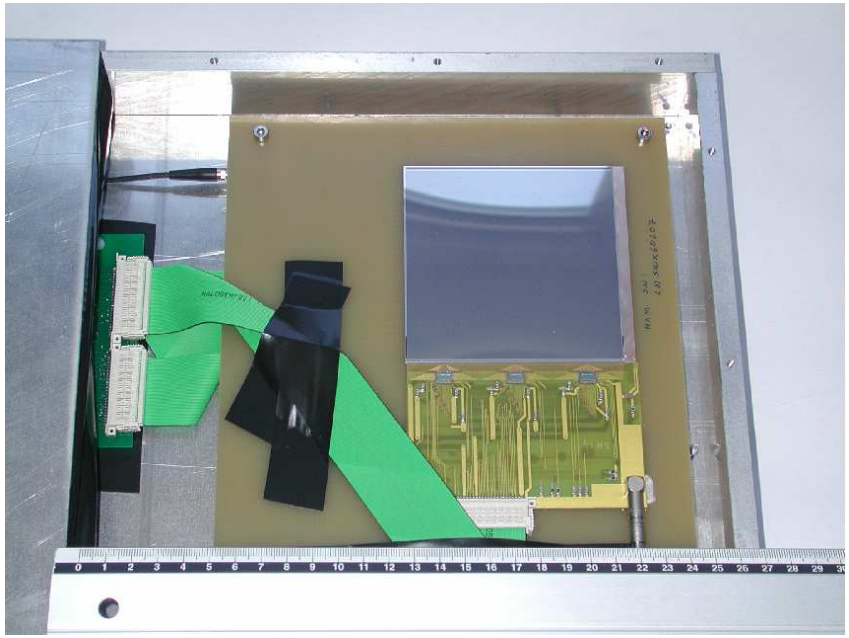

M. Prest et al., NIM A, 501:280–287, 2003

Daniela Lietti, PhD thesis. VISION: a Versatile and Innovative SIlicON tracking system

http://insulab.dfm.uninsubria.it/images/download_files/thesis_phd_lietti.pdf

Experimental setup location

Site inspection in COMPASS on 11/10/2017
Counting room quite far from experimental site: DAQ PC near setup → "short" optical fiber from crate VME to DAQ PC, then ethernet cable from DAQ PC to counting room

Timelike data aiming at 0.2% on a_μ^{HLO}?

- Not an easy task!
  - >30 channels to keep under control (at (sub)percent level)
  - local discrepancies in main channels (2π (KLOE/Babar), K^+K^- CMD2/Babar)
  - Isospin corrections for not measured channels
  - Treatment of narrow resonances? (See F. Jegerlehner, ArXiv:1511.04473)

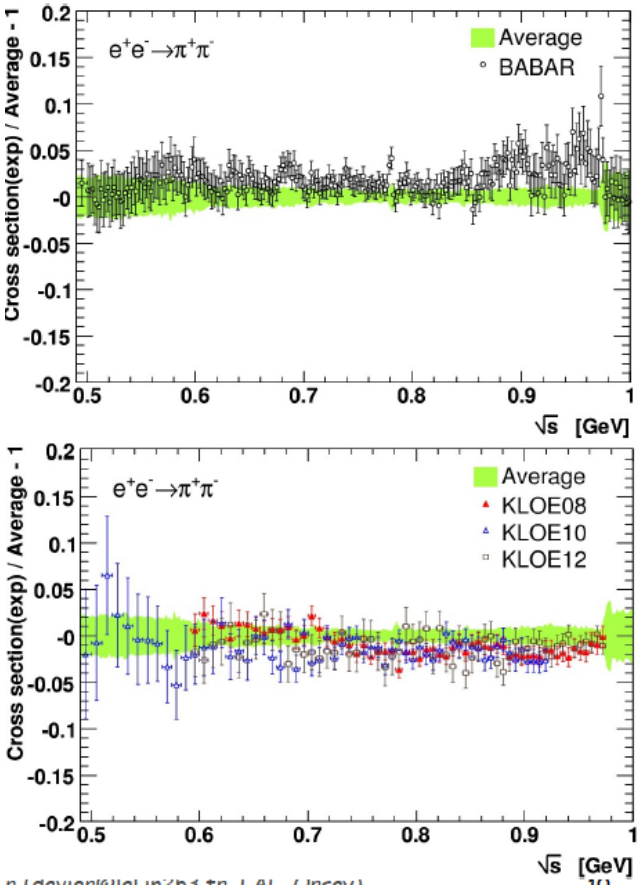

M. Davier, TAU16 WS

An independent/complementary approach is highly desirable!

Lattice-QCD progress on a_μ^{HVP}

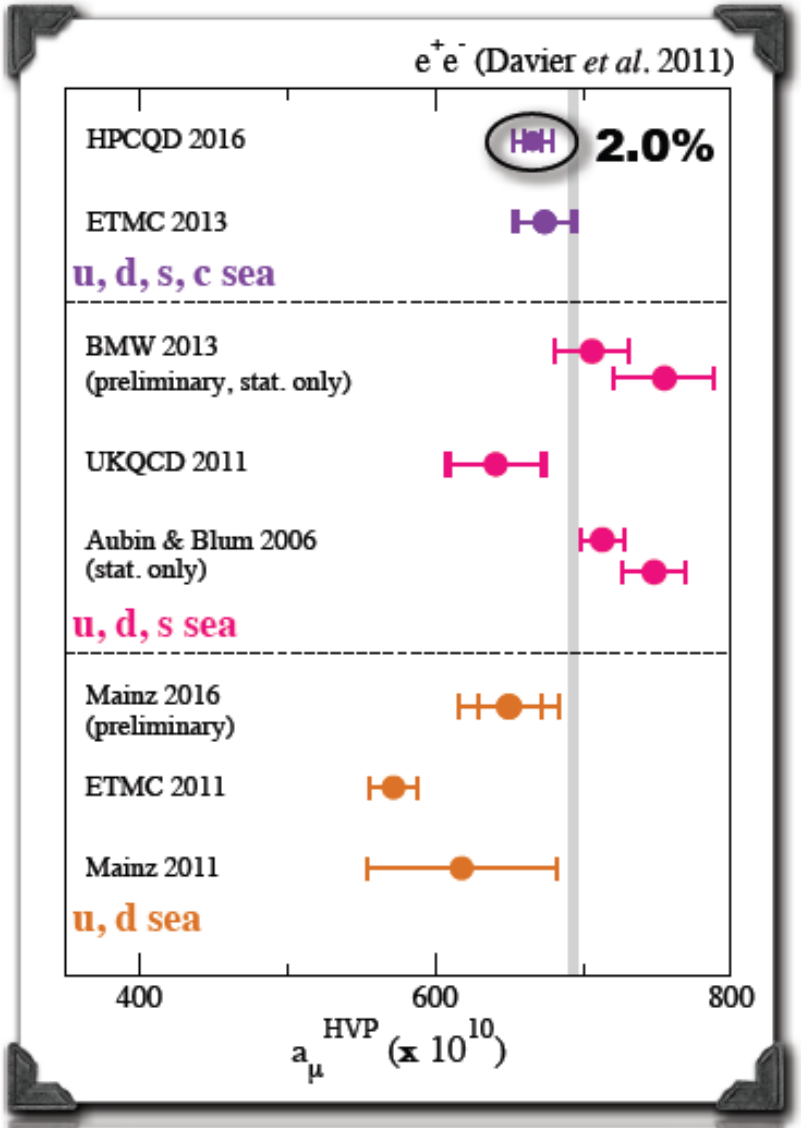

- Can calculate nonperturbative vacuum polarization function $\Pi(Q^2)$ directly in lattice QCD from simple 2-point correlation function of EM quark current [Blum, PRL 91 (2003) 052001]
- Several ongoing lattice efforts yielding new results since ICHEP 2014 including:

(1) First calculation of quark-disconnected contribution [RBC/UKQCD, PRL116, 232002 (2016)]

(2) Second complete calculation of leading-order a_μ^{HVP} [HPQCD, arXiv:1601.03071]

- First to reach precision needed to observe significant deviation from experiment

- ~1% total uncertainty by 2018 possible
- Sub-percent precision will require inclusion of isospin breaking & QED, and hence take longer

However: Recent Lattice evaluation

Hadronic vacuum polarization contribution to the anomalous magnetic moments of leptons from first principles

Sz. Borsanyi,[1] Z. Fodor,[1,2,3] C. Hoelbling,[1] T. Kawanai,[3] S. Krieg,[1,3]
L. Lellouch,[4] R. Malak,[4,5] K. Miura,[4] K.K. Szabo,[1,3] C. Torrero,[4] and B.C. Toth[1]
(Budapest-Marseille-Wuppertal collaboration)

arXiv:1711.04980v1 [hep-lat]
14 Nov

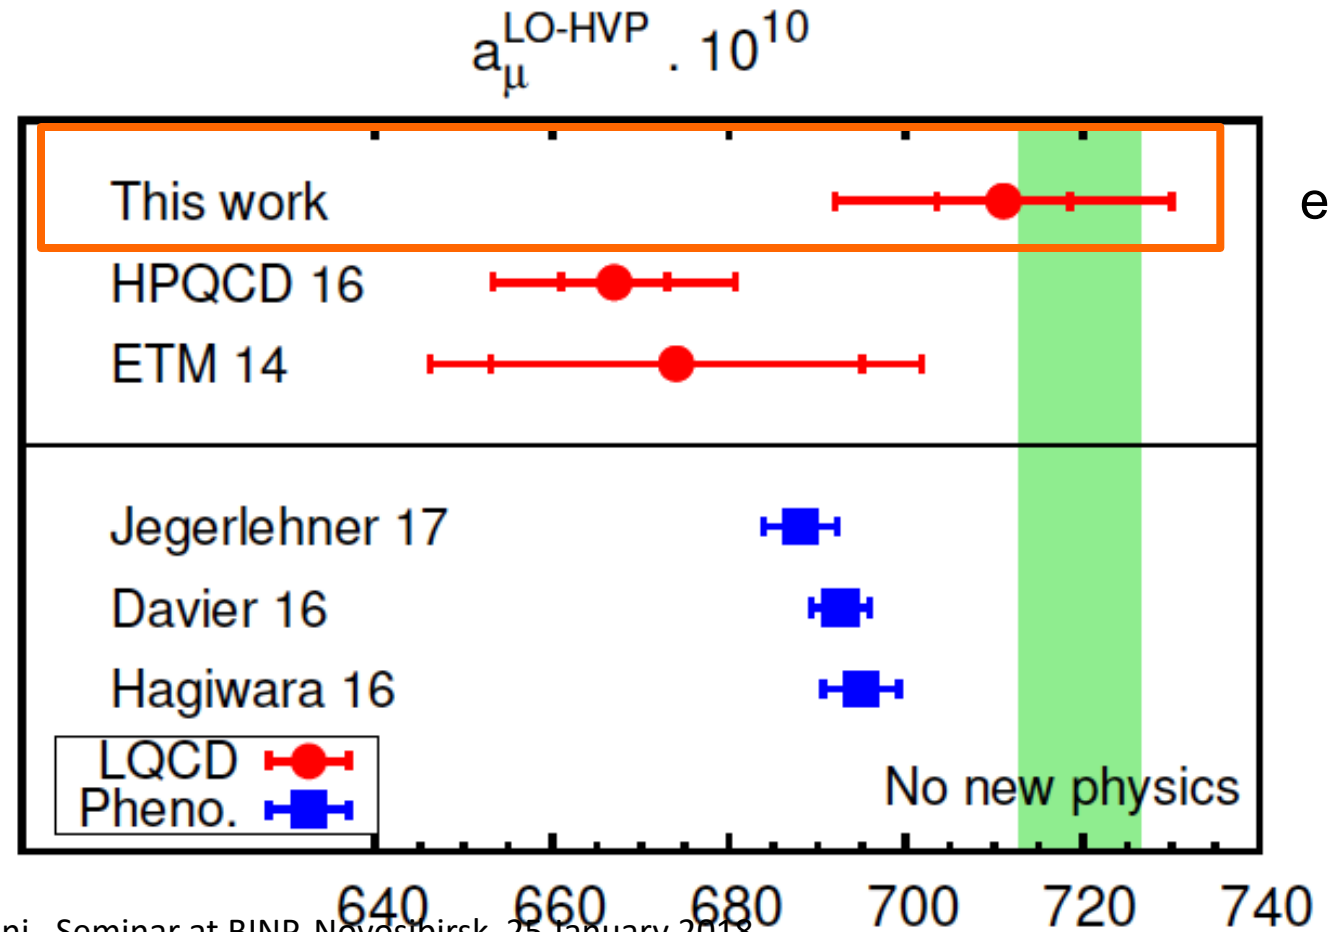

error~2.7%

$$a_\mu^{\text{LO-HVP}} = 711.0(7.5)(17.3) \times 10^{-10}$$

stat syst

2.7%

(NP). Using the SM contributions summarized in [8], we find $a_{\mu,\text{noNP}}^{\text{LO-HVP}} = (720.0 \pm 6.8) \times 10^{-10}$. The errors on the lattice results, which are in the range of 2.0 to 4.1% are substantially larger than those of the phenomenological approach. Our result for $a_\mu^{\text{LO-HVP}}$ is larger than those of the other lattice calculations and in slight tension with the one from HPQCD [33] which is $1.9\,\sigma$ away. A more detailed flavor-by-flavor comparison is given in [45]. However, our result is consistent with those from phenomenology within about one standard deviation, as well as with $a_{\mu,\text{noNP}}^{\text{LO-HVP}}$. Thus, one will have to wait for the next generation of lattice QCD calculations to confirm or infirm the larger than $3\,\sigma$ deviation between the measurement of a_μ and the prediction of the SM based on phenomenology.

arXiv:1711.04980v1 [hep-lat]
14 Nov

Experimental Setup

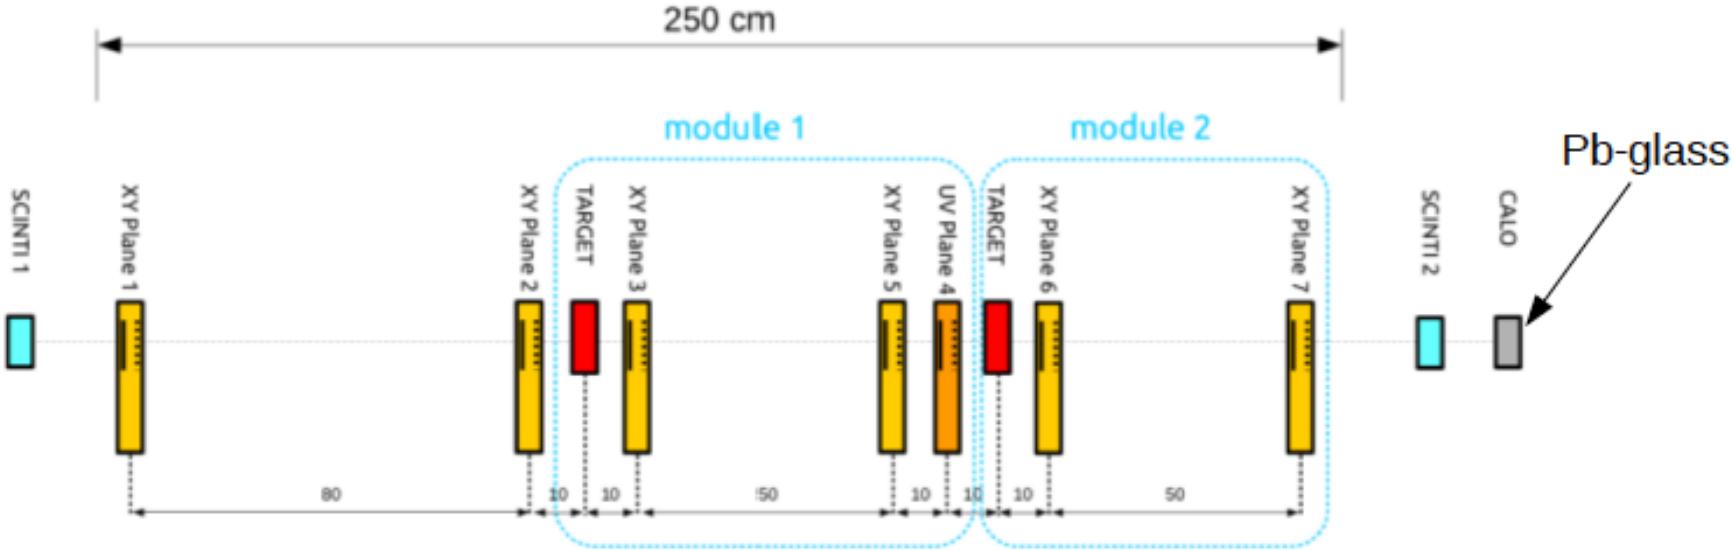

Scintillators: 2 100 x 100 mm^2

Silicon detectors: 12 XY planes
2 UV plane ±45°

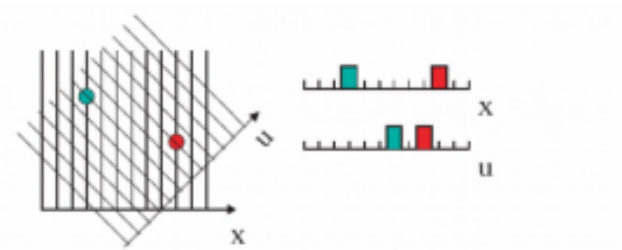

Need 3 stereo views to resolve ambiguities

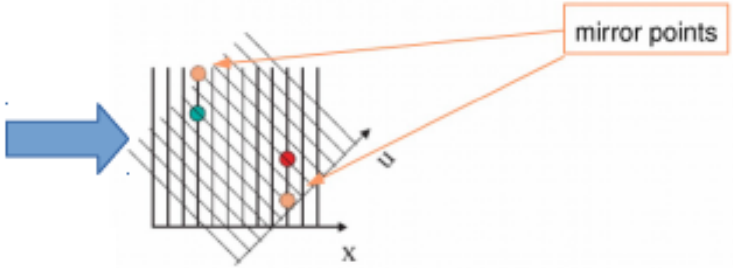

Multiple scattering angle

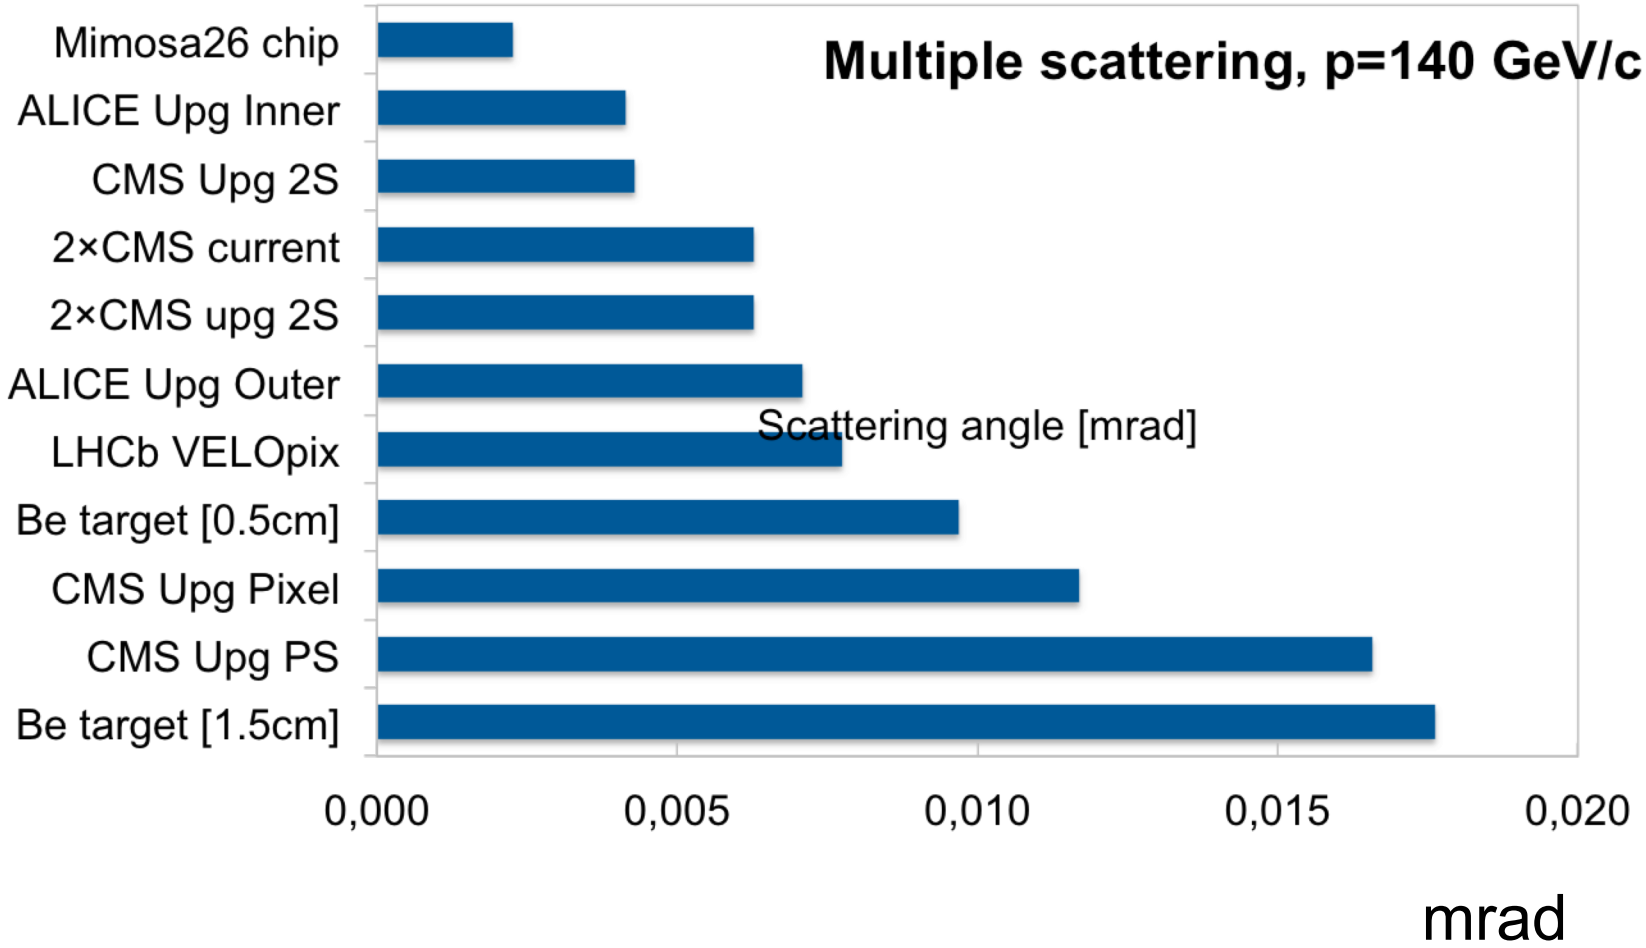

τ and trigger rate define operation mode

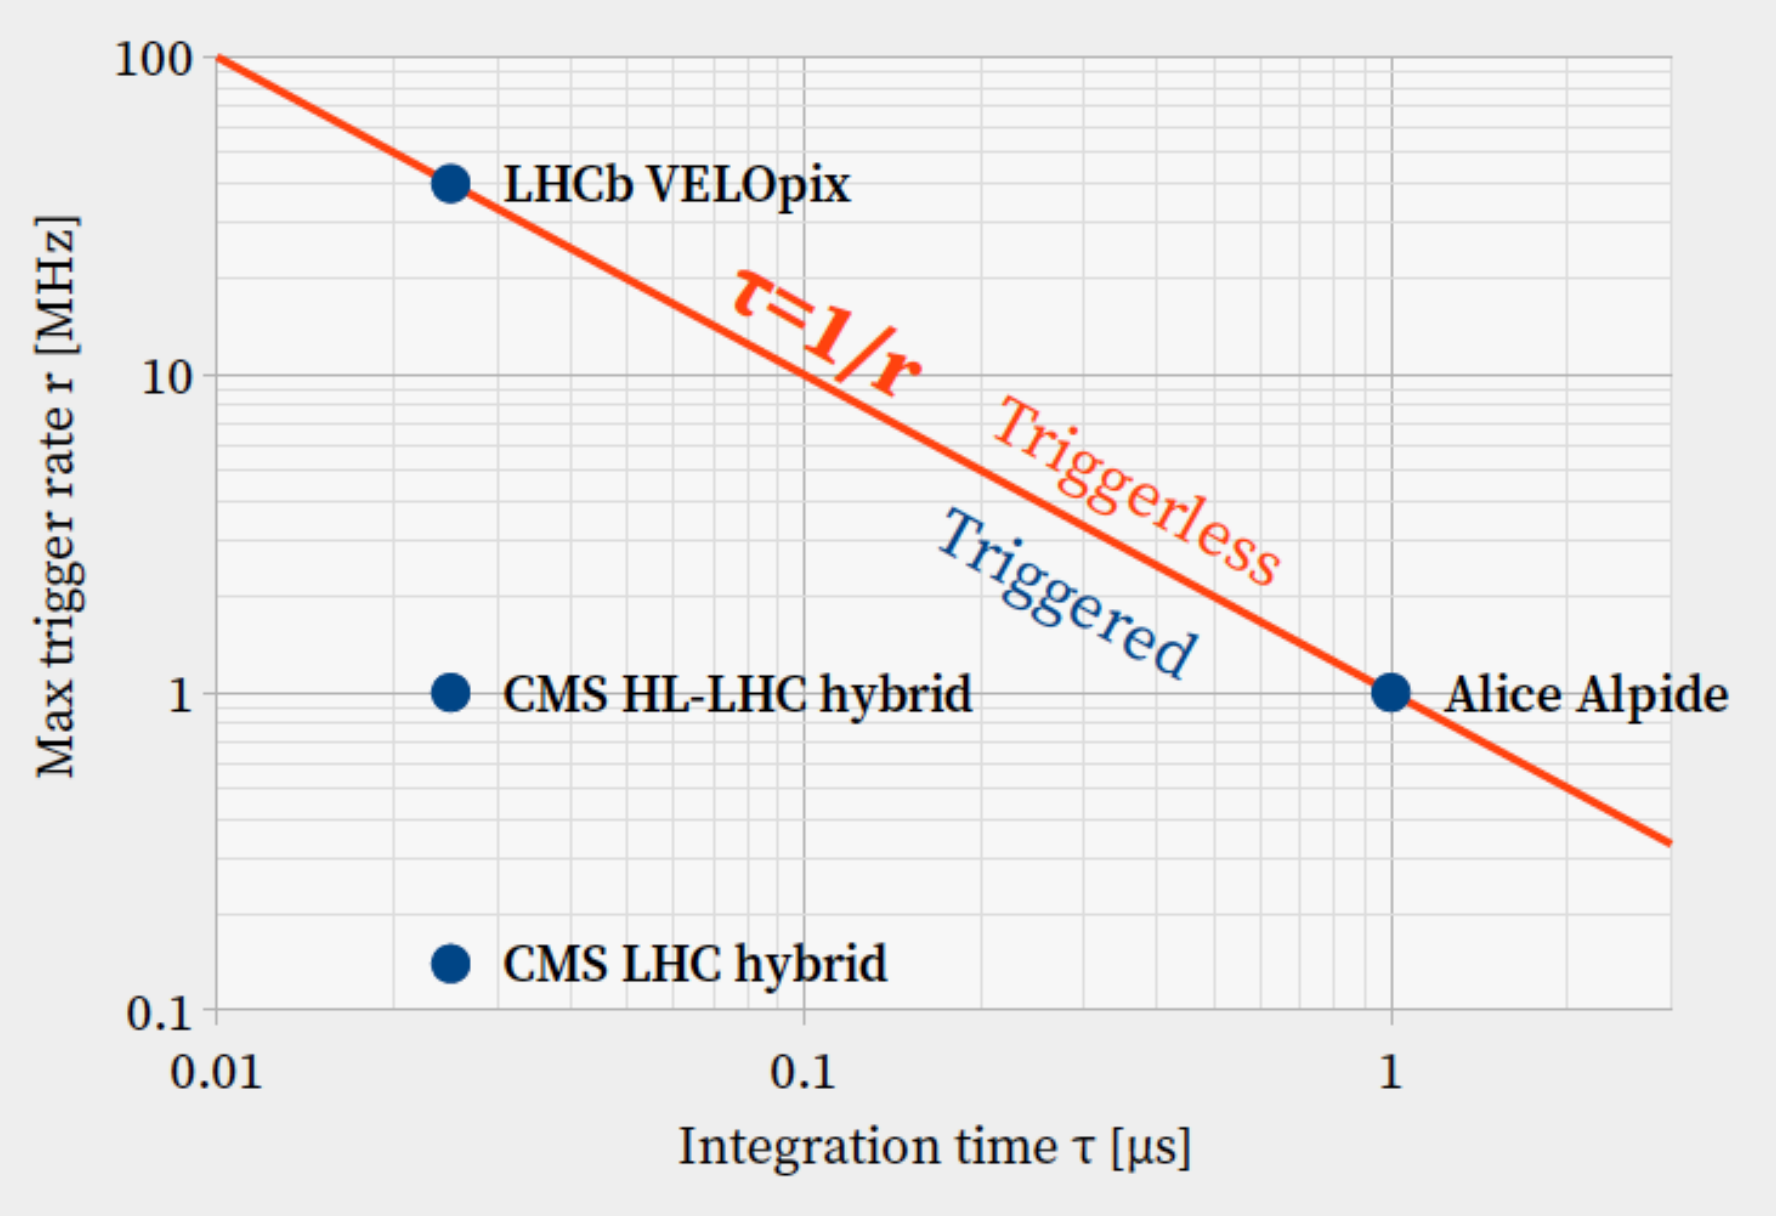

G. Venanzoni, PBC QCD-WG Meeting 2 March 2018

Connections (power, data, network)

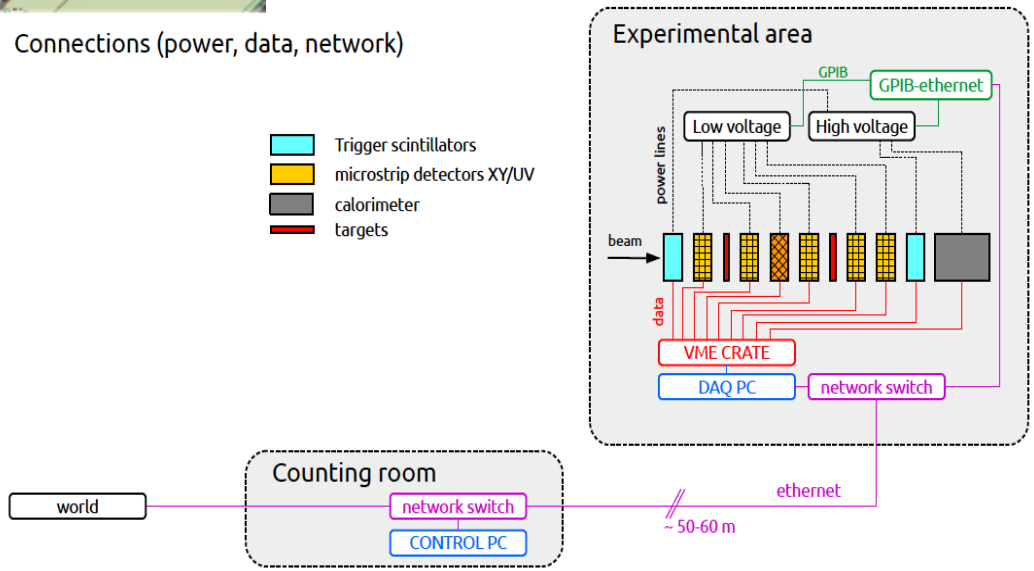

DAQ

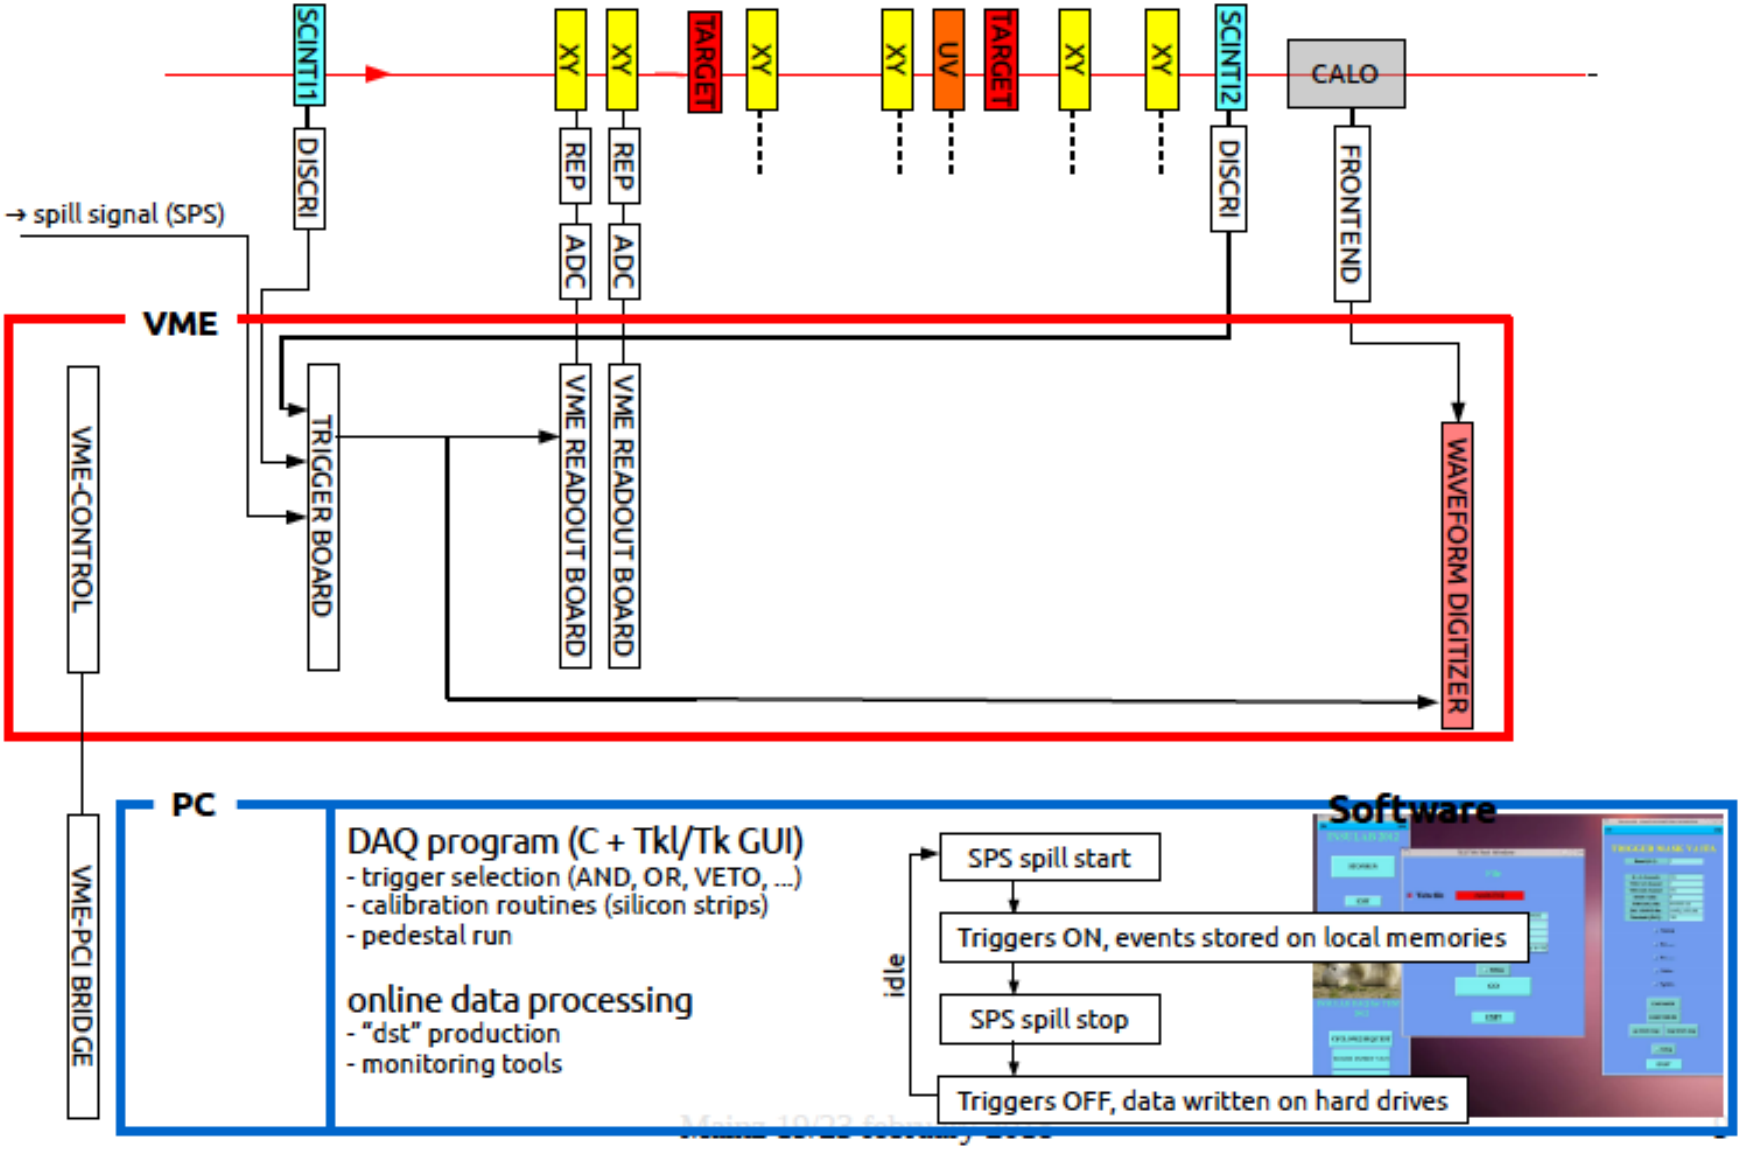
SCINTI1
XY
XY
TARGET
XY
XY
UV
TARGET
XY
XY
SCINTI2
CALO
DISCRI
REP
REP
DISCRI
FRONTEND
→ spill signal (SPS)
ADC
ADC
VME
VME-CONTROL
TRIGGER BOARD
VME READOUT BOARD
VME READOUT BOARD
WAVEFORM DIGITIZER
PC
VME-PCI BRIDGE
DAQ program (C + Tkl/Tk GUI)
- trigger selection (AND, OR, VETO, ...)
- calibration routines (silicon strips)
- pedestal run
online data processing
- "dst" production
- monitoring tools
idle
SPS spill start
Triggers ON, events stored on local memories
SPS spill stop
Triggers OFF, data written on hard drives
Software

Multiple Scattering resolution:

a worst-case scenario

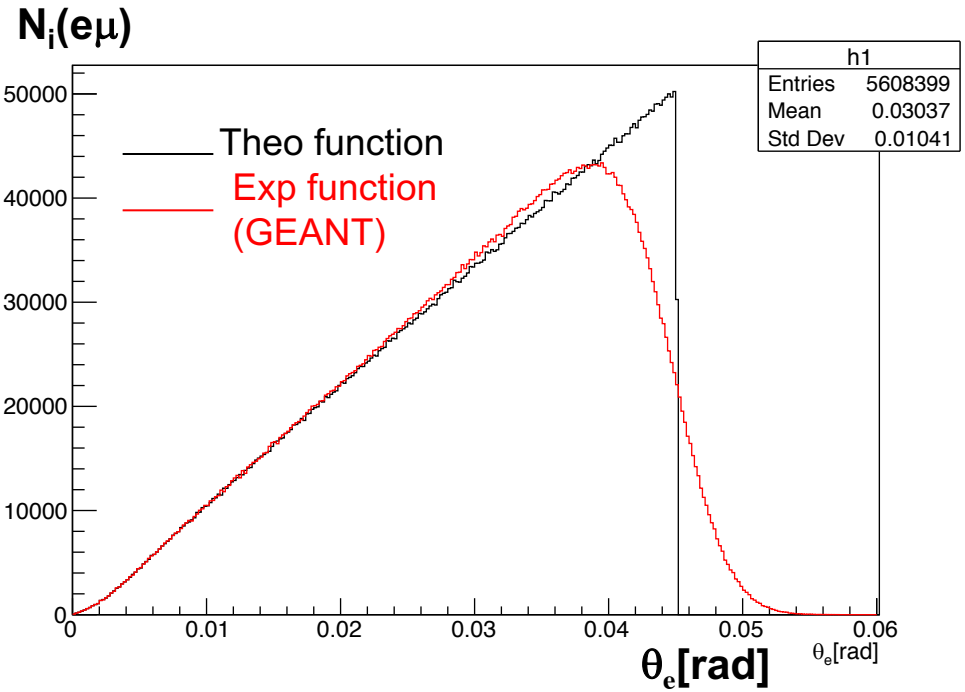

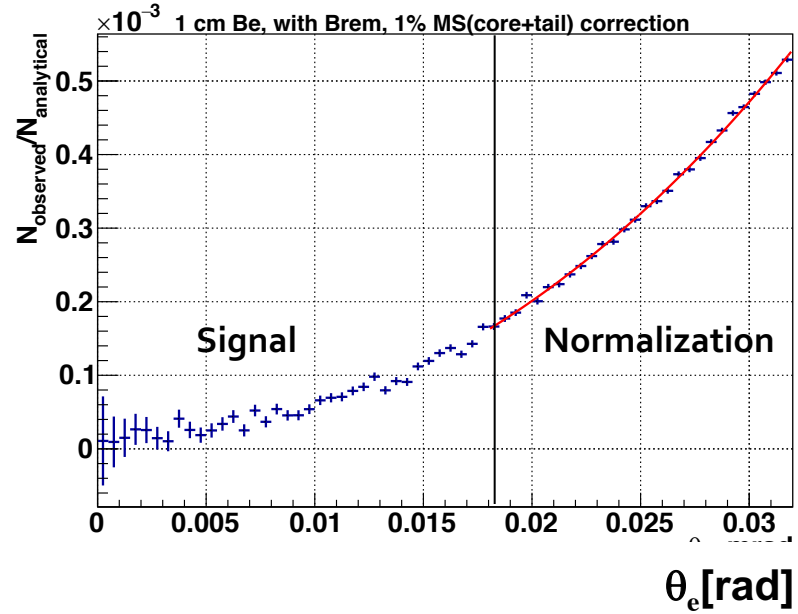

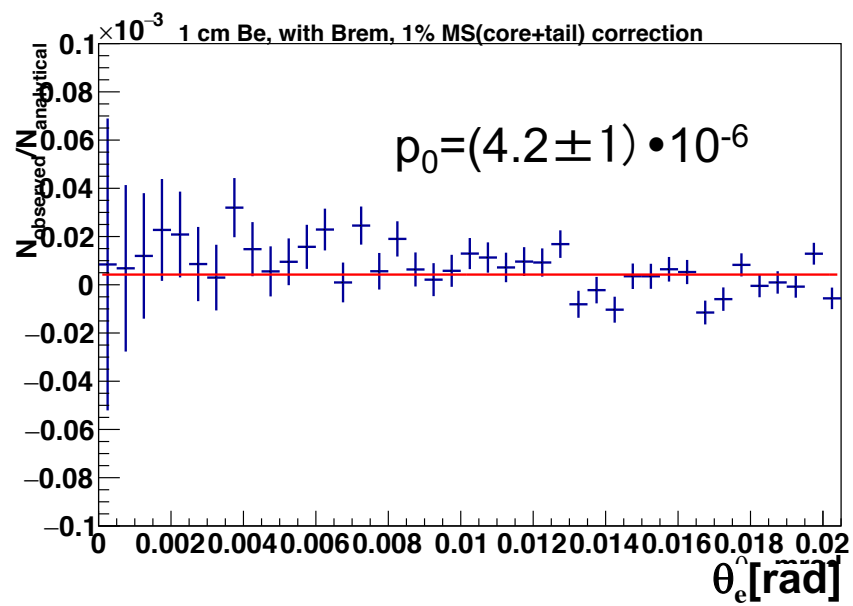

- The detector effects (mostly MS in the target) modify the theoretical spectrum ($N(\theta_e)$)
- We assume a 1% miscalibration on the GEANT model for $\sigma_{\theta e}$ MS (N_{mis})
- N_{mis} quadratically in θ_e respect to NO bias (N_i)
- By correcting N_{mis}/N_i in the normalization region → residual effects $<10^{-5}$ in the signal region

Low energy electrons should be tagged

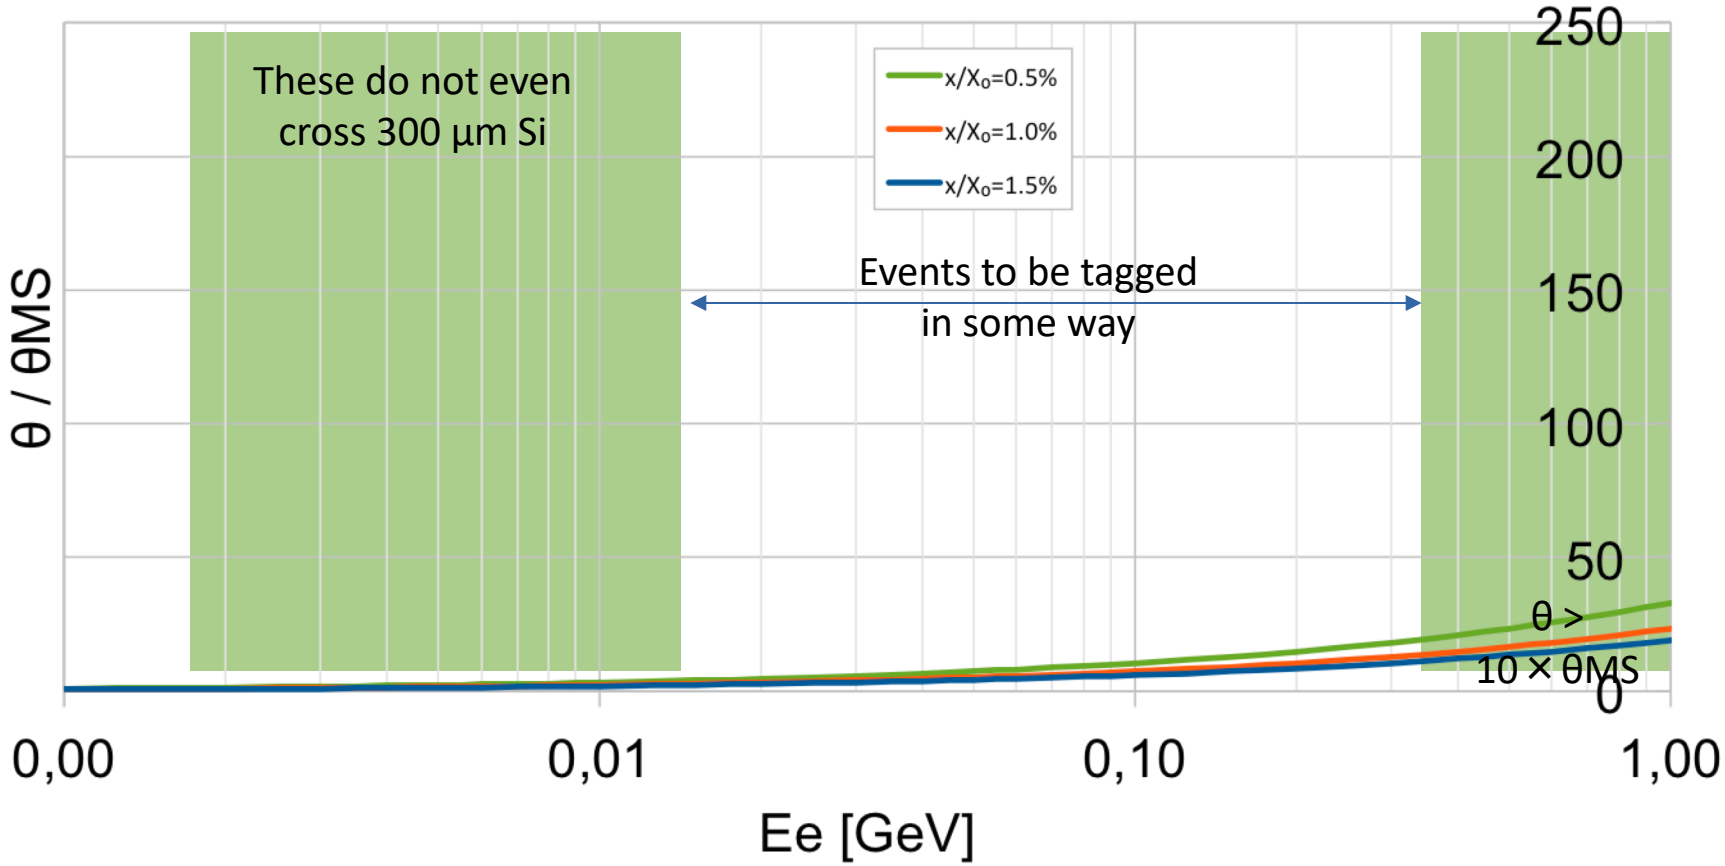

Not only the track angle

Multiple scattering

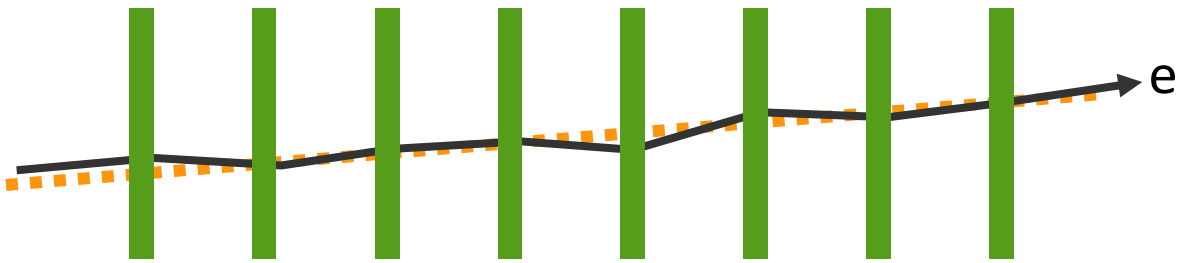

Co-planarity

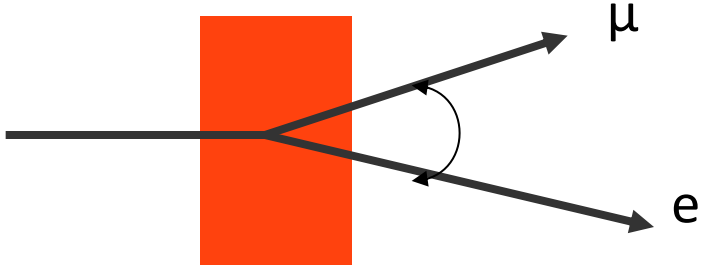

Interaction depth

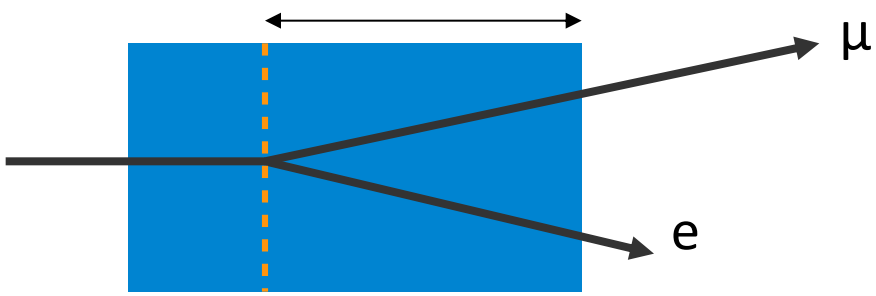

Il readout

Readout electronics

- Zero suppression mode
- 1 ADC board per 4 moduli single side
- 1 VME Readout Board per leggere gli ADC e immagazzinare i dati durante la spill
- Readout speed → 6 kHz → questo numero può salire a 15 kHz se ognuno dei 3 ASIC che leggono una vista è letto in modo indipendente (e non in una daisy chain a 3 come succede adesso) → è possibile solo costruendo moduli nuovi

Abbiamo materiale per costruire ulteriori 10 viste x-y

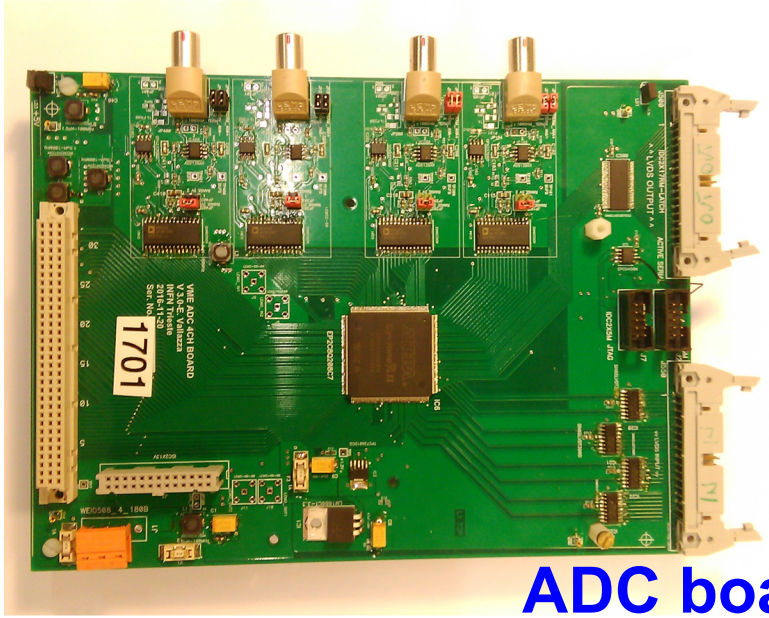

ADC board

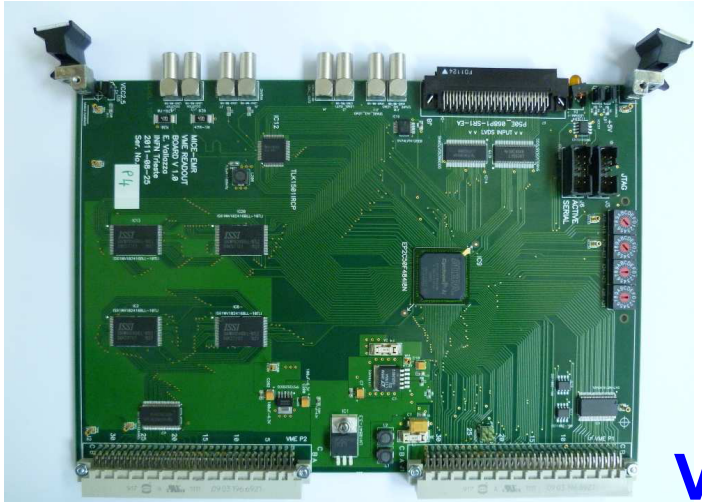

VRB

Prospect for 2018 run

Silicon beam chambers:

- 4 moduli X-Y con i rivelatori single side di AGILE → 9.5x9.5 cm^2 con strip a passo 242 μm – 1 strip floating → risoluzione spaziale di 30 μm
- 4 moduli X-Y richiedibili a INFN Bari (gruppo Fermi) → rivelatori single side di 8.75x8.75 cm^2 con strip a passo 228 μm
- In costruzione: 5 moduli X-Y per LEMMA con i rivelatori single side di AGILE

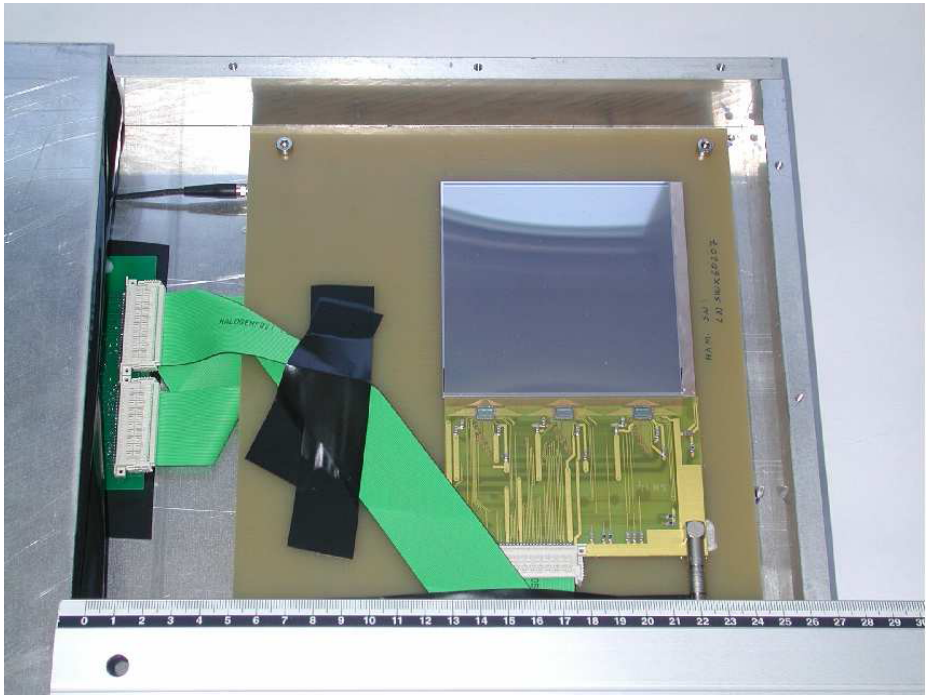

M. Prest et al., Nucl. Instr. and Meth. in Phys. Res. A, 501:280–287, 2003

Daniela Lietti, PhD thesis. VISION: a Versatile and Innovative SIlicON tracking system

http://insulab.dfm.uninsubria.it/images/download_files/thesis_phd_lietti.pdf