



# Collimation system performance

FCC week 2019

J. Molson, A. Abramov, R. Bruce, A. Mereghetti, S. Redaelli, M. Serluca

Introduction

Collimation at injection

Collimation at collision

Extraction kicker pre-fires

Conclusions

# Introduction

- The collimation system design must be tested to ensure it performs as expected during the operation of the FCC-hh.
- This can only be done via simulations of beam losses.
- A selection of simulation results will be shown.

# Simulation tools and configuration


- All simulations have been performed with the SixTrack-FLUKA coupling.
- The latest versions of each code have been used including all bug fixes.
- 100 million particles, 400 turns per simulation.
- A 30% rigidity cut from the reference is used for returning protons from FLUKA.
- Track from IPA and vary the beam halo distribution.
- Will show the standard cleaning inefficiency.

# Collimation at injection

# Injection configuration


- 3.3 TeV beam energy
- 4.6m  $\beta^*$  at each IP.
- No crossing at each IP.
- 16MV RF.
- For the off-energy simulation, an offset of -5.1975 GeV was used for all generated particles.
- $7.570001\sigma$  amplitude was used for the horizontal beam halo.

# Horizontal betatron halo

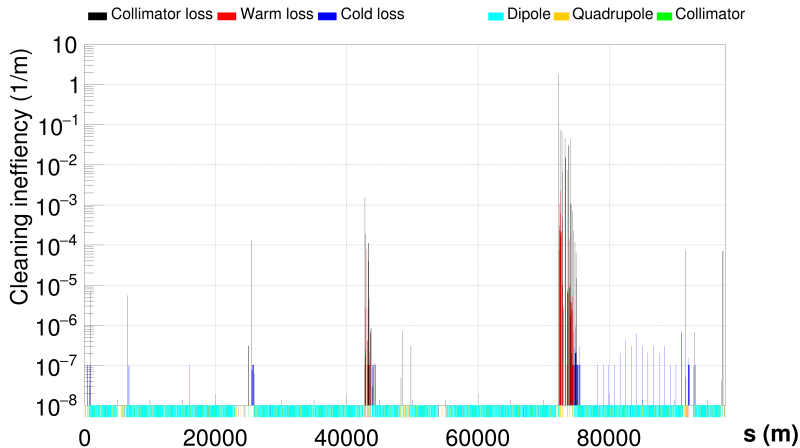





# Horizontal betatron halo

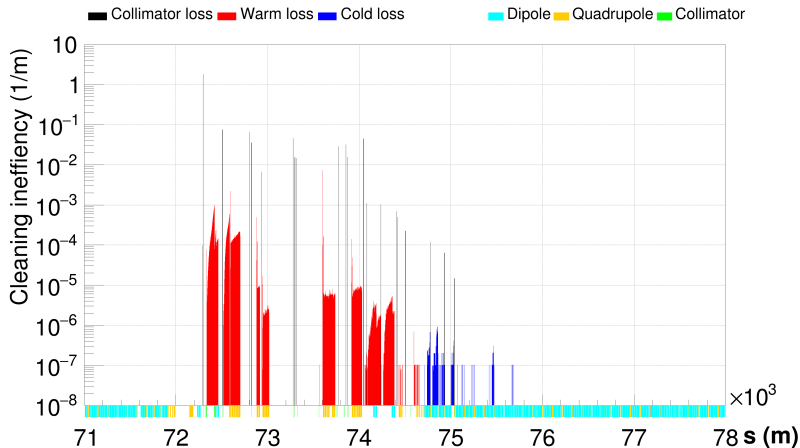

# Off-momentum halo

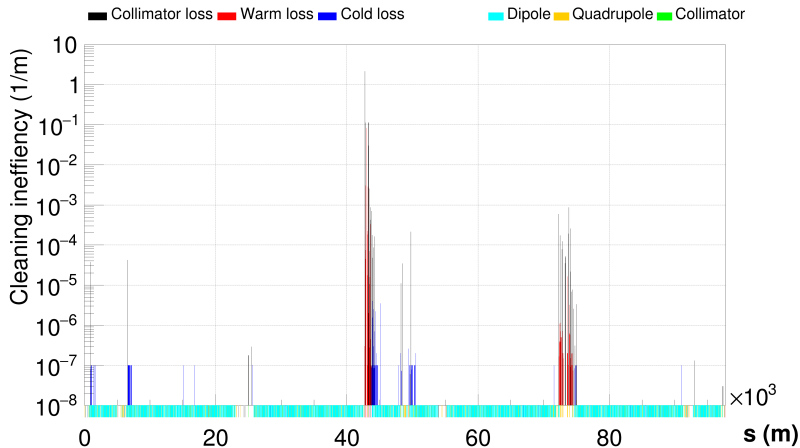

# Off-momentum halo

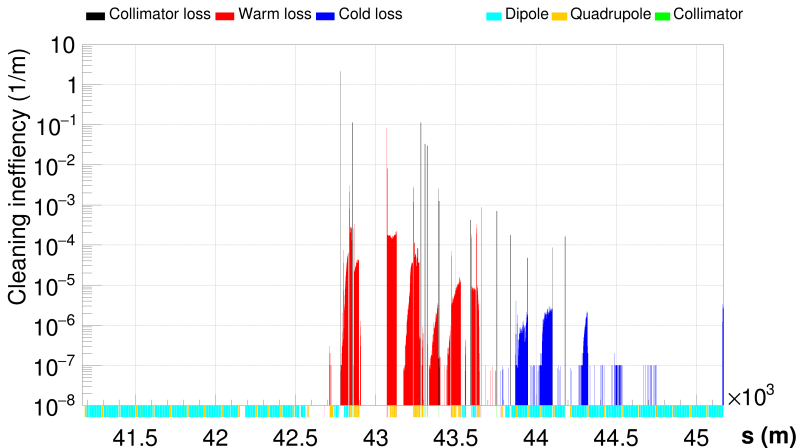

# Injection summary


- Cleaning at injection is acceptable.
- Extra TCLA/TCLD collimators perform well in the energy collimation insertion.
- The higher margin to quench at injection gives more headroom.
- Potentially the start of the ramp might need to be slightly slower than in the LHC due to losses from un-captured beam in the energy collimation.

# Collimation at collision


# Collision configuration

- 50 TeV beam energy.
- 0.3m  $\beta^*$  at each high luminosity IP.
- Crossing on at each IP ( $100\mu rad$ ), with beams colliding.
- 32MV RF.
- $7.570001\sigma$  amplitude was used for the horizontal beam halo.
- Assuming a maximum loss limit in cold regions of  $6.6 \times 10^{-7}$ .

# Horizontal betatron halo

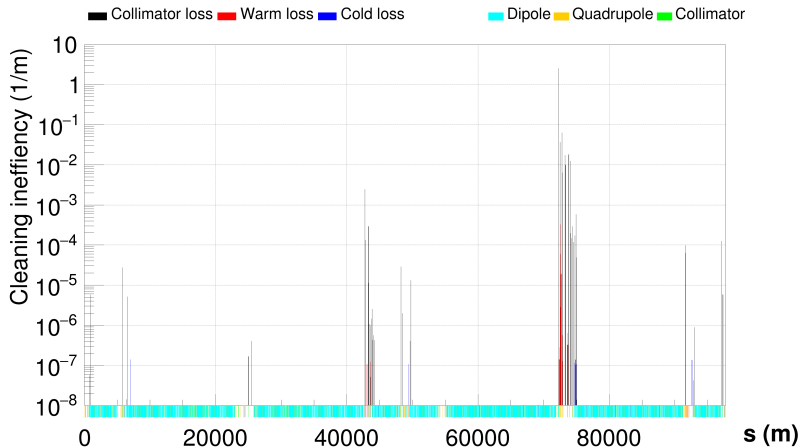


# Horizontal betatron halo

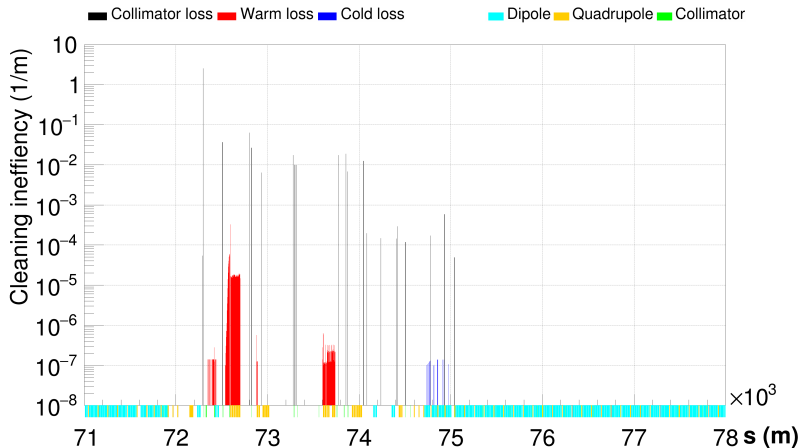



# Skew halo

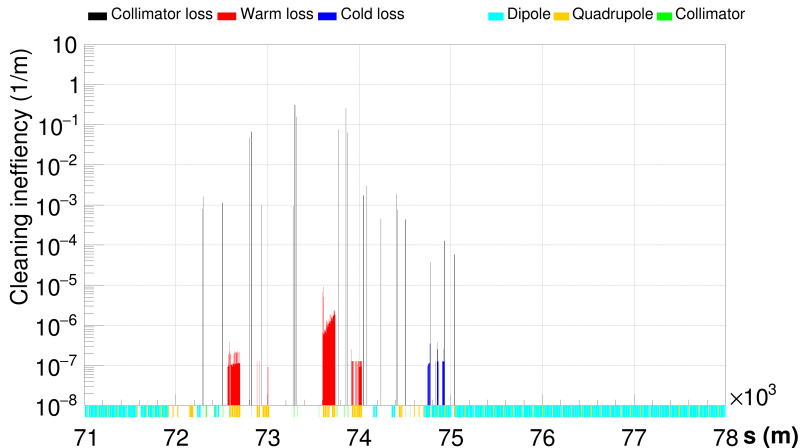


# Collision summary

- Cleaning at top energy in the collision configuration is good.
- One potential worry are skew losses with the removal of the skew TCP collimator.
- Potentially the beam lifetime limit for skew losses will need to be changed, but strong skew losses have not been observed at the LHC.


# New vertical extraction

- A new extraction system now is in lattice V10 (thanks to W. Bartmann, E. Renner), consisting of 150 segmented kicker magnets in the vertical plane instead of 300 in the horizontal.
- One possible failure is the pre-firing of 1 or more extraction kickers resulting in the beam potentially impacting the machine aperture.
- If this takes place the beam should be safely extracted at the next free abort gap.
- A safe limit of 1 bunch impacting a collimator is assumed. How many kickers can fire?


# 1 kicker pre-fire

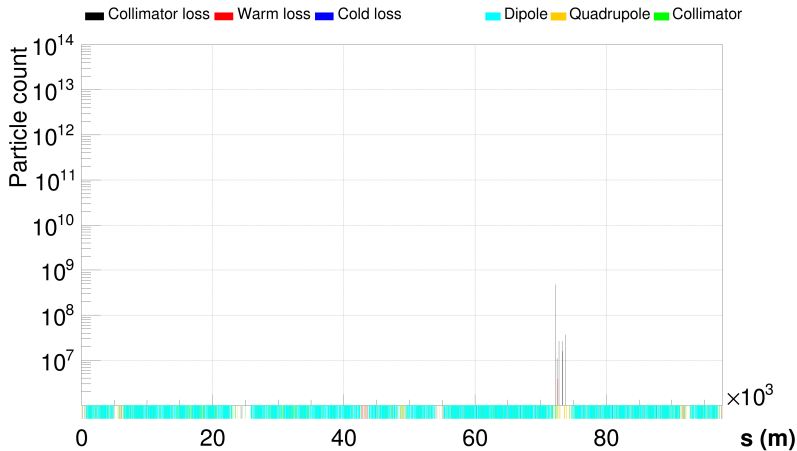


# 3 kickers pre-fire

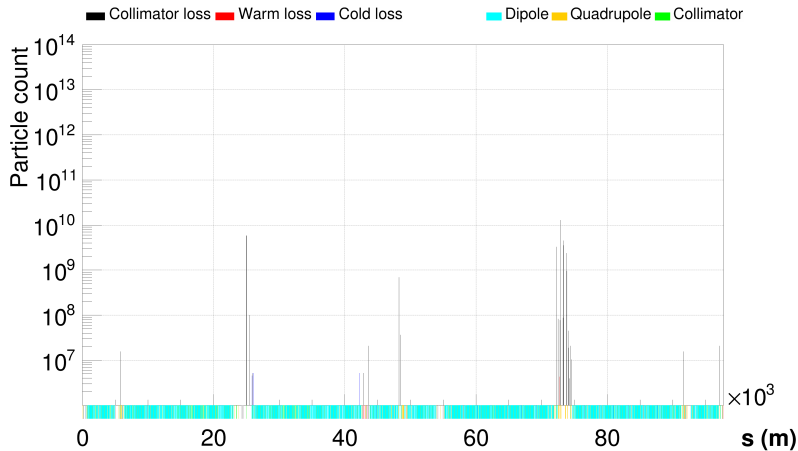

# 4 kickers pre-fire

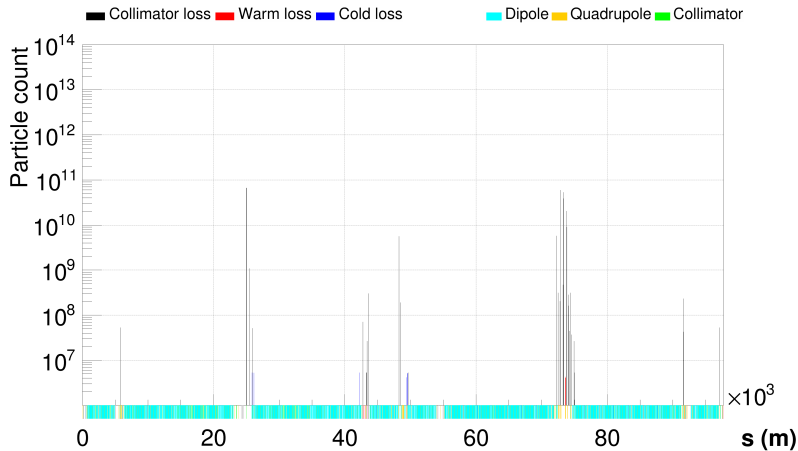

# 5 kickers pre-fire

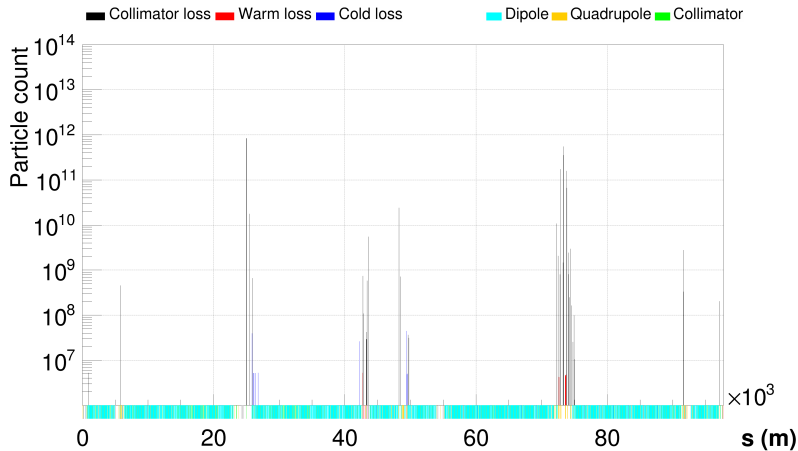

# Extraction kicker pre-fire summary

- With the new layout and assuming nominal beam parameters, up to 4 kickers can safely pre-fire without damage to the machine.
- When taking into account jaw errors, the 4 kicker pre-fire just passes the safe limit of  $1 \times 10^{11}$  particles, giving a more realistic safe limit of 3 kickers.
- This limit is highly dependent on the phase advance between the extraction kickers and the collimation insertion. If phase advances change, then these simulations will need to be re-run.



# Conclusions

- The system performance is currently good and within the required limits.
- Collision debris absorbers (TCLs) and masks must still be added to the lattice.
- Further enhancements and optimisation can be made - This includes a new placement for the skew TCP collimator, new simulations with errors and misalignments, and looking at new collimation system layouts and methods (e.g. crystals, e-lenses, etc).



[home.cern](http://home.cern)

# Collimator settings

Collimator	Material	Number	Injection ( $n\sigma$ )	Collision ( $n\sigma$ )
$\beta$ TCP	CFC	2	7.6	7.6
$\beta$ TCSG	CFC/MoGr	11	8.8	8.8
$\beta$ TCLA	W	5	12.6	12.6
$\beta$ TCLD	W	3	21.0	35.1
$\delta$ TCP	CFC	1	10.8	18.7
$\delta$ TCSG	MoGr	4	13.0	21.7
$\delta$ TCLA	W	5	14.4	24.1
$\delta$ TCLD	W	4	21.0	35.1
TCT	W	12	14.0	10.5
experimental TCLD	W	8	21.0	35.1
TCDQ	CFC	1	9.8	9.8
extraction TCLA	W	2	11.8	11.8
extraction TCLD	W	1	21.0	35.1

# Betatron collimation optics

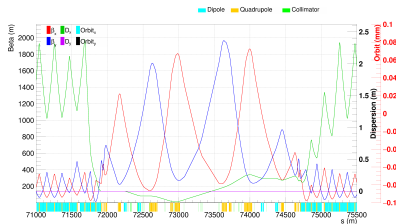


Figure: The optics in the betatron collimation insertion - (IRJ) at injection configuration.

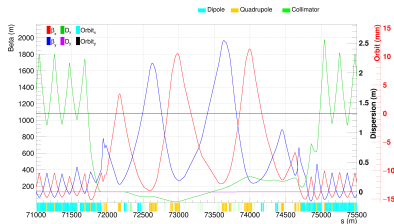


Figure: The optics in the betatron collimation insertion (IRJ) at collision configuration.

# Energy collimation optics

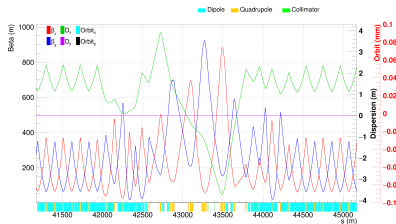


Figure: The optics in the energy collimation insertion - IRF at injection configuration.



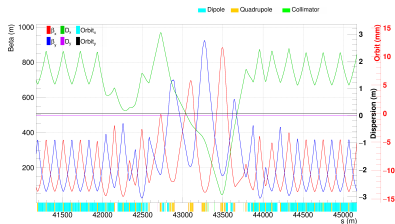


Figure: The optics in the energy collimation insertion (IRF) at collision configuration.


# 1 kicker pre-fire

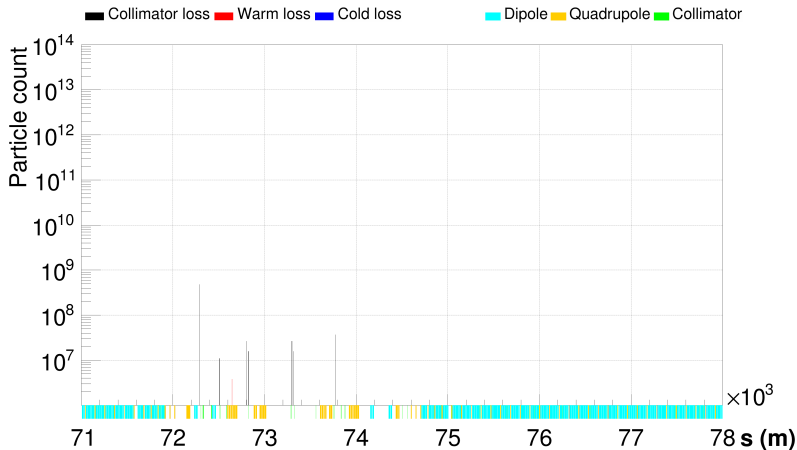

# 3 kickers pre-fire

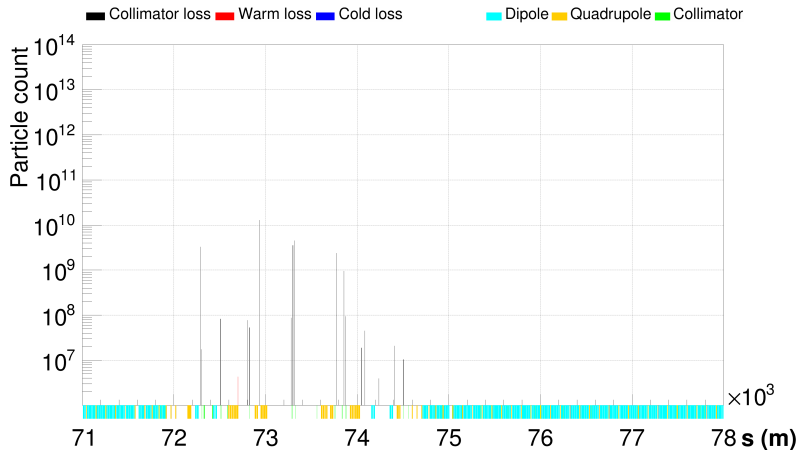


# 4 kickers pre-fire

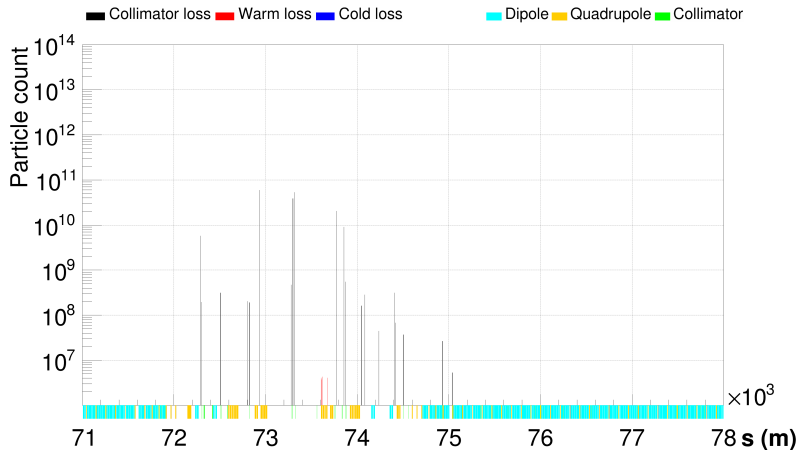




# 5 kickers pre-fire

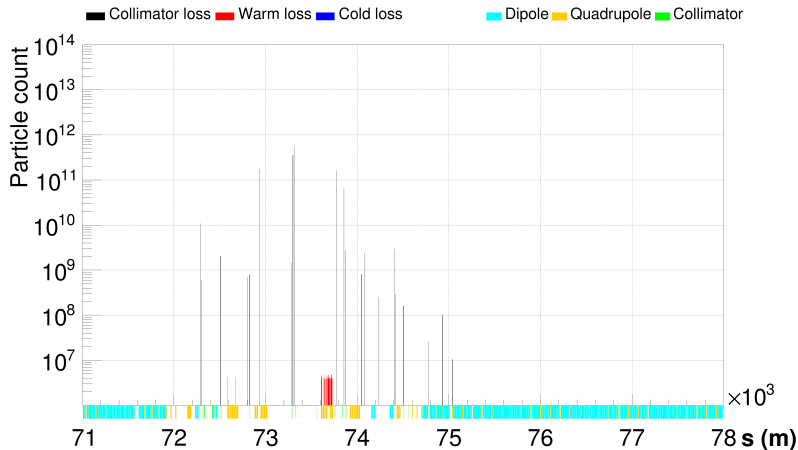

# 4 Extraction kickers with errors

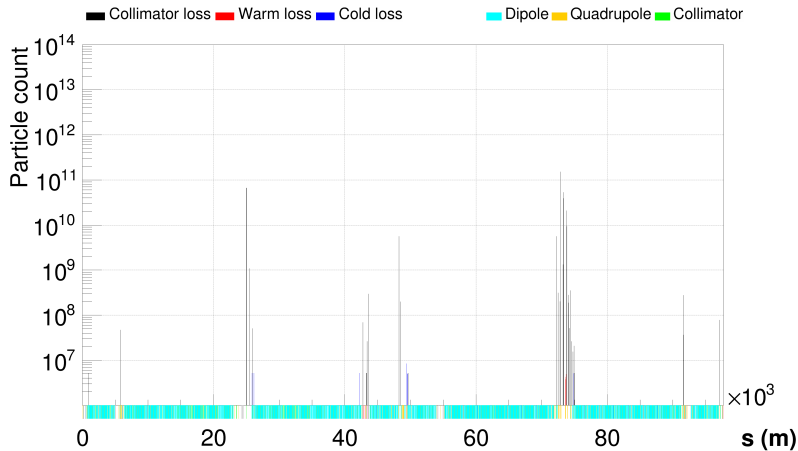

# Changes since last FCC week

- All simulations have been performed with the latest lattice V10 and the up to date TCDQ model, and added collimators.
- Extra TCLD collimators have been added in each collimation insertion.
- Extra TCLA type collimators have been added at the end of the extraction straight section.
- The dispersion has been increased in the energy collimation region.
- Removal of the skew TCP.