

The status of MICE Step IV

*François Drielsma on behalf of the MICE collaboration
Département de Physique Nucléaire et corpusculaire
Université de Genève
CH-1211 Geneva, SWITZERLAND*

1 Ionization cooling

Ionization cooling technique (Fig. 1) provides the only practical solution to prepare high brilliance beams necessary for a neutrino factory or muon colliders, because it is fast enough to cool the beam within the muon lifetime.



Figure 1: Ionization cooling principle: 1. Energy loss by ionization (dE/dx reduces p_L and p_T) 2. Heating from multiple scattering 3. p_L restored by RF cavities.

To maximize cooling we need a material with low-Z to be placed at a position where the transverse momentum p_T has a maximum (β_{\perp} has a minimum).

2 MICE

The Muon Ionization Cooling Experiment (MICE) [1, 2] is under development at the Rutherford Appleton Laboratory (UK). The goal of the experiment is to build a section of a cooling channel that can demonstrate the principle of Ionization cooling and to verify its performance in a muon beam. The MICE collaboration consists of ~ 150 scientists and engineers from Bulgaria, China, Italy, Japan, Netherlands, Serbia, Switzerland, the UK and the USA.

MICE uses muon beams of limited intensity, where particles can be measured individually using scintillator-based detectors. The particle content of the muon beam is measured by using time-of-flight detectors (TOF0, TOF1, TOF2), Cherenkov detectors, the KL (KLOE Light) calorimeter and the Electron Muon Ranger (EMR), that provide precise muon, pion and electron identification. Two identical Scintillating fibre trackers in 4T

solenoids are situated upstream and downstream of the cooling section and will be used to reconstruct the beam emittance, by measuring the spatial coordinates and momentum (x, y, p_x, p_y, p_z) of each muon.

The experiment is being assembled, tested and operated in steps. Each step will validate different parts of the setup. The original schedule has been re-baselined in order to allow the final demonstration of ionization cooling to be completed in 2017.

3 MICE Step I (completed)

The MICE muon beam line at ISIS, RAL, was built to provide beams of different momenta and emittance so that the performance of the cooling channel can be fully explored. During the initial stage of MICE, a novel technique based on time-of-flight counters was used to establish that the beam emittance is in the range 0.7–2.8 mm.rad, with central momenta in the range 170–280 MeV/ c , with a momentum spread of about 20 MeV/ c . The beam line (Fig. 2) is now constructed and operational [3]. Its properties have been measured. The PID detectors (TOF0, TOF1, Ckov, TOF2, KL, EMR) are installed. They have been commissioned with 13×10^6 triggers collected in Step I. MICE Muon Beam meets all the design requirements [4] (Fig. 3).

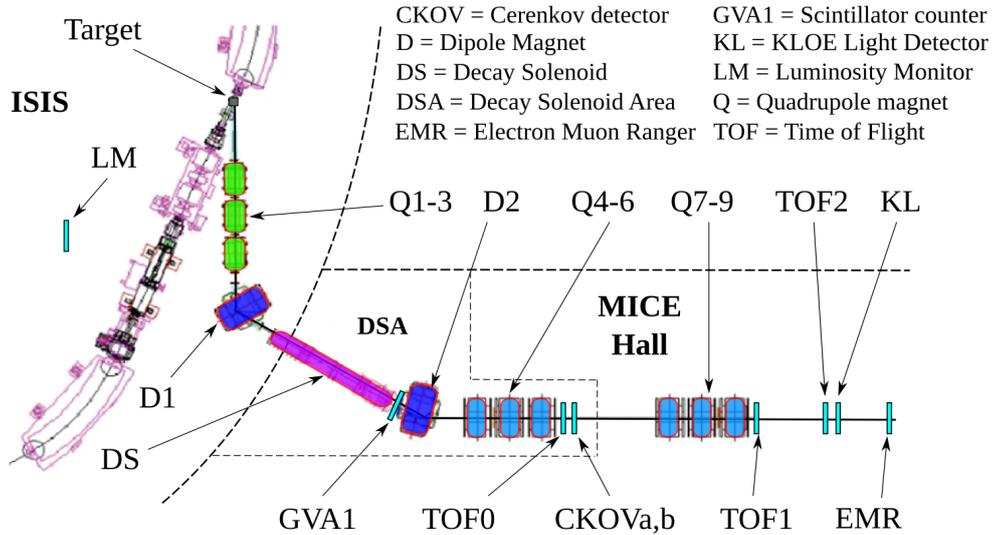


Figure 2: MICE Step I beam line

4 Step IV (commissioning)

The physics plan for Step IV (Fig. 4) of the experiment includes first measurements of transverse normalized emittance reduction, measurements of the equilibrium emittance of

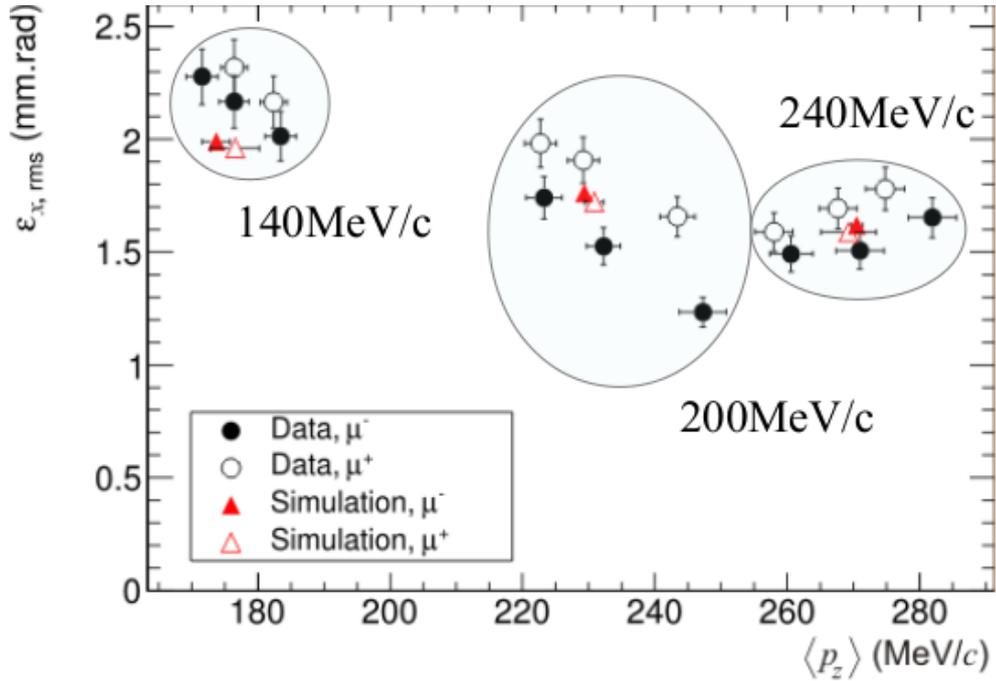


Figure 3: Transverse 2D emittance after correction for measurement resolution and multiple scattering versus mean p_z of the seventeen measured beams. Solid black circles: μ^- data, open black circles: μ^+ data, solid red triangles: μ^- simulation, open red triangles: μ^+ simulation. The nominal $p_z = 140$ MeV/ c beams correspond to momenta in the range 170–190 MeV/ c , $p_z = 200$ to 220–250 MeV/ c , and $p_z = 240$ to 250–290 MeV/ c .

a given absorber and for a given beta function, measurement of 6D emittance change, as well as precision measurements of multiple scattering. Lithium Hydride and Liquid hydrogen absorbers with different optics configurations will be examined. Fig. 5 shows the status of the implementation of Step IV in the MICE Hall.

A description of the new components introduced in Step IV is given in the following paragraphs.

4.1 Trackers

Each tracker module is composed of a scintillating-fibre tracking detector (Fig. 6) installed within a 4T spectrometer solenoid. Each tracking detector consists of 5 planes (stations), composed of three doublet-layers of scintillating fibres, providing 3 views. To reduce multiple Coulomb scattering of muons to an acceptable level, a fibre diameter of 350 μm was used.

The trackers are positioned inside the bore of ~ 1.3 m long superconducting solenoid, which provides a uniform 4 T field. Additional superconducting coils are used to match the magnetic optics to that of the the cooling channel.

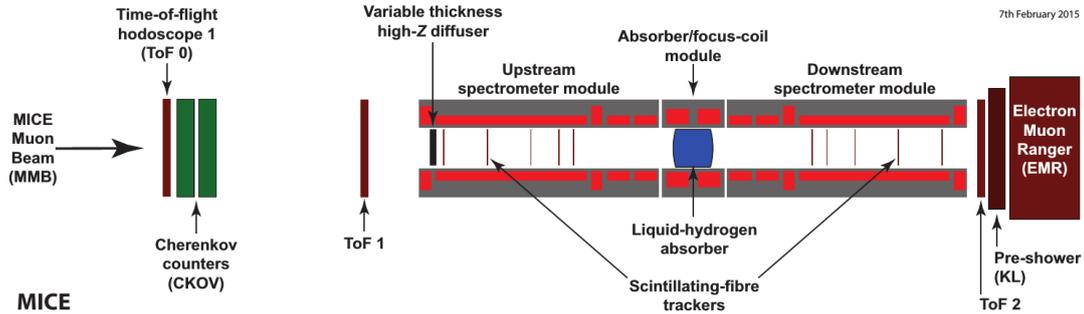


Figure 4: Schematic diagram of the Step IV configuration of MICE. The muon beam enters from the left of the figure. The beam-line instrumentation (the time-of-flight, TOF, hodoscopes, the Cherenkov (CKOV) counters, the pre-shower, KL, detector and the Electron Muon Ranger, EMR) are indicated. The spectrometer solenoids, and the scintillating-fibre trackers they contain are shown upstream and downstream of the central absorber/focus-coil (AFC) module.

4.2 Diffuser

The Diffuser (Fig. 7) placed before the upstream spectrometer will be used to produce a broad range of emittances. Multiple scattering in materials with small radiation lengths is used to increase the beam emittance.

4.3 Absorber/focus-coil module

The focus-coil module (Fig. 8, right) consist of two superconducting 4 T coils wound on a single bobbin. The coils can be run with the same polarity (Solenoid mode) or with opposite polarities (Flip mode) and will provide strong focusing at the absorber. The liquid-hydrogen absorber is shown on Fig. 9, left. The 65 mm thick disk of the lithium-hydride absorber is shown on Fig. 9, right.

5 Conclusions

Muon beams of low emittance provide the basis for the intense, well-characterized neutrino beams of a Neutrino Factory and for lepton-antilepton collisions at energies of up to several TeV at a Muon Collider.

The international Muon Ionization Cooling Experiment (MICE) will demonstrate ionization cooling - the technique by which the mu-beam phase-space volume is reduced. MICE is being constructed in a series of steps. At Step IV, MICE will study the properties of liquid hydrogen and lithium hydride that affect cooling. A solenoidal spectrometer will measure emittance up and downstream of the absorber vessel, where a focusing coil focuses muons. The construction of Step IV at RAL is nearing completion. The status of



Figure 5: Photograph of the state of construction of MICE Step IV taken in August 2015. The upstream spectrometer, the absorber/focus-coil module and the downstream spectrometer, placed inside a Partial Return Yoke (PRY), may be seen behind of the downstream PID system (TOF2, KL and EMR).

the project will be described together with a summary of the performance of the principal components. Plans for the commissioning, operation and measurement programme of Step IV will be described.

References

- [1] Muon ionization cooling experiment, <http://mice.iit.edu>.
- [2] MICE Collaboration, Proposal to the Rutherford Appleton Laboratory: an International Muon Ionization Cooling Experiment (MICE), MICE-NOTE-21.
- [3] MICE Collaboration, The MICE Muon Beam on ISIS and the beam-line instrumentation of the Muon Ionization Cooling Experiment, *Journal of Instrumentation* 7 no. 5 (2012) P05009, arXiv:1203.4089
- [4] MICE Collaboration, Characterisation of the muon beams for the Muon Ionisation Cooling Experiment, *Eur. Phys. J. C* 73 (2013) 10, 2582, arXiv:1306.1509

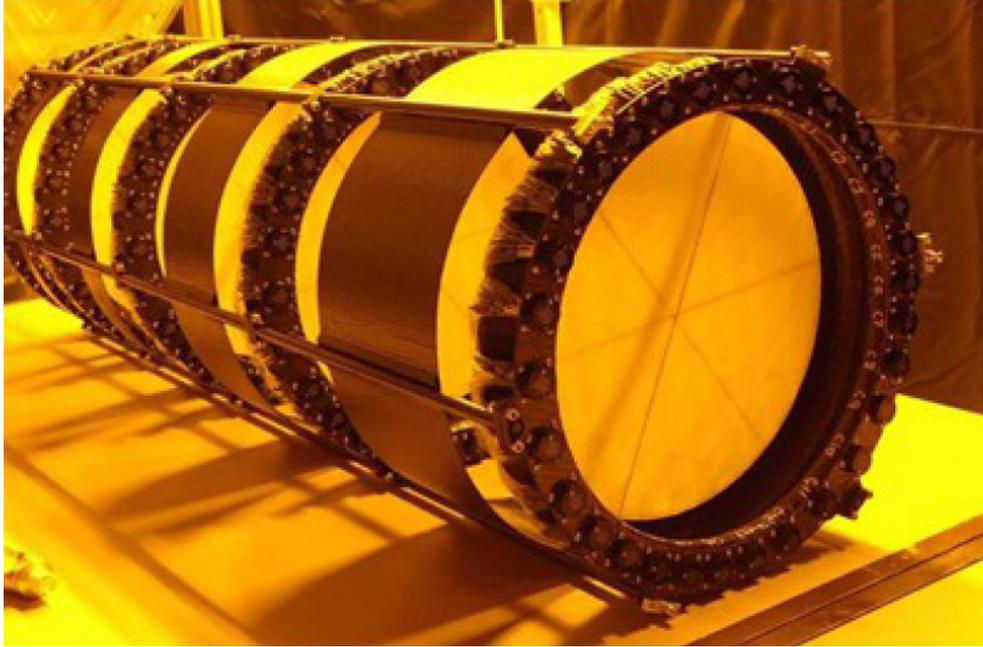


Figure 6: The 5 stations of one of the two MICE scintillating-fibre tracker

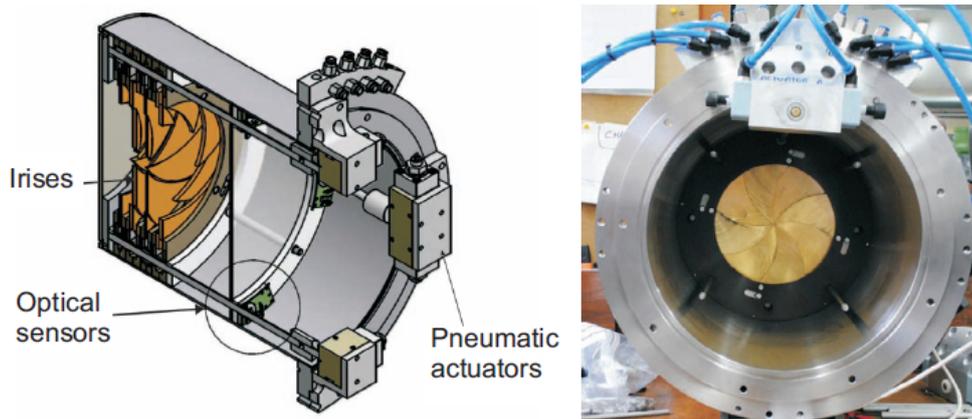


Figure 7: Left: schematic of the MICE diffuser showing the irises. Right: one of the brass irises being tested.



Figure 8: Superconducting focus-coil module



Figure 9: Left: the liquid-hydrogen absorber vessel prior to installation in the focus-coil module. Right: the lithium-hydride absorber.