

LARA: a Laser-based Beam Line for Clinical Applications

JAI Fest

Ajit Kurup

7th December 2018

**Imperial College
London**

Introduction

- The 'Centre for the Clinical Application of Particles' (the CCAP) is an interdisciplinary collaboration of personnel from:
 - The Imperial Department of Physics, the Imperial Faculty of Medicine, the Imperial Academic Health Science Centre, the Imperial CRUK Cancer Centre, the Institute of Cancer Research, the John Adams Institute and the Oxford Institute for Radiation Oncology

**Imperial College
London**

Imperial College Healthcare
NHS Trust

NHS
NHS Trust

ICR

The Institute of
Cancer Research


JAI
John Adams Institute
for Accelerator Science



- The CCAP's mandate is to:
 - “Develop the technologies, systems, techniques and capabilities necessary to deliver a paradigm shift in the clinical exploitation of particles.”
- The Centre's programme will:
 - Develop novel, compact, laser-driven accelerator systems for clinical applications;
 - Deliver the capability to assess the biological and therapeutic efficacy of different ion species; and
 - Develop improved diagnostic, dose-measurement, imaging, treatment-planning, data-processing, and machine-learning techniques.
- Focus of this talk is on the conceptual design of Laser Accelerator for Radiobiological Applications (LARA).
 - Initial stage will deliver in vitro studies of radiobiological effects.
 - Second stage will allow in vivo studies.

Laser Accelerator for Radiobiological Applications – LARA

- Laser Accelerator for Radiobiological Applications (LARA) is a facility proposed by the CCAP that will study radiobiological effects using a laser-driven ion beam.
 - Intense beams.
 - Protons and light ions, e.g. carbon.
- Conceptual design of LARA requires simulation of accelerator components and being able to study dose deposition in the cells and surrounding material in the end-station.
- Develop the conceptual design using BDSIM.
 - Particle tracking simulations to compare with the optics design.
 - Study energy loss in the end station and verify required beam parameters.



LASER TARGET

Laser used to generate intense ions beams and beams of different types of ions, e.g. protons and carbon ions.

CAPTURE SECTION

Gabor lenses used for compact focussing to capture the large divergence and energy spread of the laser driven ion beam.

UPSTREAM MATCHING

Quadrupole focussing channel to match the beam from the Gabor lenses to the dipole.

ENERGY AND ION SELECTION


Dipole bending and collimator system to select particles based on momentum.

END STATION

Where the cells will be irradiated. The beam will be delivered vertically from below the cell sample container.

DOWNSTREAM MATCHING



Quadrupole focussing channel to match the beam to the end station

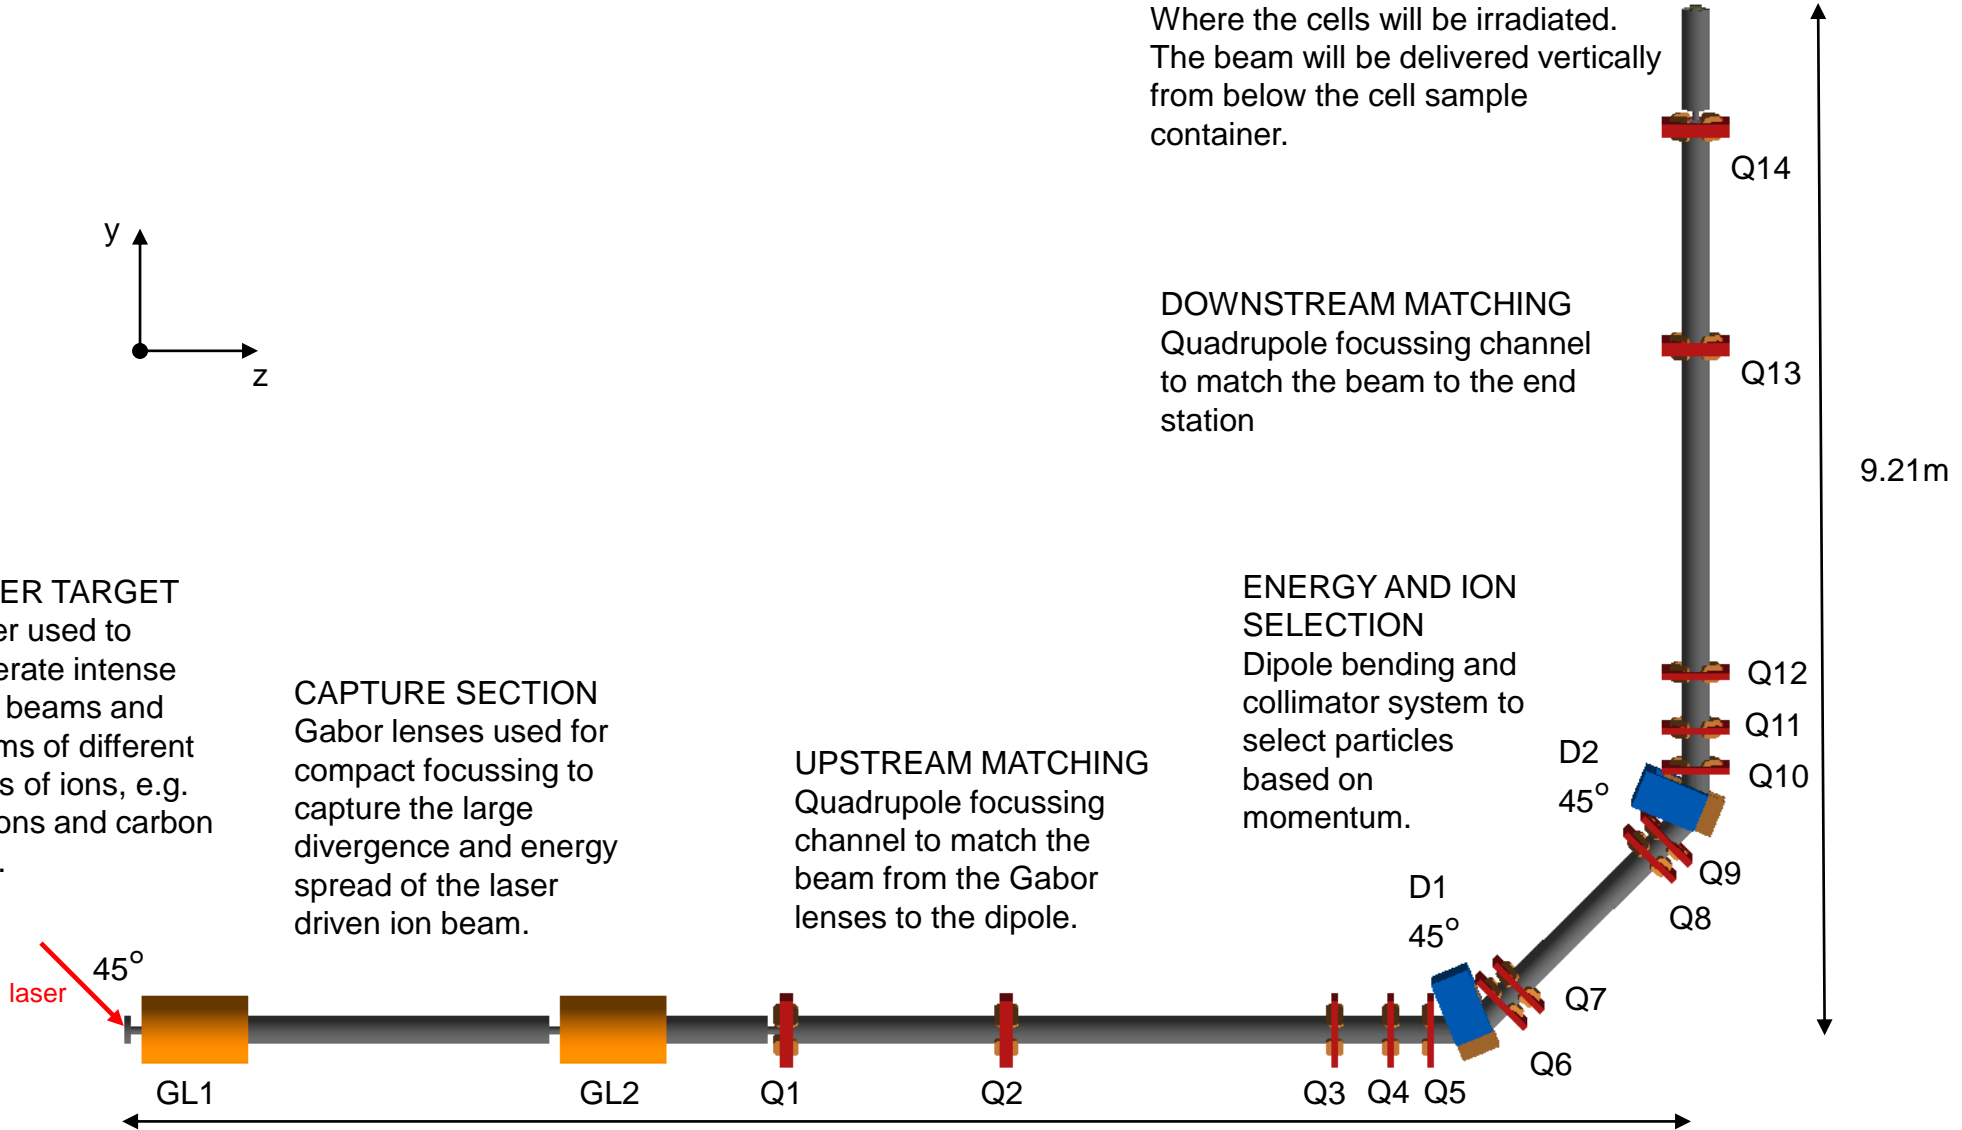

14.05m

Total beam line length: 22m

Initial Beam

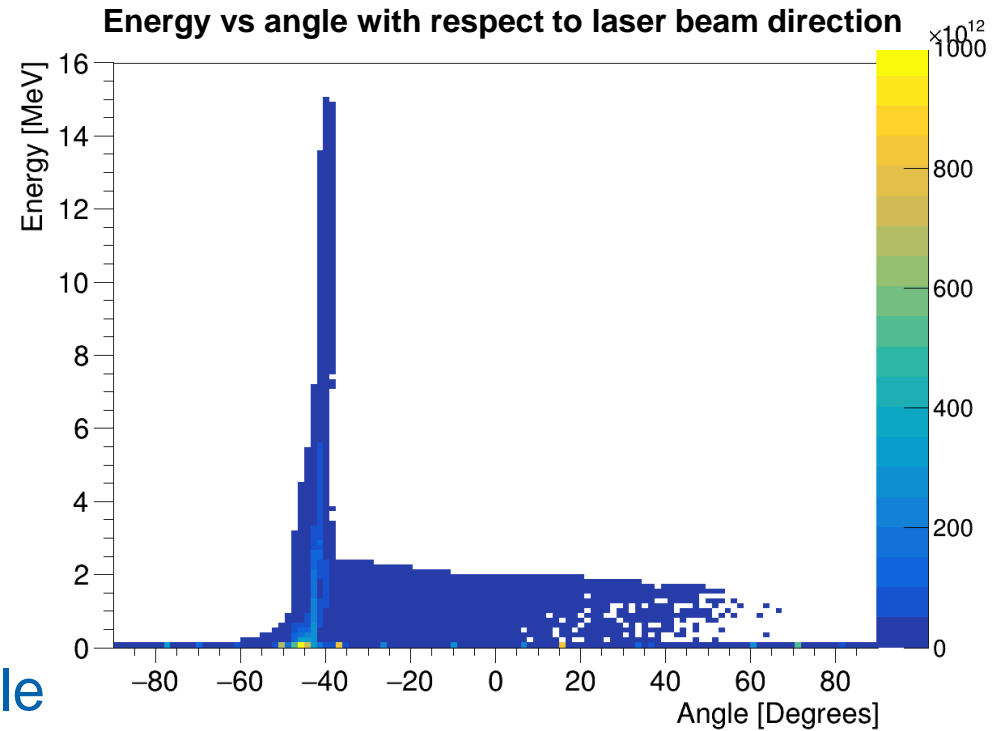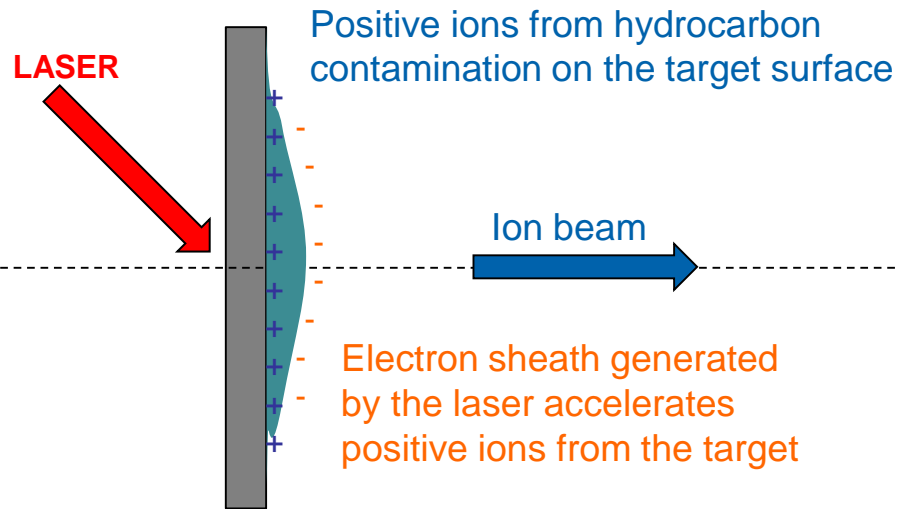


Laser driven ion beam simulation using EPOCH.

- Produces intense beams and multiple species, e.g. proton and carbon ions.
- Initial simulations with BDSIM used a beam generated from Twiss parameters for comparison with the optics design.
 - $\beta_{x,y} = 71 \times 10^{-6} \text{ m}$
 - $\epsilon_{x,y} = 4 \times 10^{-8} \pi. \text{ m.rad}$
 - $\alpha_{x,y} = 0$
 - Kinetic energy = 15MeV

} Small beam size and large divergence.


Laser at Imperial

- Current operating parameters
 - 100mJ, 38fs and 10Hz.
- Aim to reach
 - 1J, 30fs and 10Hz.

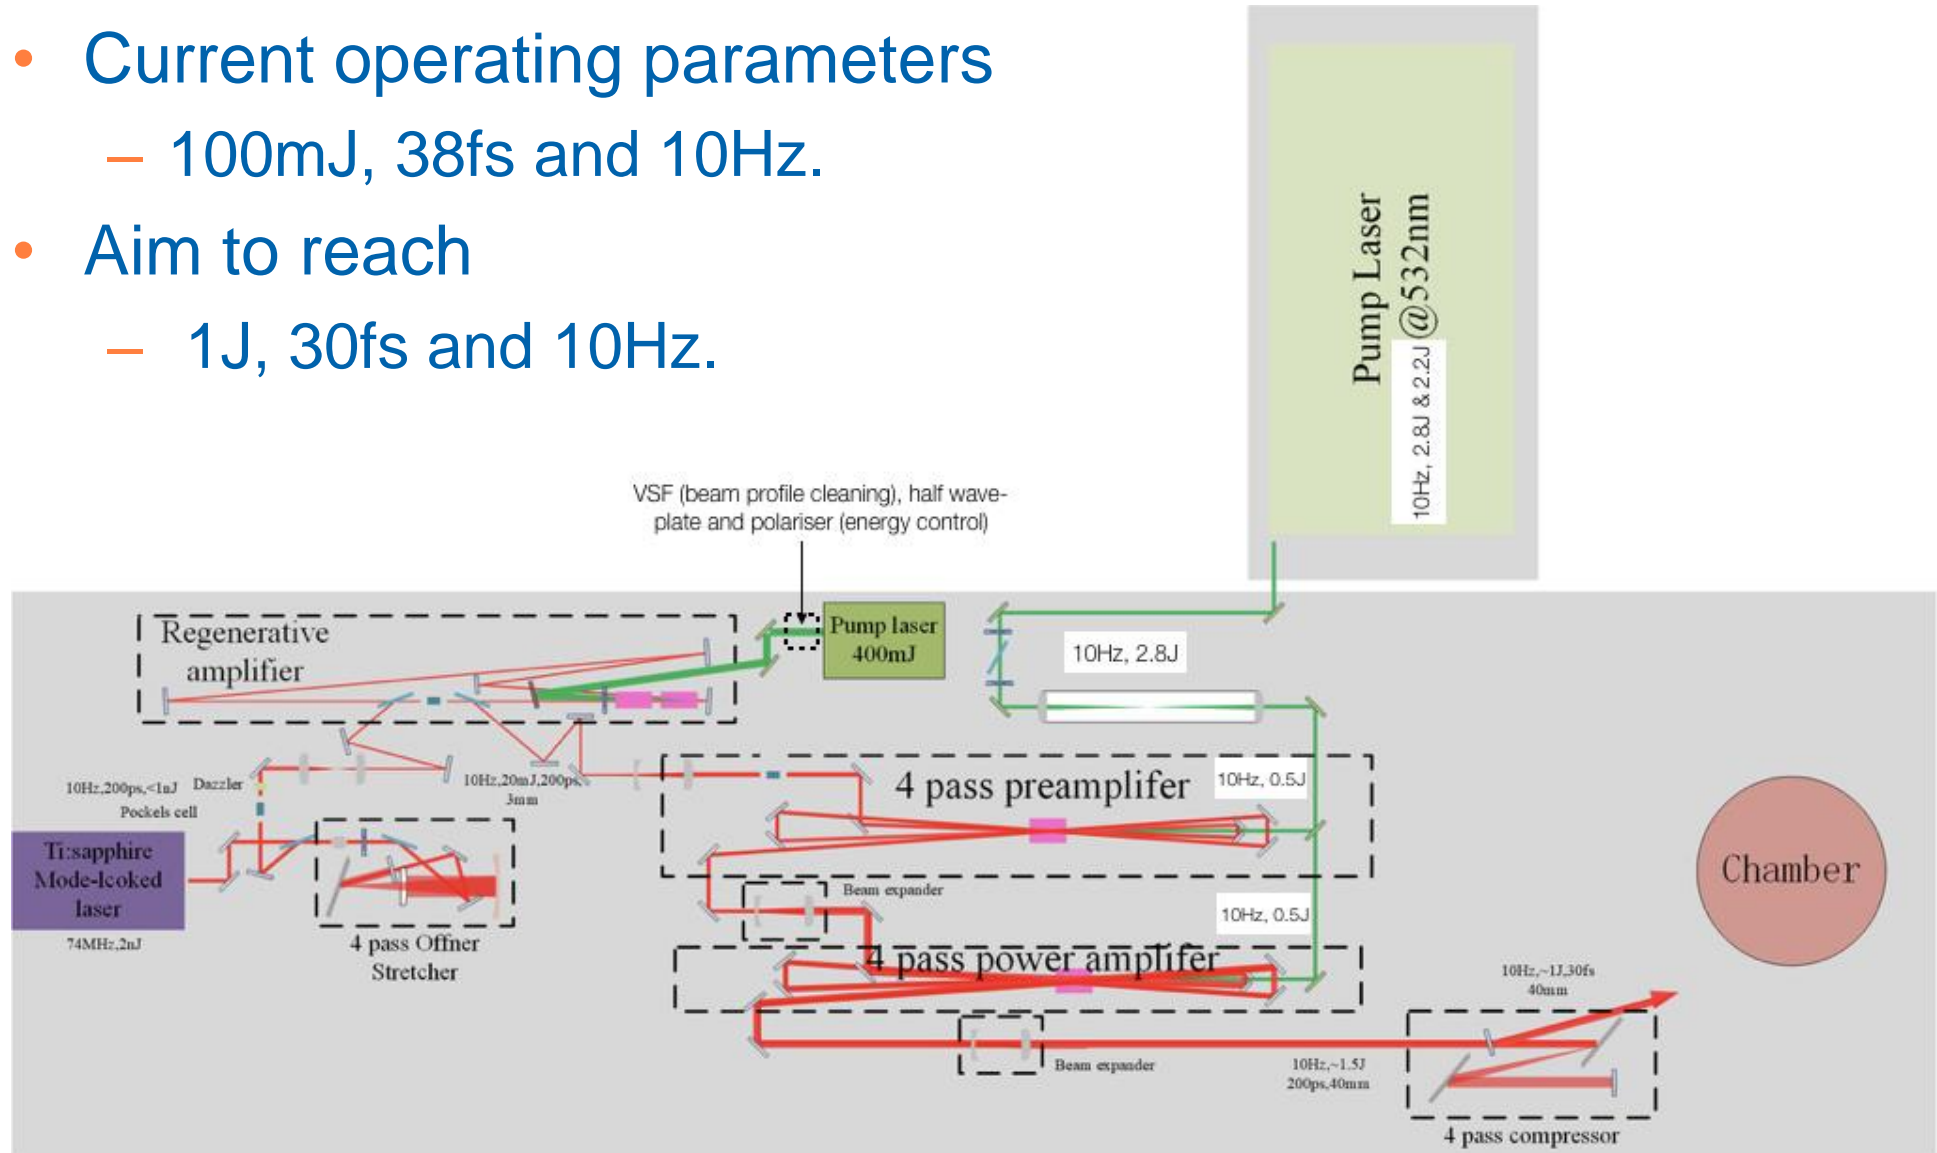


Schematic diagram of the laser.



Capture

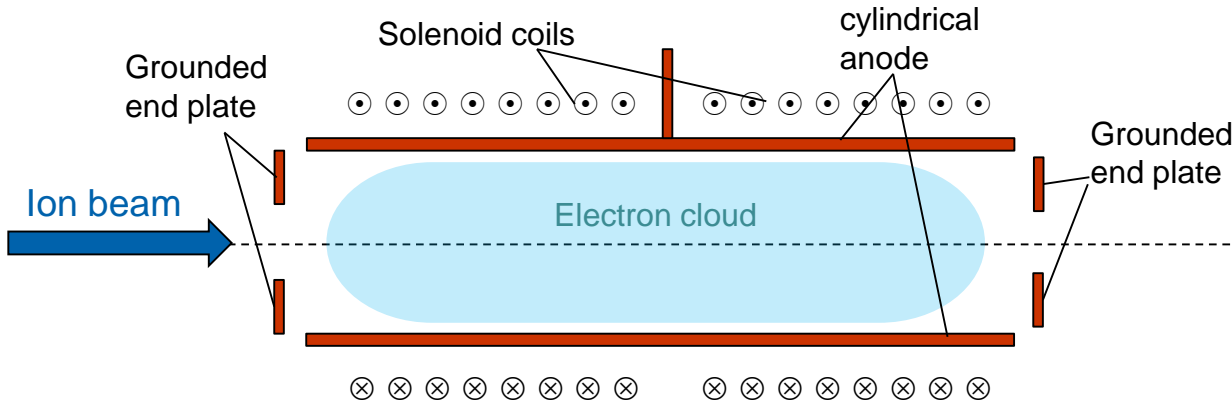

- The Gabor lens uses a plasma to generate a strong electro-static focusing field.
- Original prototype tested with a 1MeV proton beam at the Surrey Ion Beam Centre.
- Upgraded Gabor lens has been recently assembled and will be tested at Imperial.
 - Vacuum tests.
 - Tests with a radioactive source.
 - Tests with the laser driven ion beam.

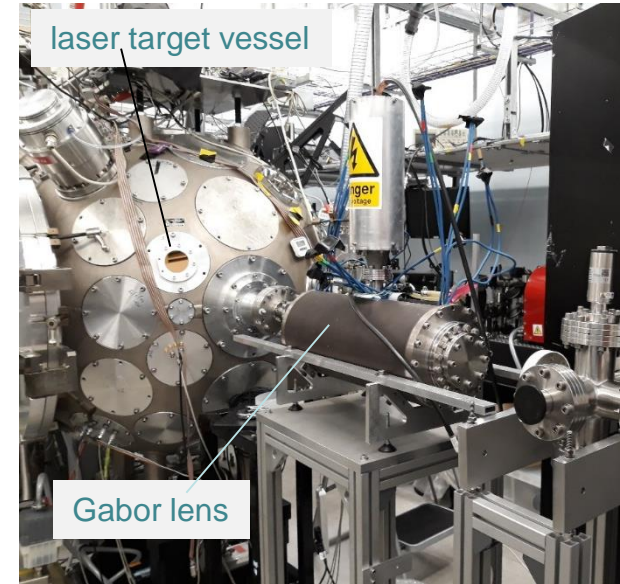


Original Gabor lens prototype was to be tested with the Cerberus laser at Imperial.

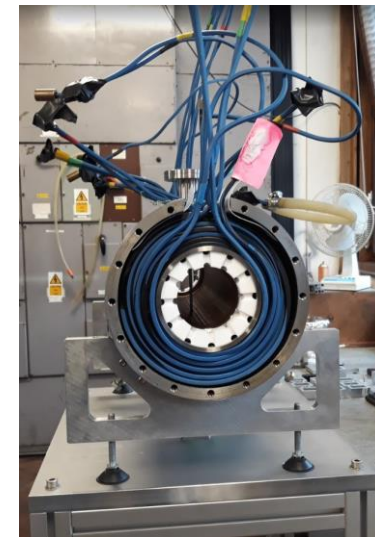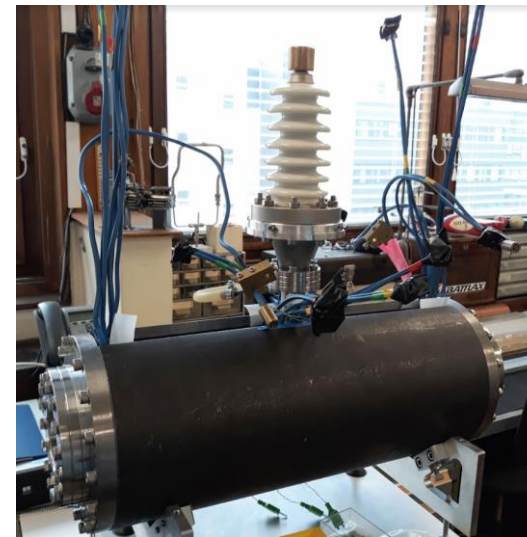

Upgraded Gabor lens being assembled 3/12/18

Capture

Beta function comparison between BeamOptics and BDSIM

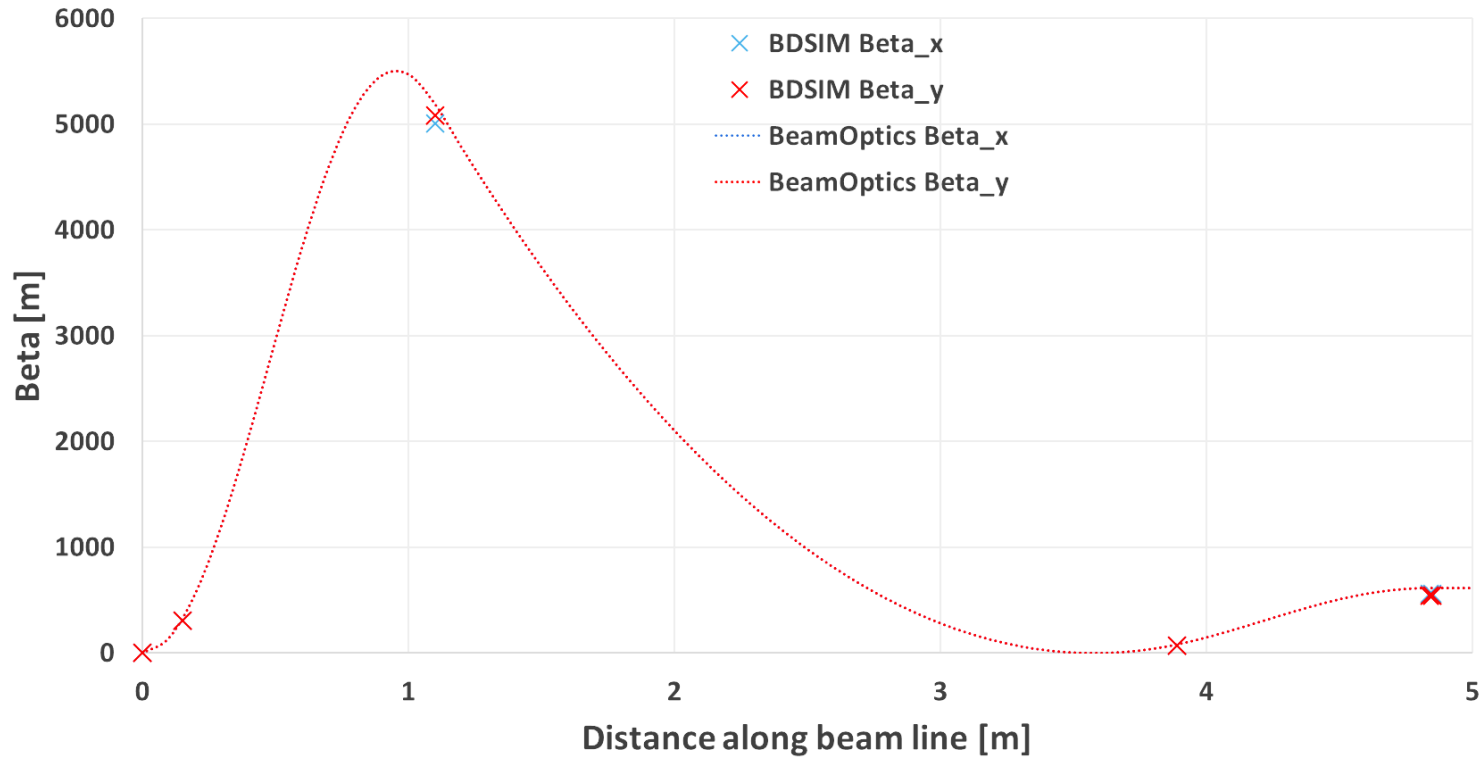

	Equivalent Solenoid
Gabor lens 1	1.4T
Gabor lens 2	1.1T





- Included in the BDSIM simulation as a solenoid of equivalent focusing strength.
 - Can use electro-static field map from a plasma simulation.
 - BDSIM developers may provide a Gabor lens element in the future.

Beam Transport


- Dipole bends and collimators for energy selection and vertical delivery of the beam to the end station.
 - Option for ion species selection using a Wien filter.
- Particle tracking simulations with BDSIM based on optics design.

Beta function comparison between BeamOptics and BDSIM

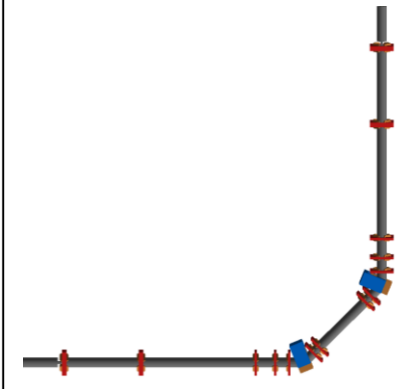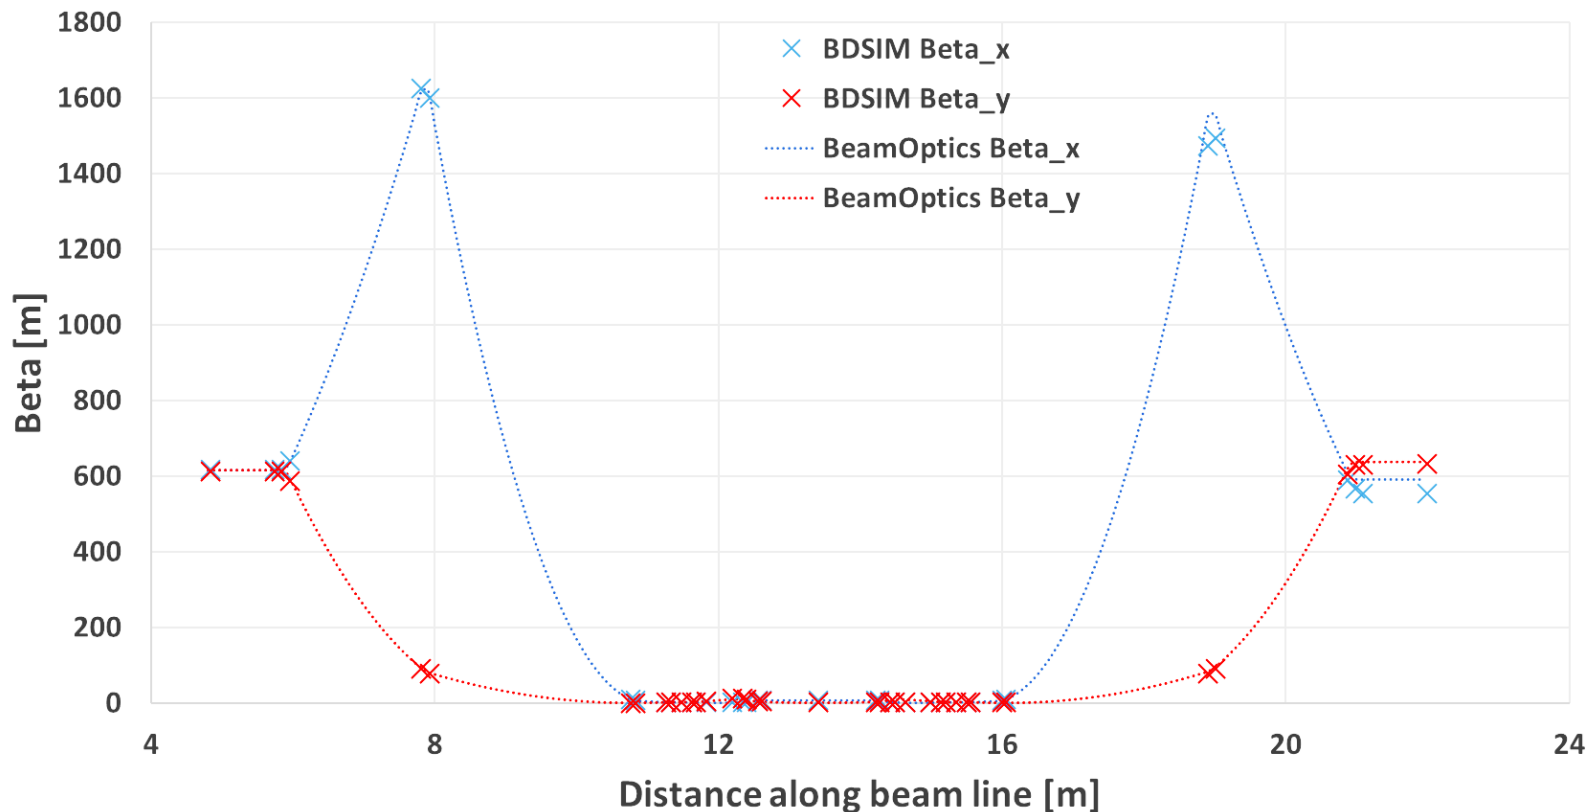


Transport

- Optics in the bending region. Differences in Beta_y may be due to different treatments of edge focussing.

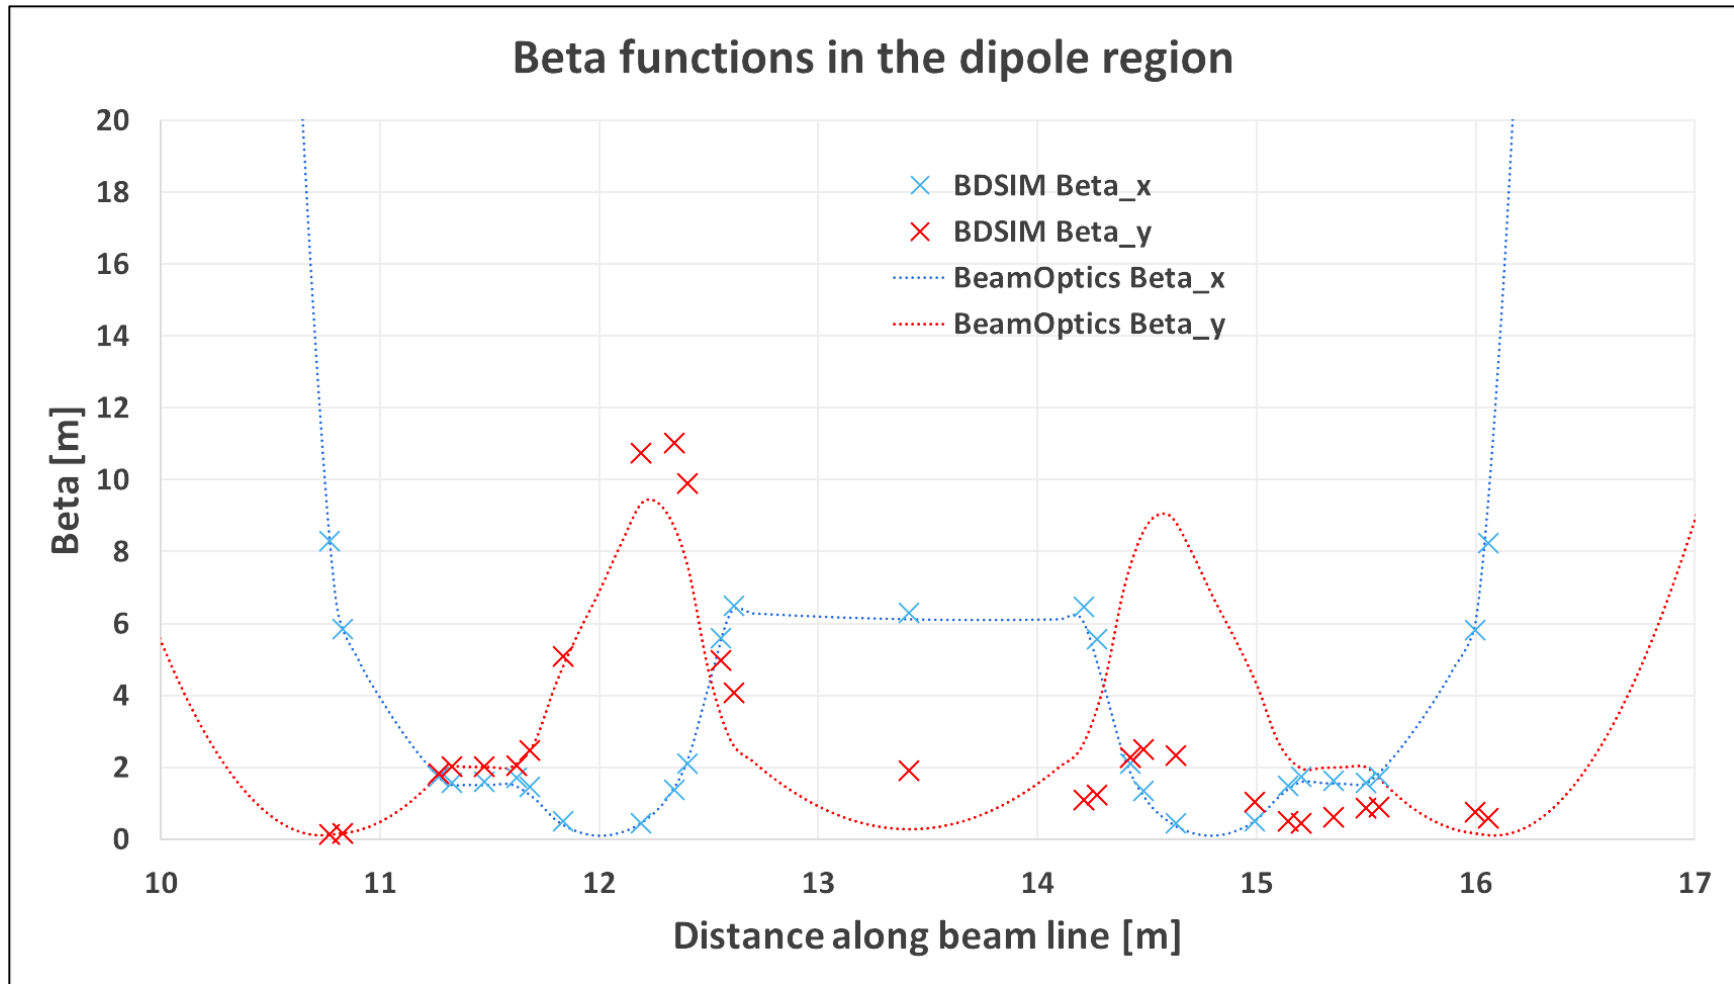



Alternative Beam line

- More compact design in progress.
- Capture and beam transport based on Gabor lenses.
- Energy selection based on collimation.
- Momentum selection in the arc.
- Option to use normal conducting solenoids.

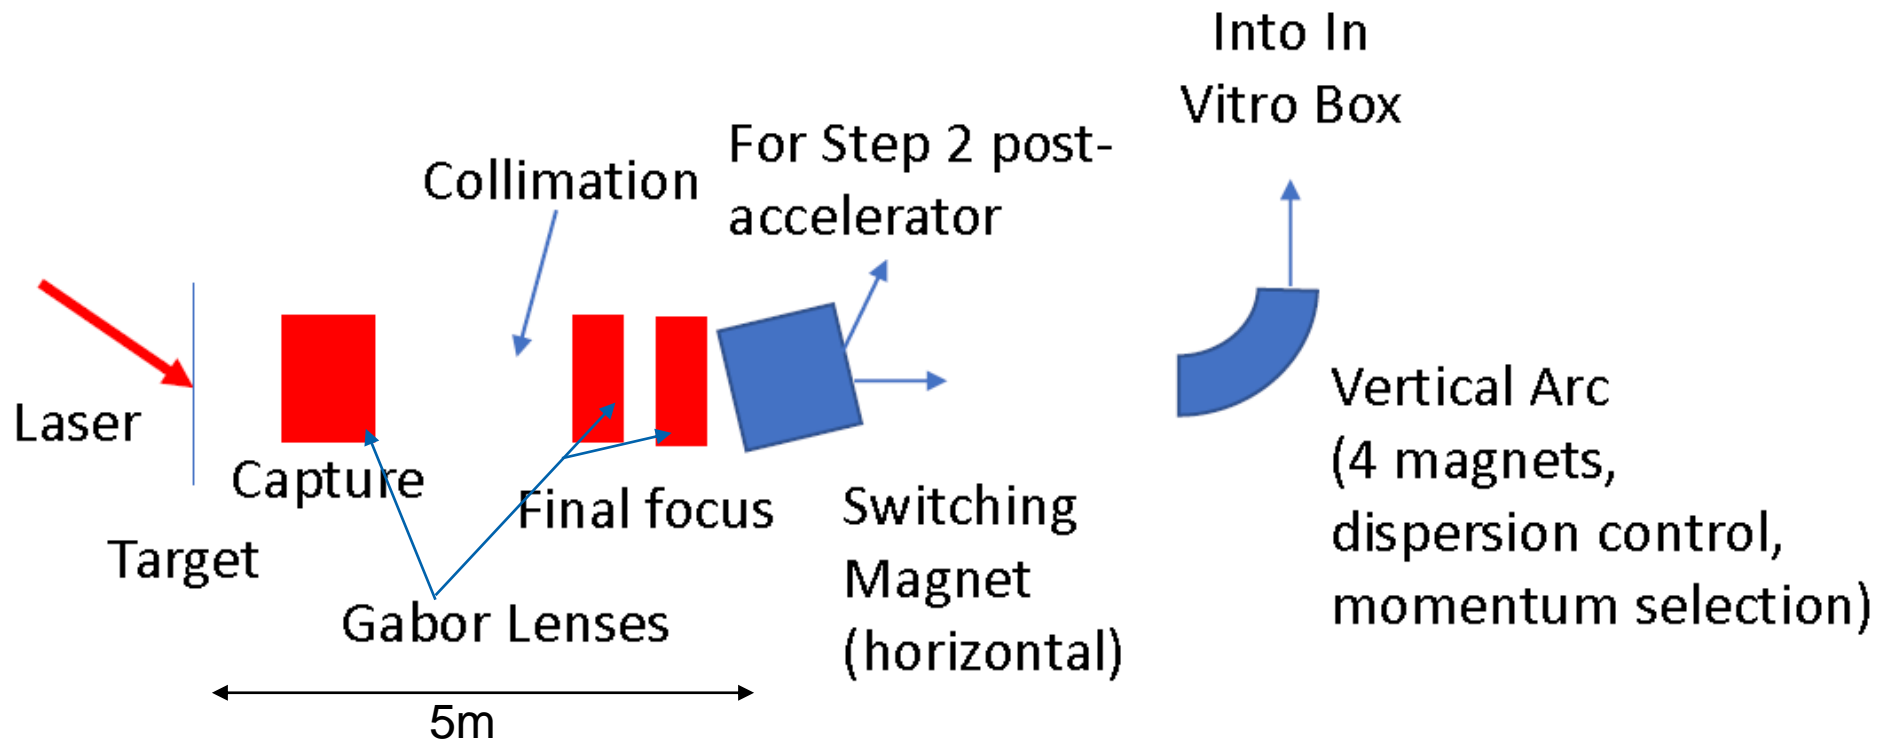


End Station

- Material budget determines required beam energy.
 - More material increases cost of laser.
 - Consider cell sample containers.

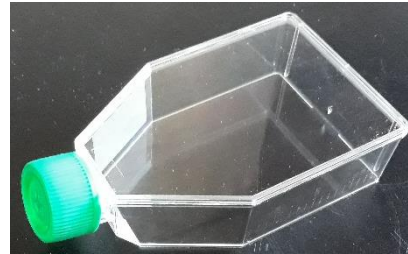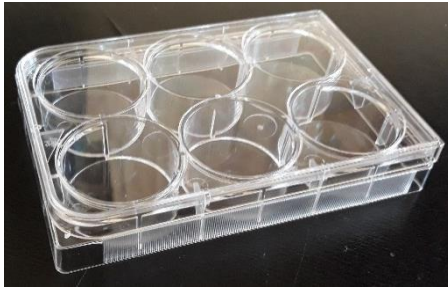



- Energy deposition and dose calculation very important for the design of the end station.
 - Want the Bragg peak in the cell layer.
 - Ensure efficient delivery of dose to the cells (i.e. minimize the time needed to irradiate a sample).
- BDSIM provides energy loss along beam direction.

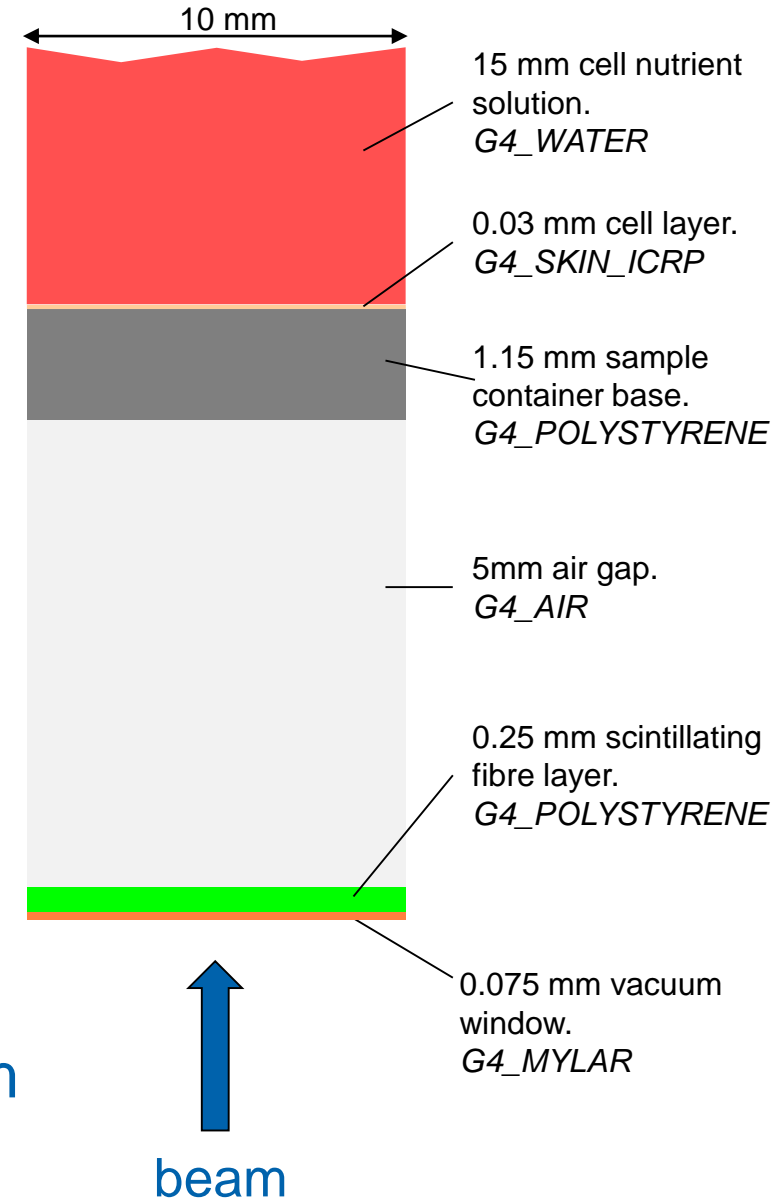

End Station


- Energy loss in the end station using the beam tracked from after the capture section.

Energy loss as a function of depth for different beam energies

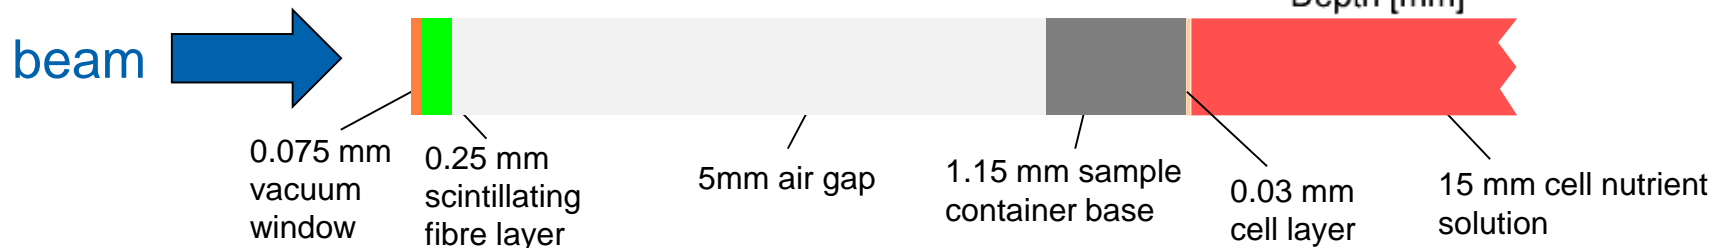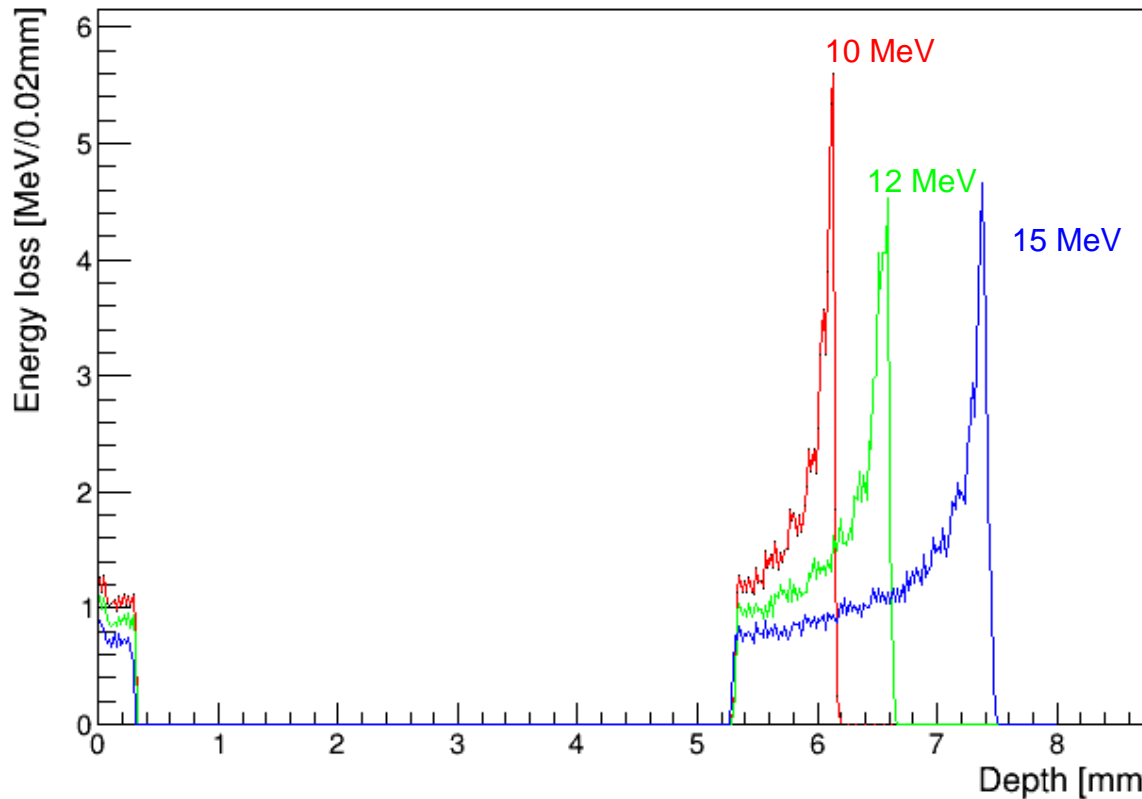

LARA – Stage II

- Goal is to irradiate animal models.
 - Need post-acceleration to increase energy of the beam driven by the laser.
- Current solution is based on an FFA.
 - Can achieve factor 3 increase in momentum or more.
 - For 15 MeV input can get 127MeV.
 - Would like to accelerate protons, helium, C^{6+} and other ions.
 - Development follows R&D for ISIS-II at RAL.

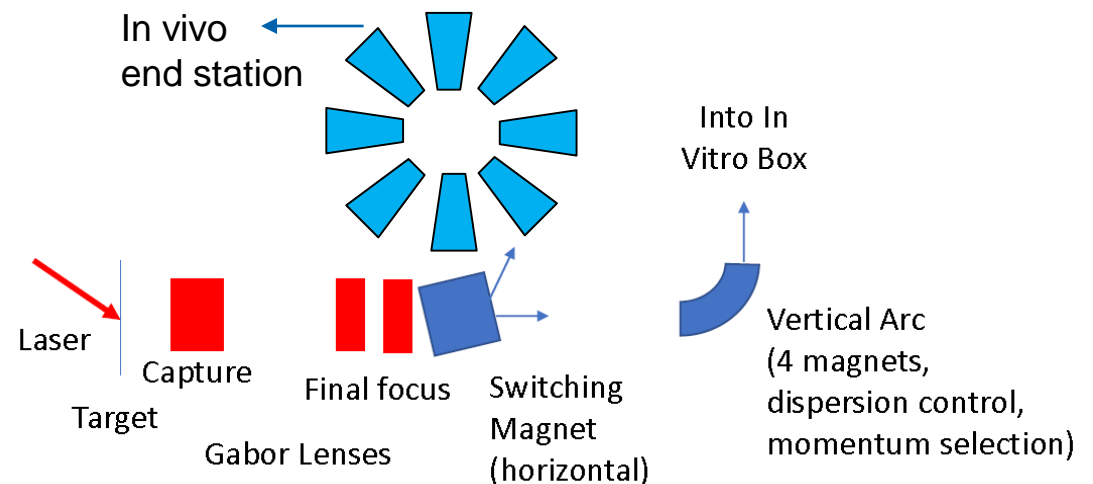

Summary and Future Plans

- Initial design of the CCAP radiobiology facility has been simulated using BDSIM.
 - Particle tracking simulations compare well with the optics design.
 - Details of the materials in the end station has been simulated to verify the required beam energy and thus the requirements on the laser system.
- Future plans.
 - Completion of the conceptual design report for LARA.
 - Study effect of beam variability using the beam from the laser simulation.
 - Collimation, beam dumps and shielding of the end station.
 - Gabor lens testing.
 - Investigate alternative beam line for energy and particle selection.
 - Design post-accelerator for LARA stage II.

Acknowledgements

- Imperial College London
 - Geoff Barber, Victoria Blackmore, Oliver Ettliger, Chris Hunt, Hin Tung Lau, Ken Long, Jaroslaw Pasternak and Juergen Pozimski.
- University of Birmingham summer students
 - Laura Murgatroyd and Rebecca Taylor.
- Medical University of Vienna
 - Sylvia Gruber
- Thanks to BDSIM developers Laurie Nevay and William Shields.