

Material budget study of the MPD detector at the NICA collider *

A.BYCHKOV, V.KEKELIDZE, O.ROGACHEVSKY
Joint Institute for Nuclear Research, Dubna, Russia

R.ESENOV, D.KIBIZOV, N.PUKHAEVA
Joint Institute for Nuclear Research, Dubna, Russia
North Osetia State University, Vladikavkaz, Russia

The Multi Purpose Detector (MPD) is the experiment at the NICA collider. Due to nested construction of the collider experiments the construction of the each inner detector of MPD have effect on the working of the other outer detectors and should be studied very carefully to make proper estimation of its material. The material budget study of the Multi Purpose Detector (MPD) is considered in details.


PACS numbers: 07.05.Fb, 07.05.Hd, 07.05.Kf

1. Introduction

The Multi Purpose Detector (MPD) experiment [1] at the Nuclotron based Ion Collider fAcility (NICA) in Dubna [2] is designed to explore the QCD phase diagram of strongly interacting matter in the region of highly compressed and hot baryonic matter. Detectors for this experiment should work with the high track reconstruction efficiency ($> 95\%$) and good momentum resolution for charged particles ($< 3\%$) in the expected high-multiplicity events (~ 1000 tracks for Au-Au collisions at $\sqrt{s_{NN}} = 11$ GeV).

Such requirements limit the mass of vertex and tracking detectors for the collider experiments. To meet the conflicting goals of minimizing detector mass and also in-corporating cooling, power distribution and supported constructions an integrated system design approach is needed. The precision of the measured vertex and track parameters is degraded due to multiple scattering effects in the detectors materials. It is therefore crucial to carefully account and limit for every material contribution in the detector acceptance

* Presented at NICA days 2019

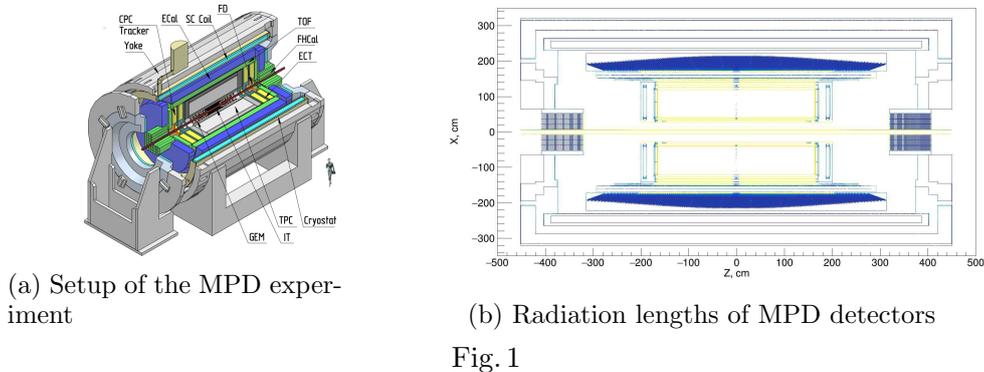

region. The magnitude of multiple scattering depends on the local material budget measured in units of the material constant X_0 .

2. MPD detector setup

The experimental set-up proposed for the MPD is shown in the figure 1a. From inside to outside in the figure, the subdetectors are:

- inner tracker (ITS) Primary goals of the ITS are the determination of the primary collision vertex and secondary vertices necessary for reconstruction of decaying particles. IT should provide tracking and identification of low momentum particles not reaching the TPC and improve the momentum and angular resolution of particles measures within the TPC.
- The TPC aimed to reconstruct and identify charged particles in the pseudorapidity region $|\eta| < 1$. The ionization energy loss (dE/dx) measurements in the TPC gas will give an additional capability for particle identification.
- The high performance time-of-flight (TOF) system based on RPC (resistive plate chambers) allows pion, kaon and proton identification in the broad rapidity range and up to the total momentum of 2 GeV/c. The TOF detector has a cylindrical shape, covering polar angles $|\theta - 90^\circ| < 63^\circ$ degrees.
- The electromagnetic calorimeter (ECAL), which aims to measure the energy of particles mainly interacting by electromagnetic force. Those particles are electrons, positrons and photons. They are stopped by this detector and deposit their energy, which is measured then.

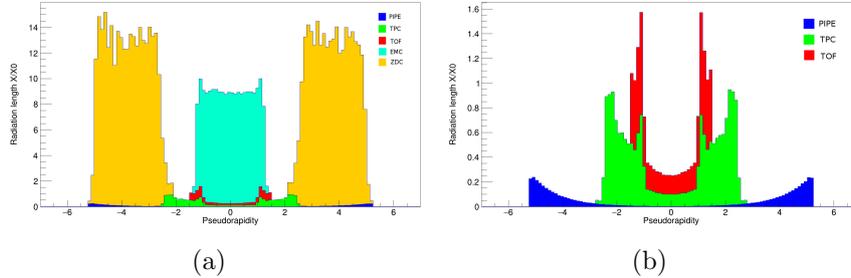


Fig. 2: Averaged material budget a) for all MPD detectors. b) for the pipe, TPC and TOF detectors.

- Forward Hadron Calorimeter (FHCAL) is designed to measure the energy distribution of the projectile nuclei fragments (spectators) and forward going particles produced close to the beam rapidity. The FHCAL consists of two hadron calorimeters with 45 towers each arranged symmetrically from the interaction point.

The first stage of the MPD consists of the time projection chamber (TPC) supplemented by the TOF detector, ECAL and FHCAL calorimeters and fast forward trigger detector FT. At the final stage of MPD detector setup considers the few endcap detectors placed between TPC and magnet endcap. Among them will be EndCap Tracker (ECT), cathode pad chamber (CPC) tracker and endcap TOF.

3. Material budget of the MPD subdetectors

Due to nested MPD design each detector in it has an impact on outer one. For estimation of energy loss material budget for all components of the MPD should be calculated.

For estimation of the radiational length of the detector material the GEANT4 version 10.5.1 package [4] provides a fictitious particle, geantino. The geantino accumulates the radiation length of the materials along its passage. These particles, generated uniformly over the pseudo rapidity range calculate the radiation lengths of total and individual contributions of the geometry elements.

The passage of the geantino through the material of the simulated MPD detector is tracked in GEANT4, imaging the material distribution of the detector by plotting, for each step of the geantino's spatial trajectory, the fraction of the total radiation or hadronic interaction length of its trajectory, traversed in that step.

Fig. 1b shows the scan of the MPD detectors with the usage of geantino particles from GEANT4 package. The picture clearly demonstrates the increasing of the material budget towards outer detectors so that tracking detectors have relatively small radiation lengths materials and electromagnetic (ECAL) and hadronic (FHCAL) calorimeters have much larger radiation lengths.

Averaged material budget for the other subdetectors is shown on the Fig. 2a.

The beam pipe and time projection chamber support wheels must also be included in the material budget. Fig. 2b shows the yield to radiation length from the material of tracking detectors (TPC, TOF) and pipe.

4. Results

The material budget of the all of MPD detectors was estimated. The detailed simulation of MPD TPC was performed with thermoscreen and electronics. Next step will be including the detailed Inner Tracking System and TPC into material budget study of MPD.

5. Acknowledgements

We would like to thank S. Rasin and S. Movchan for their comments and discussions. This work was supported by RFFI grant 18-02-40102.

REFERENCES

- [1] *MPD Conceptual Design Report* ver. 1.4, 2011
- [2] *NICA project - Nuclotron-based Ion Collider fAcility* <http://nica.jinr.ru>
- [3] *Time Projection Chamber for Multi-Purpose Detector at NICA Technical Design Report* (rev.05), 2017
- [4] J. Allison et al., NIM **A835**, 2016, p. 186-225.