




19. ZIMÁNYI SCHOOL WINTER WORKSHOP ON HEAVY ION PHYSICS

Dec. 2. - Dec. 6.,
Budapest, Hungary

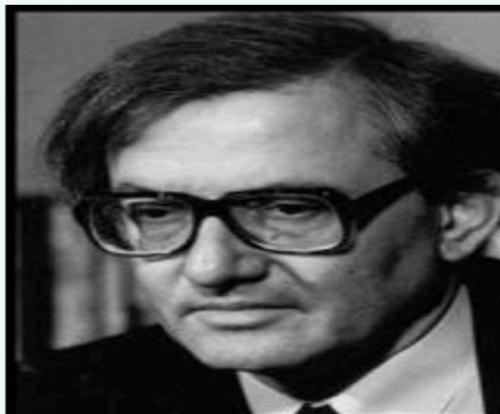

József Zimányi (1931 - 2006)




Istituto Nazionale di Fisica Nucleare

Latest results of NArCoS: a new correlator for neutrons and light charged particles

PAGANO EMANUELE VINCENZO⁽¹⁾

(1) INFN, Laboratori Nazionali del Sud, Catania, Italy

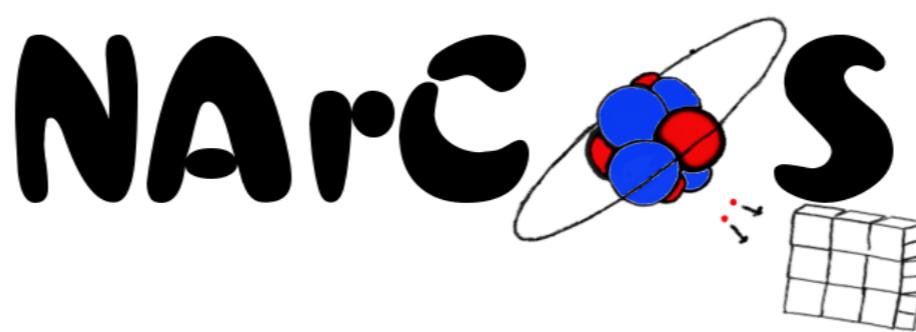


Project's motivations

The advent of the new facility for Radioactive Ion Beams (RIBs)
in particular for the n-rich ones

“The RIBs are an important opportunity”

(C. Horovitz)

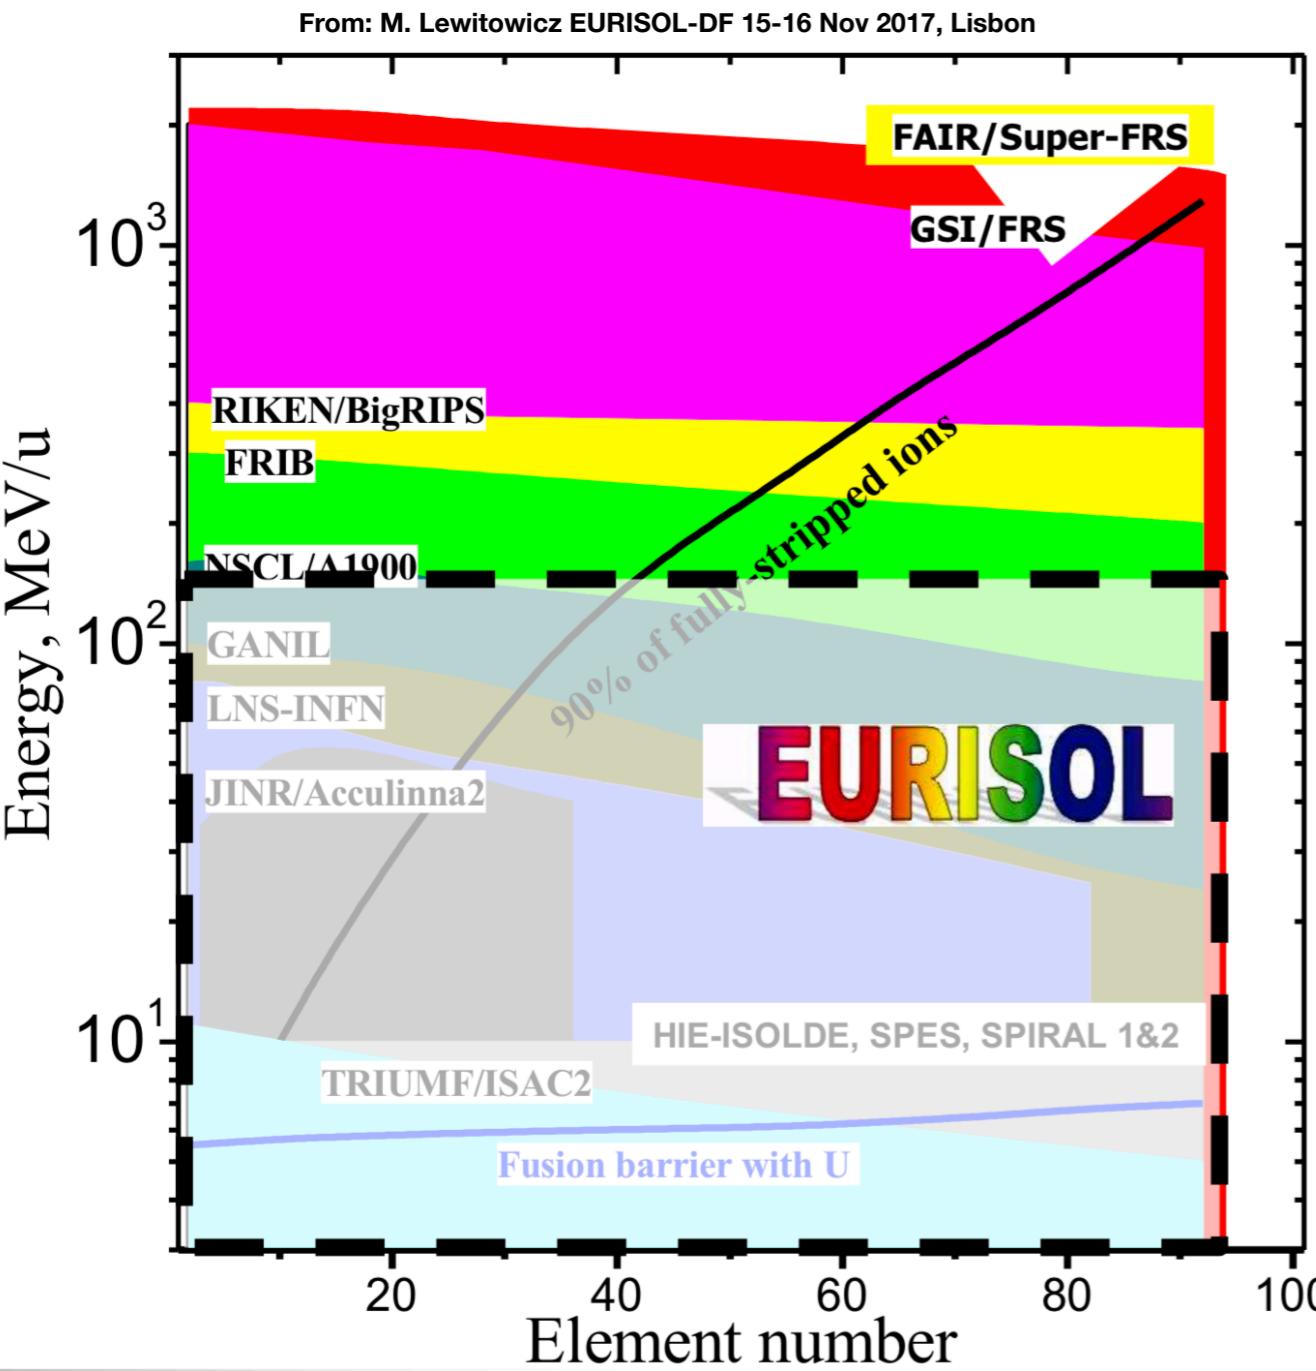

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications


- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

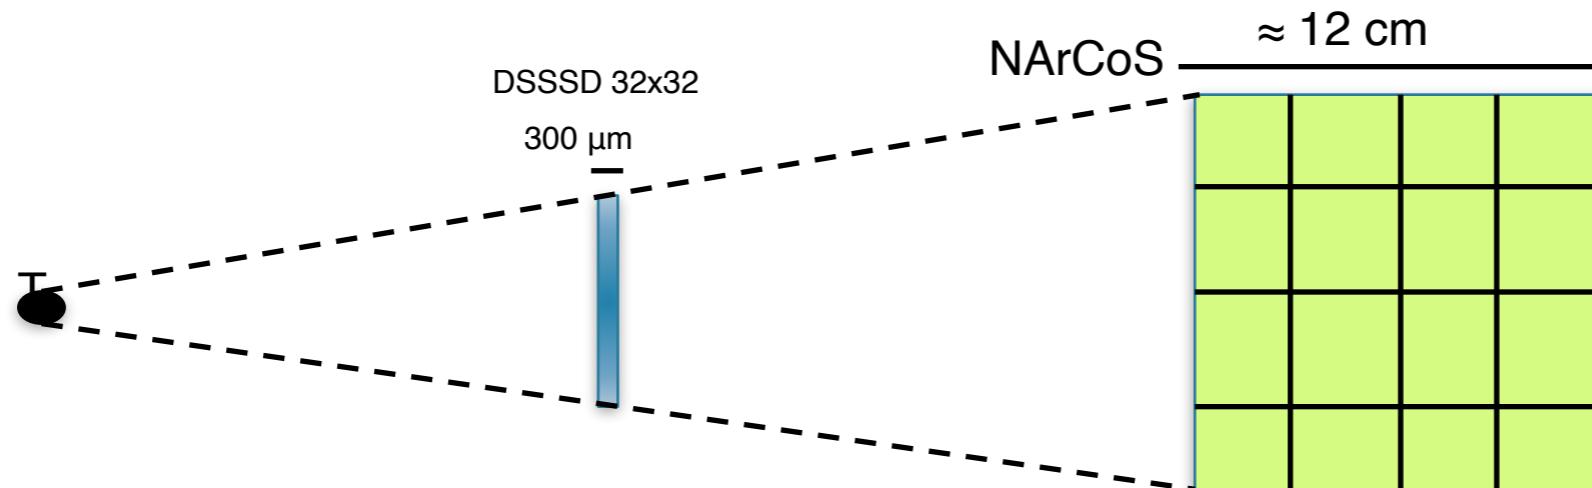


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

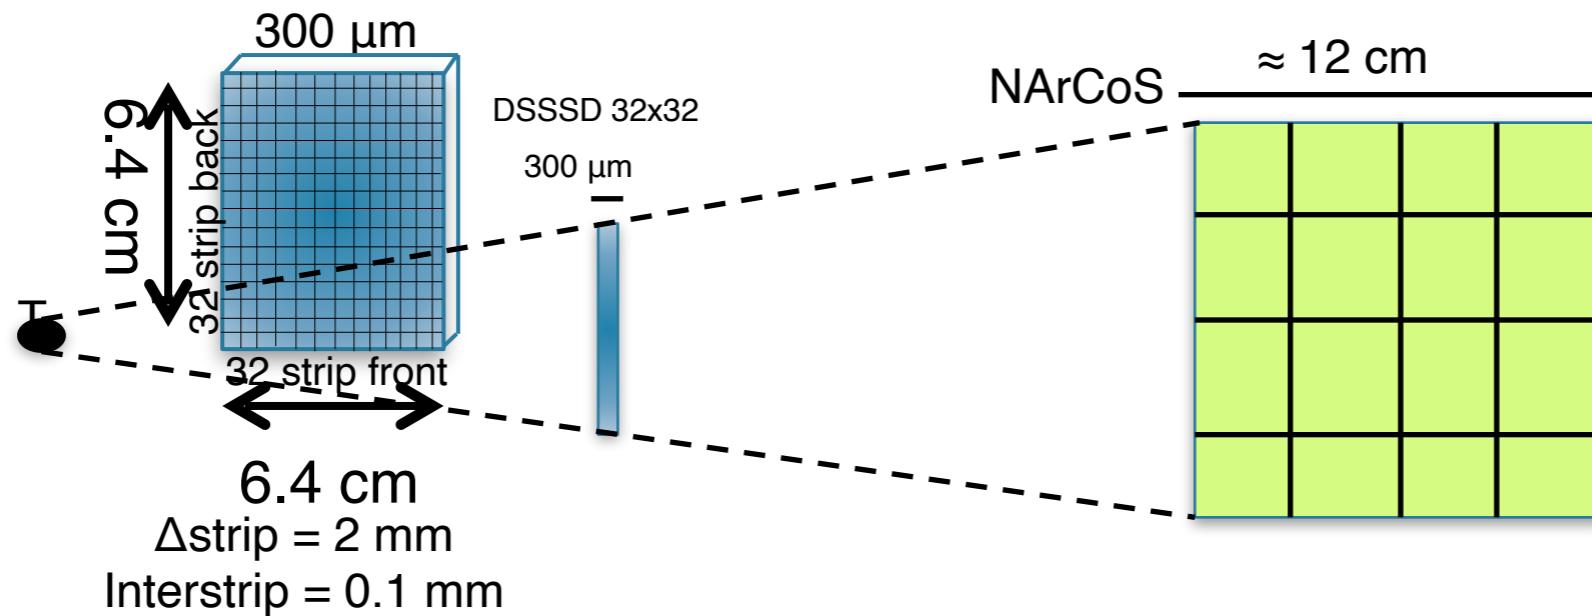


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes $\rightarrow 3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/ γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

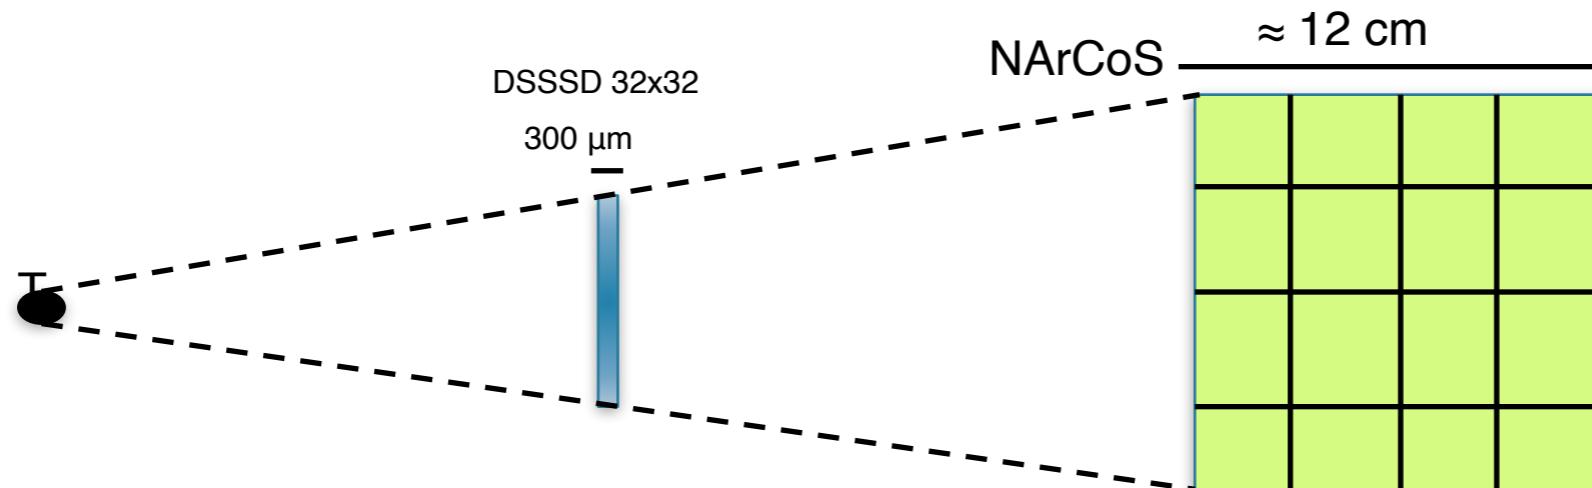


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

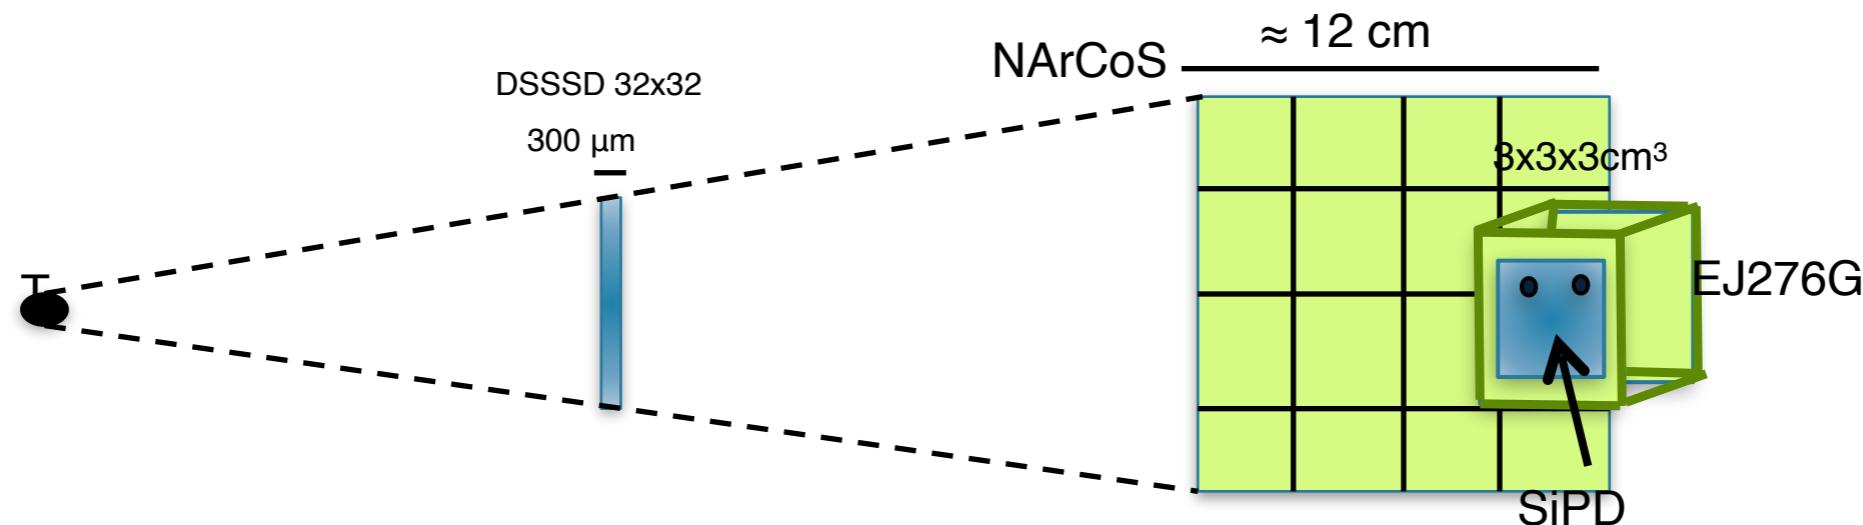


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

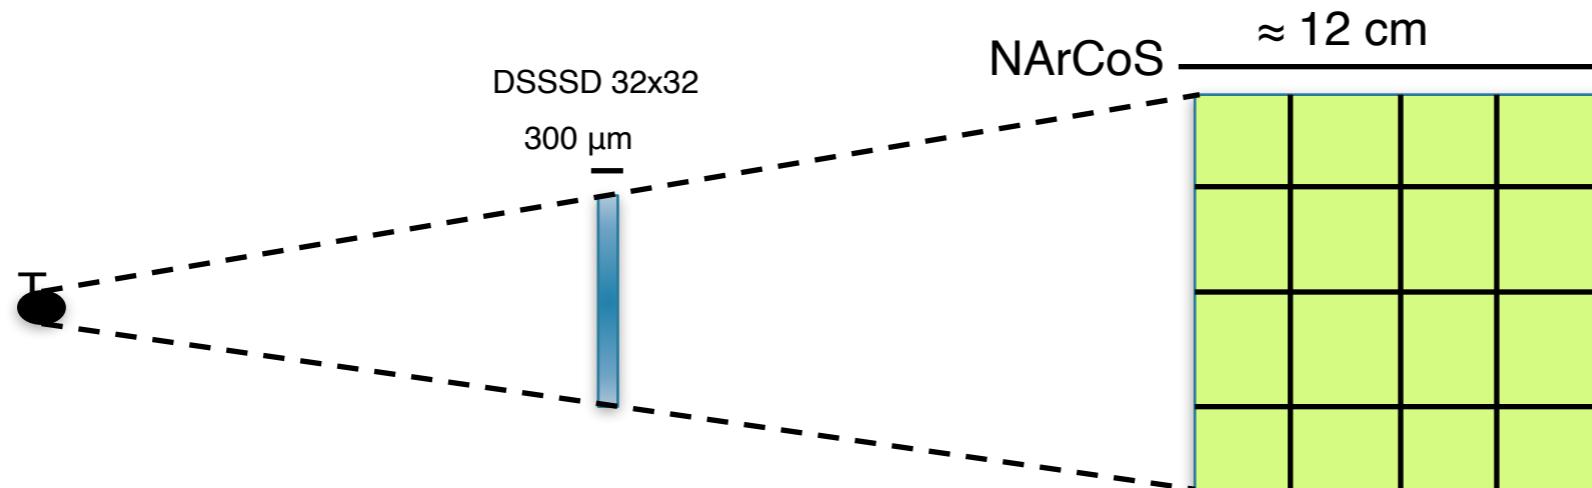


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

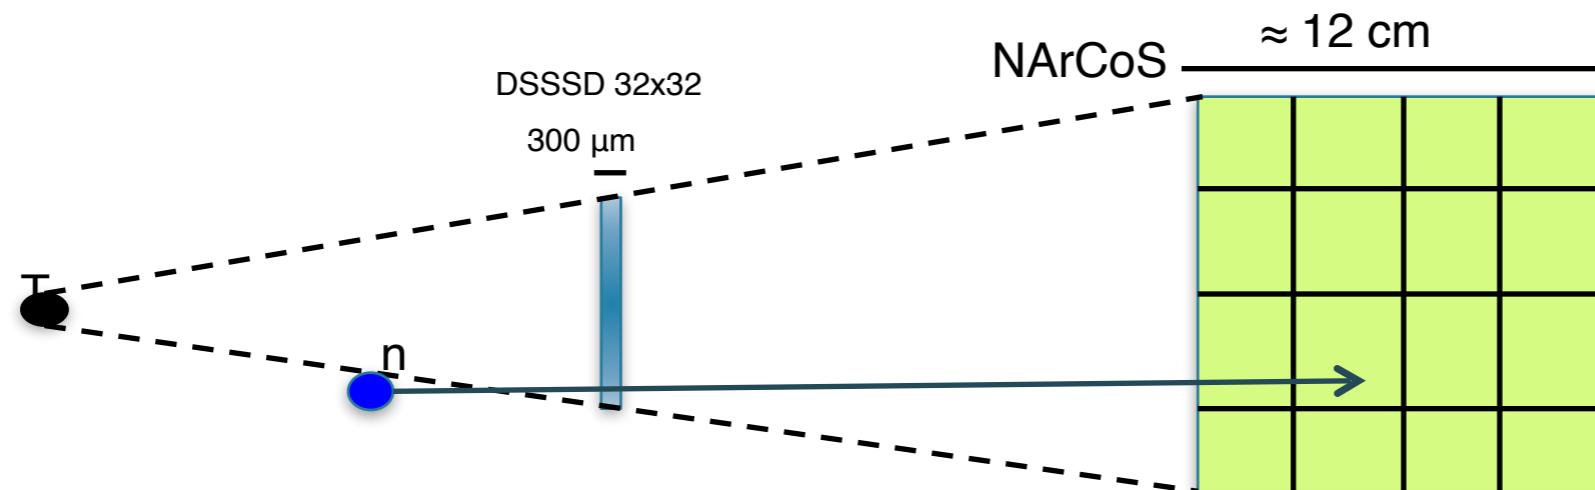


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA

To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

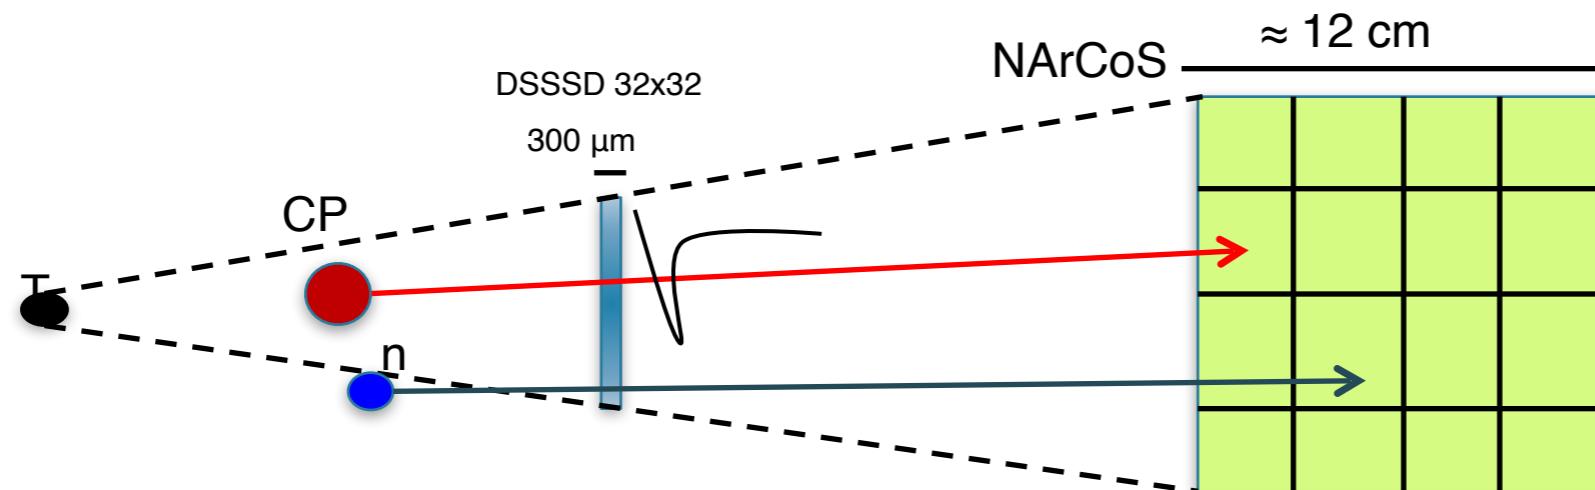


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

IDEA


To realize a prototype of detector able to detect at the same time charged particles and neutrons with high energy and angular resolution for reaction studies and applications

- Candidate: The plastic scintillator EJ276-Green Type (ex EJ299-33) ($3 \times 3 \times 3 \text{ cm}^3$)
- 1 cluster: 4 consecutively cubes -> $3 \times 3 \times 12 \text{ cm}^3$
- Reading the light signal: Si-PD or Si-PM and digitalization
- Modular, reconfigurable (in mechanic and electronic)
- Discrimination of n/γ from PSD (but also light charged particles)
- Energy measurement from ToF ($\Delta t \leq 1 \text{ ns}$ with $L_{\text{ToF}} \approx 1 \div 1.5 \text{ m}$)
TOF measured using the RF of the CS or with an ancillary MCP (low intensity exotic beams)

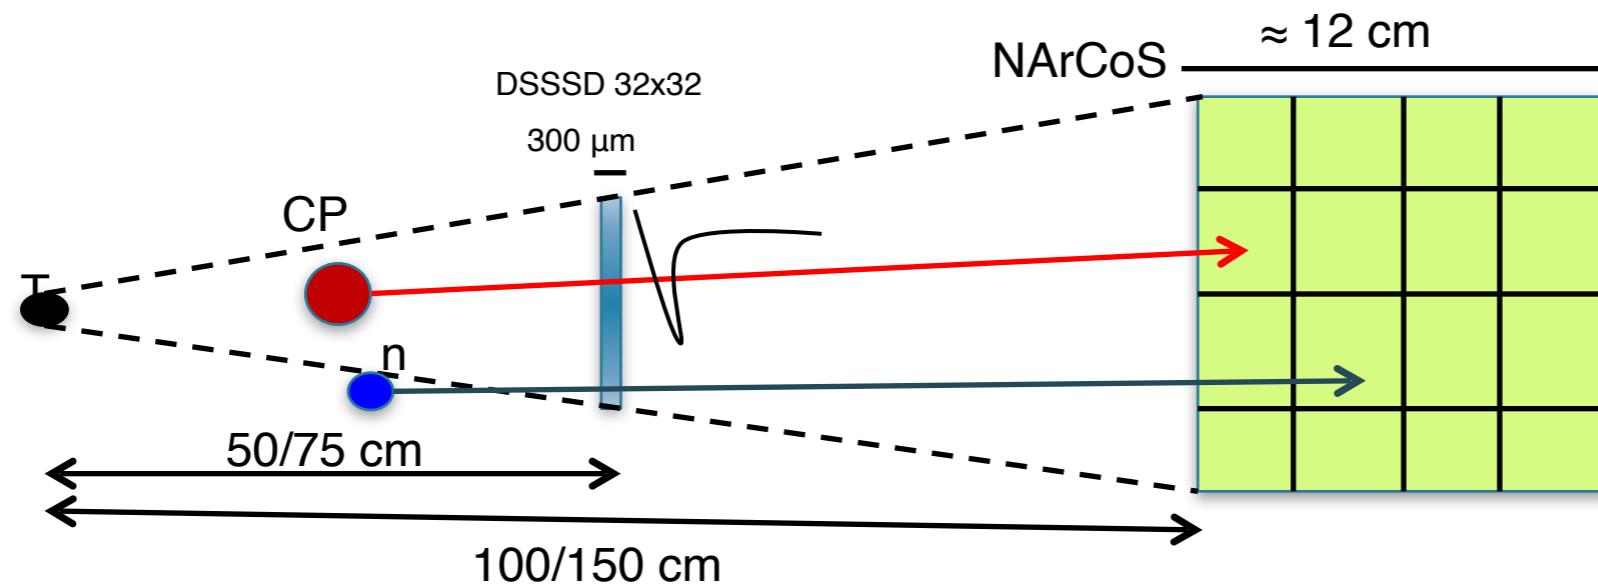


*Si incrocia l'info ampiezza-PSD e info da fasci di calibrazione (n,CP)

Just few numbers

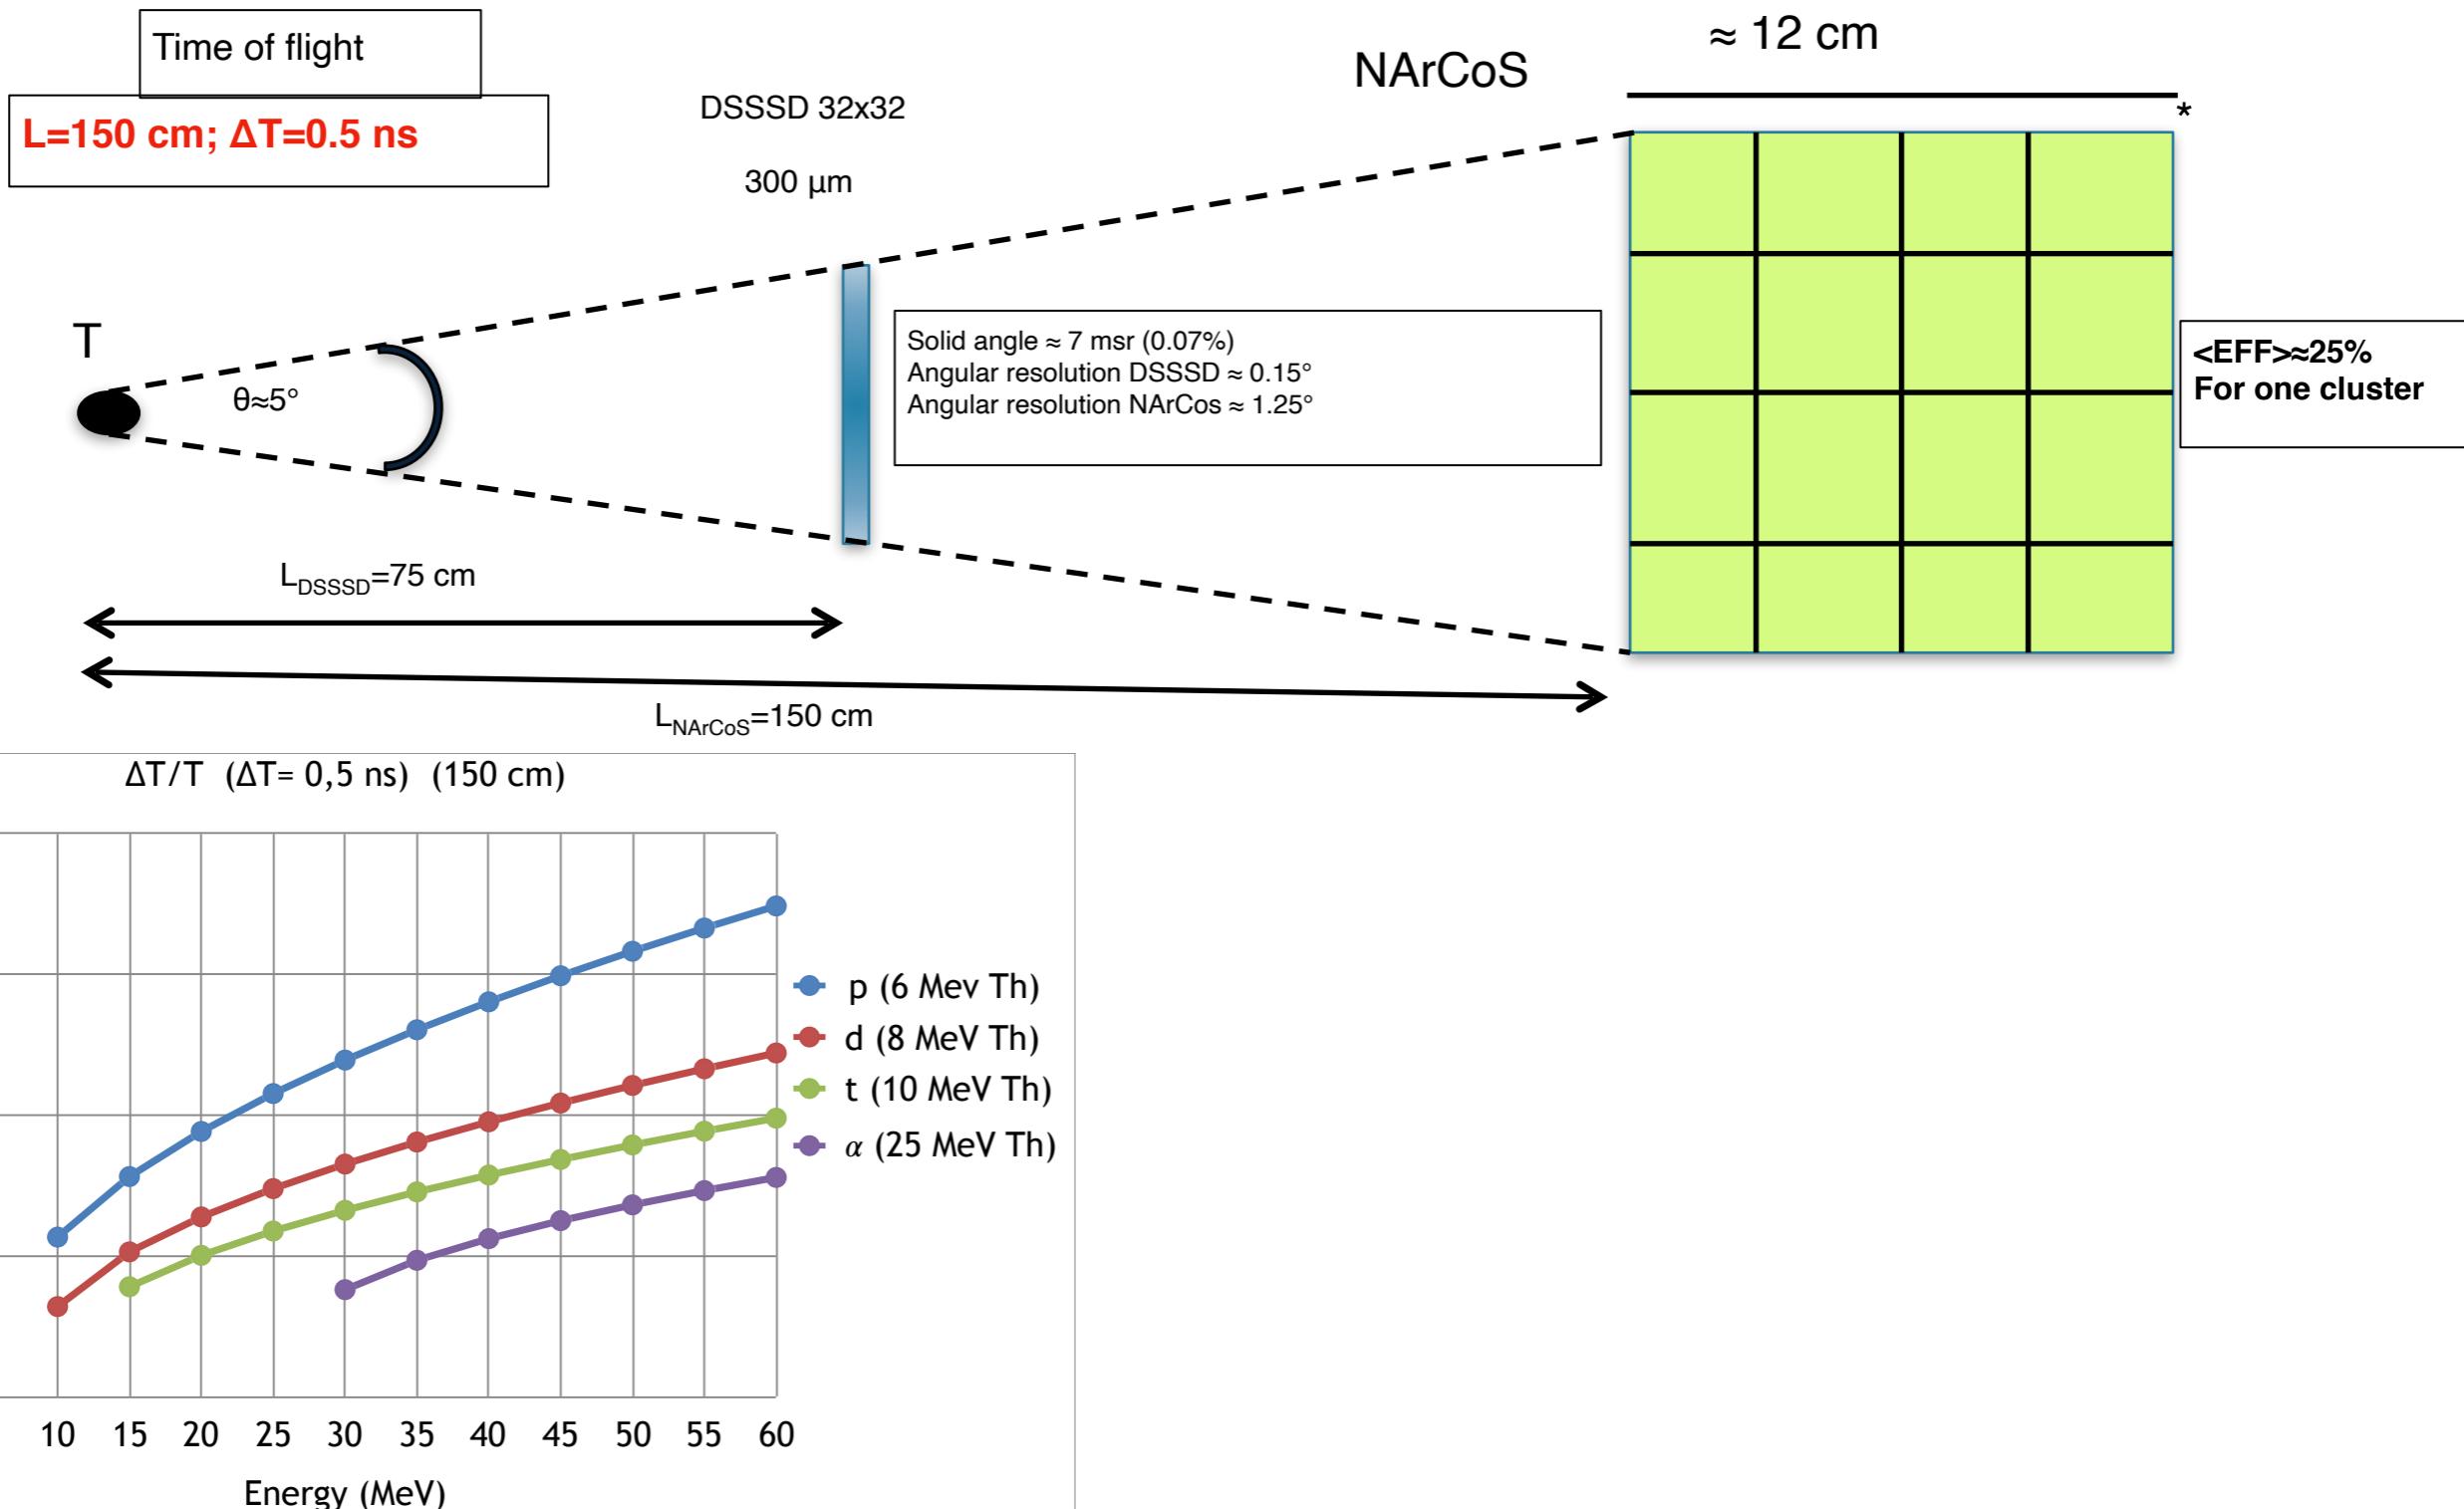


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

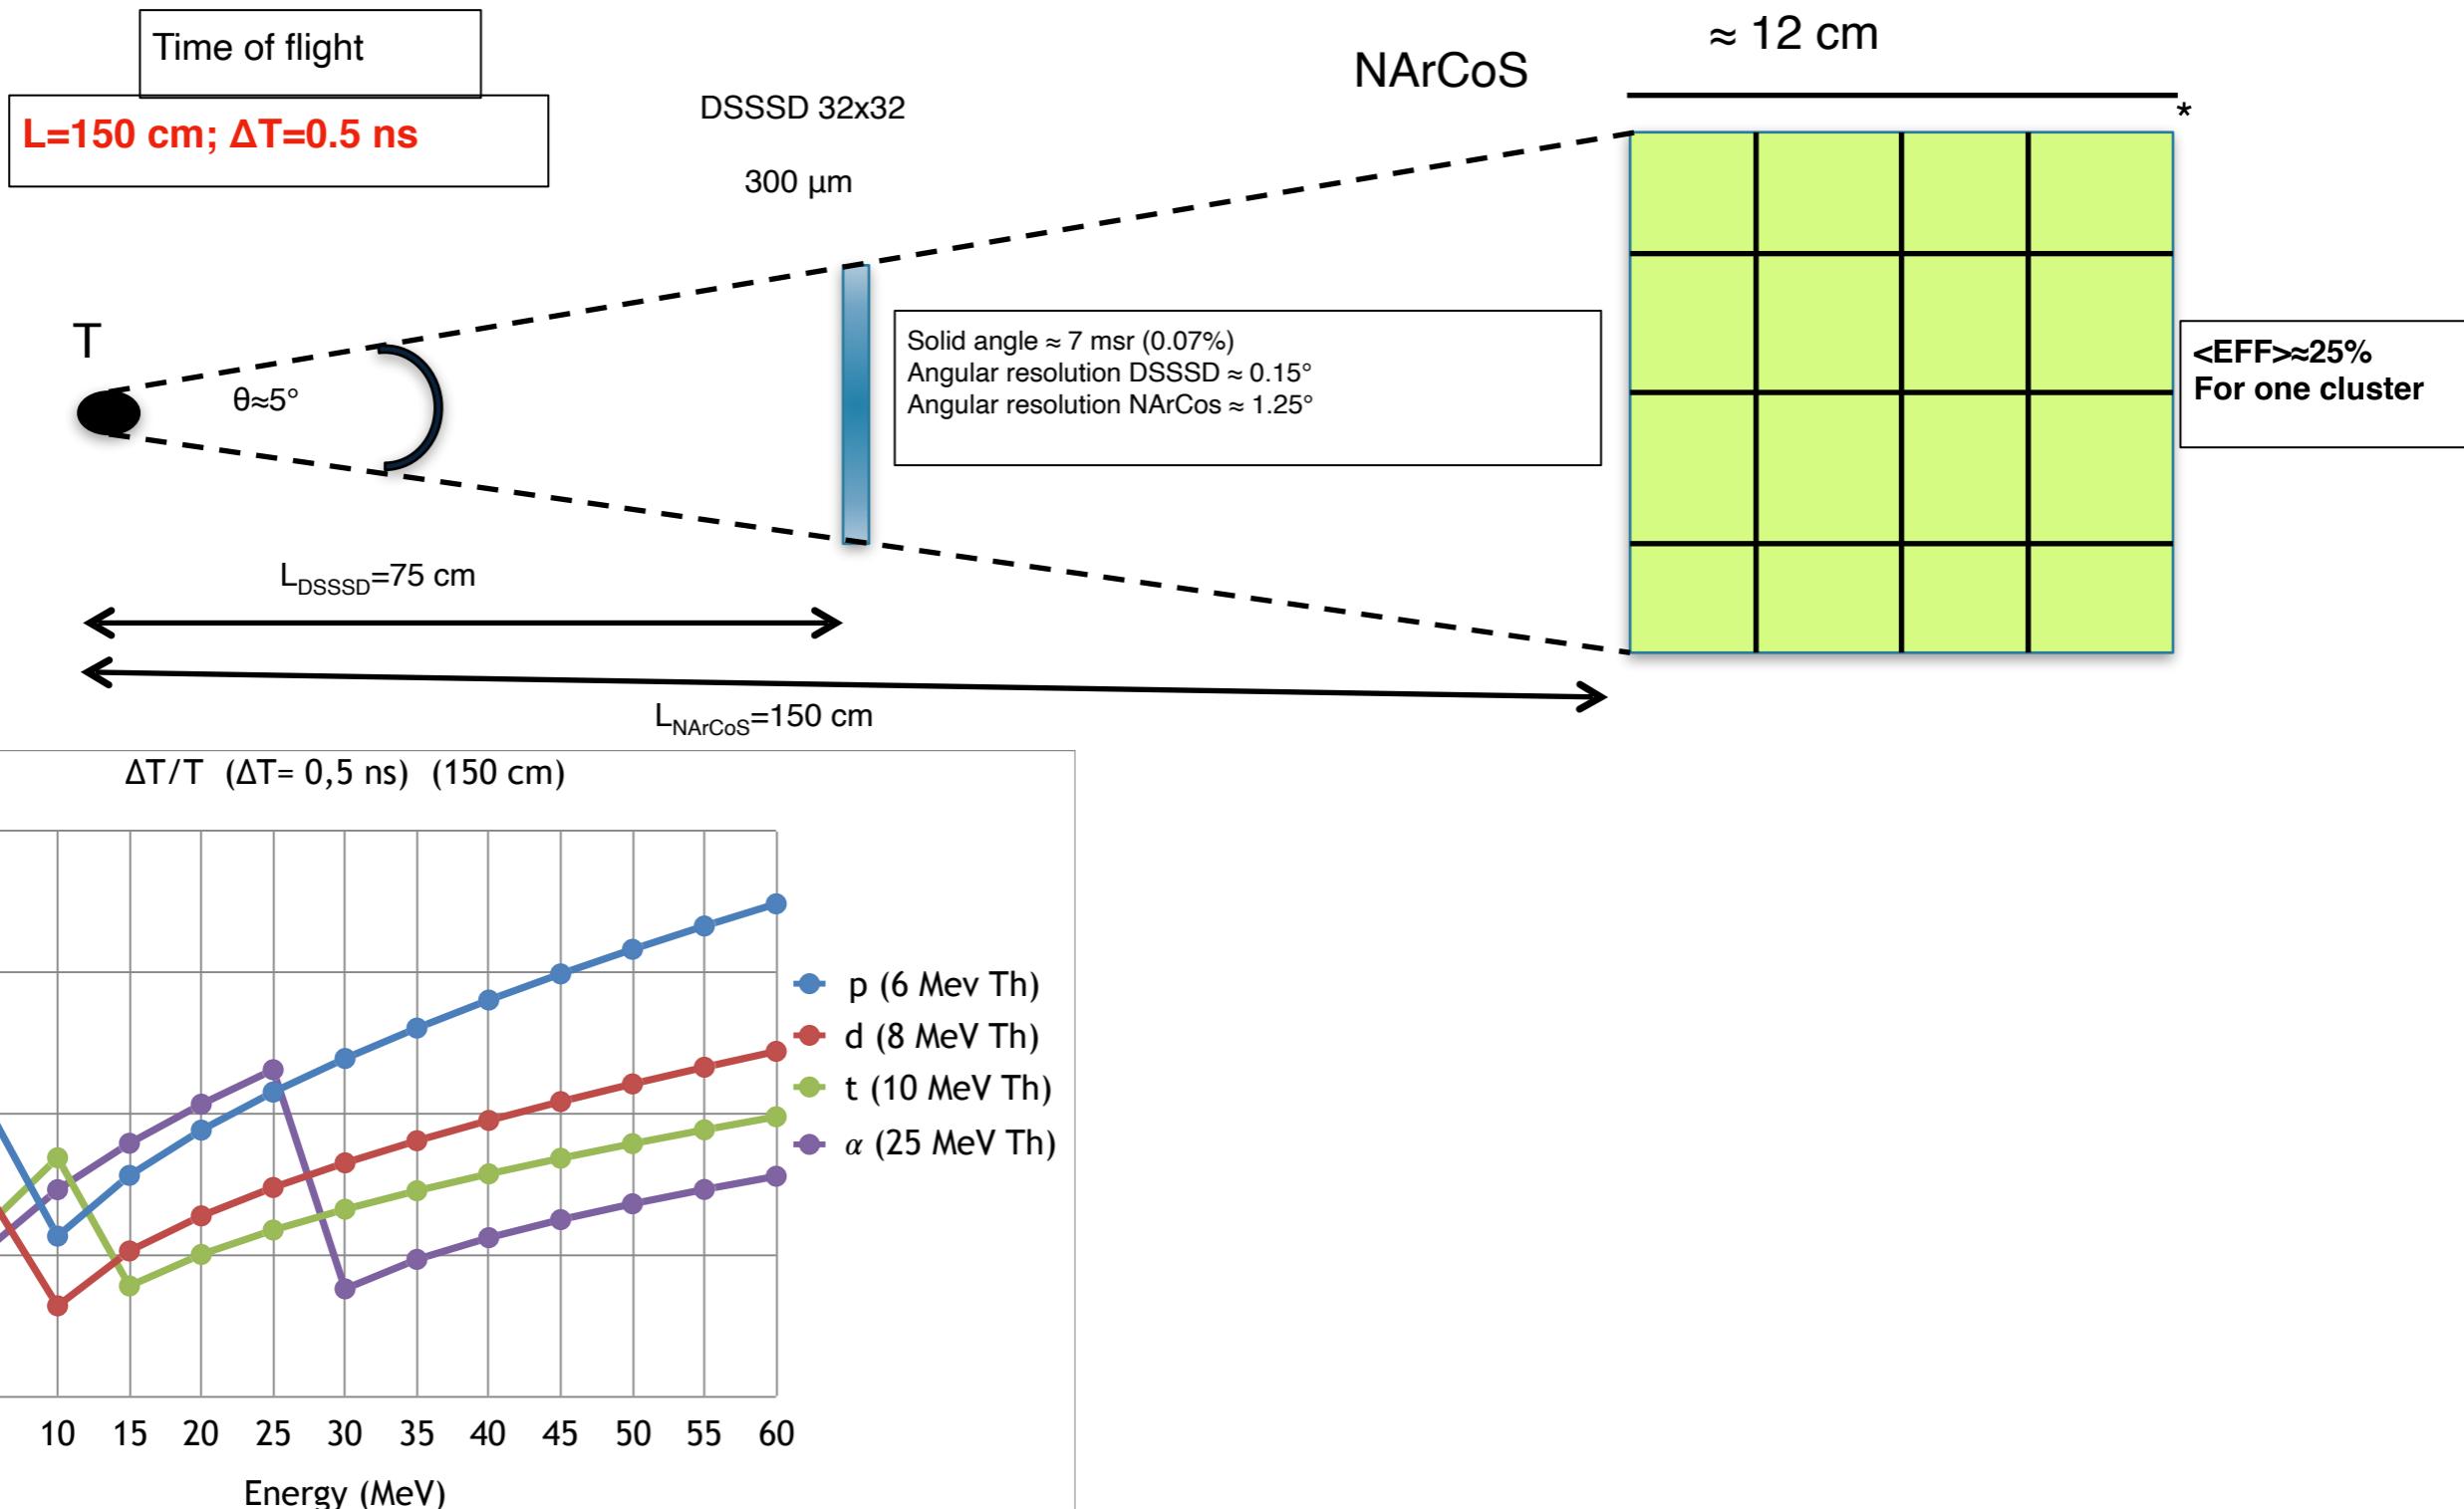


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

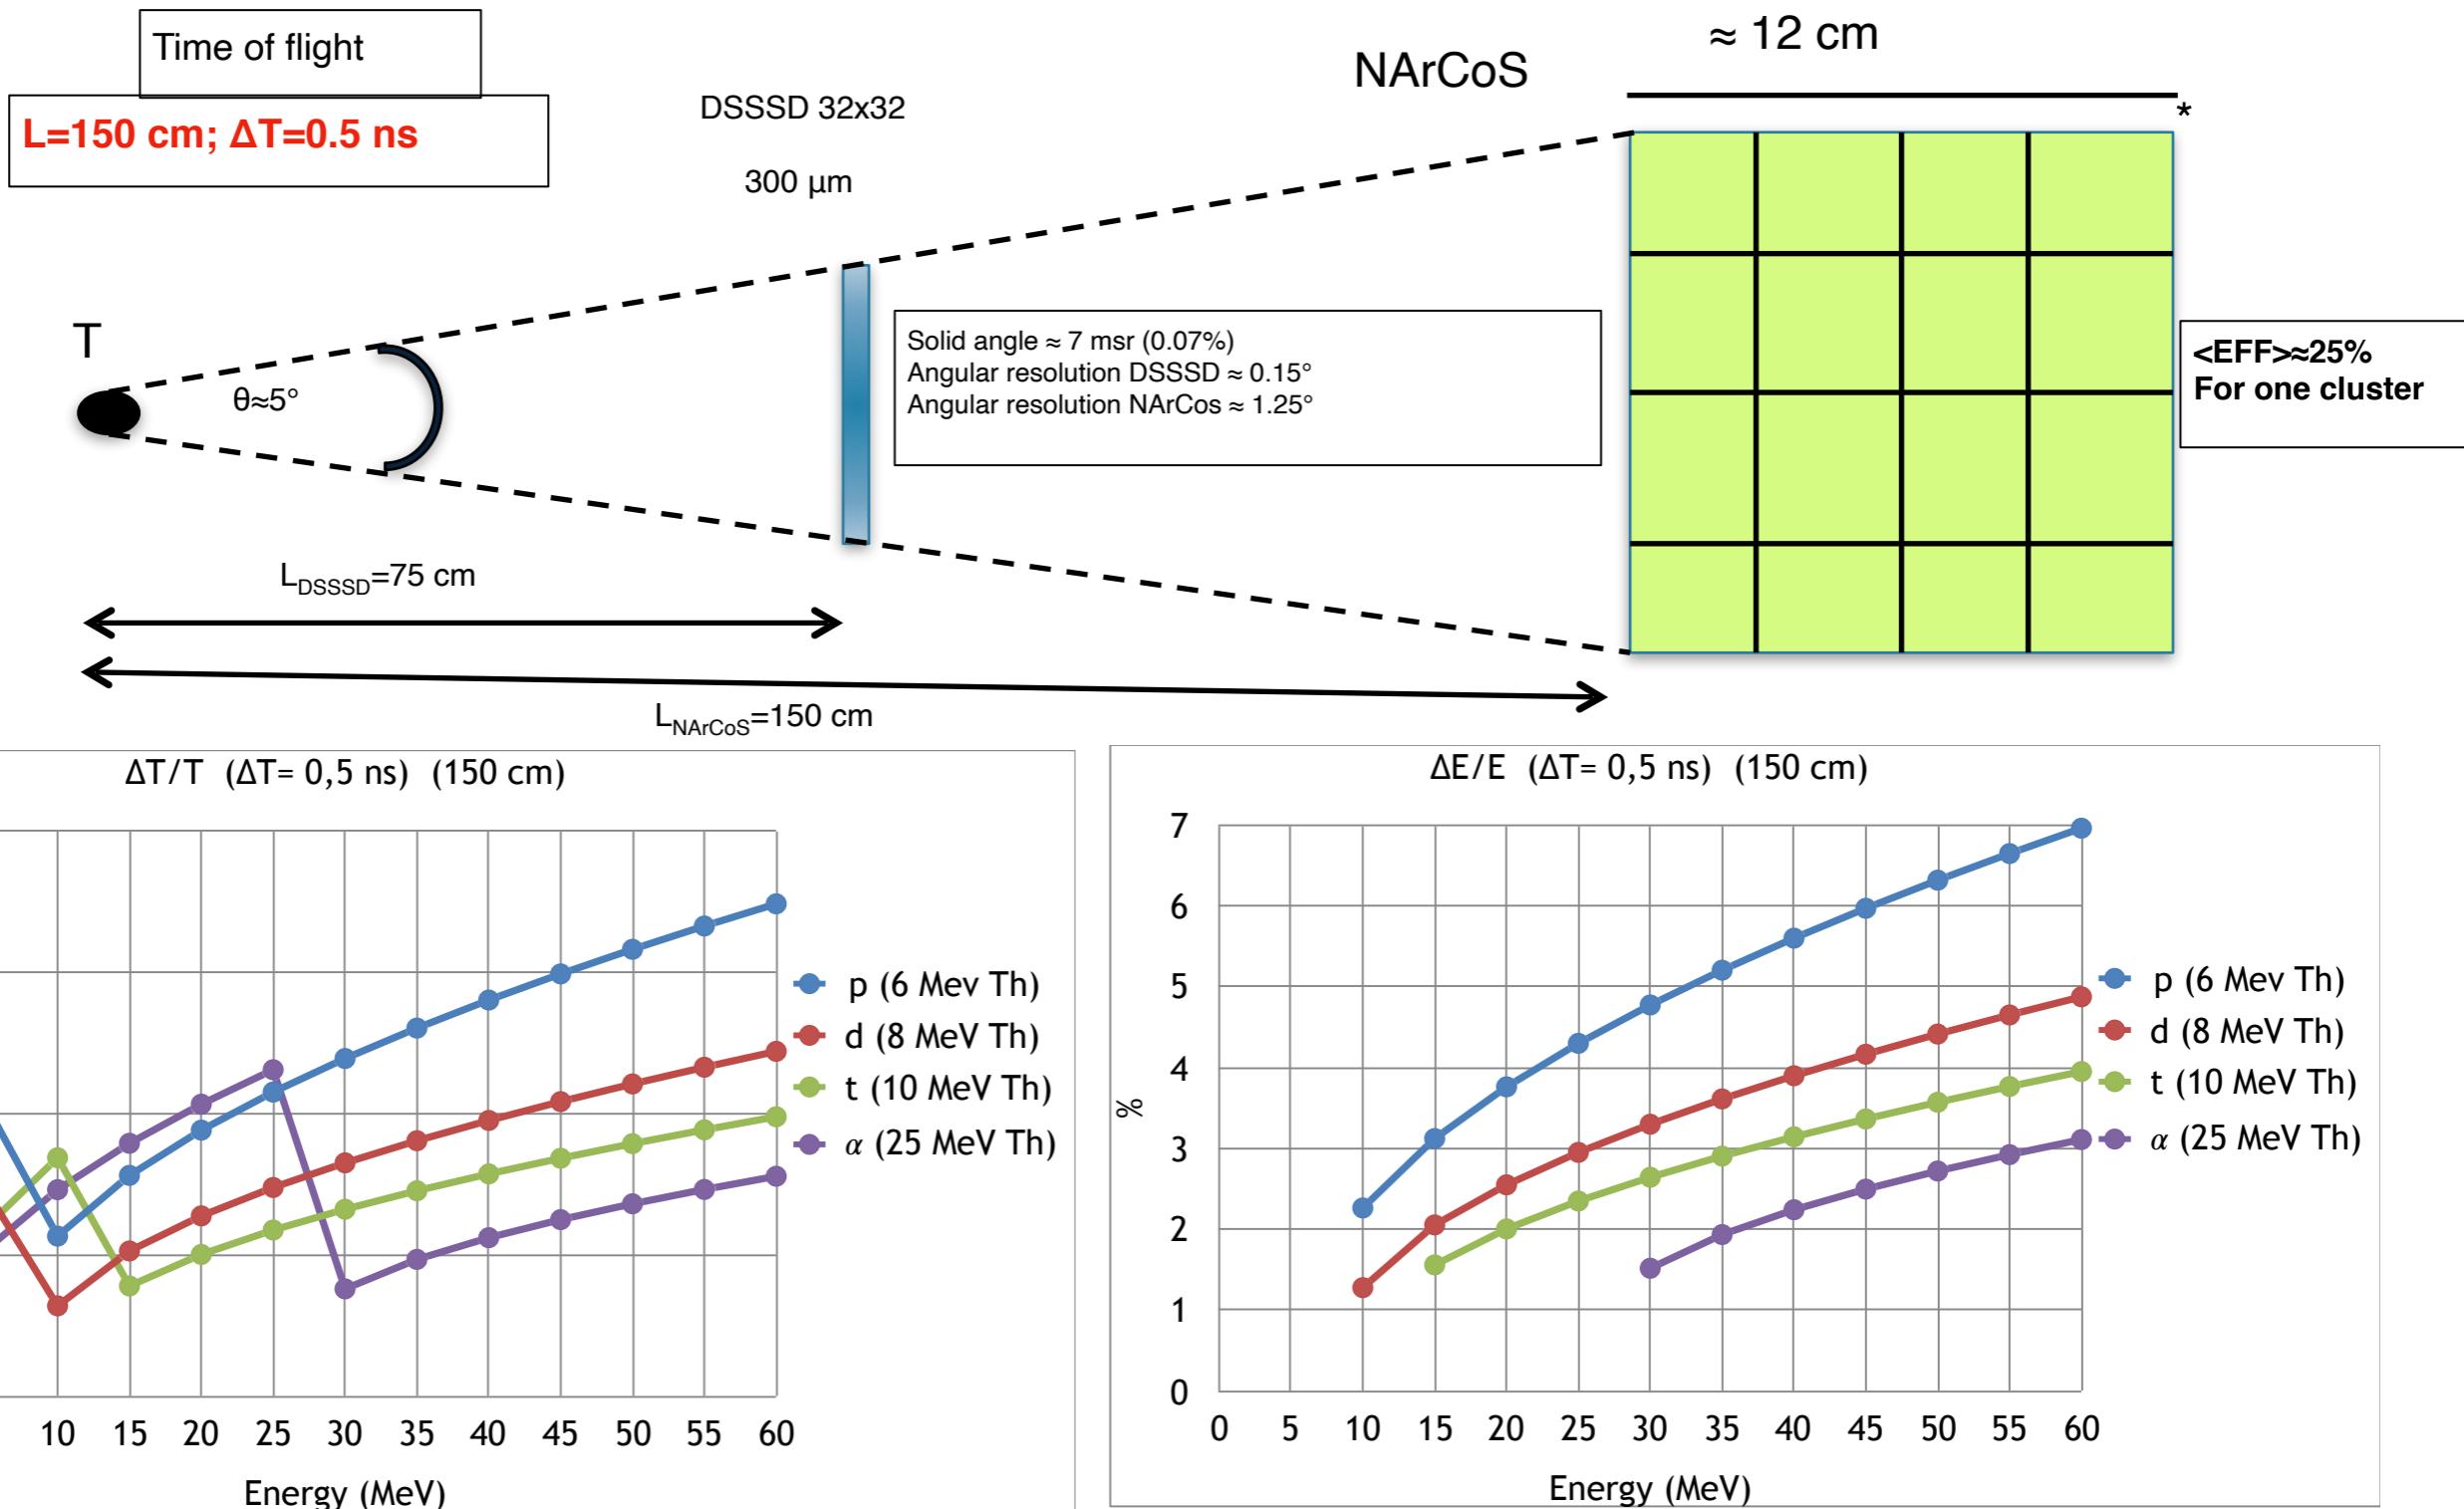


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

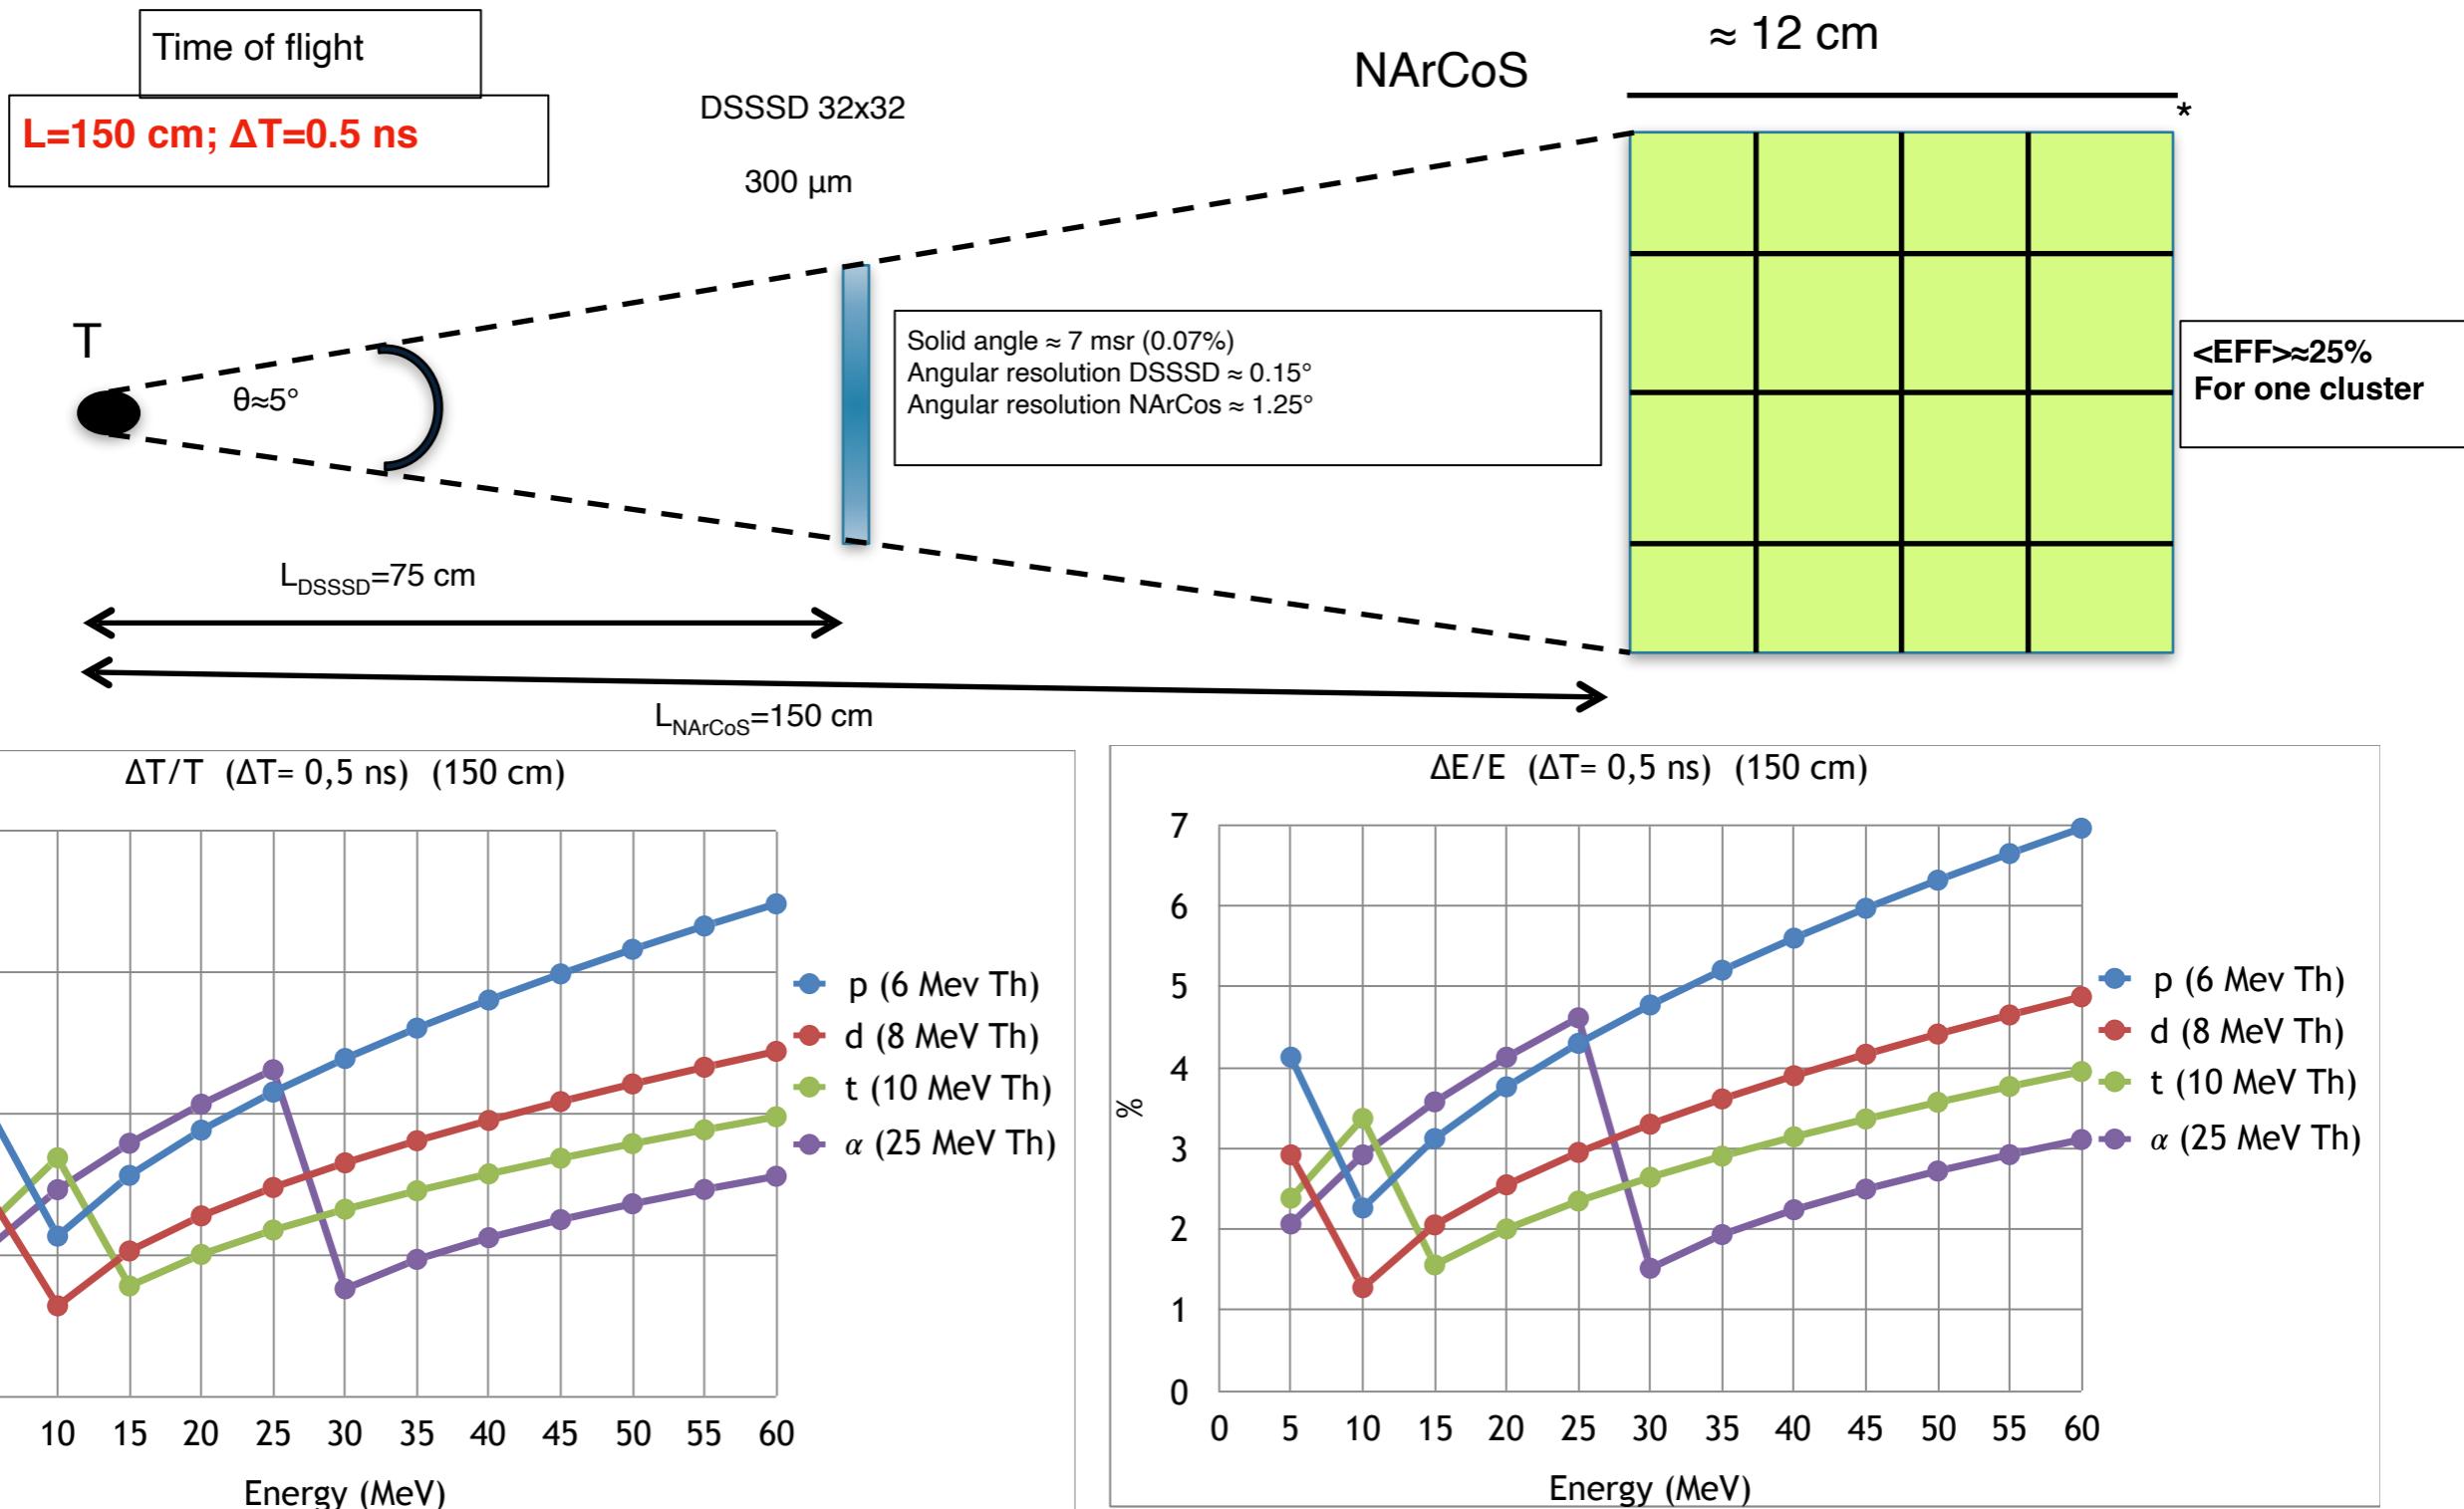


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

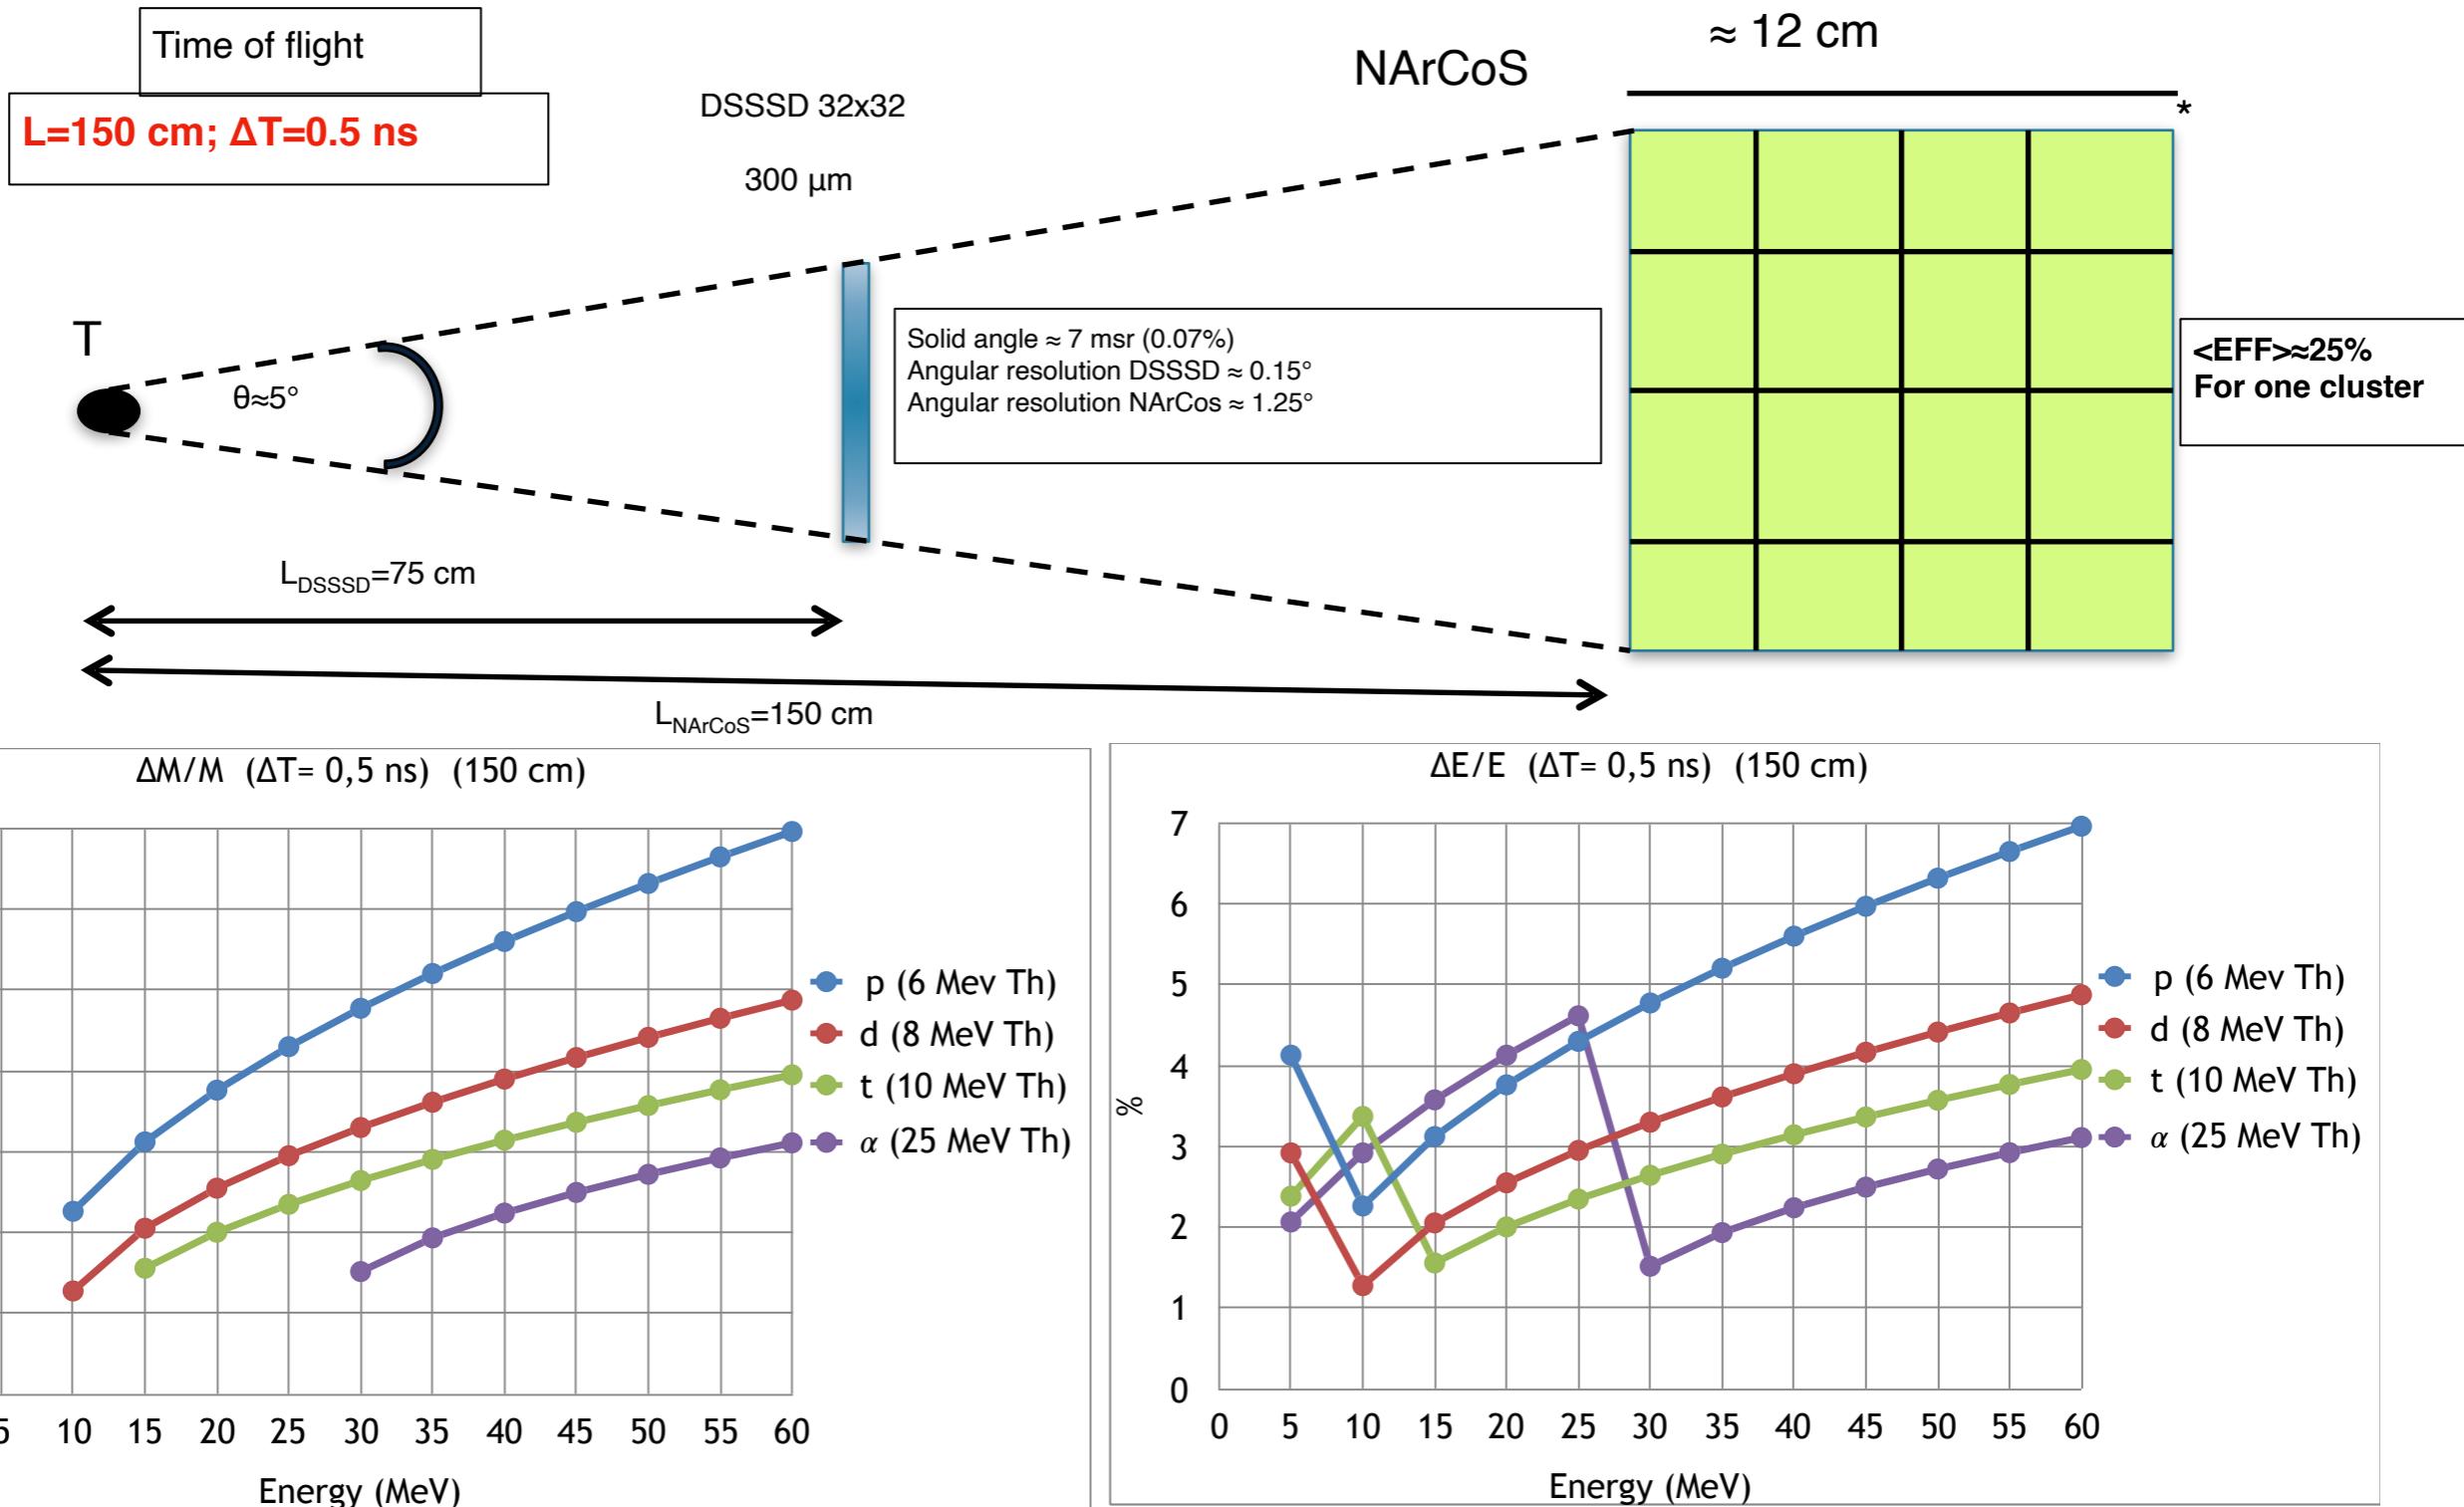


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

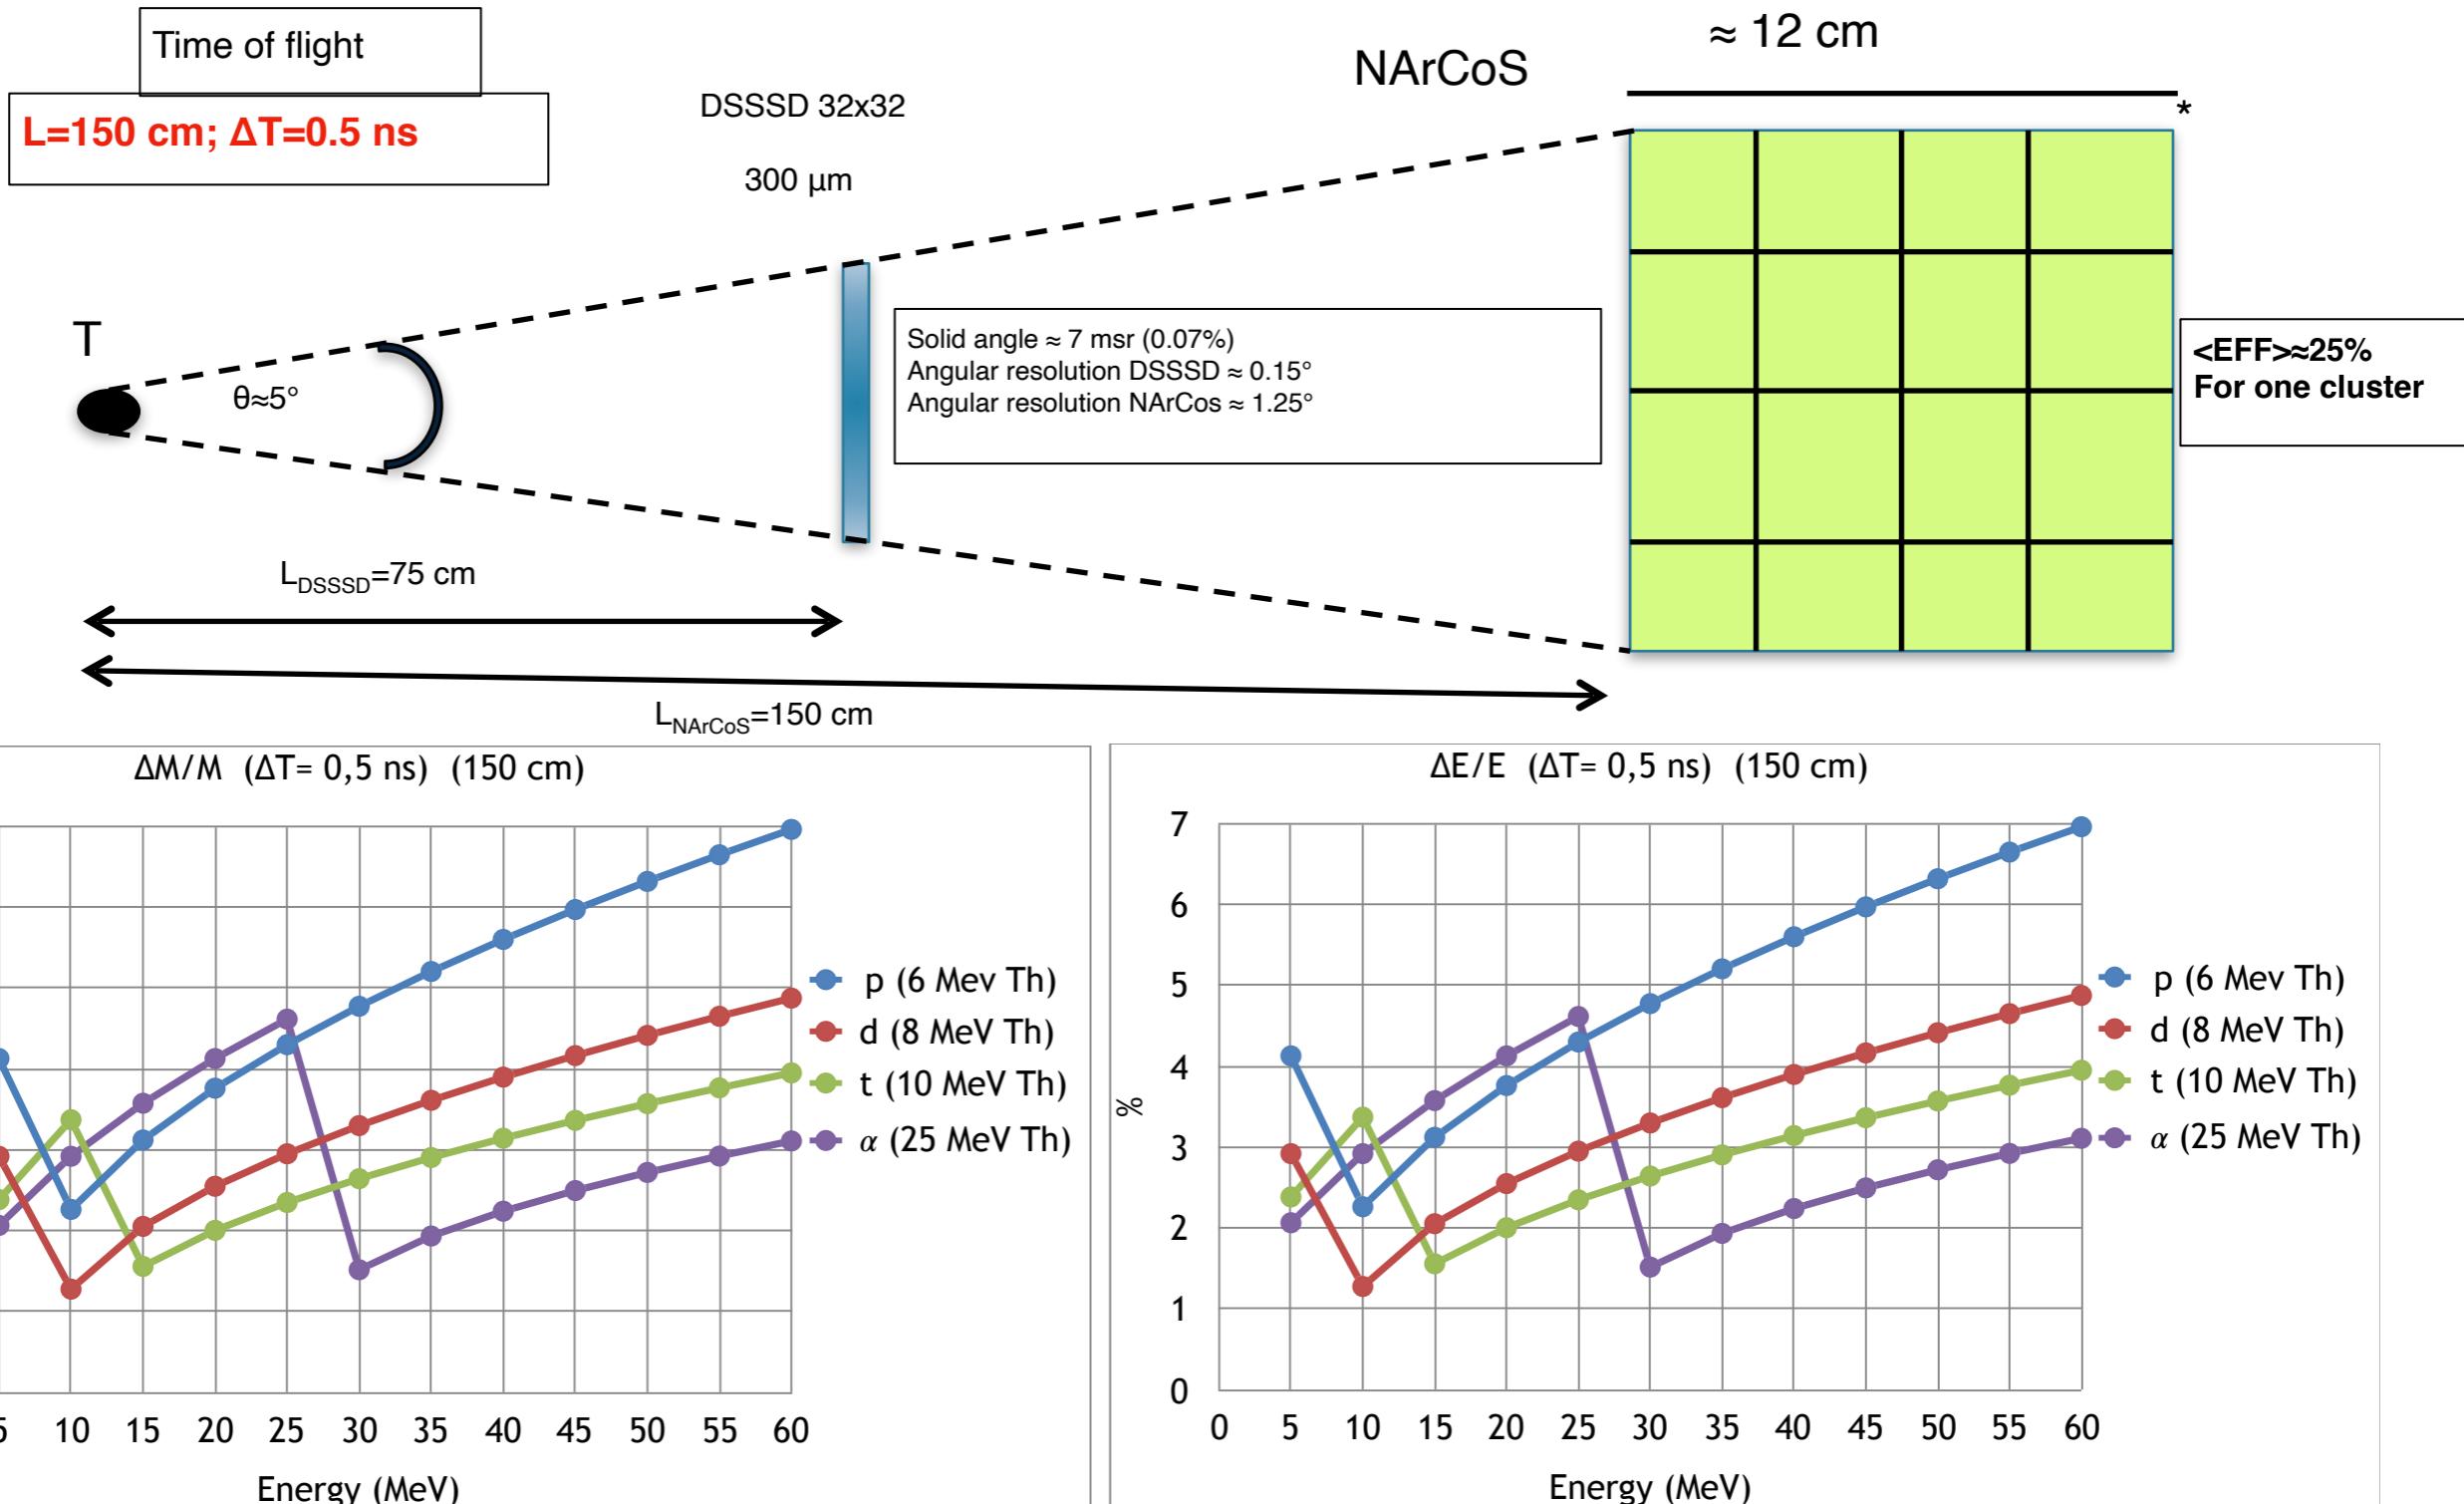

*the mechanical structure will have the possibility of an angular movimentation


Just few numbers

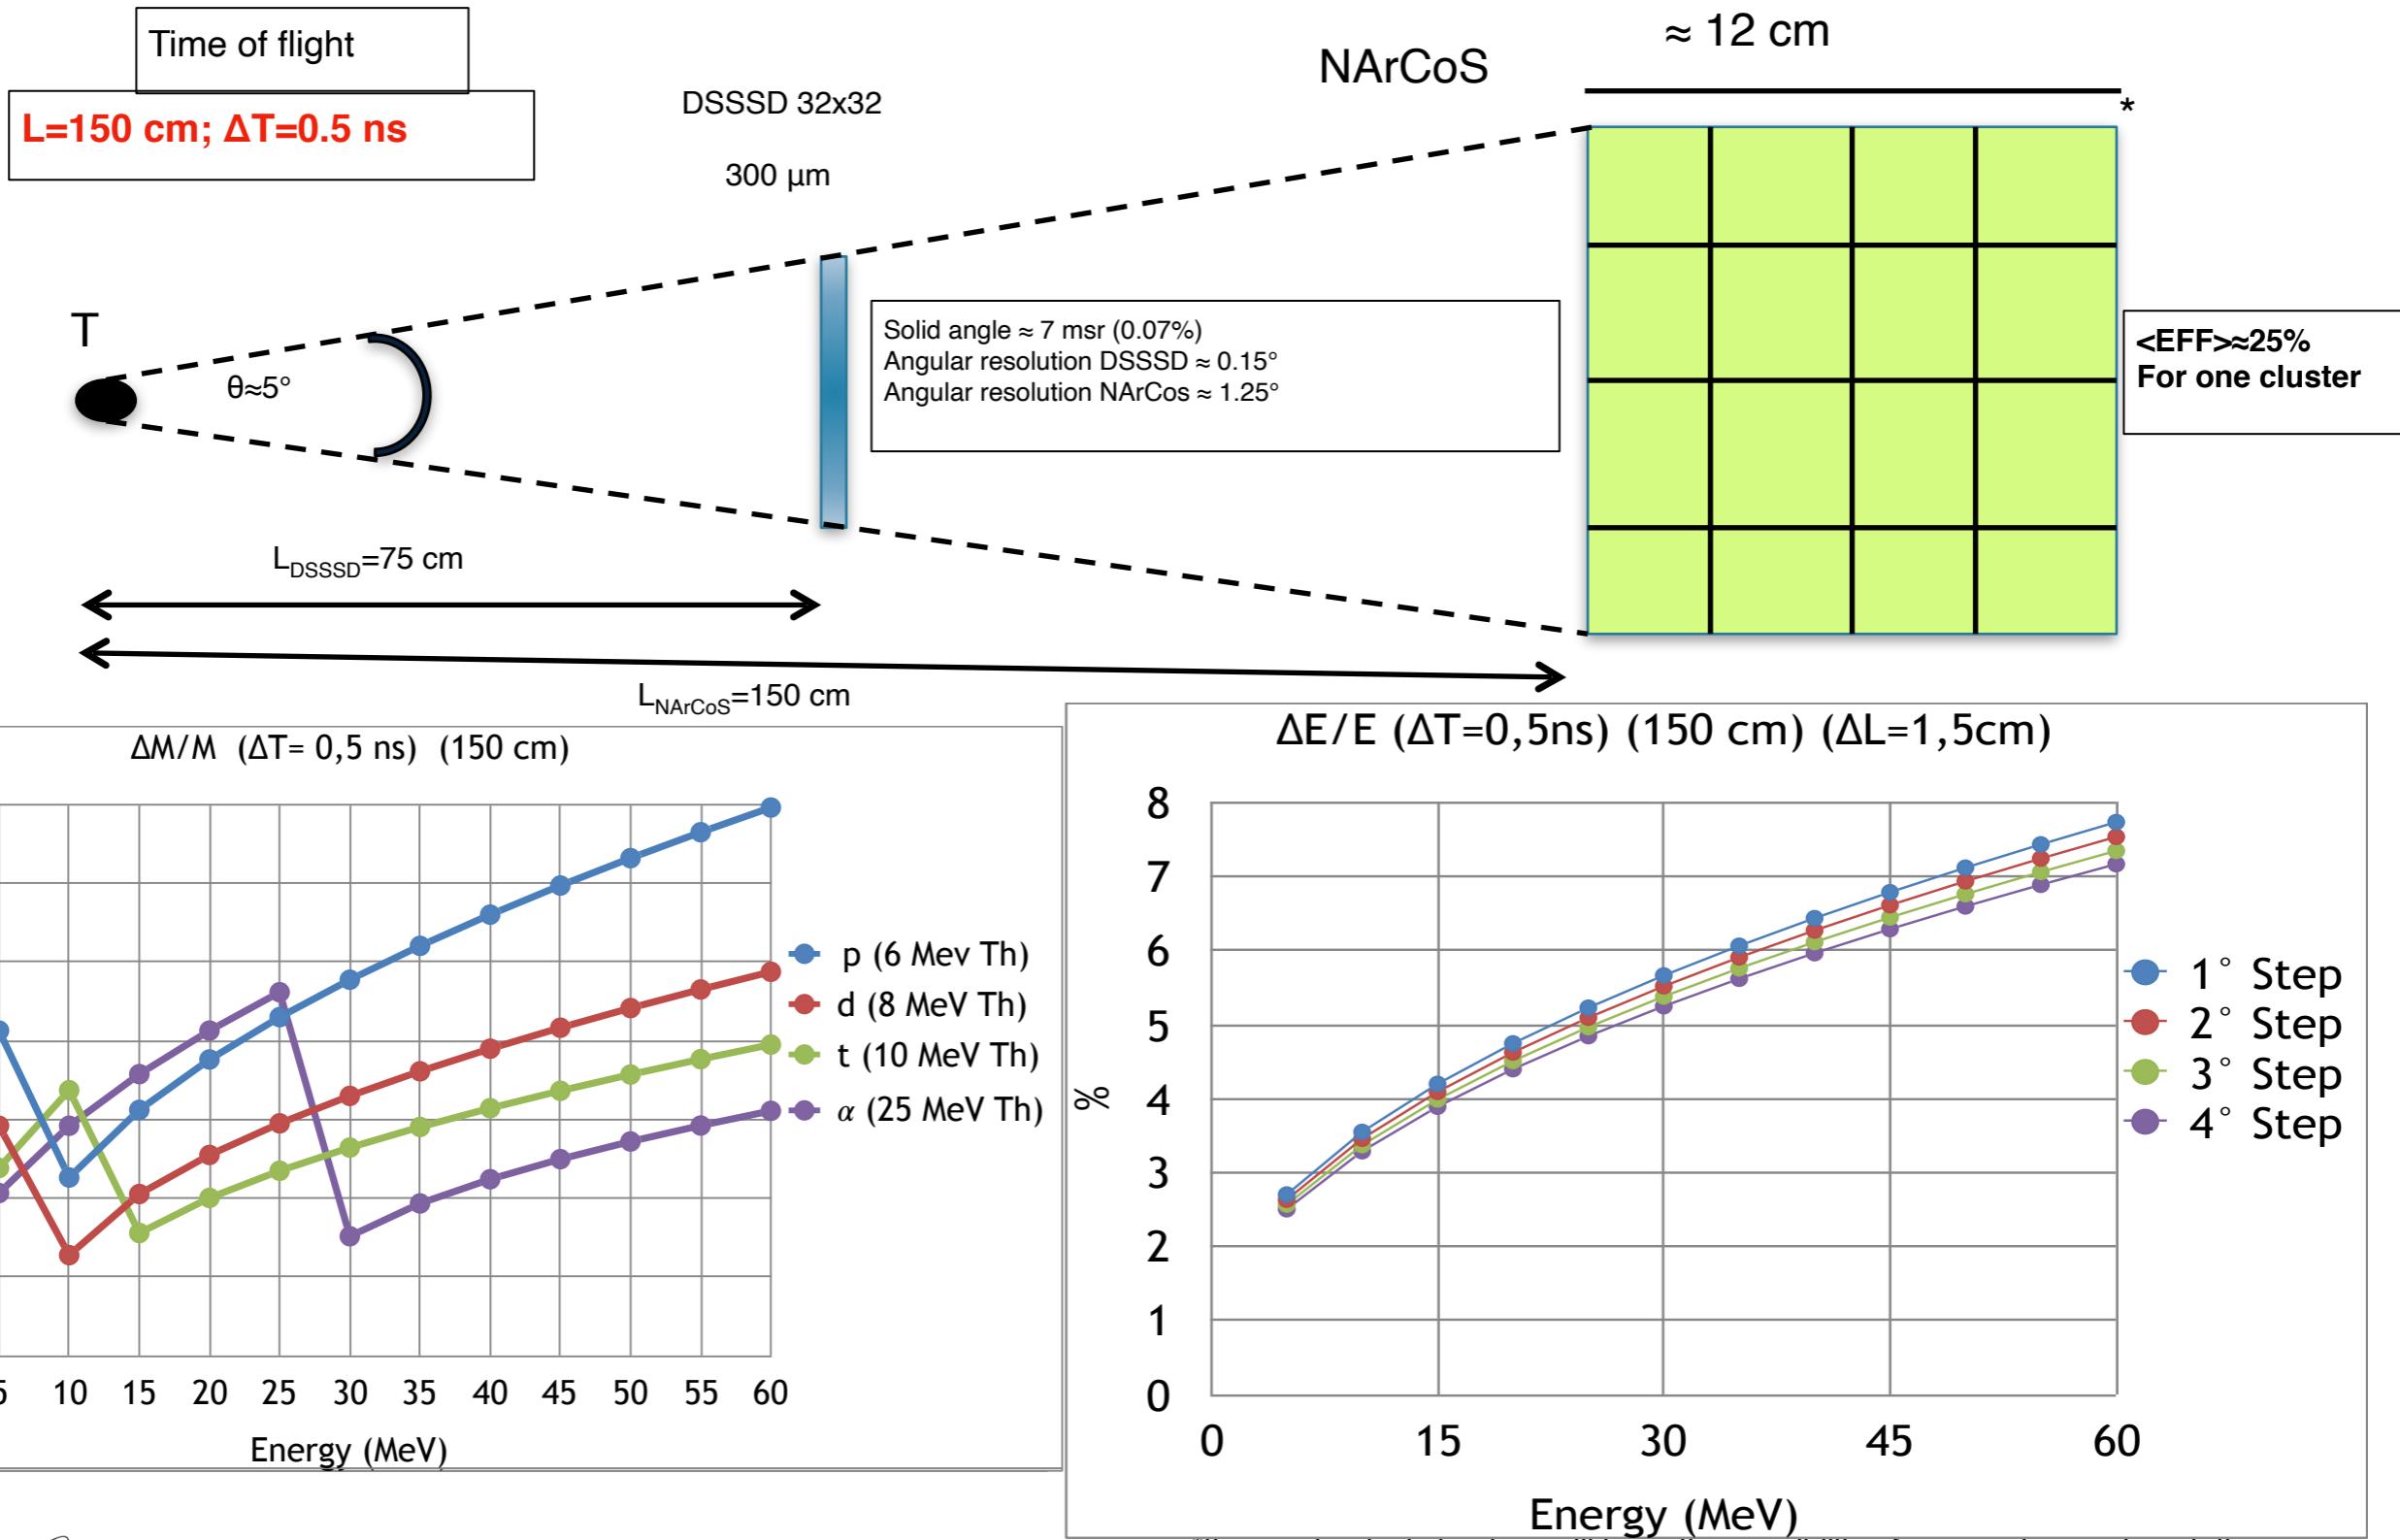



What about the neutron detection efficiency?

GEANT 4 simulation in order to estimate the neutron detection efficiency

Mean value for one detection cell ($3 \times 3 \times 3 \text{ cm}^3$) $\approx 9\%$

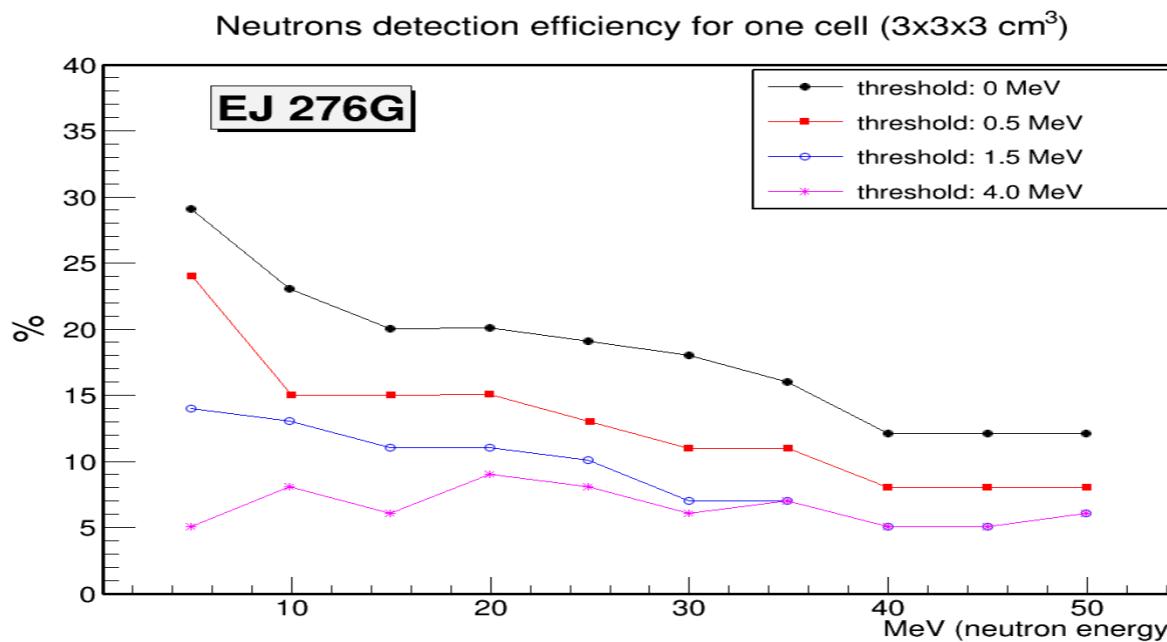

Mean value for one detection cluster ($3 \times 3 \times 12 \text{ cm}^3$) $\approx 25\%$

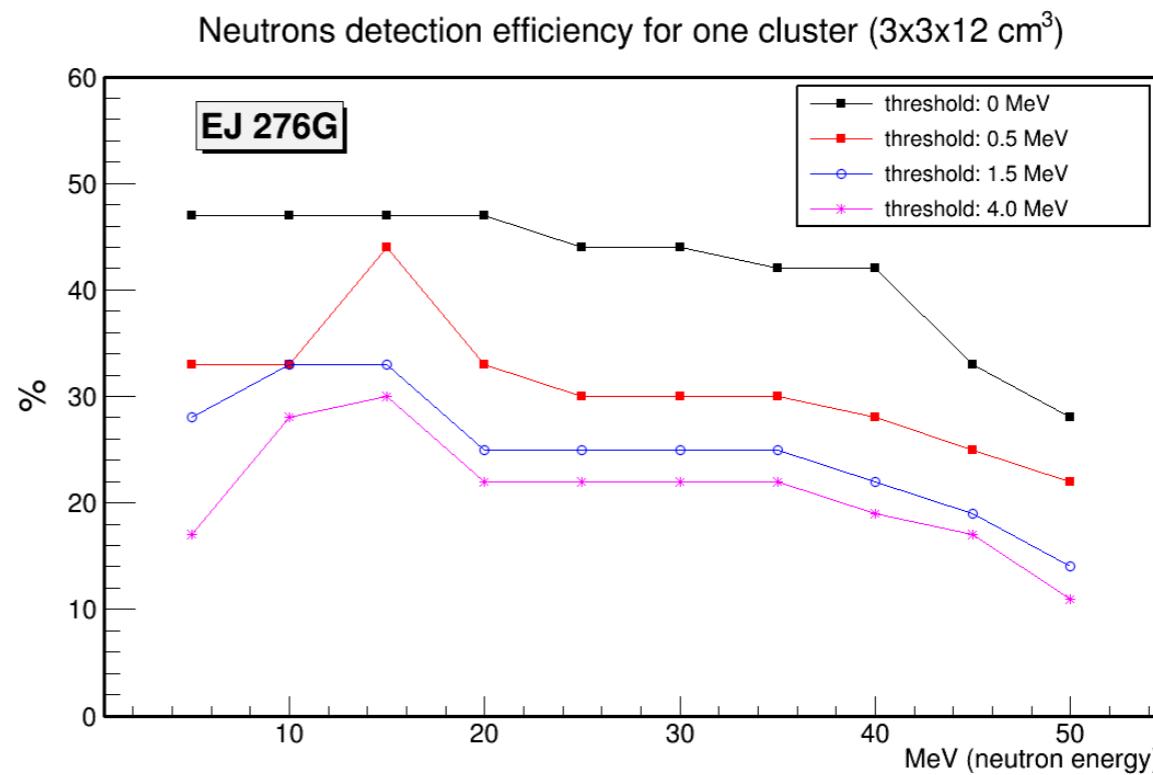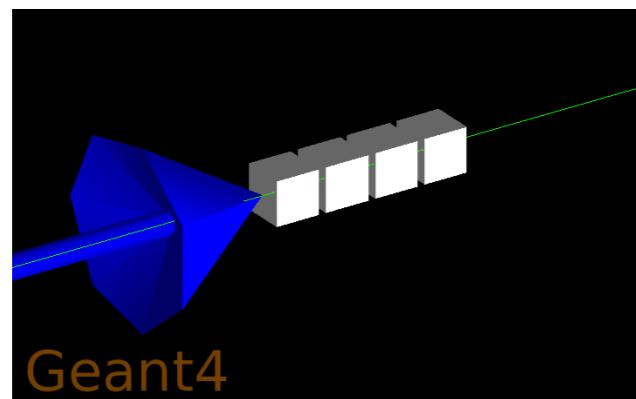

L'EJ276

(ex EJ-299-33)




N. Zaitsev et al., NIM A 668 (2012) 88.
N. P. Hawkes et al., NIM A729 (2013) 522
S.A. Pozzi et al., NIM A723 (2013) 19
E. V. Pagano et al. NIM A 889 (2018) 83-88
E. V. Pagano et al. NIM A 905 (2018) 47-52

L'EJ276

(ex EJ-299-33)



EJ-276 & EJ-276G EMISSION SPECTRUM

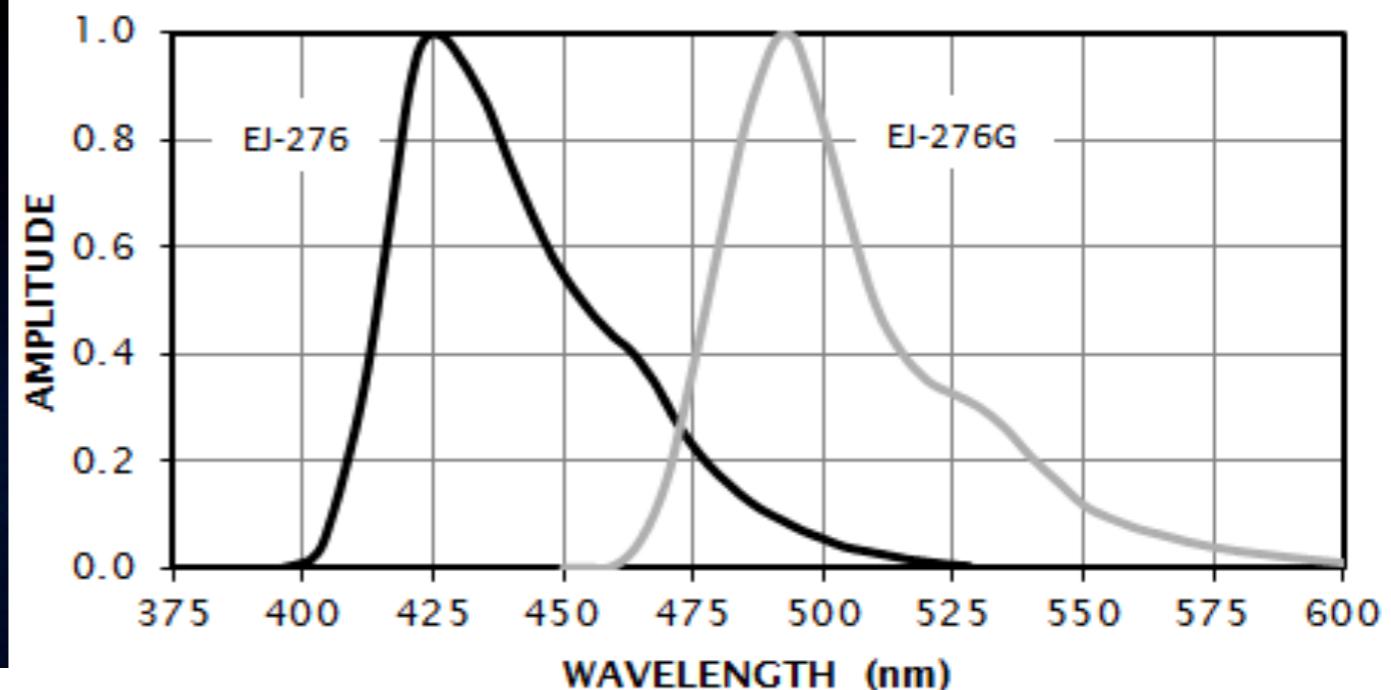


L'EJ276

(ex EJ-299-33)



EJ-276 & EJ-276G EMISSION SPECTRUM

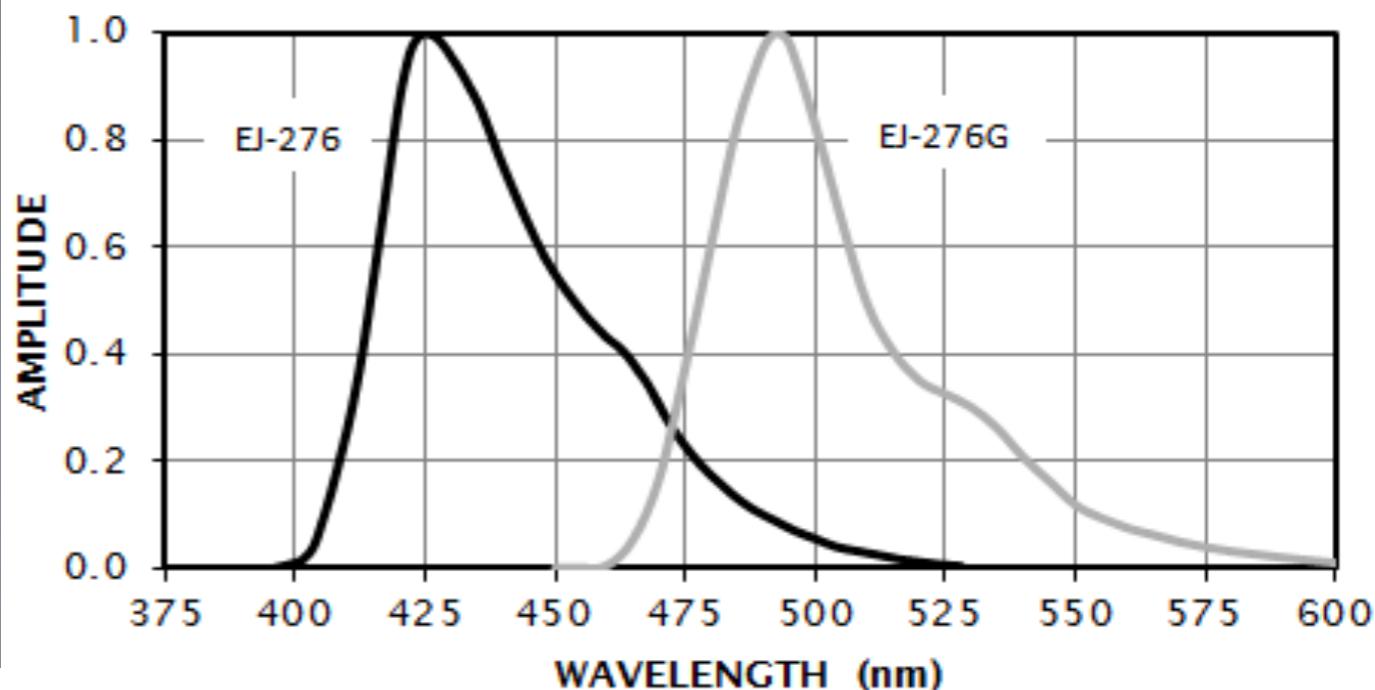


PROPERTIES	EJ-276	EJ-276G
Light Output (% Anthracene)	56	52
Scintillation Efficiency (photons/1 MeV e ⁻)	8,600	8000
Wavelength of Maximum Emission (nm)	425	490
No. of H Atoms per cm ³ (x10 ²²)	4.53	4.53
No. of C Atoms per cm ³ (x10 ²²)	4.89	4.89
No. of Electrons per cm ³ (x10 ²³)	3.52	3.52
Density (g/cm ³)	1.096	1.096
Approx. Mean Decay Times of First 3 Components (ns)	Gamma Excitation	13, 35, 270
	Neutron Excitation	13, 59, 460

L'EJ276

(ex EJ-299-33)



EJ-276 & EJ-276G EMISSION SPECTRUM

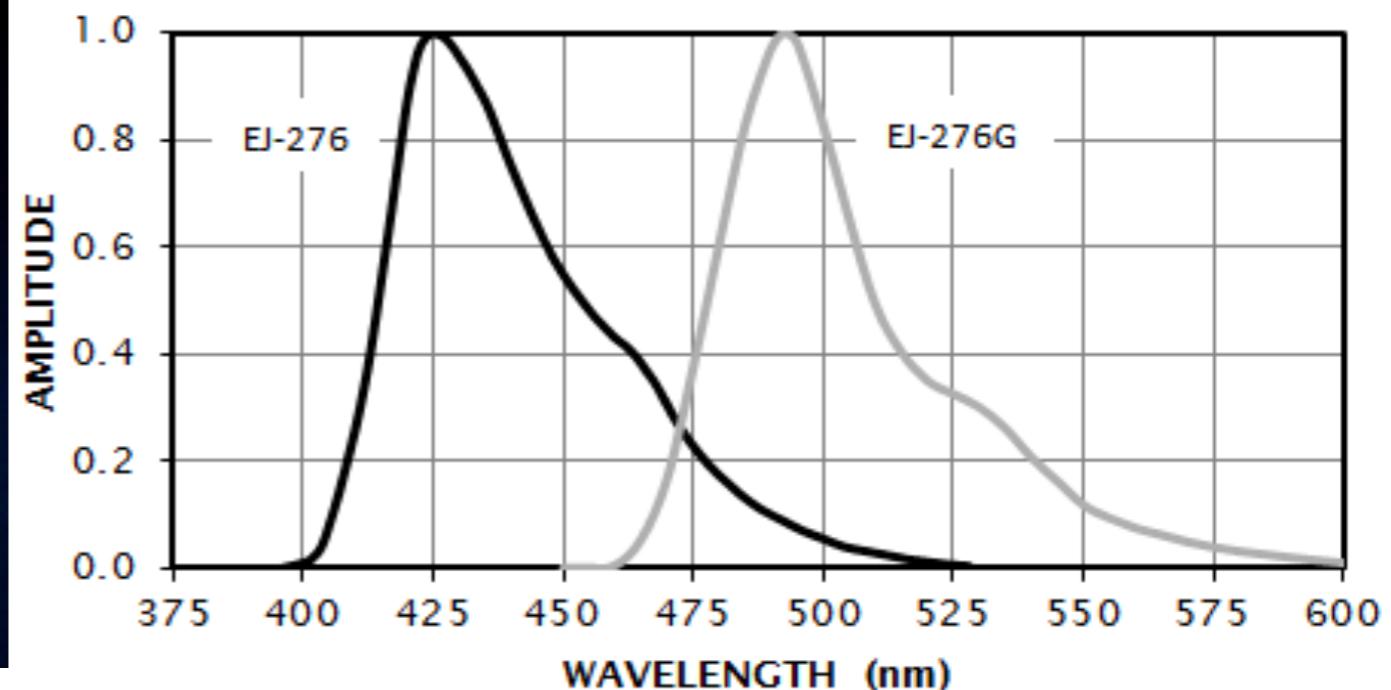


L'EJ276

(ex EJ-299-33)




EJ-276 & EJ-276G EMISSION SPECTRUM

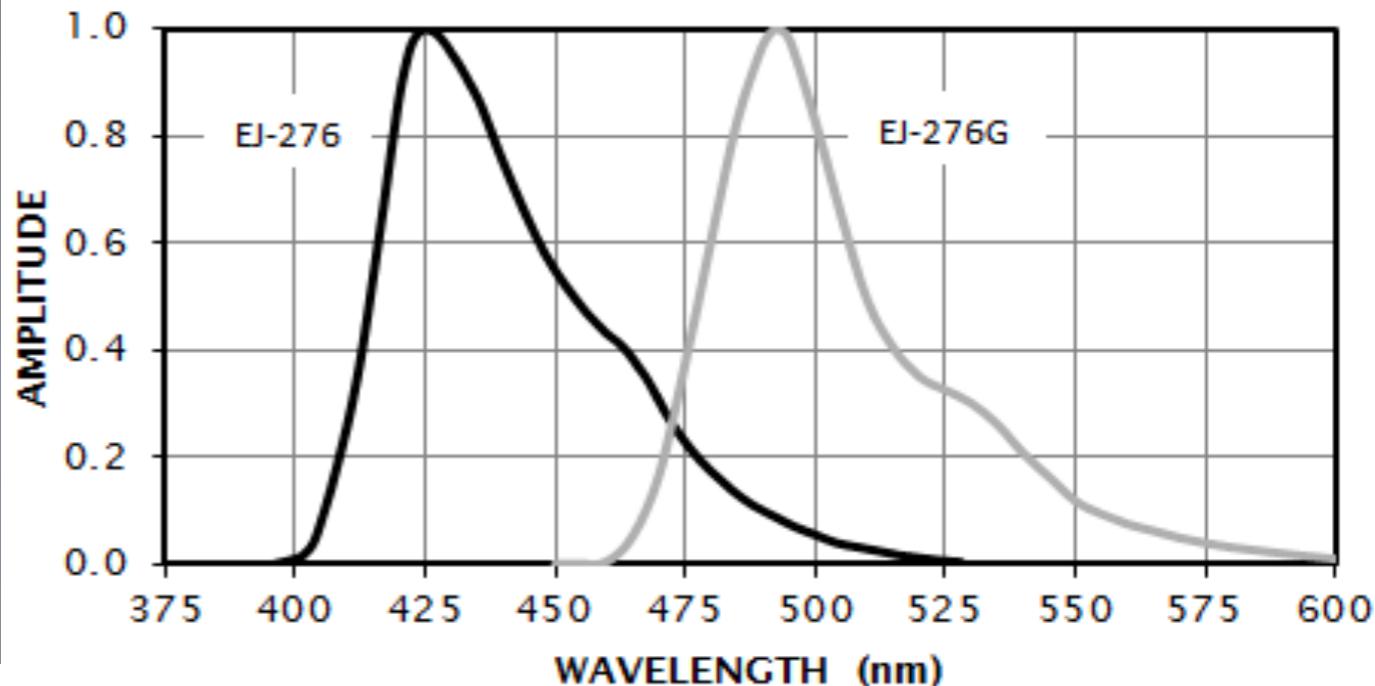

PHOTODIODE

Si PIN photodiode
S3204/S3584 series

Large area sensors for scintillation detection

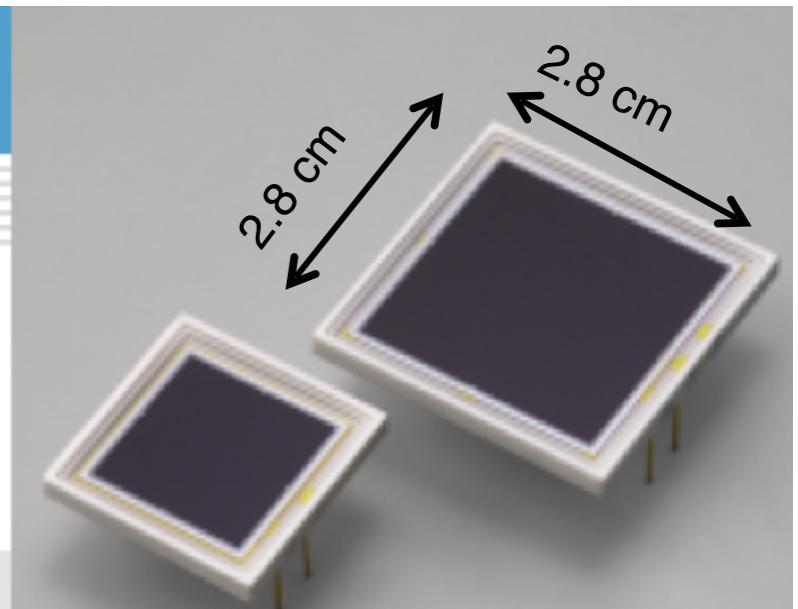

HAMAMATSU
PHOTON IS OUR BUSINESS


S3204/S3584 series are large area Si PIN photodiodes having an epoxy resin window. These photodiodes are also available without window.

L'EJ276


(ex EJ-299-33)




EJ-276 & EJ-276G EMISSION SPECTRUM

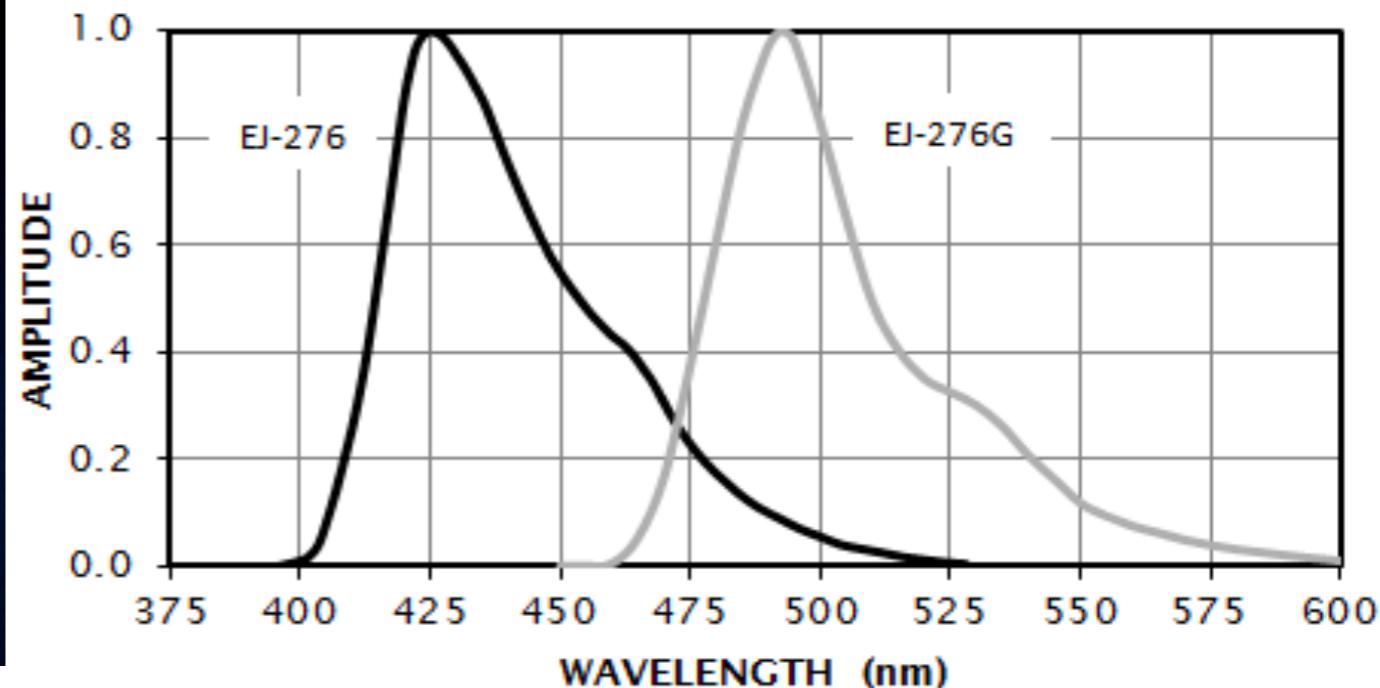


Spectral response

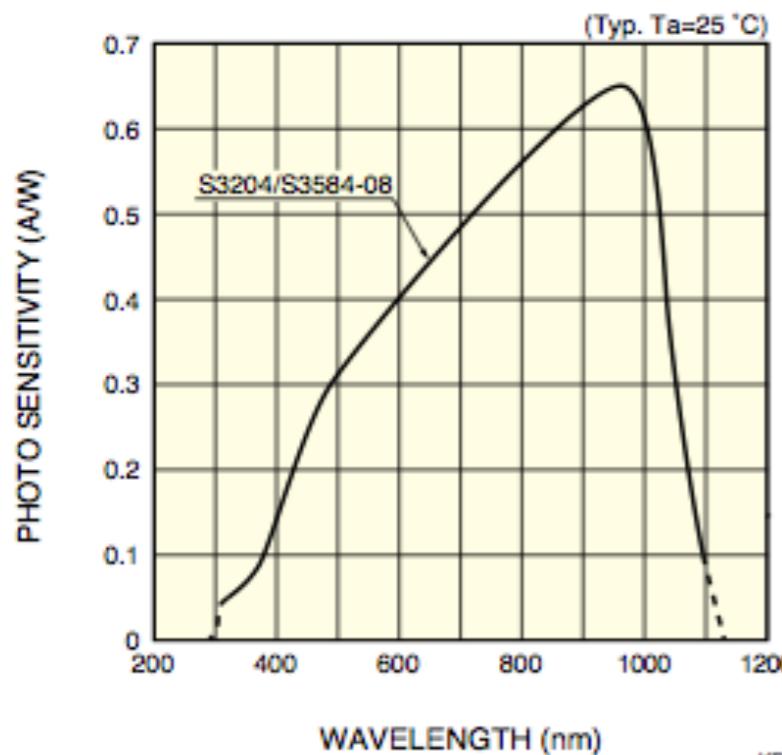

Spectral response (without window)

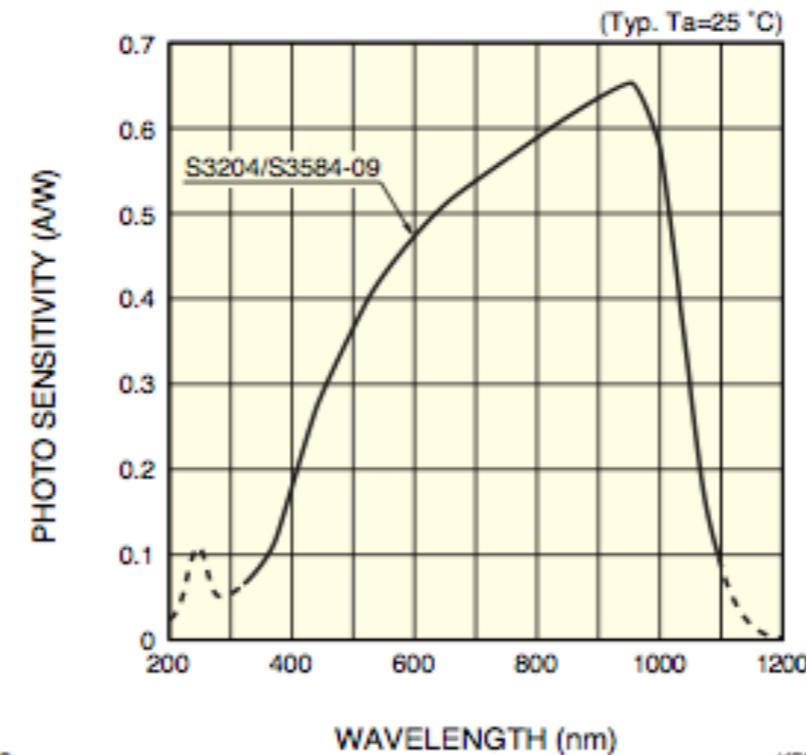


S3204/S3584 series are large area Si PIN photodiodes having an epoxy resin window. These photodiodes are also available without window.

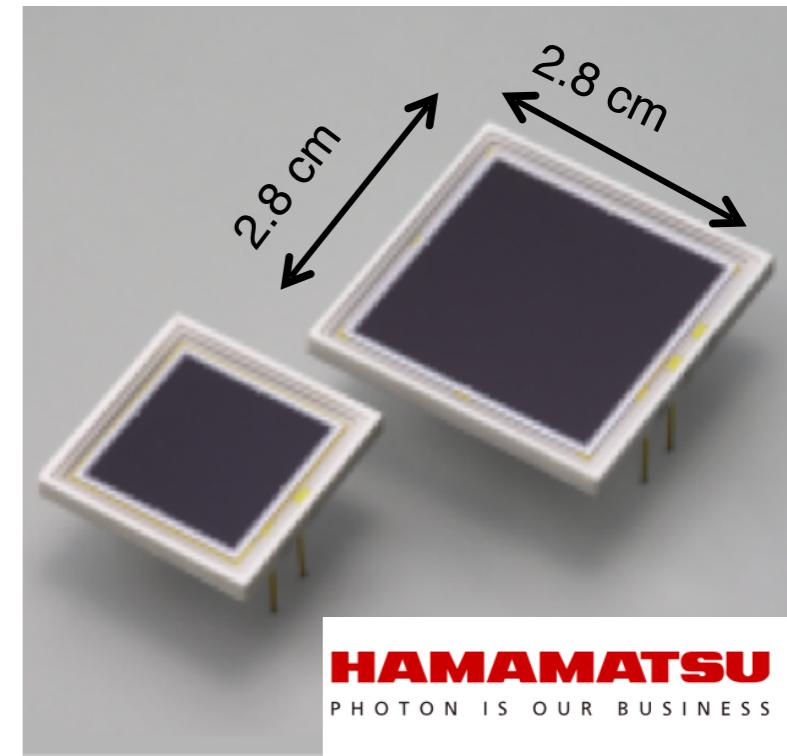

Test using radioactive sources @ LNS




Dimention: 3x3x3 cm³
<neutron EFF> (GEANT4) ≈ 9%
Read by PM tube: EMI-9544QA
High Voltage: 1500-1700 V

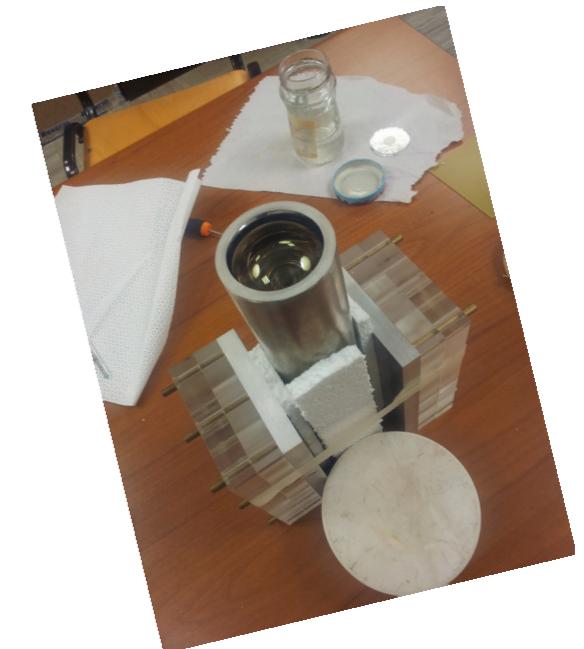

Test using radioactive sources @ LNS





Dimention: 3x3x3 cm³
<neutron EFF> (GEANT4) ≈ 9%
Read by PM tube: EMI-9544QA
High Voltage: 1500-1700 V

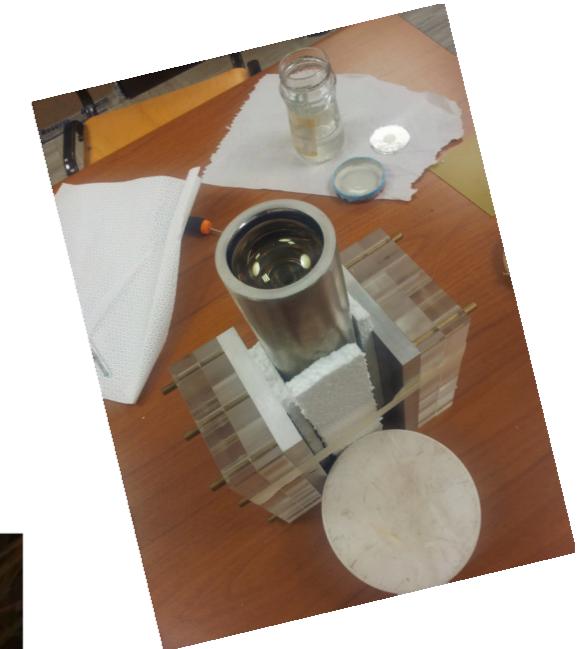

Test using radioactive sources @ LNS



Dimention: 3x3x3 cm³
<neutron EFF> (GEANT4) ≈ 9%
Read by PM tube: EMI-9544QA
High Voltage: 1500-1700 V

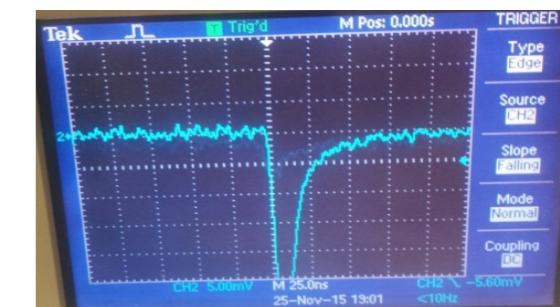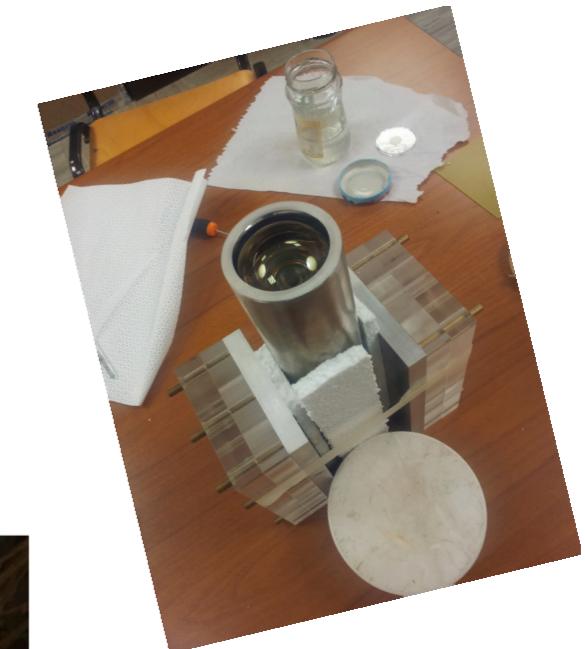


PM -EMI 9954QA
Like in ARGOS detector

G. Lanzanó, et al., NIM A 312, 3, (1992), 515-520

Test using radioactive sources @ LNS



Dimention: 3x3x3 cm³
<neutron EFF> (GEANT4) ≈ 9%
Read by PM tube: EMI-9544QA
High Voltage: 1500-1700 V

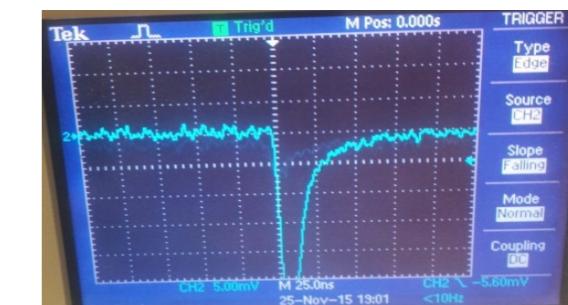


PM -EMI 9954QA
Like in ARGOS detector

G. Lanzanó, et al., NIM A 312, 3, (1992), 515-520

Sources:
1) γ ^{60}Co
2)a ^{241}Am
3)a ^{232}Th
4)n e γ AmBe

Some results: the digitalized signal

Traces_BaseRestore_3_0_channel_41

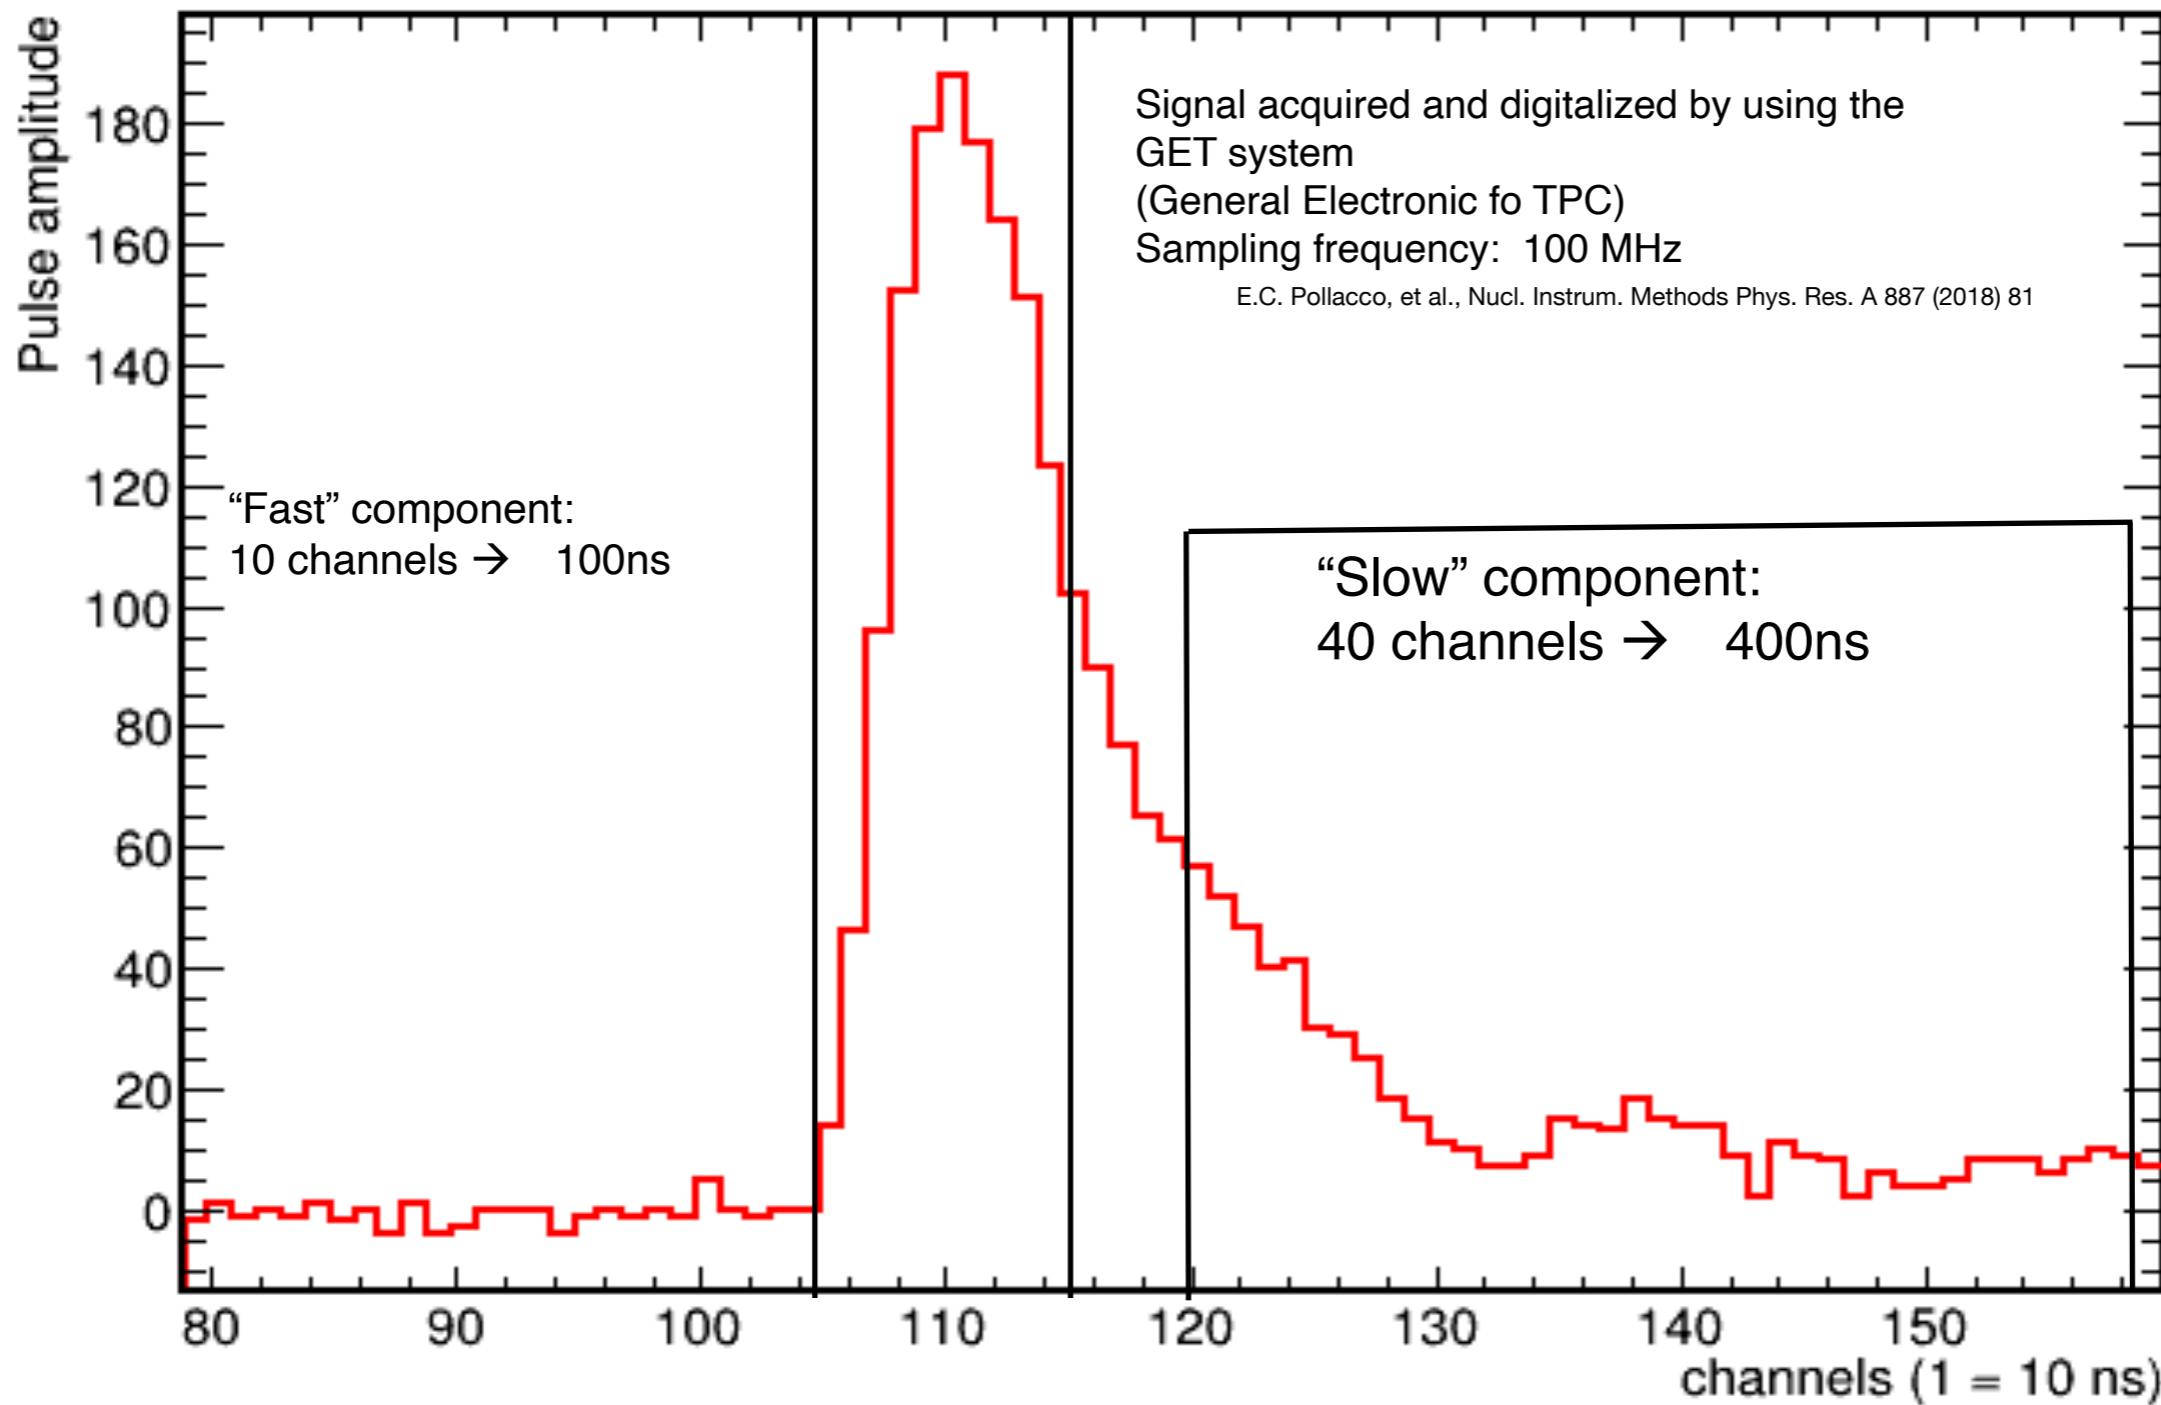


Some results: A few of spectra

E. V. Pagano et al. NIM A 889 (2018) 83-88


Some results: A few of spectra

E. V. Pagano et al. NIM A 889 (2018) 83-88

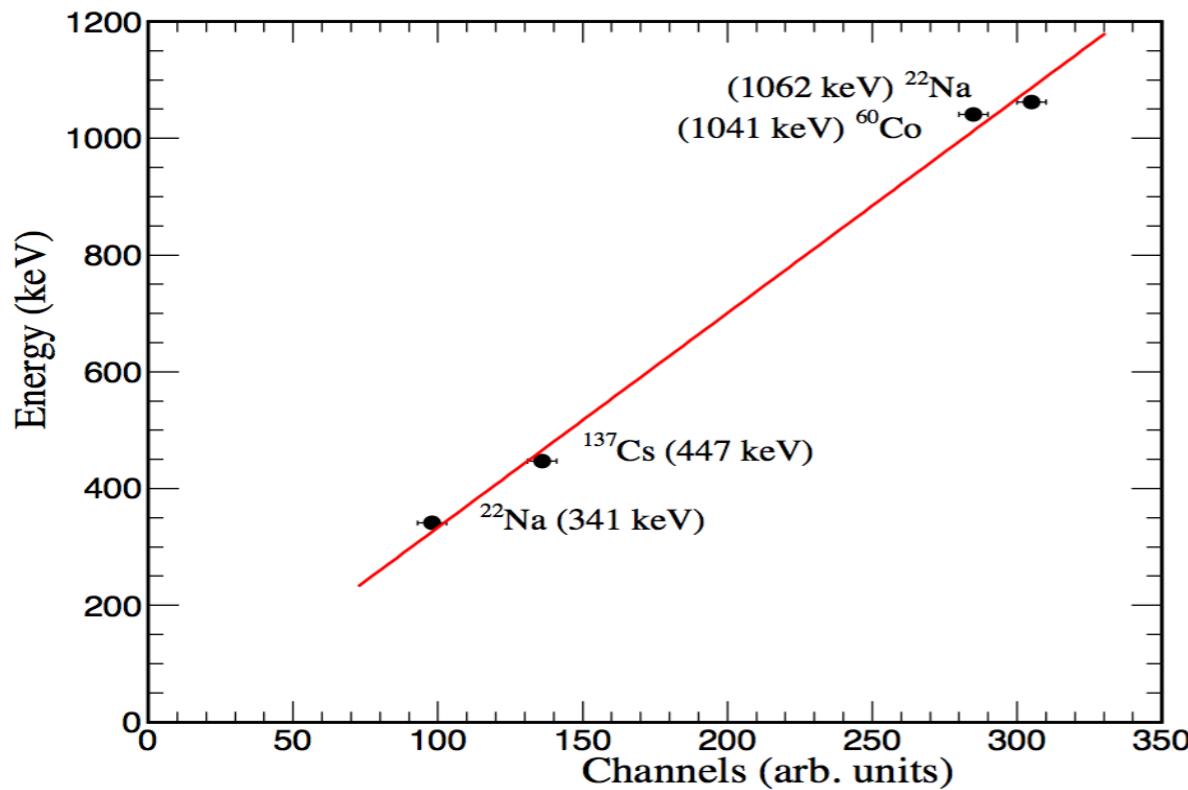



Some results: A few of spectra

E. V. Pagano et al. NIM A 889 (2018) 83-88

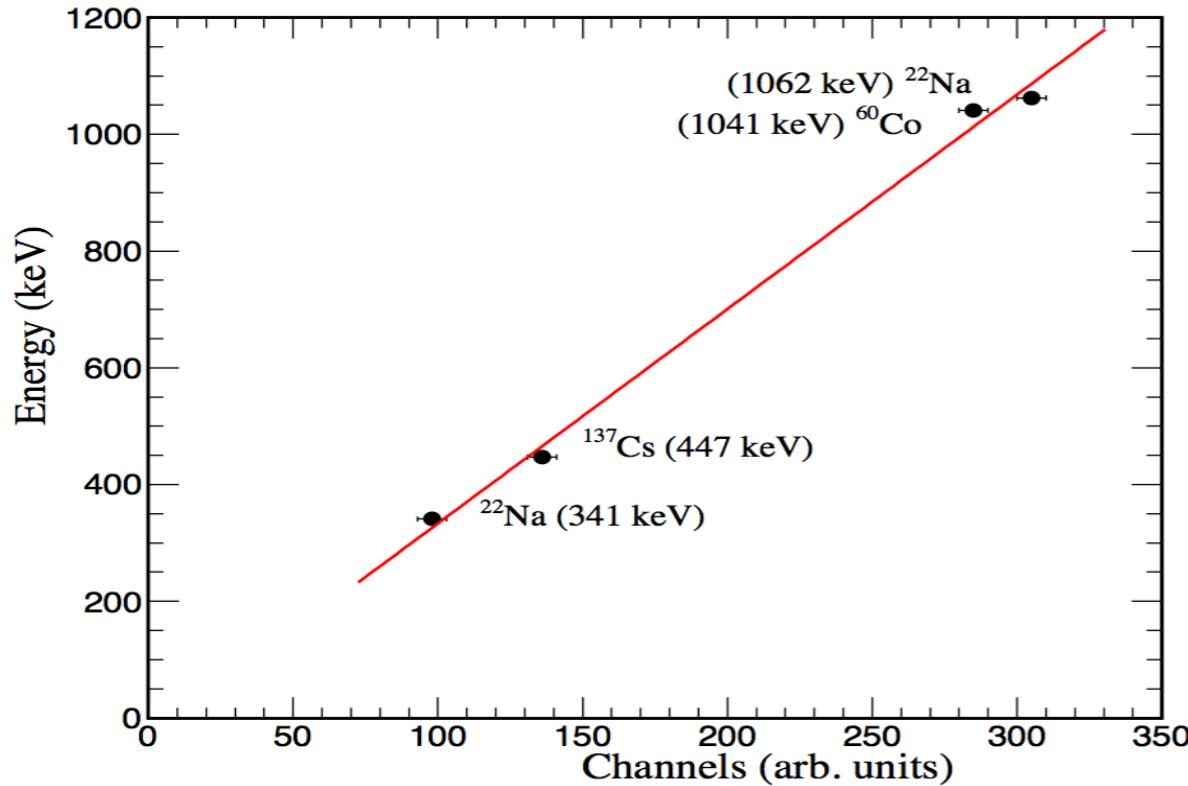




Some results: A few of spectra

E. V. Pagano et al. NIM A 889 (2018) 83-88

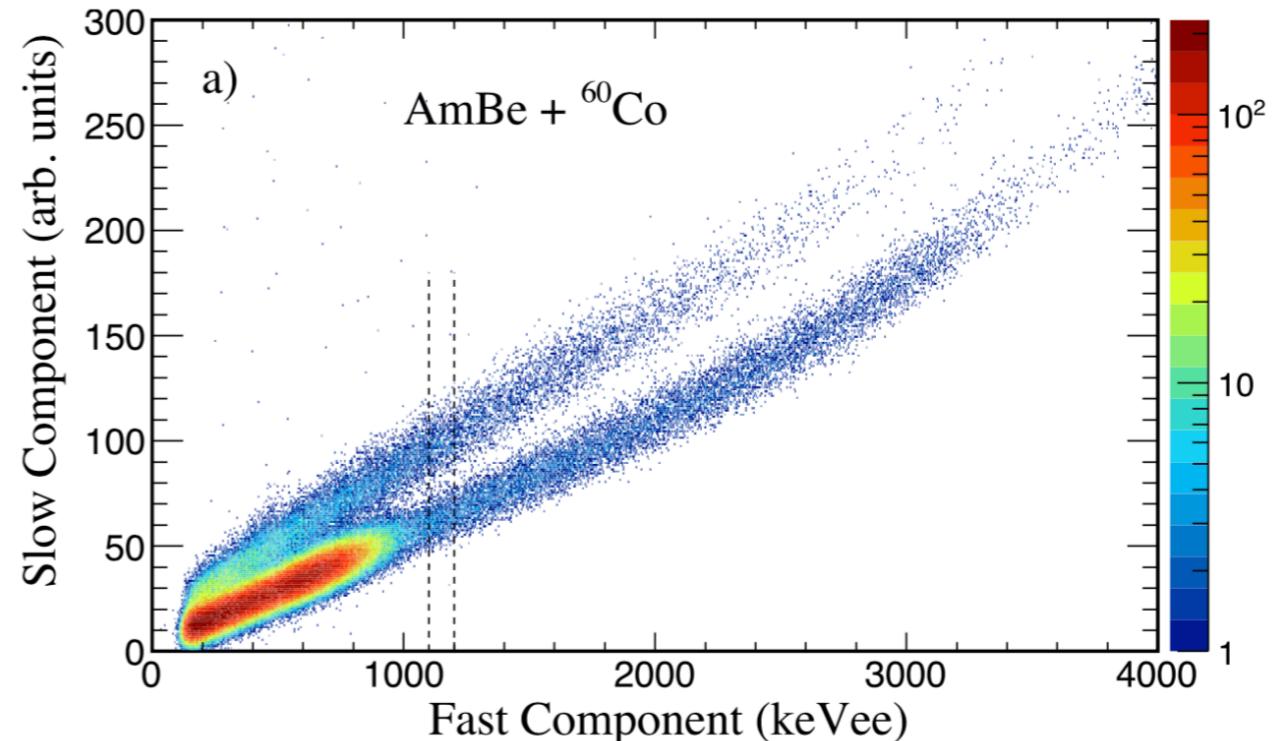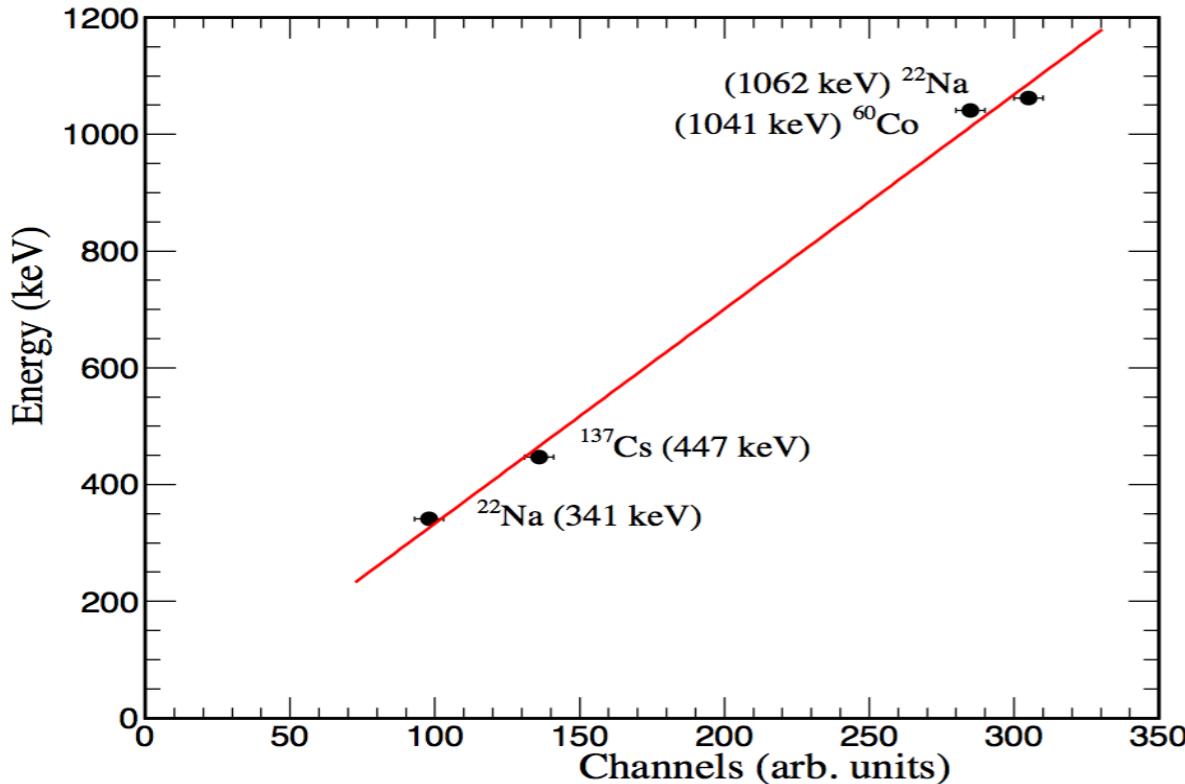




Some results: A few of spectra

E. V. Pagano et al. NIM A 889 (2018) 83-88

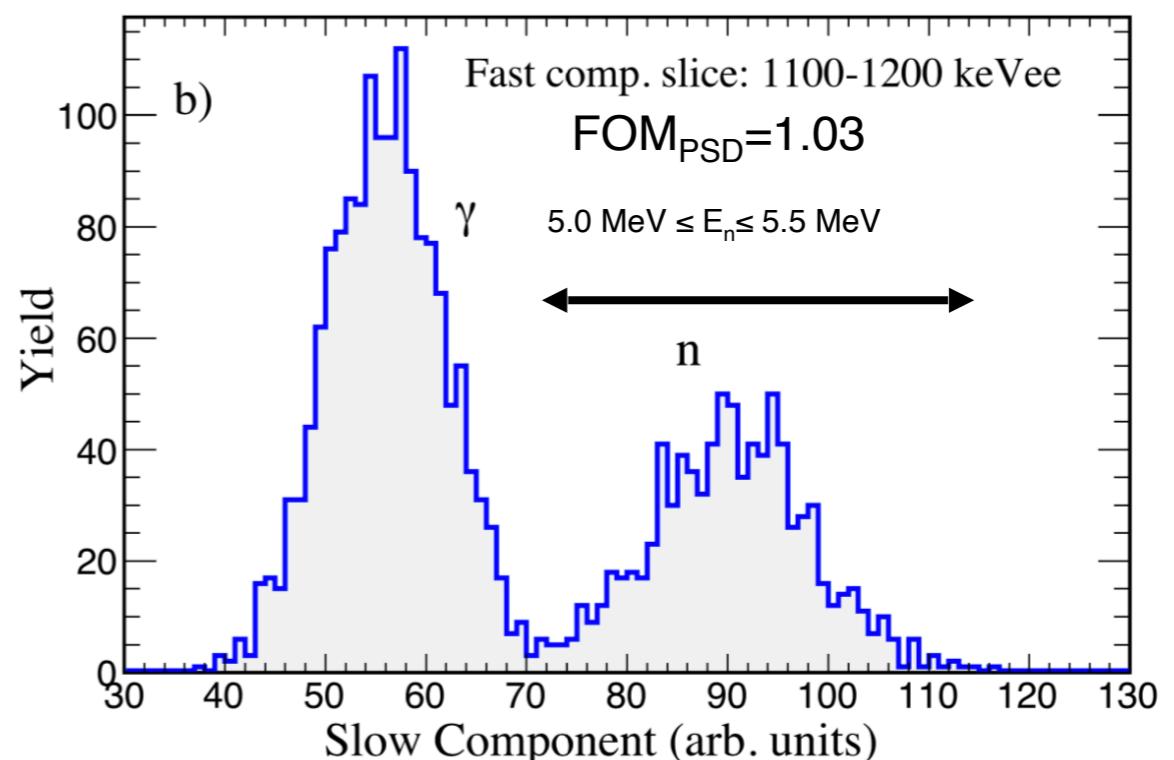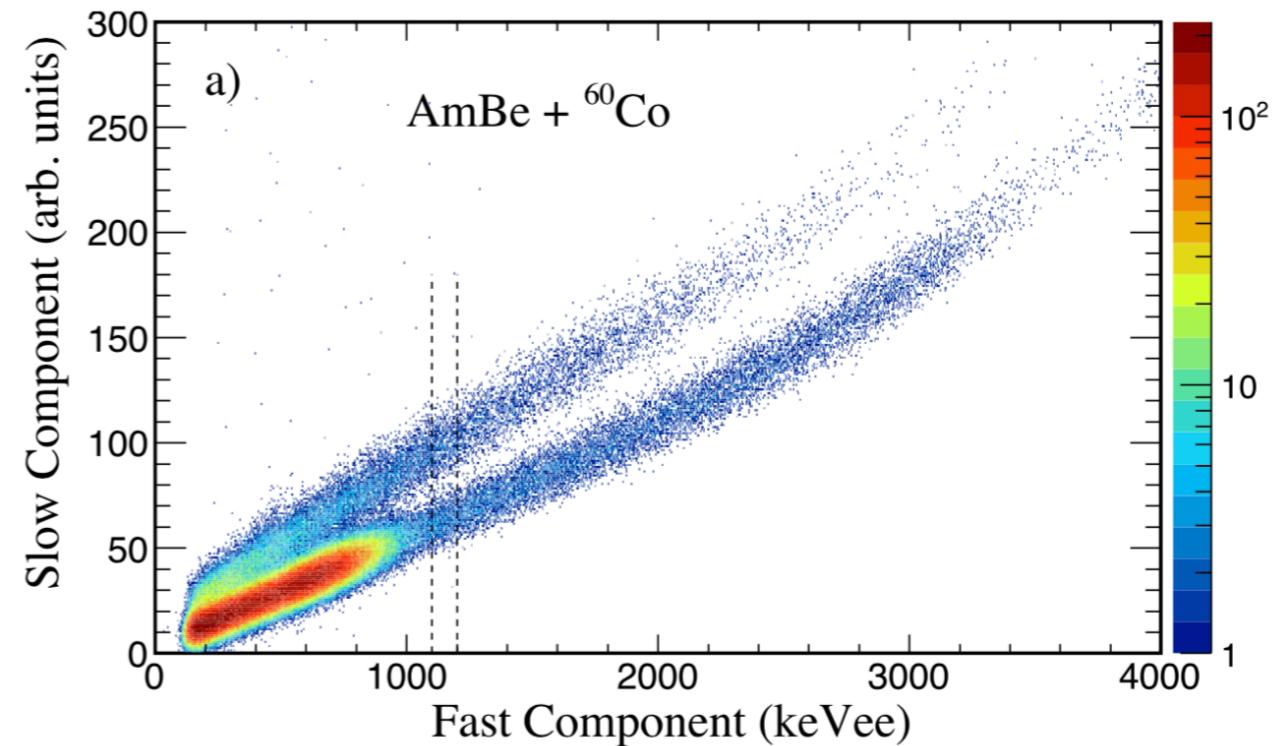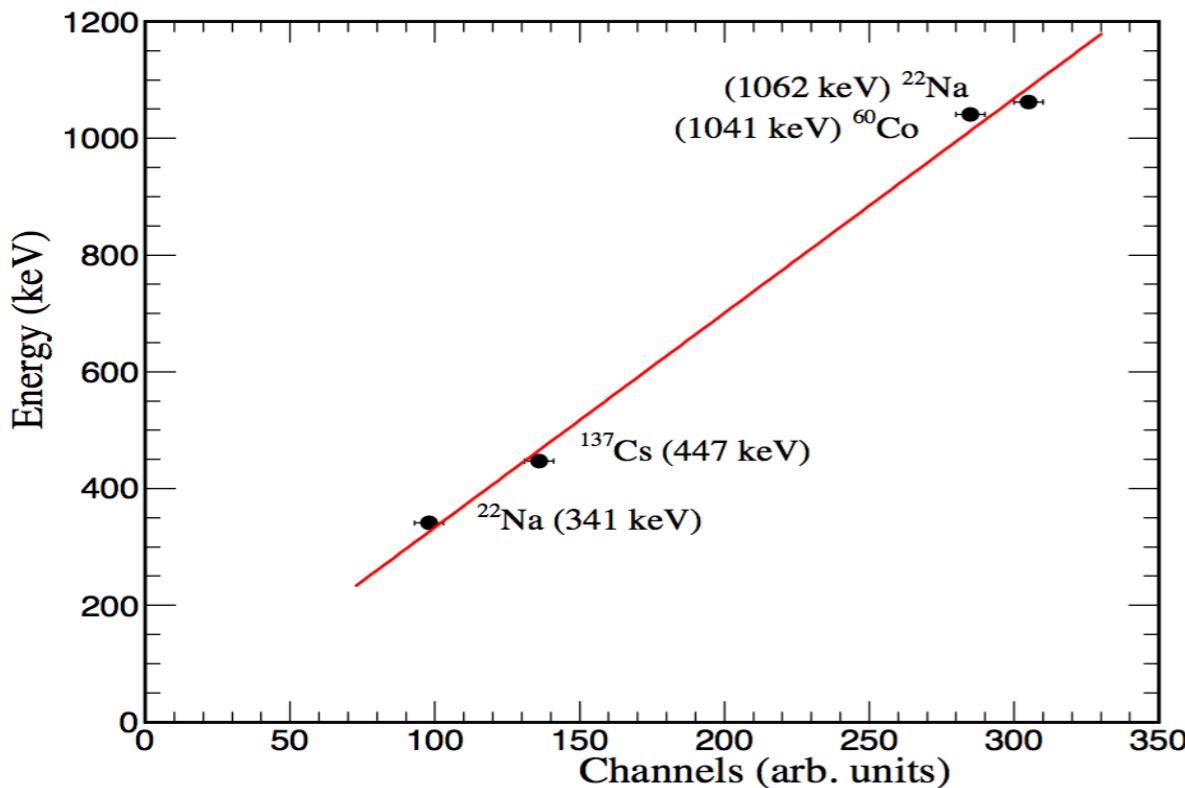

Some results: A few of spectra

E. V. Pagano et al. NIM A 889 (2018) 83-88

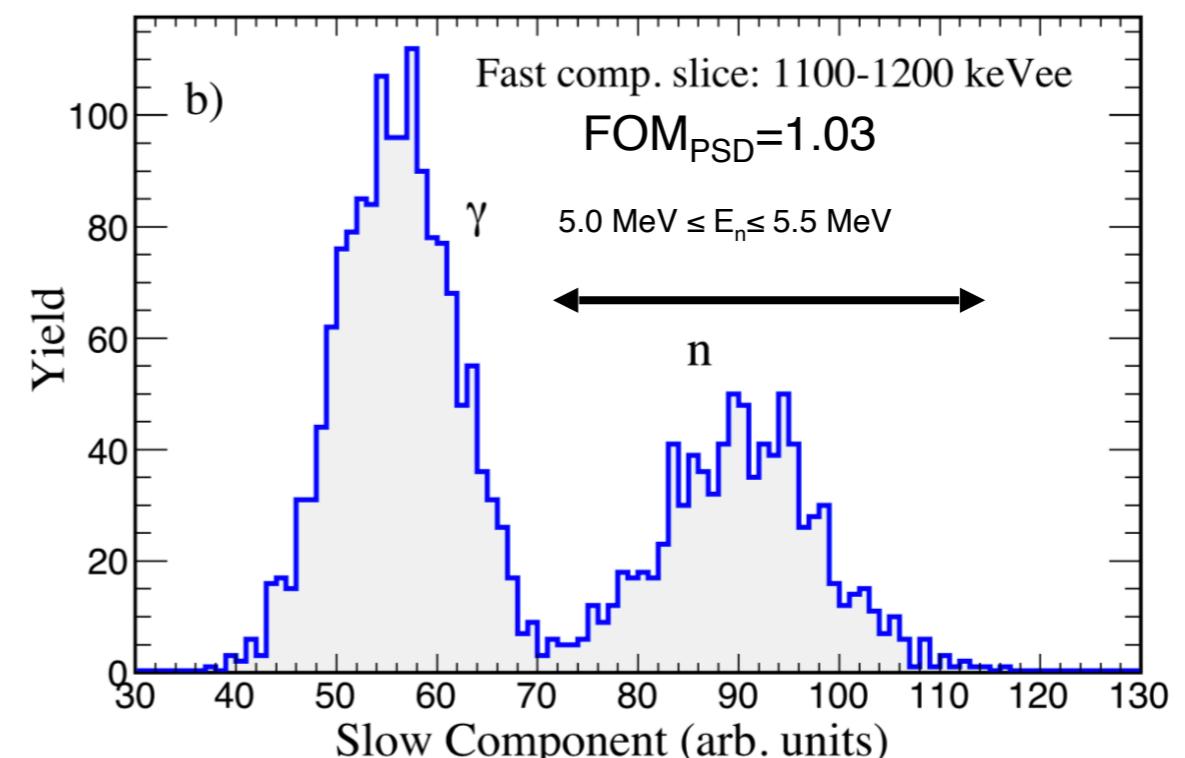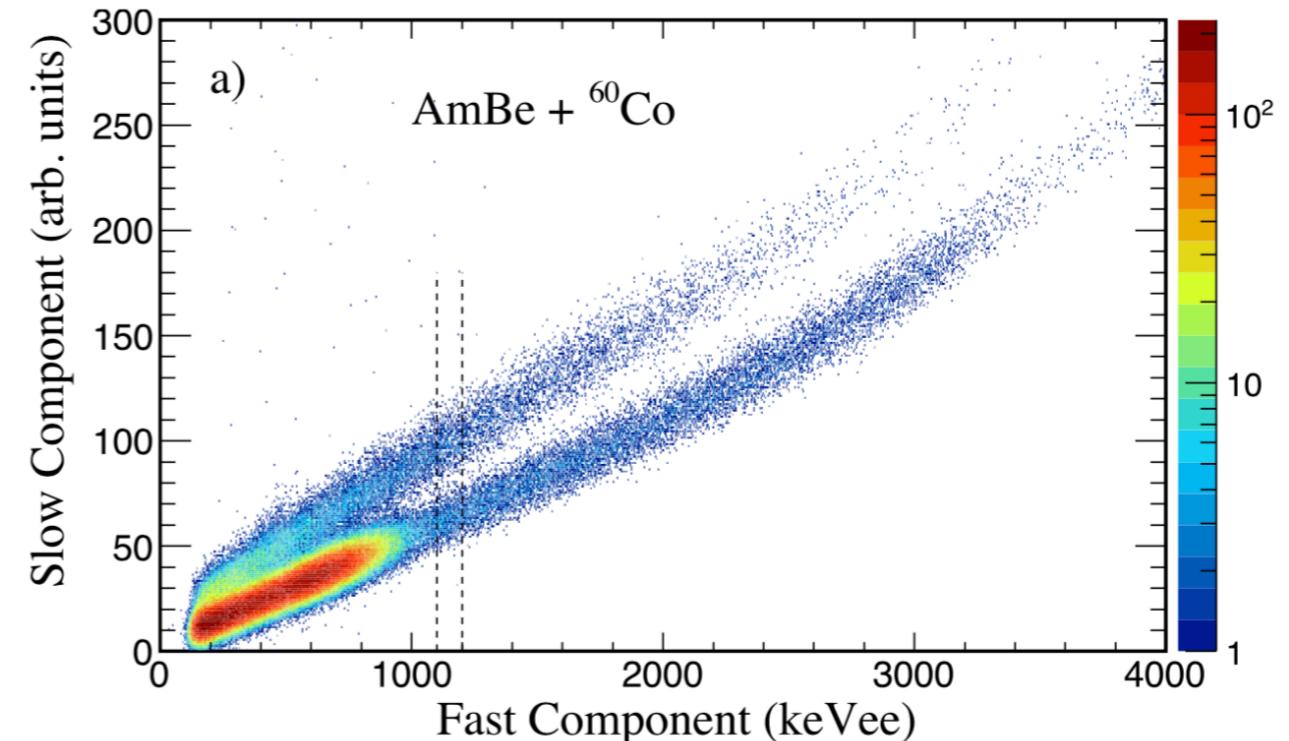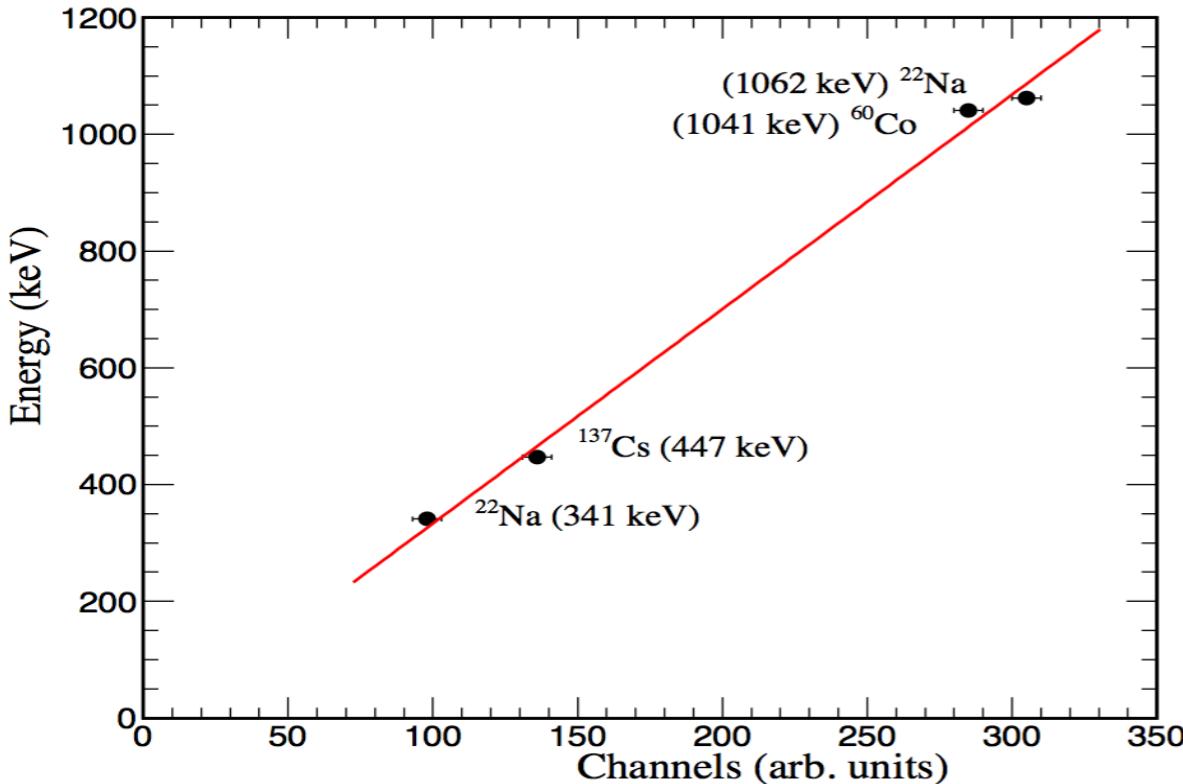

Detection threshold ≈ 0.7 MeV

Discrimination threshold ≈ 1.5 MeV ($FOM_{PSD}=0.43$)

$$L_{out} = A \cdot E_{dep} - B \cdot (1 - e^{-C E_{dep}})$$

$$A = 0.8 \text{ MeVee} \cdot \text{MeV}^{-1};$$


$$B = 3.9 \text{ MeVee},$$

$$C = 0.19 \text{ MeV}^{-1};$$


C. C. Lawrence et al., NIM A759 (2014) 16

Some results: A few of spectra

E. V. Pagano et al. NIM A 889 (2018) 83-88

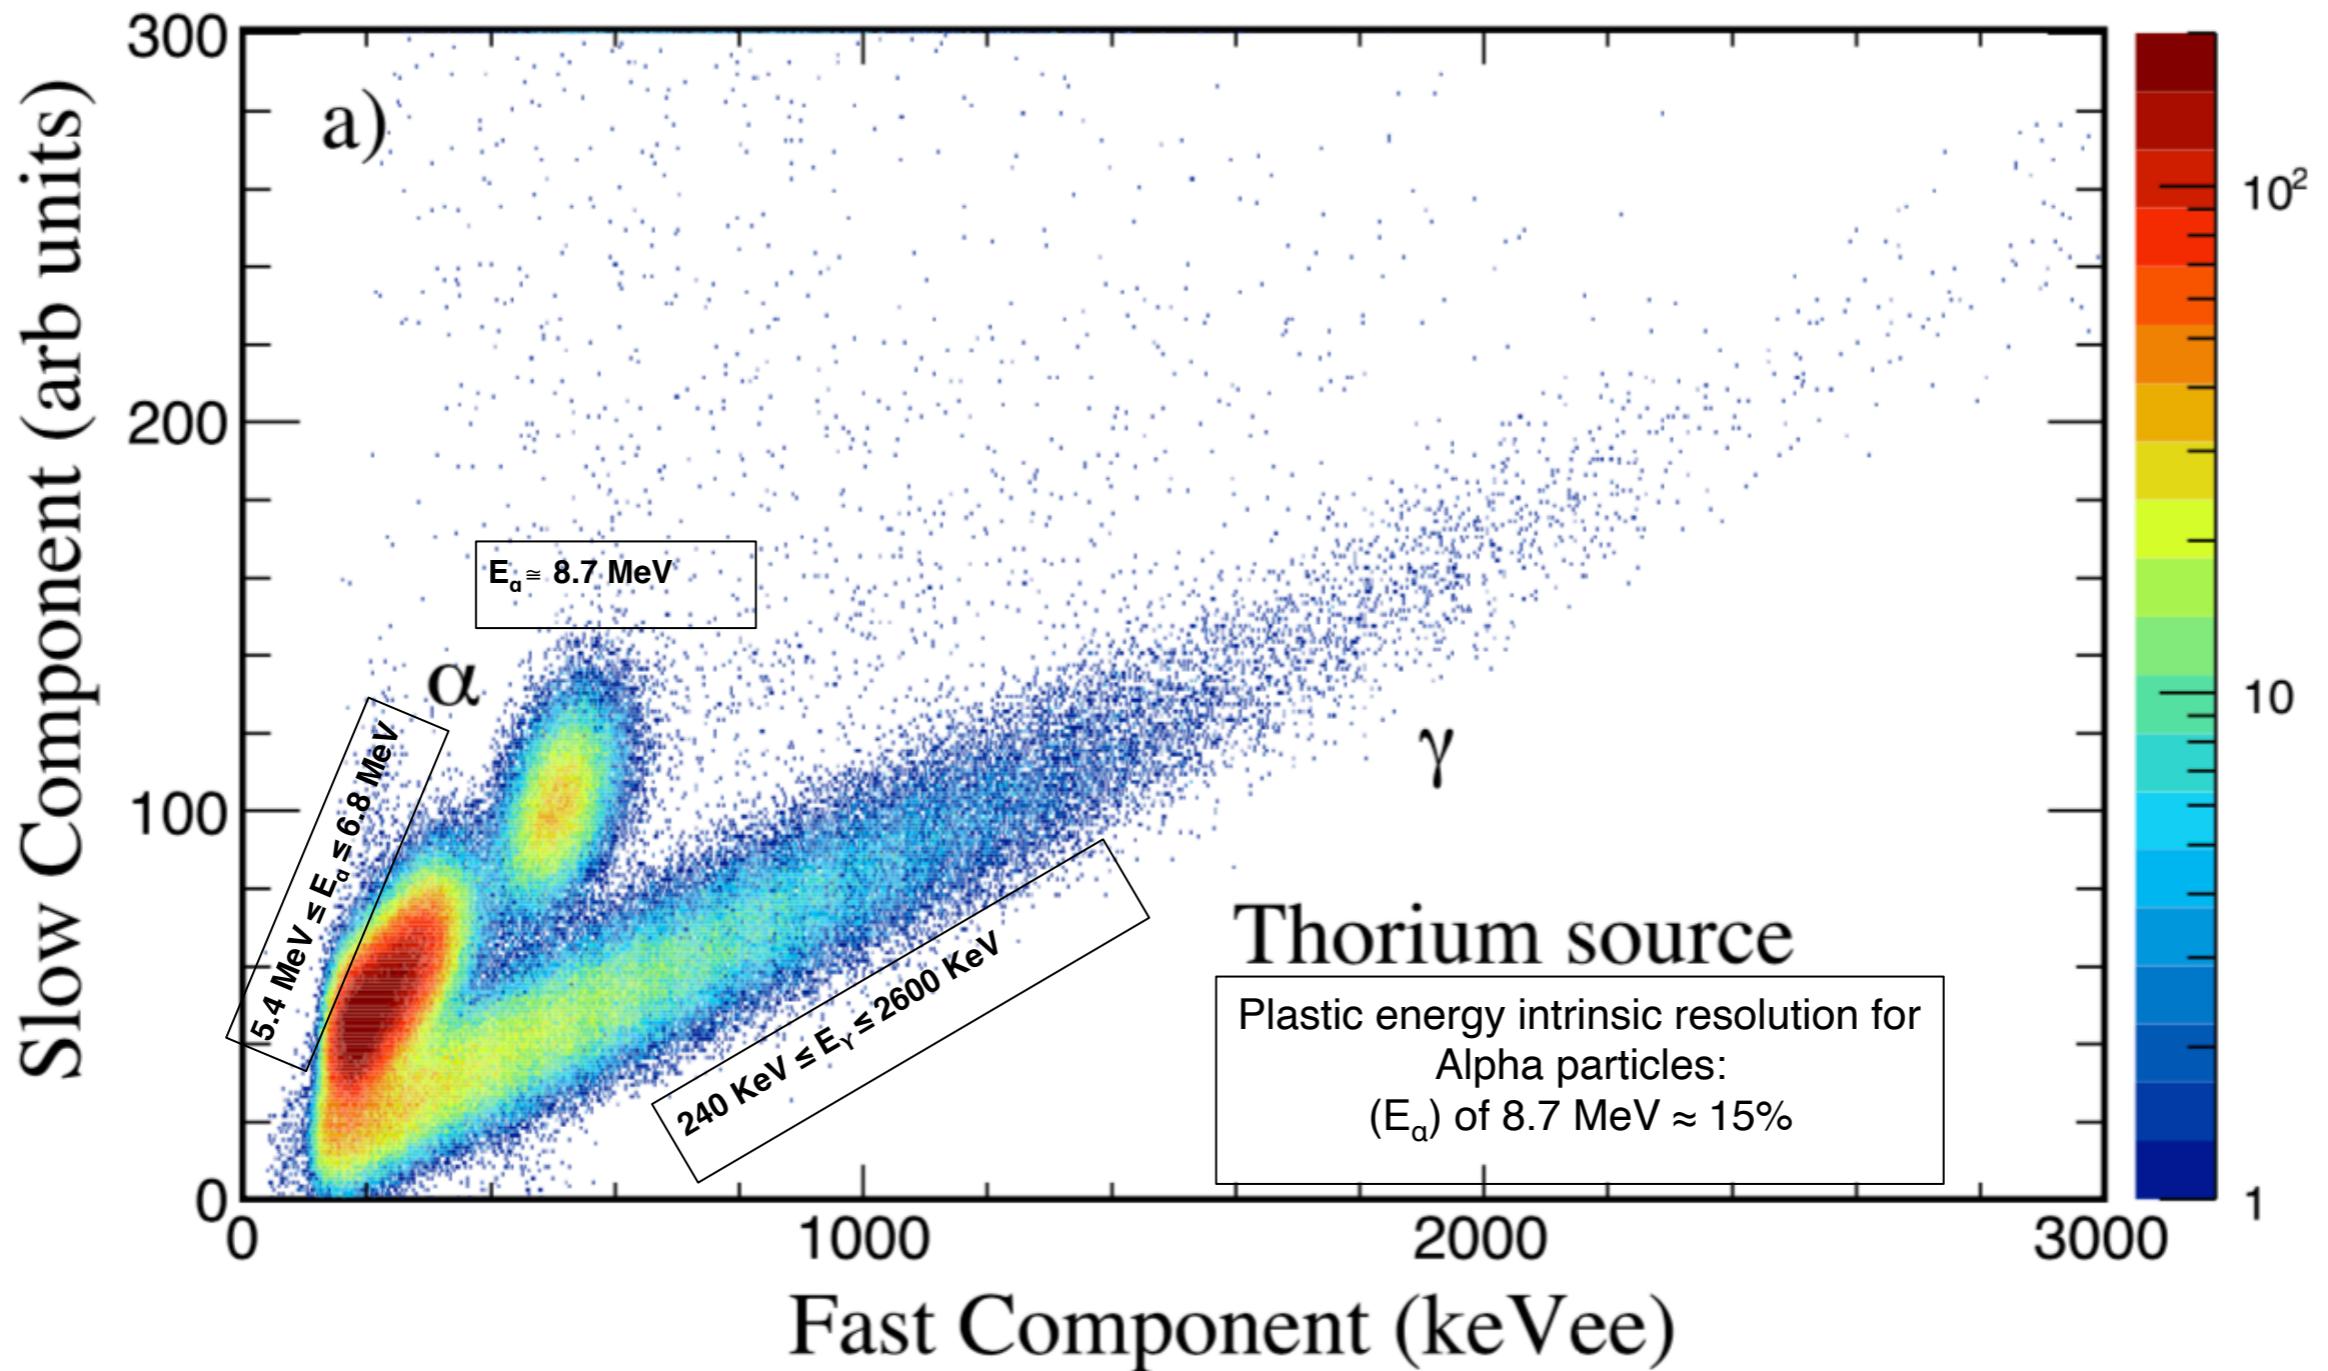


Some results: A few of spectra

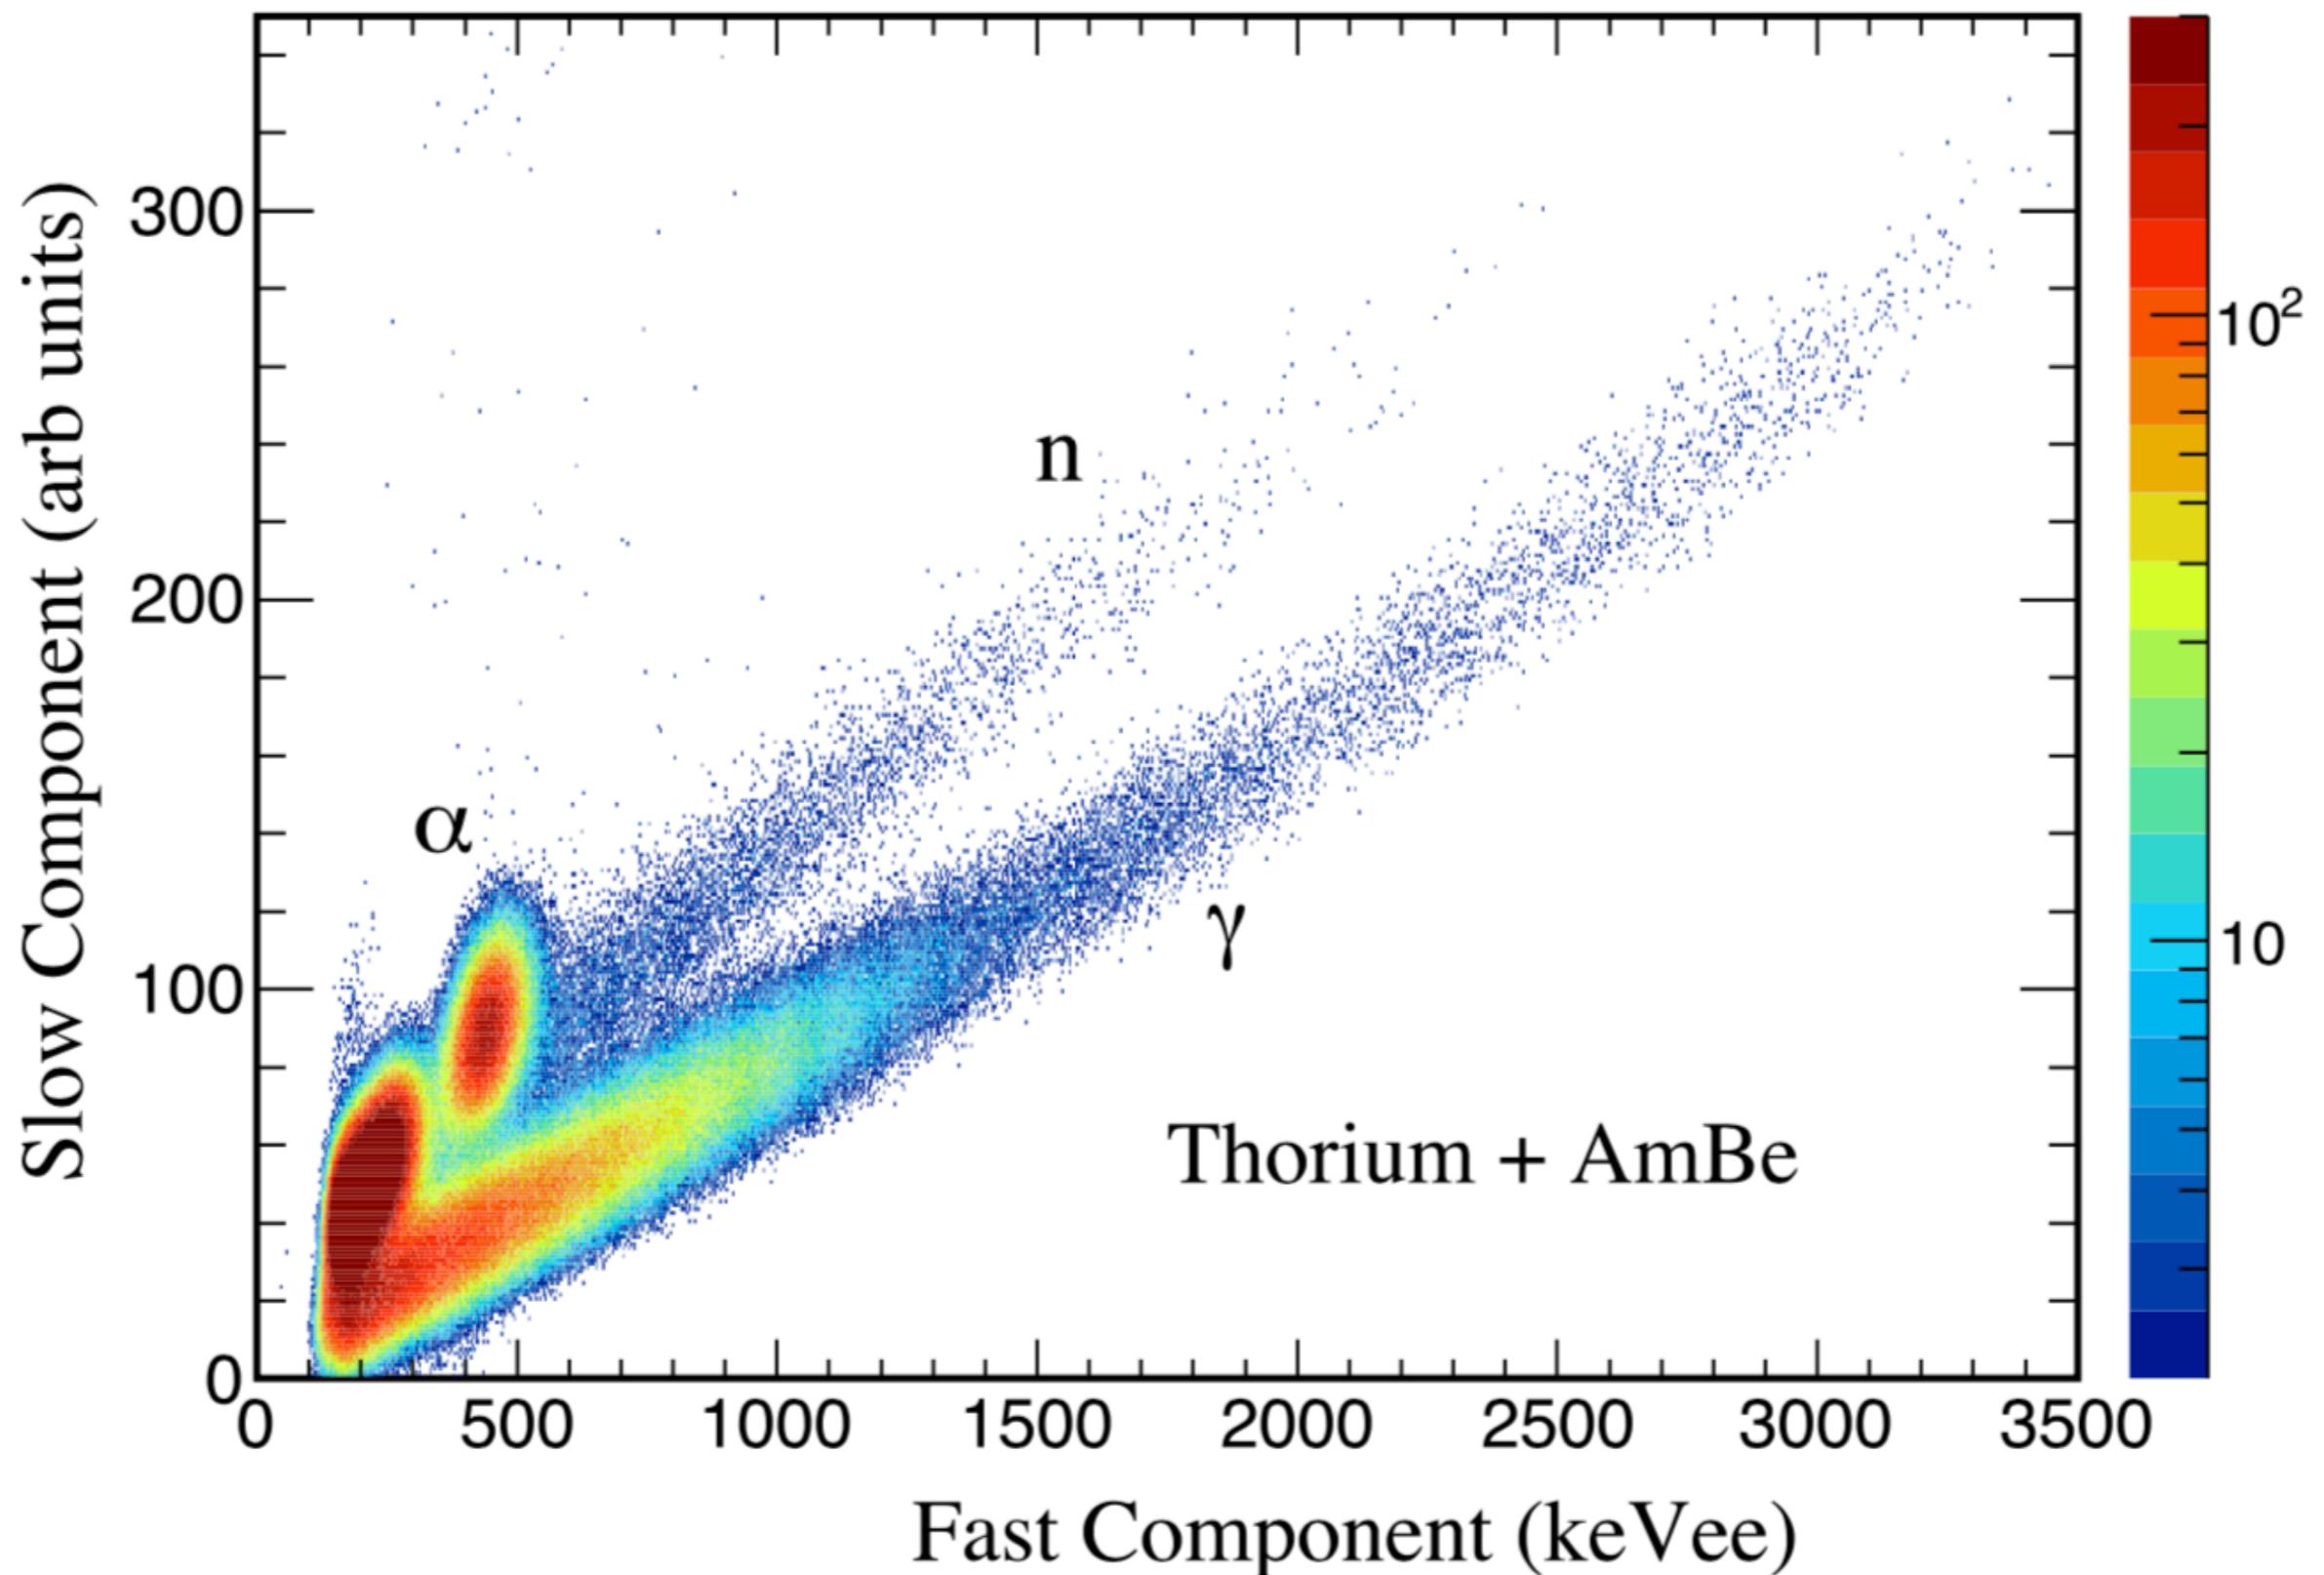


Second results: tests in high background condition

The test was done during the Barrier experiment @ LNS $^{24}\text{Mg} + ^{90,92}\text{Zr}$ @ $71.5\text{MeV} < E < 81 \text{ MeV}$

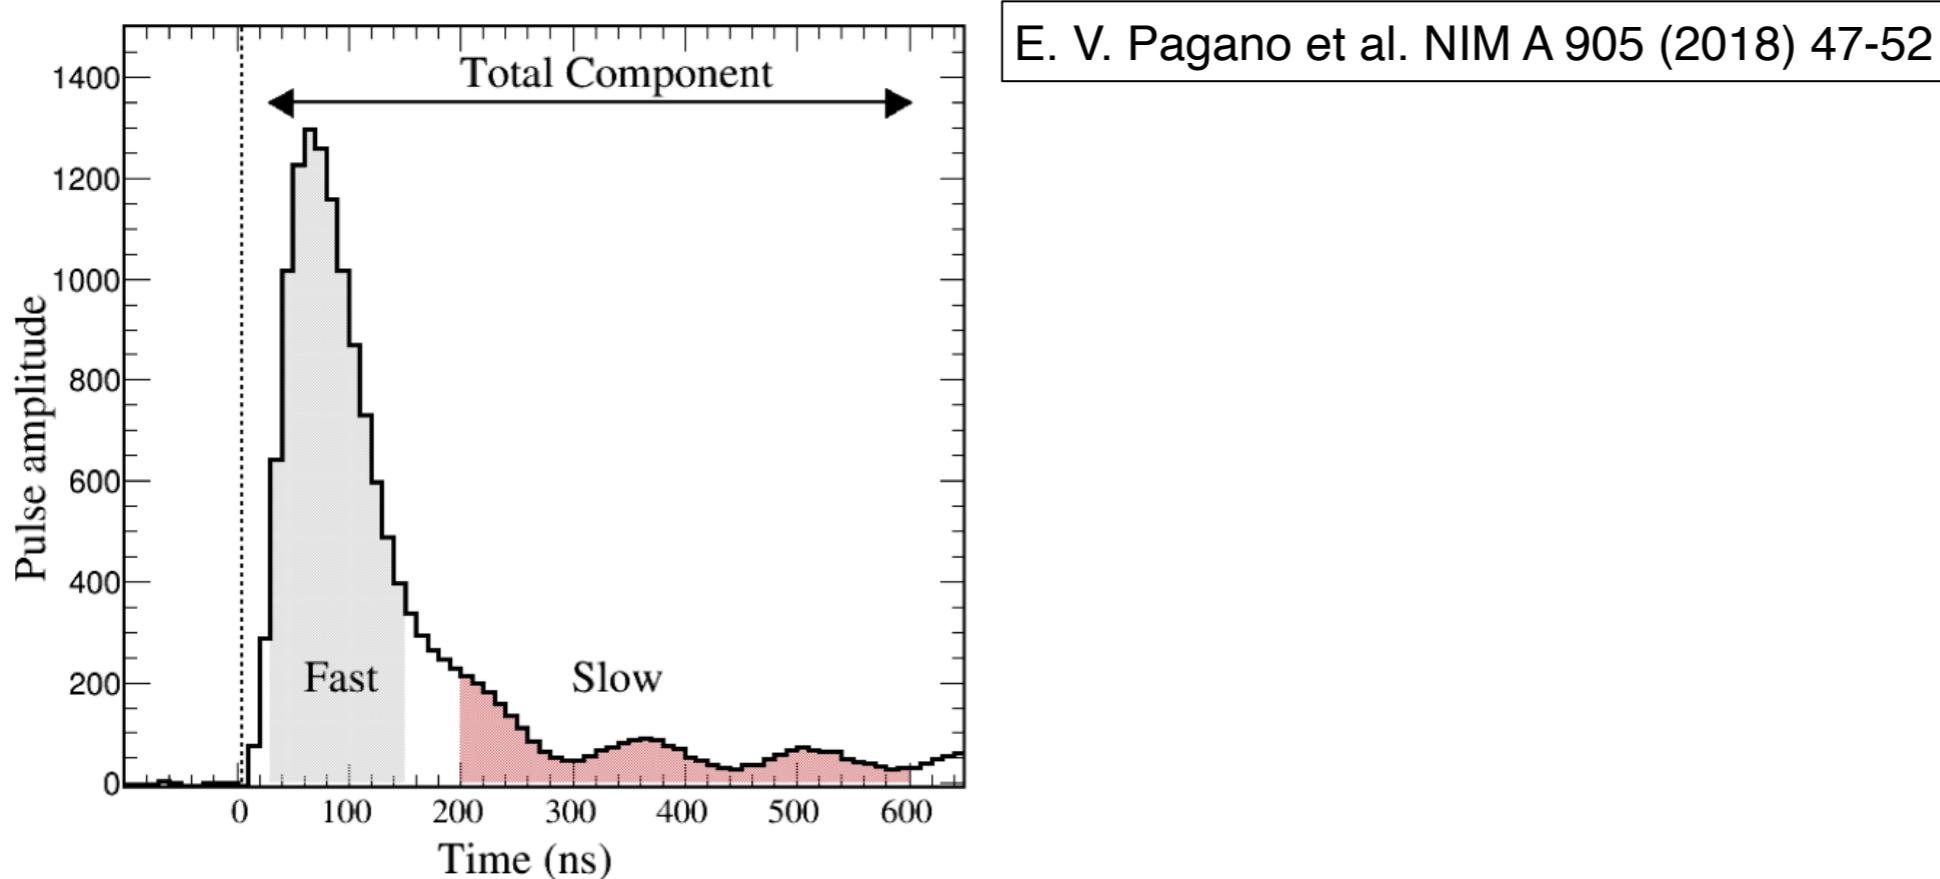


Second results: tests in high background condition

The test was done during the Barrier experiment @ LNS $^{24}\text{Mg} + ^{90,92}\text{Zr}$ @ $71.5\text{MeV} < E < 81 \text{ MeV}$

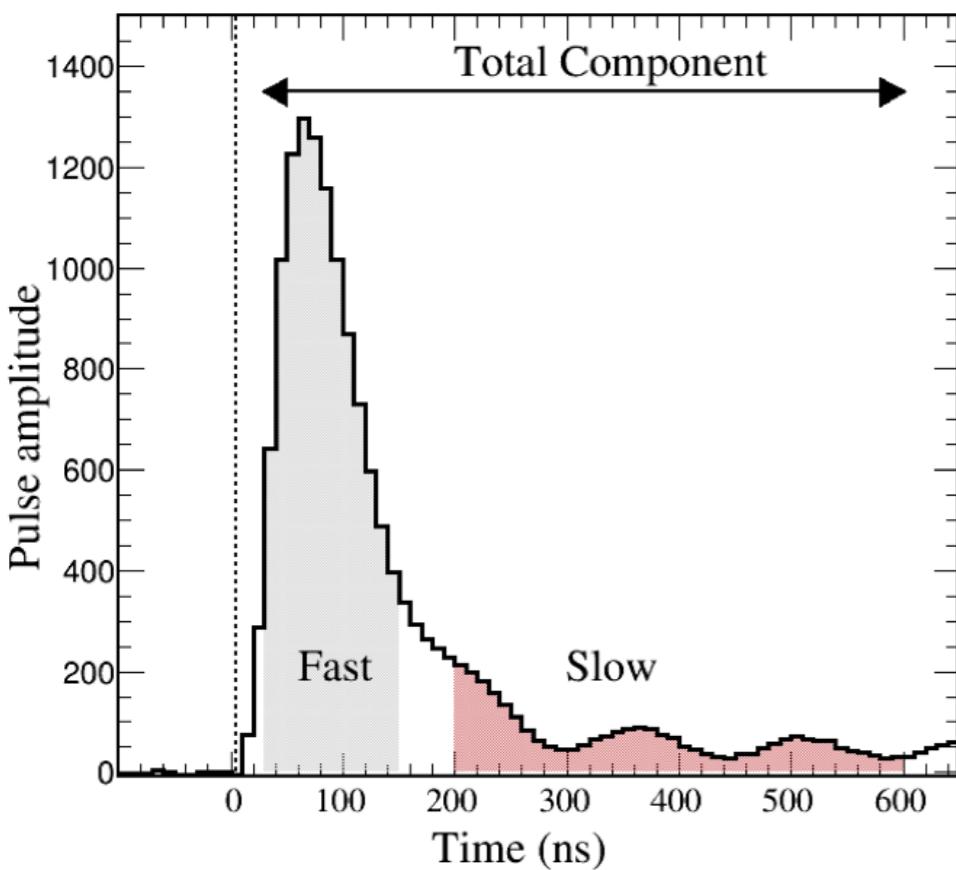


E. V. Pagano et al. NIM A 905 (2018) 47-52


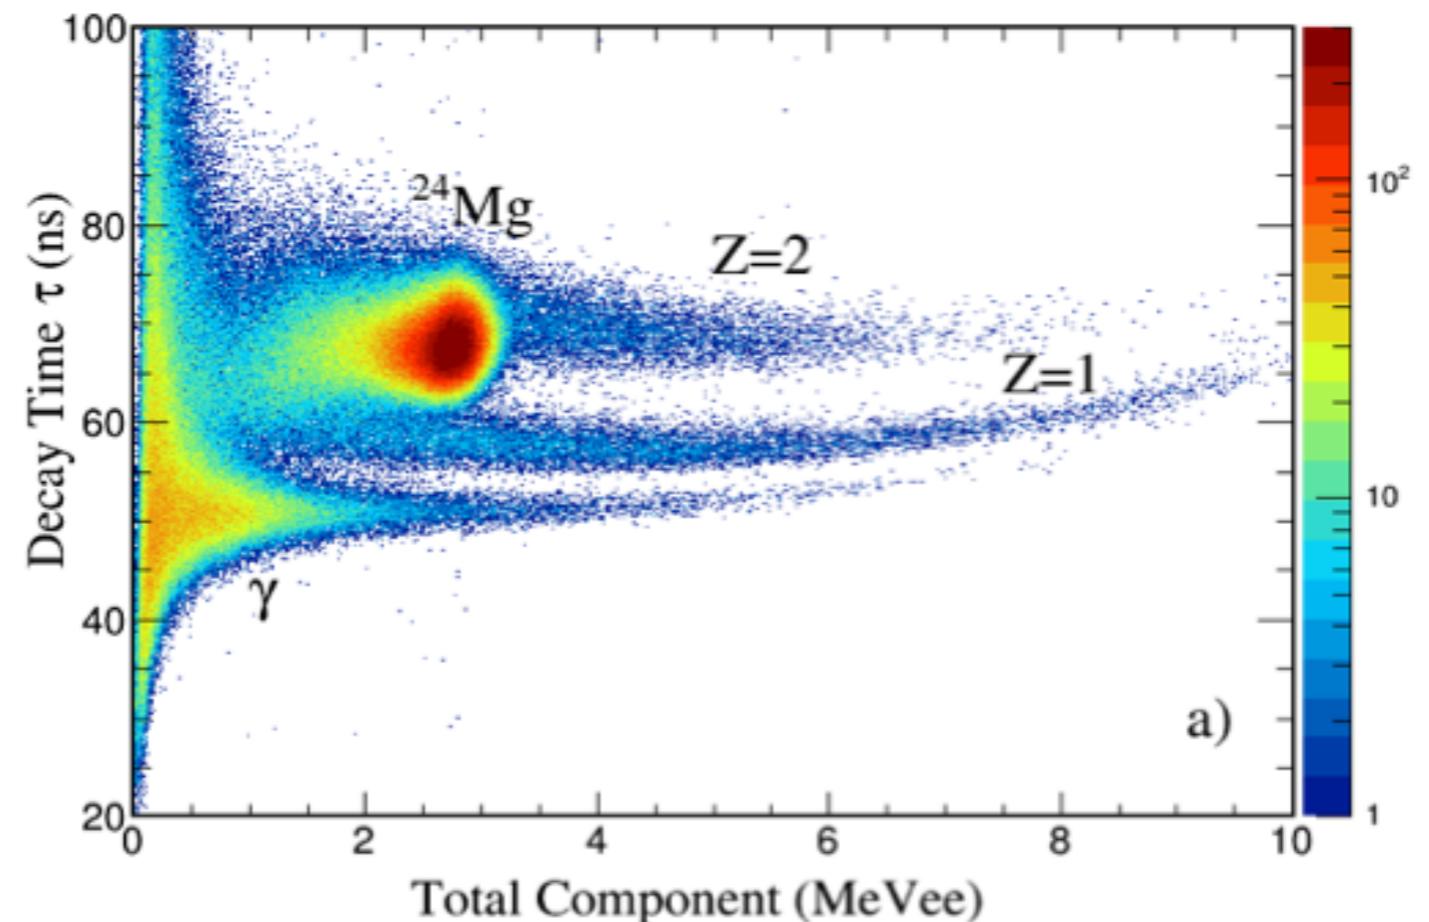


Second results: tests in high background condition

The test was done during the Barrier experiment @ LNS $^{24}\text{Mg} + ^{90,92}\text{Zr}$ @ $71.5\text{MeV} < E < 81 \text{ MeV}$

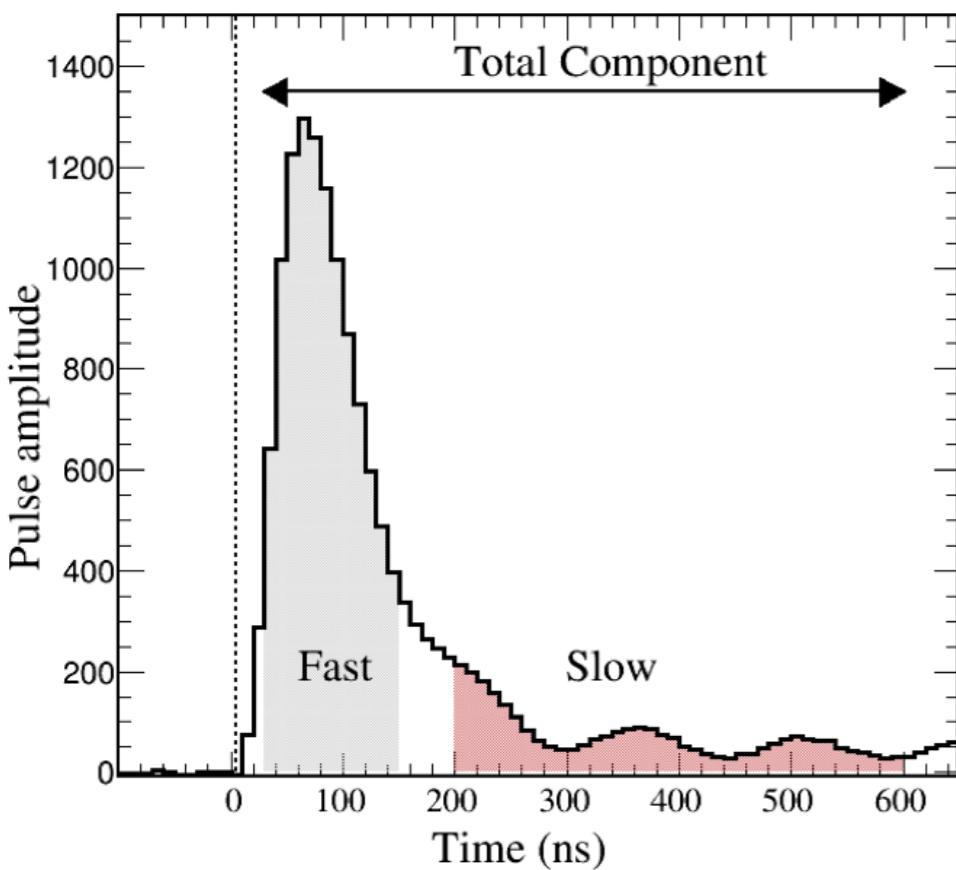


E. V. Pagano et al. NIM A 905 (2018) 47-52


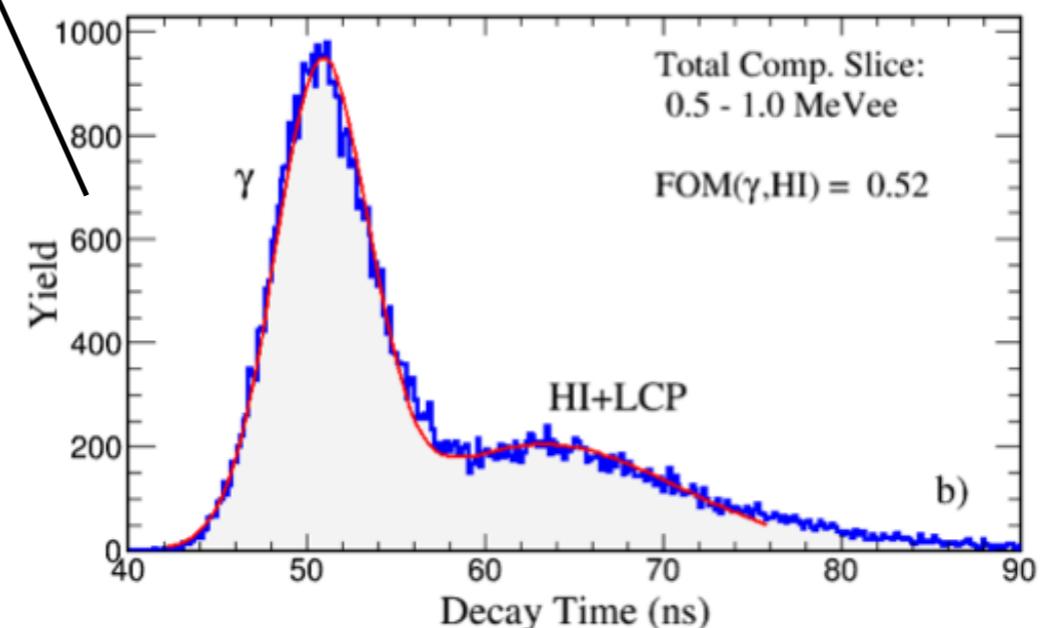
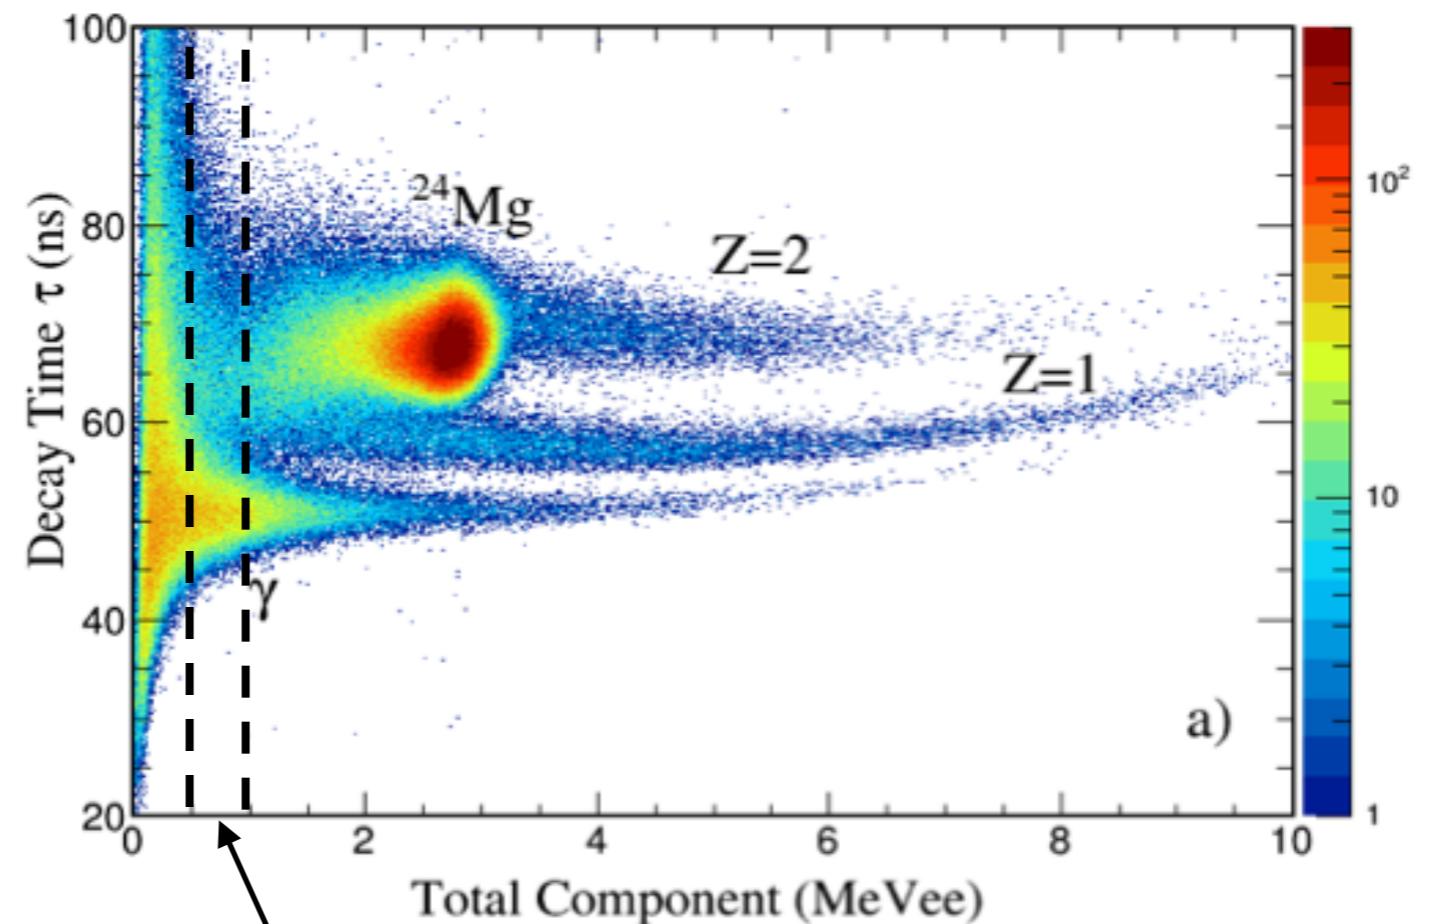


Second results: tests in high background condition

The test was done during the Barrier experiment @ LNS $^{24}\text{Mg} + ^{90,92}\text{Zr}$ @ $71.5\text{MeV} < E < 81 \text{ MeV}$

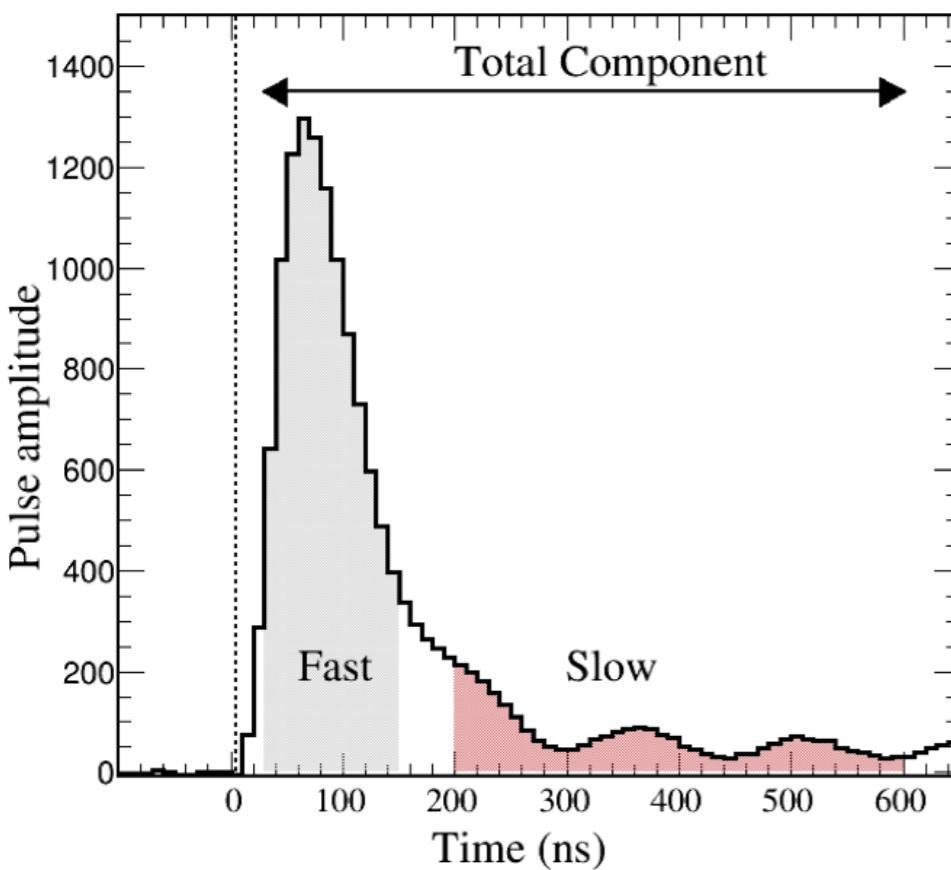

E. V. Pagano et al. NIM A 905 (2018) 47-52

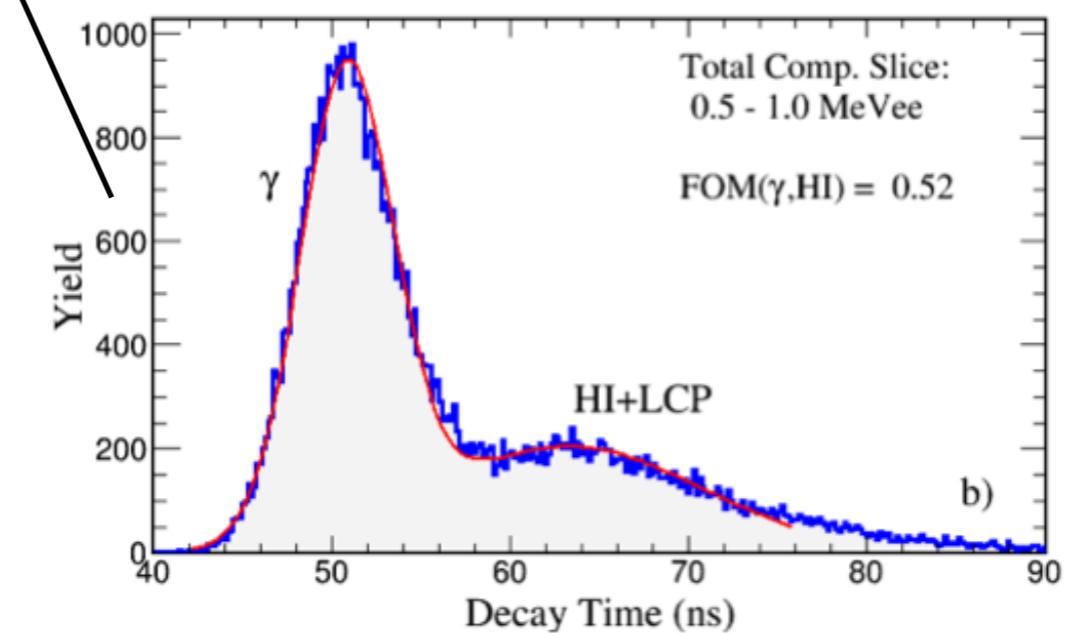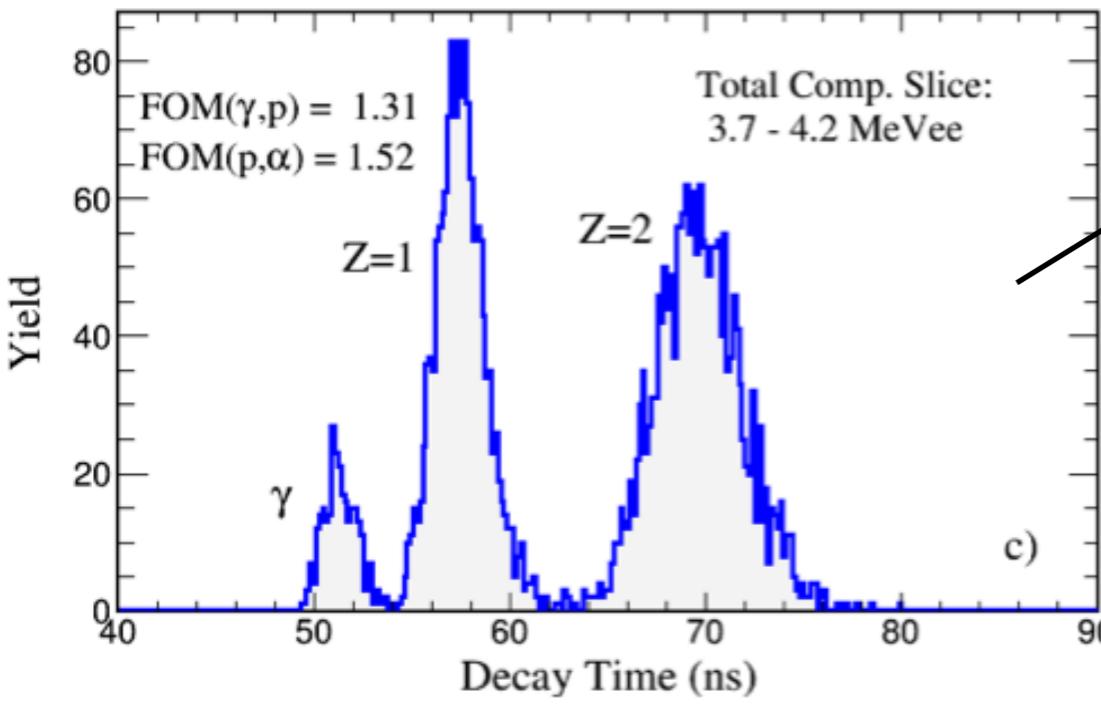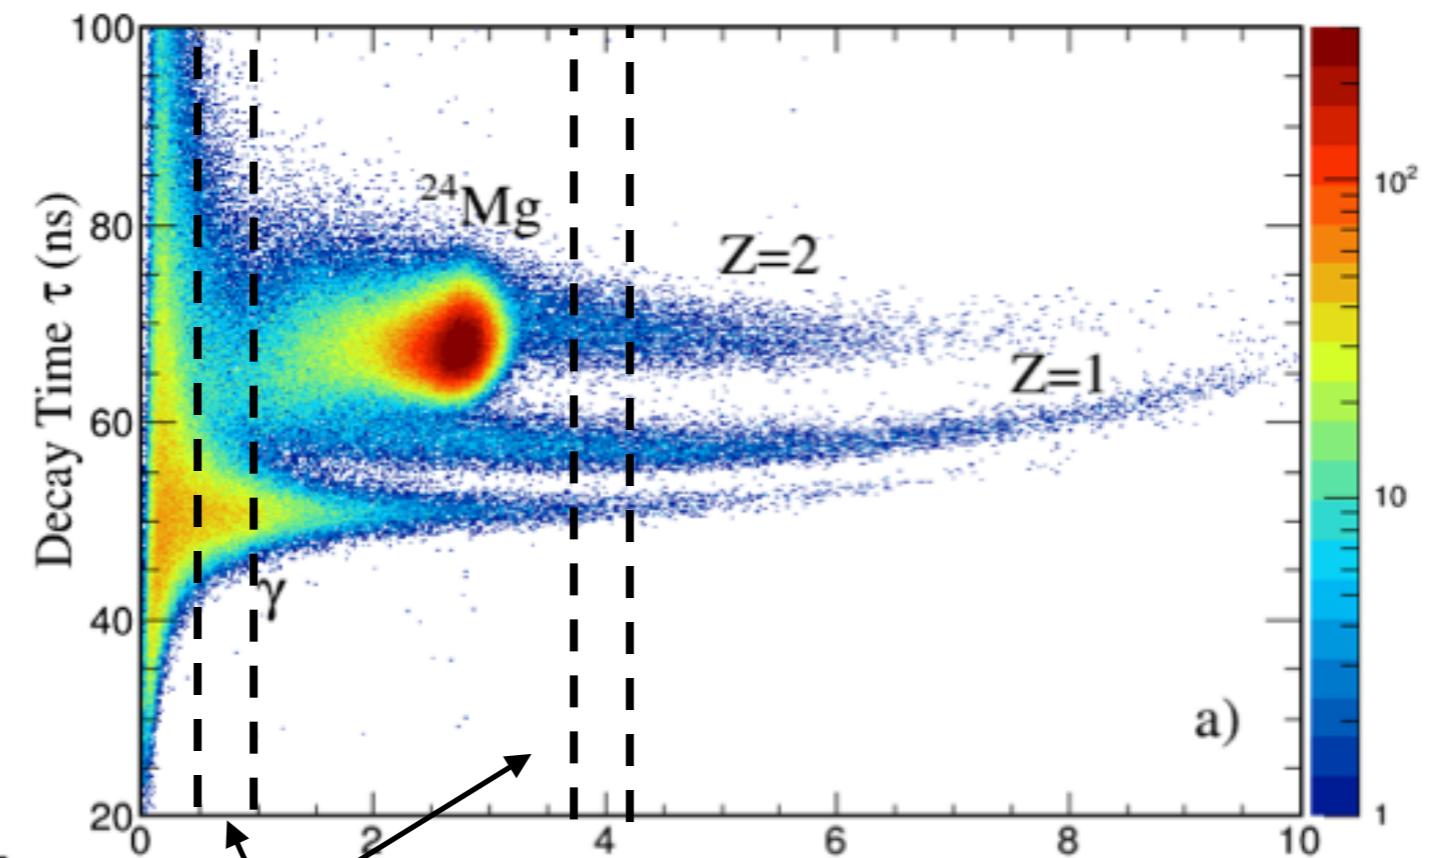

Purposes of the project

Energy of interest: $5 \leq E \leq 100$ AMeV (having particular attention to the Fermi regime)

Nuclear fundamental physics

- Intensity interferometry (HBT effect)
n-n, n-p, n-LCP, n-IMF, n-TLF, n-PLF
- Studies related to the nuclear symmetry energy (EOS) and its dependence to the nuclear density
- Neutron stars (nuclear astrophysics)
- Reaction mechanism
- Reaction times
- Clustering
- Validation of nuclear dynamics model (BUU,QMD)
- Measurements of the neutron signal in the n-rich RIBs (SPES, SPIRAL2, FRIB, FAIR)

Some applications

- Radioprotection
- Measurement of neutron flux (single measurement, cross section)
- Validation of MC based code (GEANT4, MCNPX)
- Homeland security

Purposes of the project: a few example for the fundamental nuclear physic

Intensity interferometry (HBT effect)

Correlation functions

$$1 + R(q) = C \frac{Y_{Coinc}(q)}{Y_{Uncor}(q)}$$

Space-time characterization of the emitting source

Purposes of the project: a few example for the fundamental nuclear physic

Intensity interferometry (HBT effect)

N. Colonna et al., PRL 75, 23 (1995) 4190-4193

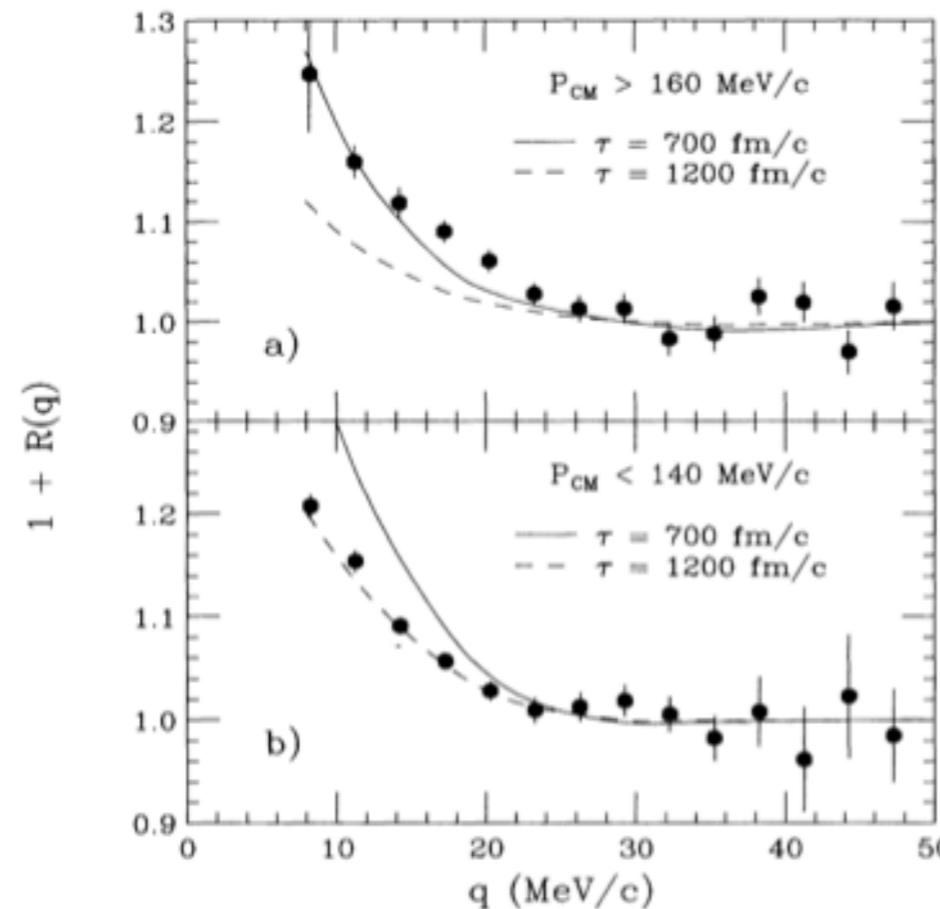


FIG. 3. Angle-integrated correlation functions for two cuts on the total neutron pair momentum in the compound nucleus frame. The solid and dashed curves are results of theoretical calculations with the indicated emission time scales.

$$1 + R(q) = C \frac{Y_{Coinc}(q)}{Y_{Uncor}(q)}$$

ion of the emitting source

Purposes of the project: a few example for the fundamental nuclear physic

Intensity interferometry (HBT effect)

N. Colonna et al., PRL 75, 23 (1995) 4190-4193

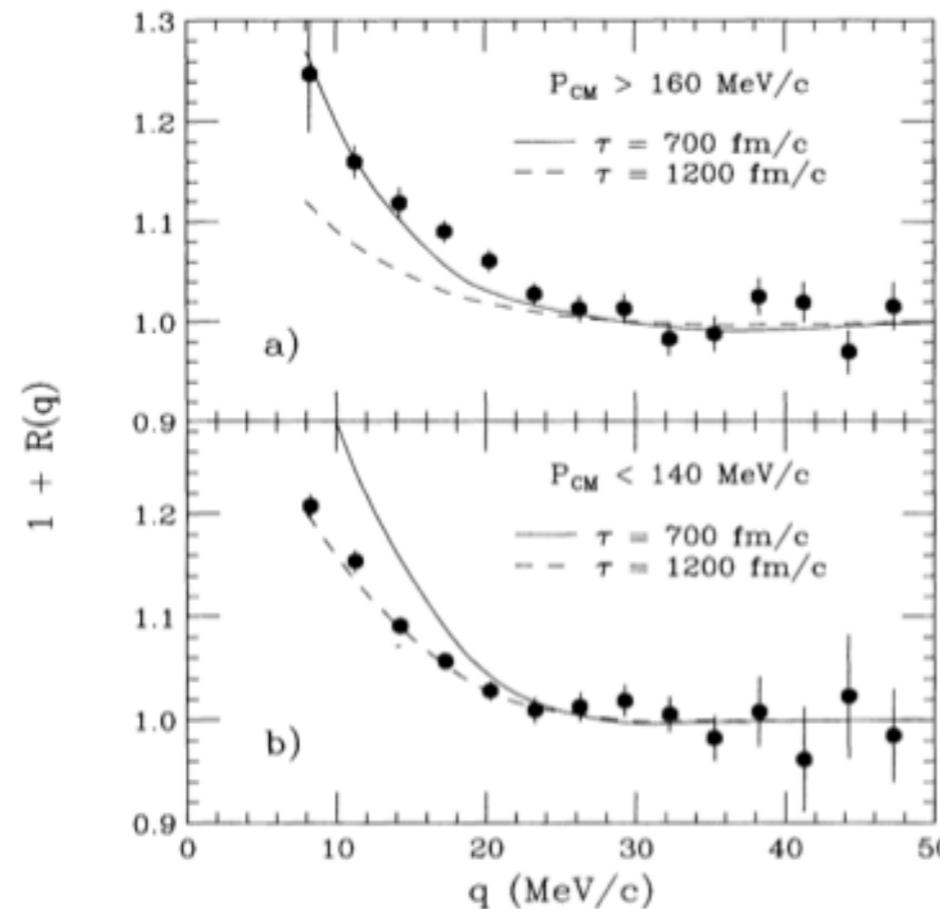


FIG. 3. Angle-integrated correlation functions for two cuts on the total neutron pair momentum in the compound nucleus frame. The solid and dashed curves are results of theoretical calculations with the indicated emission time scales.

R. Ghetti et al., PRL 87, 10 (2001)

$$1 + R(q)$$

ion of the er

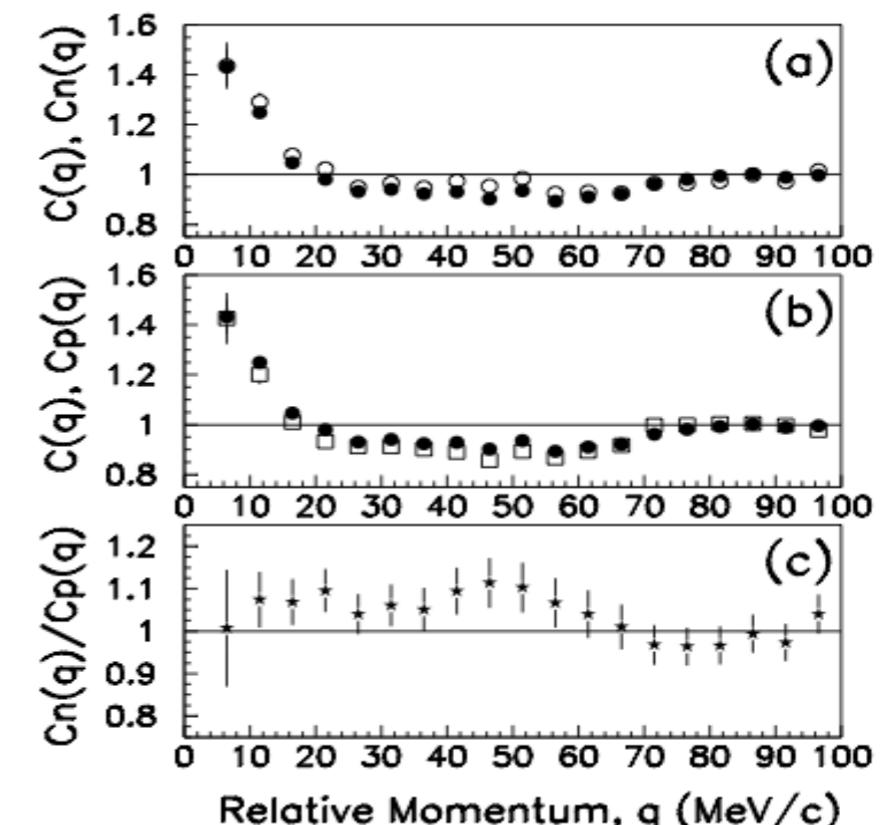


FIG. 2. Experimental ungated np correlation function $C(q)$, from the $E/A = 45$ MeV $^{58}\text{Ni} + ^{27}\text{Al}$ reaction [solid dots in panels (a),(b)] compared to panel (a), open circles: $C_n(q)$, constructed from pairs of type $E_n > E_p$, and panel (b), open squares: $C_p(q)$, constructed from pairs of type $E_n < E_p$. The ratio C_n/C_p is shown in panel (c).

Purposes of the project: a few example for the fundamental nuclear physic


Intensity interferometry (HBT effect)

Correlation functions

$$1 + R(q) = C \frac{Y_{Coinc}(q)}{Y_{Uncor}(q)}$$

Space-time characterization of the emitting source

Purposes of the project: a few example for the fundamental nuclear physic

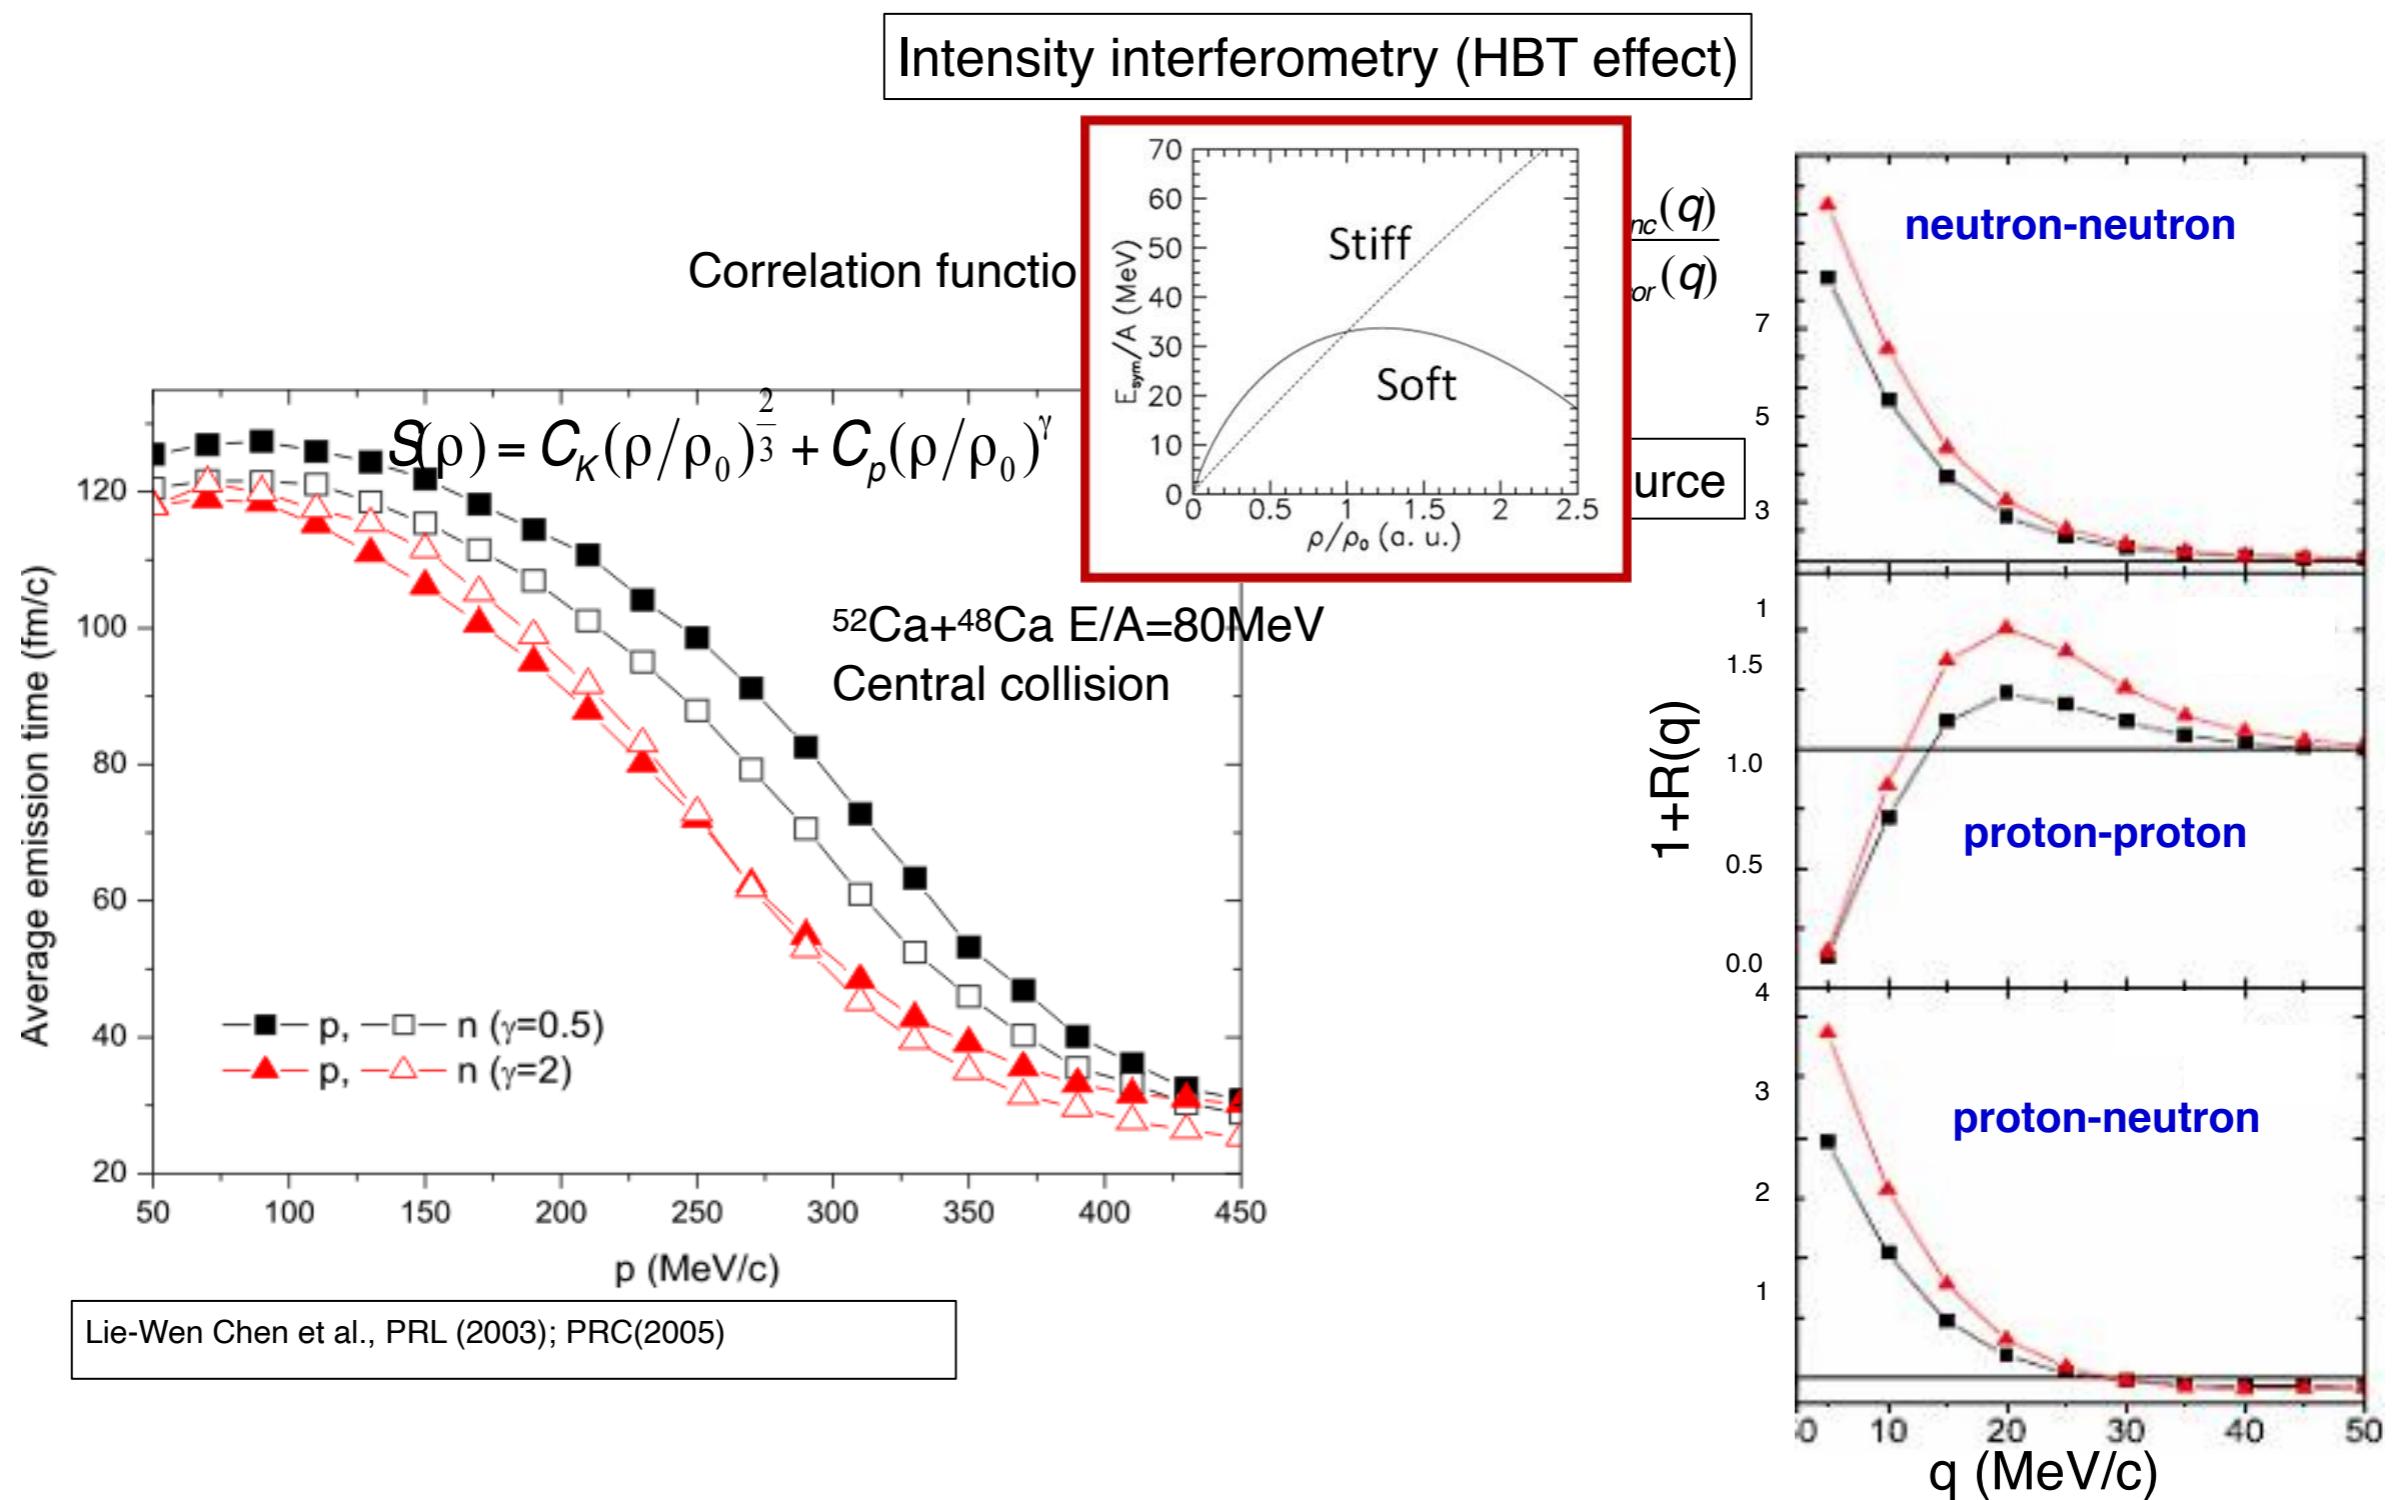

Purposes of the project: a few example applications

Anti-cancer therapy:
Risk of secondary radio-induced cancers

In proton therapy, in particular in the pediatric one (but not only), the “damage” caused from the neutron to the healthy cells is one of the principal causes of the so called “secondary radio-induced tumors” in particular if there are used degraders or collimators (passive technique)[1].

[1] Hall, E. J (2006) Intensity-modulated radiation therapy, protons, and the risk of second cancers.
Int J Radiat Oncol Biol Phys 65: 1-7.

Purposes of the project: a few example applications

Anti-cancer therapy: Risk of secondary radio-induced cancers

In proton therapy, in particular in the pediatric one (but not only), the “damage” caused from the neutron to the healthy cells is one of the principal causes of the so called “secondary radio-induced tumors” in particular if there are used degraders or collimators (passive technique)[1].

[1] Hall, E. J (2006) Intensity-modulated radiation therapy, protons, and the risk of second cancers.
Int J Radiat Oncol Biol Phys 65: 1-7.

Validation of Monte Carlo codes

Measurement of cross sections ($d^2\sigma/d\theta dE$) have a huge interest for the validations of Monte Carlo code like GEANT4 in particular for neutrons in the Fermi energy regime

Purposes of the project: a few example applications

Anti-cancer therapy: Risk of secondary radio-induced cancers

In proton therapy, in particular in the pediatric one (but not only), the “damage” caused from the neutron to the healthy cells is one of the principal causes of the so called “secondary radio-induced tumors” in particular if there are used degraders or collimators (passive technique)[1].

[1] Hall, E. J (2006) Intensity-modulated radiation therapy, protons, and the risk of second cancers.
Int J Radiat Oncol Biol Phys 65: 1-7.

Validation of Monte Carlo codes


Measurement of cross sections ($d^2\sigma/d\theta dE$) have a huge interest for the validations of Monte Carlo code like GEANT4 in particular for neutrons in the Fermi energy regime

Neutron Camera

Possible device for homeland security and health safety to be installed in airports, ports, etc...



Perspectives

FIRST RESULT ON EJ276 green coupled with Si-PD *

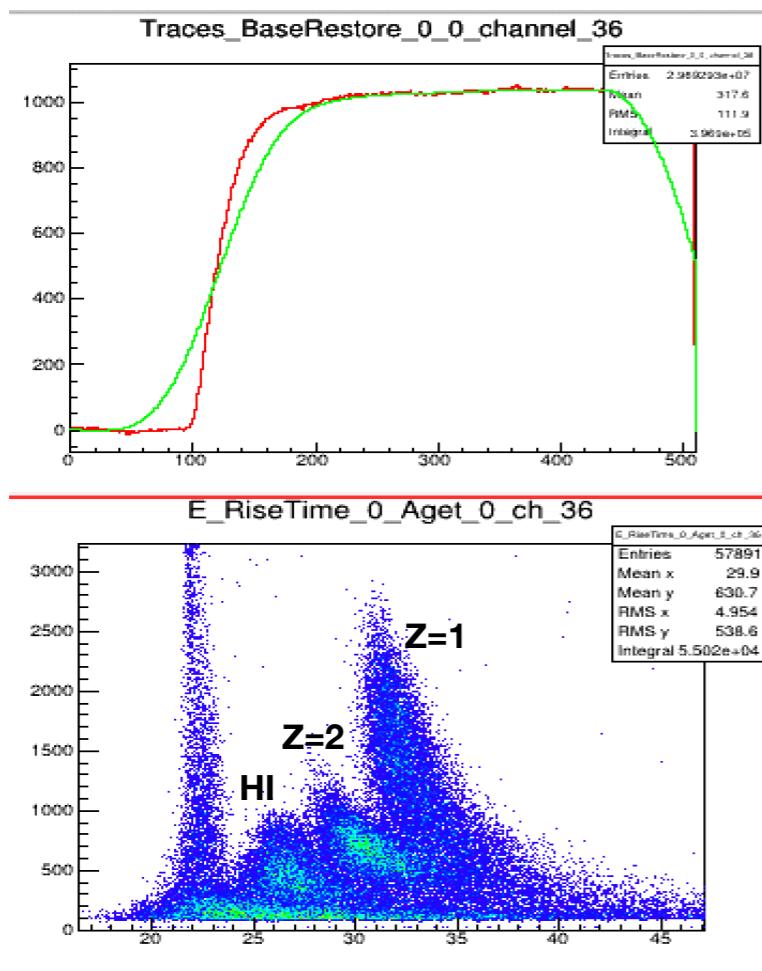

FIRST RESULT ON EJ276 (ordinary) coupled with Si-PM **

$^{112}\text{Sn} + ^{64}\text{Zn}$ @ 20MeV/A
CHIFAR Experiment LNS
November 2019

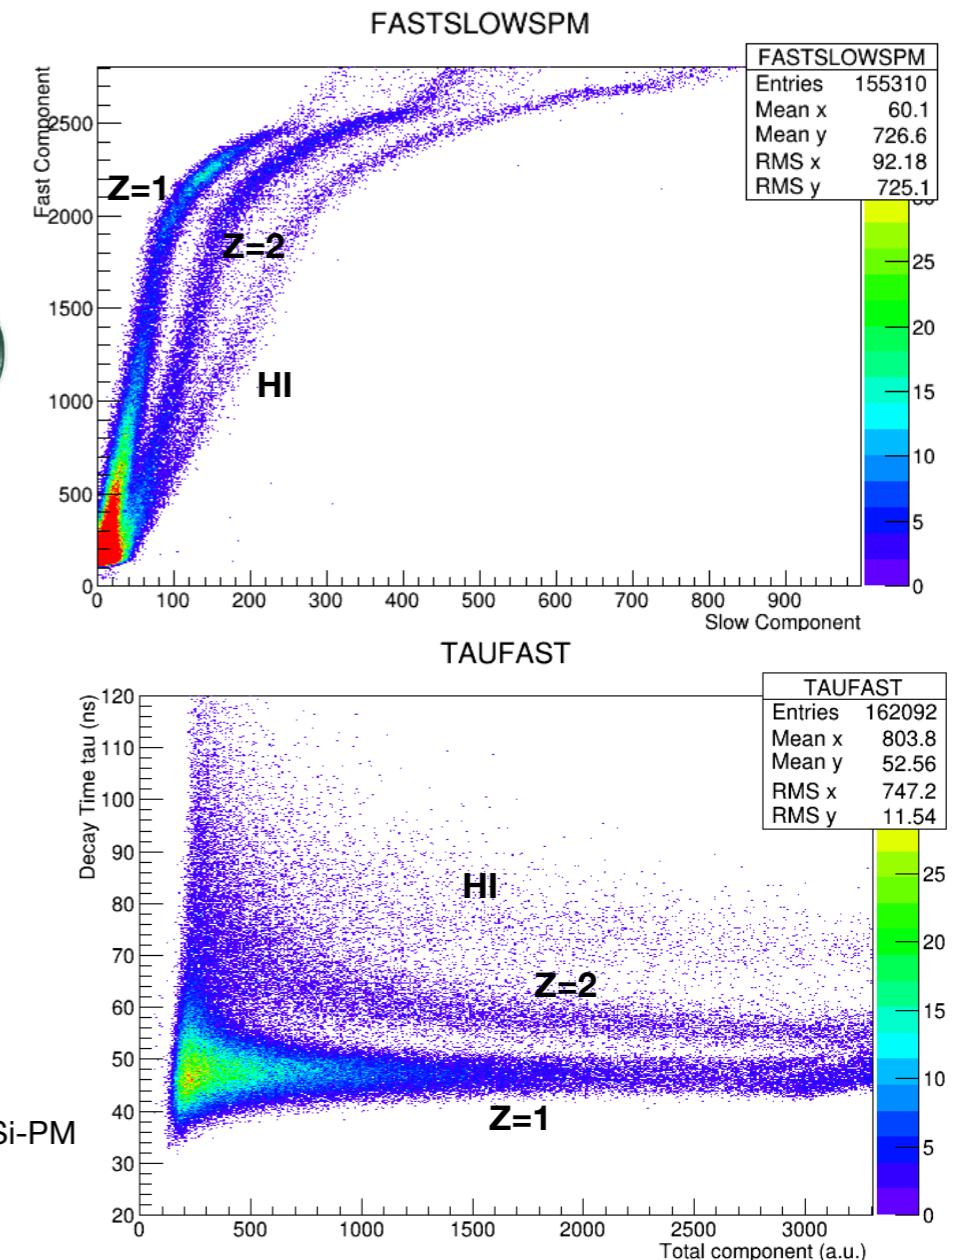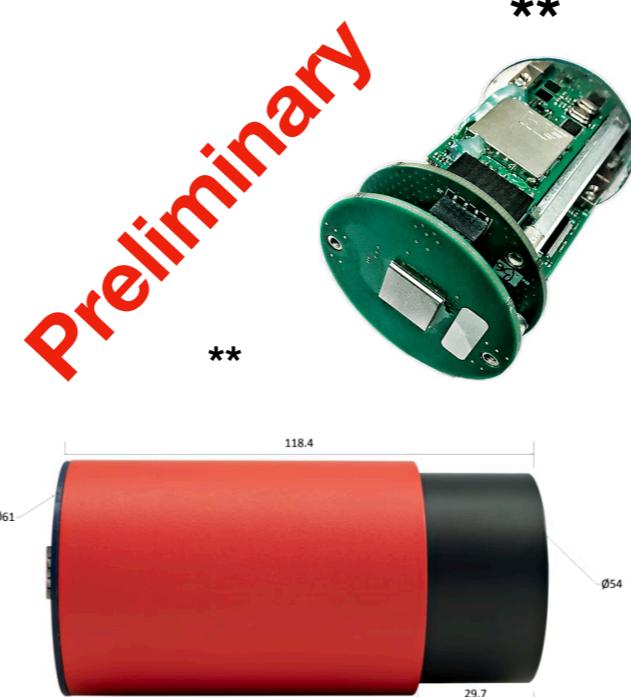

New test experiment proposed to next PAC @ LNS: PLASTICTEST

The idea of the test is to study the performances of the EJ276G coupled with Si-PD and of the EJ276 coupled with Si-PM about energy resolution, neutron detection efficiency, timing and PSD properties.

We also want to make a preliminary study about the background reduction and the crosstalk problem

Using the reaction :



Mean neutron of about 14 and 10 MeV at about 20° (lab frame)

* Hamamatsu PIN photodiode 28X28 mm² (S3584 series)

** i-Spector produce by CAEN

Conclusions

The results carried out so far are with EJ276 coupled by PM are encouraging. It seems possible to build a versatile and modular detector for neutrons and light charged particles with high angular and energy resolution, read by using silicon technology and signal digitalization. The studies of the background and of the cross-talk problems and theirs influence on the experimental results are going on using the GEANT4 software. The studies on the timing properties of the EJ-276 green version and its PSD capability, performed by using silicon technology(PD, or SiMP) are going on.



Conclusions

The results carried out so far are with EJ276 coupled by PM are encouraging. It seems possible to build a versatile and modular detector for neutrons and light charged particles with high angular and energy resolution, read by using silicon technology and signal digitalization. The studies of the background and of the cross-talk problems and theirs influence on the experimental results are going on using the GEANT4 software. The studies on the timing properties of the EJ-276 green version and its PSD capability, performed by using silicon technology(PD, or SIMP) are going on.

Thank you for the attention



Backup Slides

Just few numbers

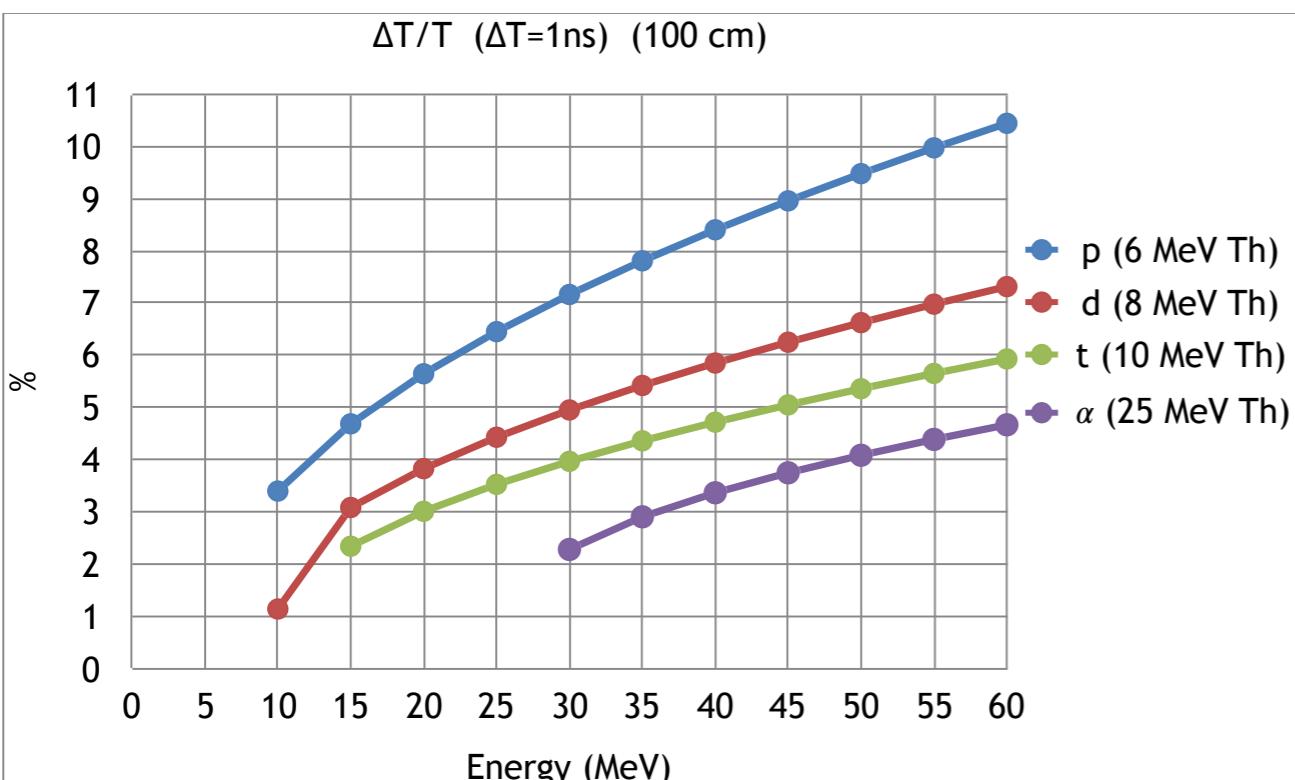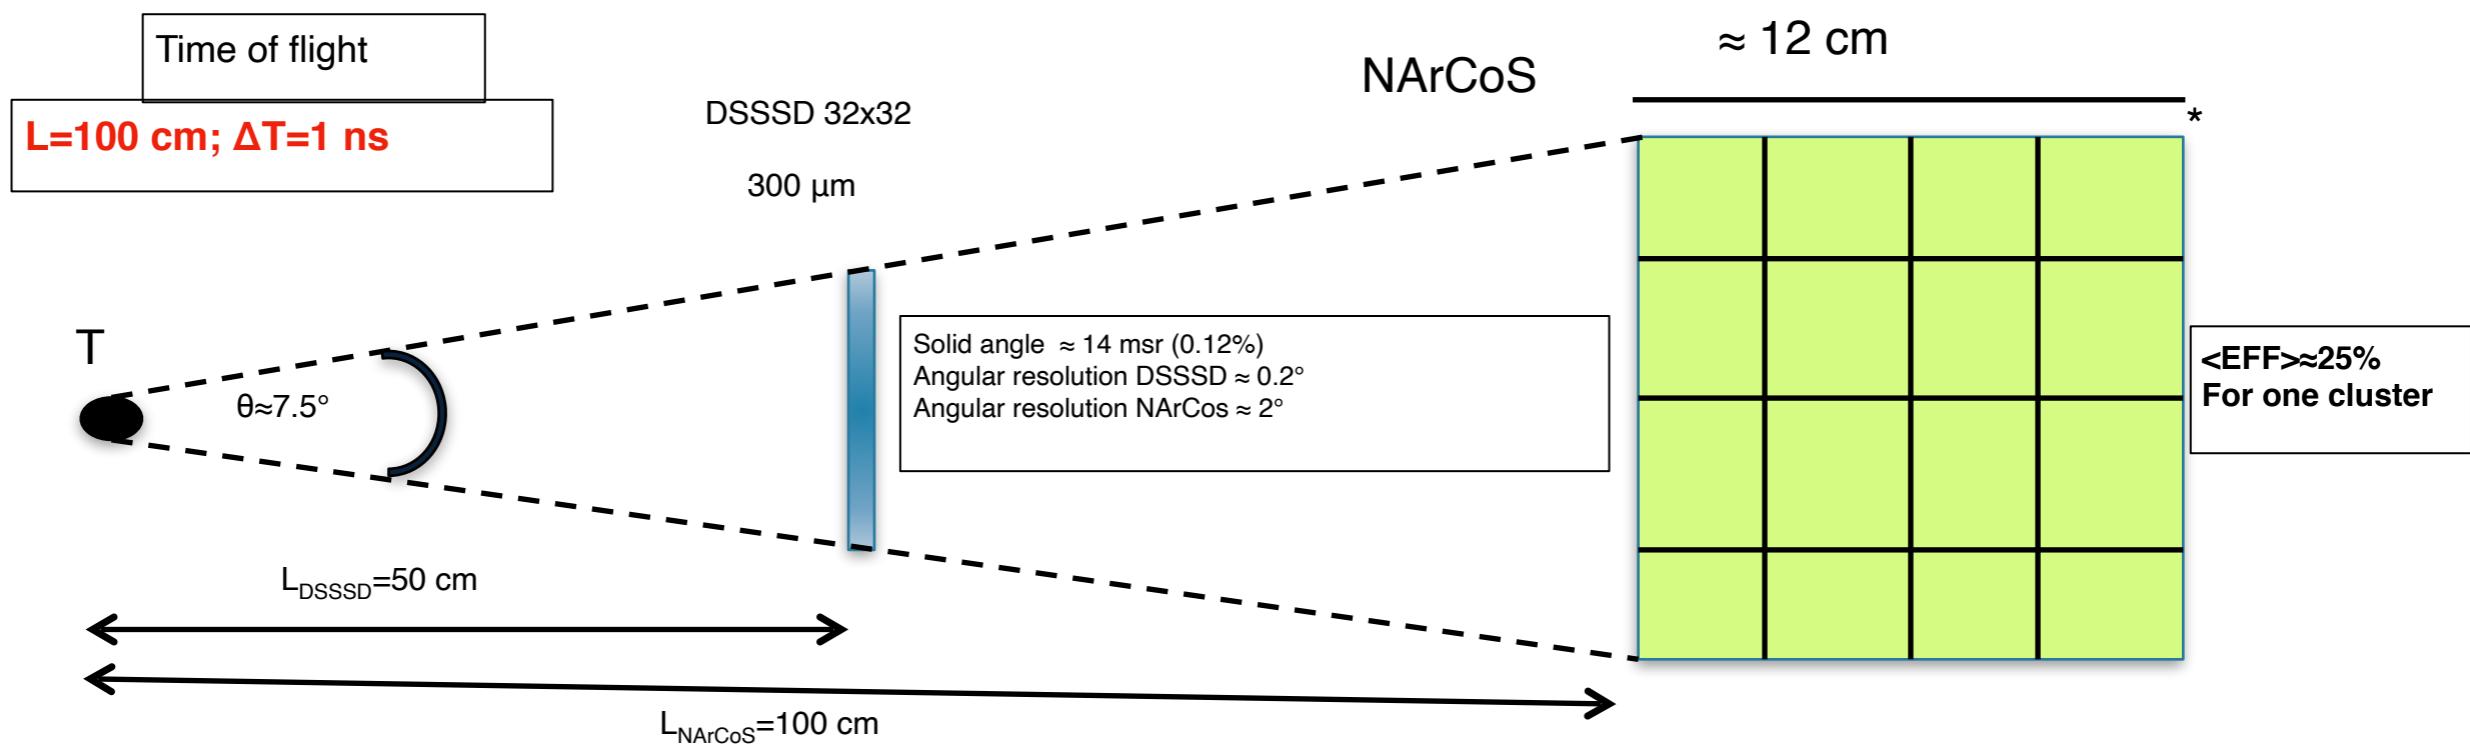




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

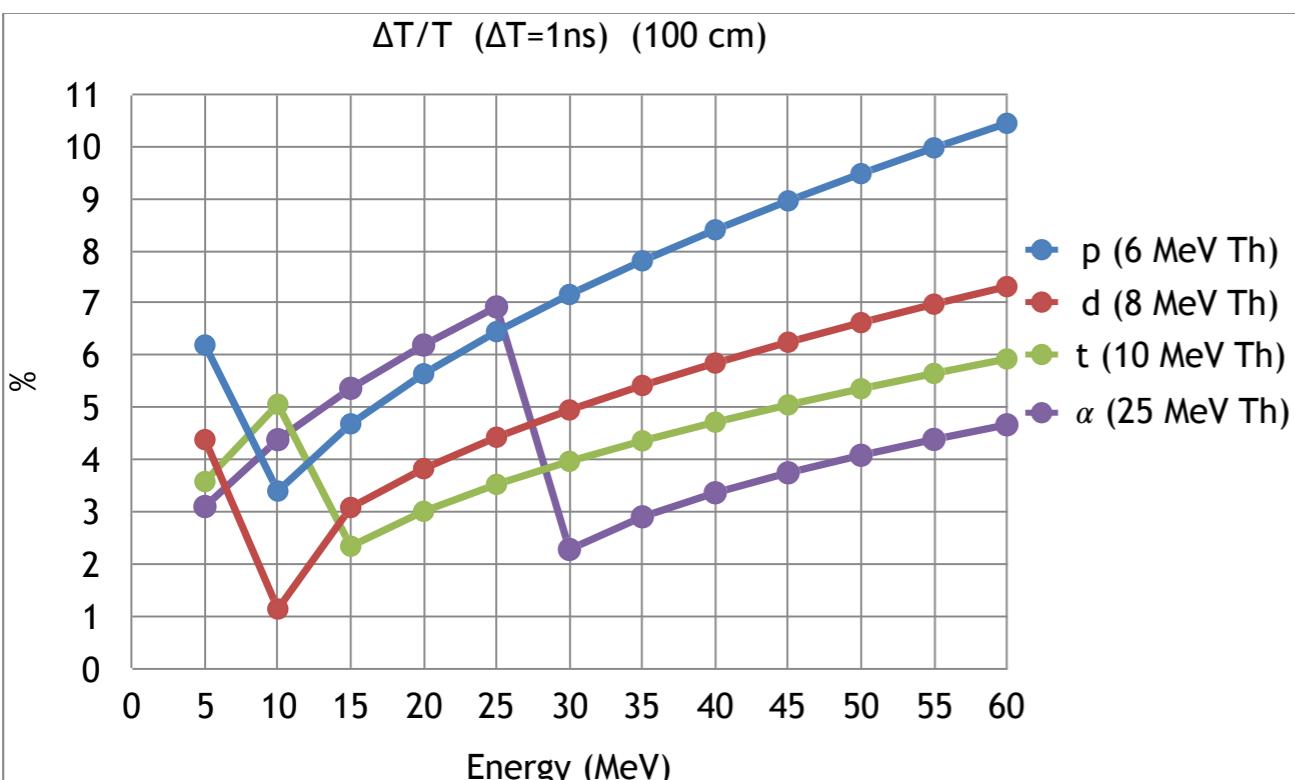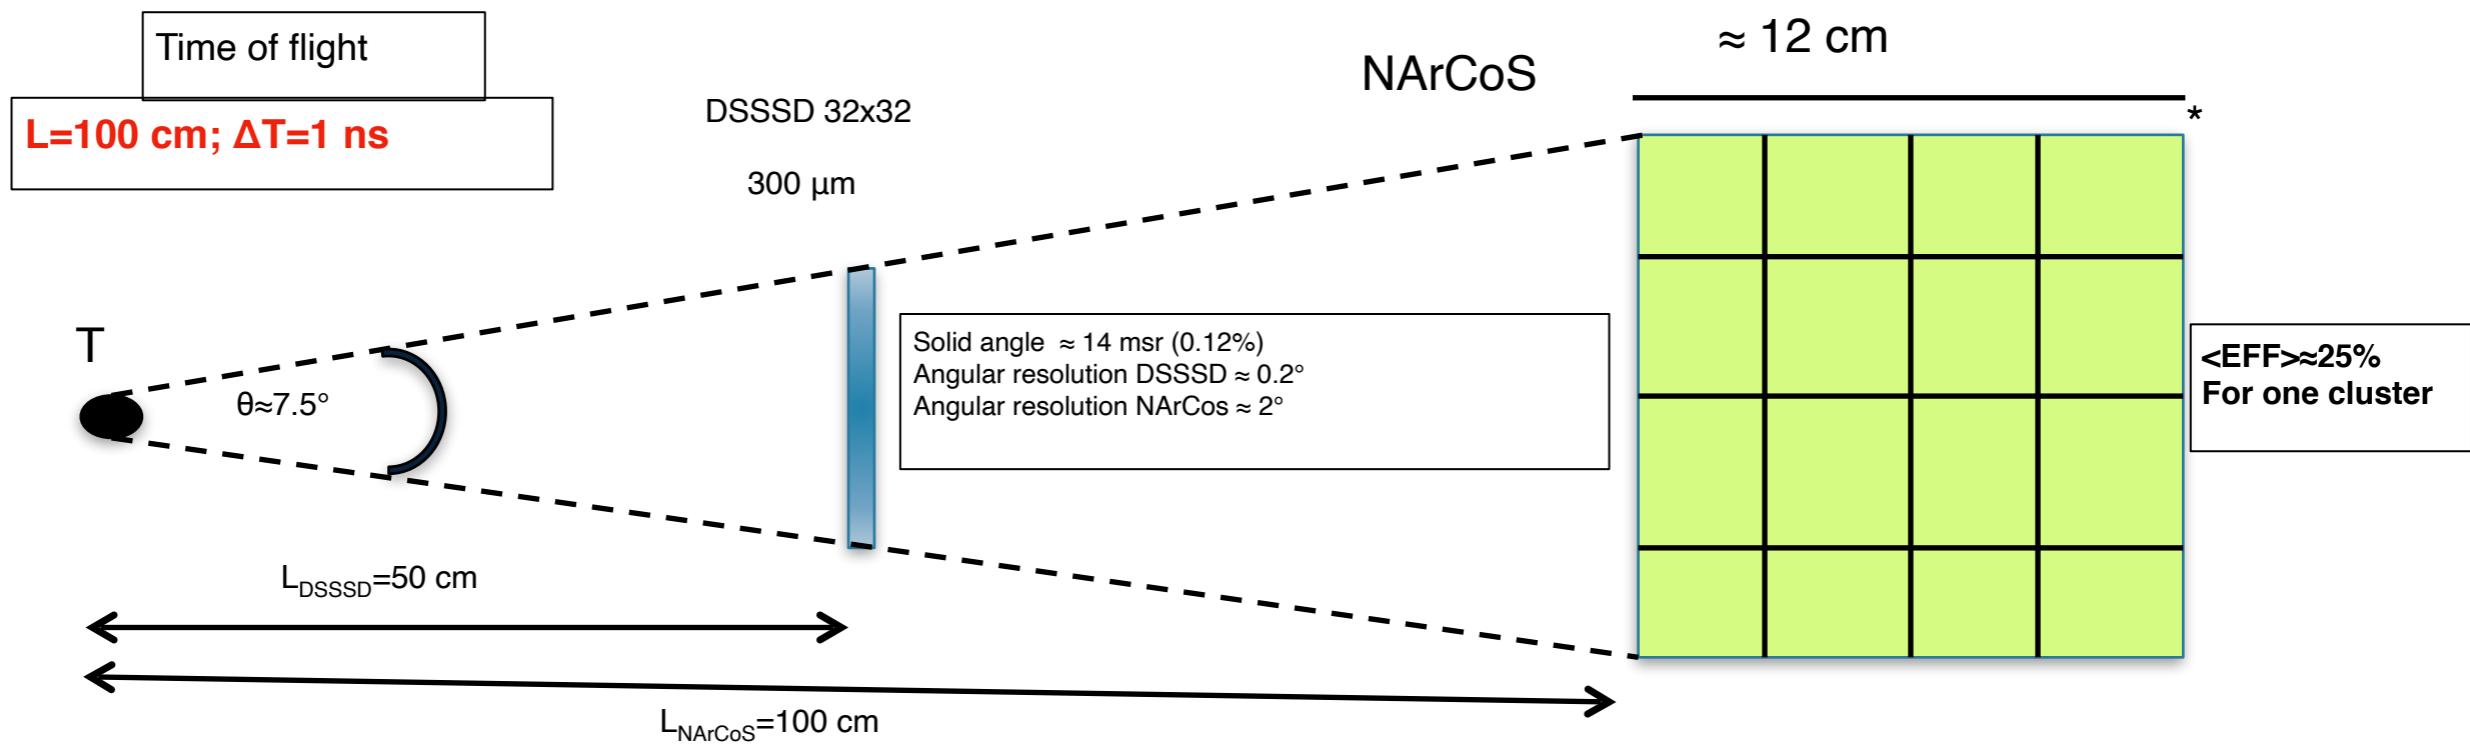




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

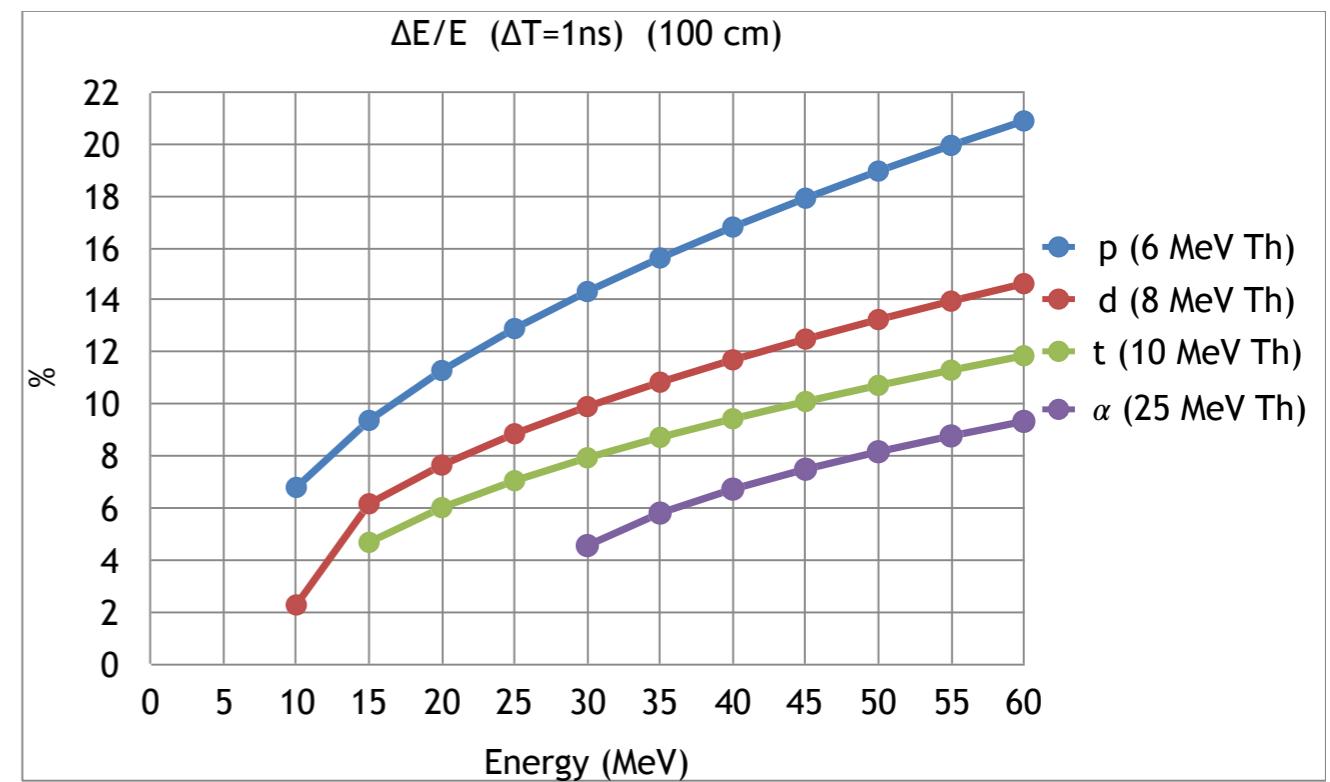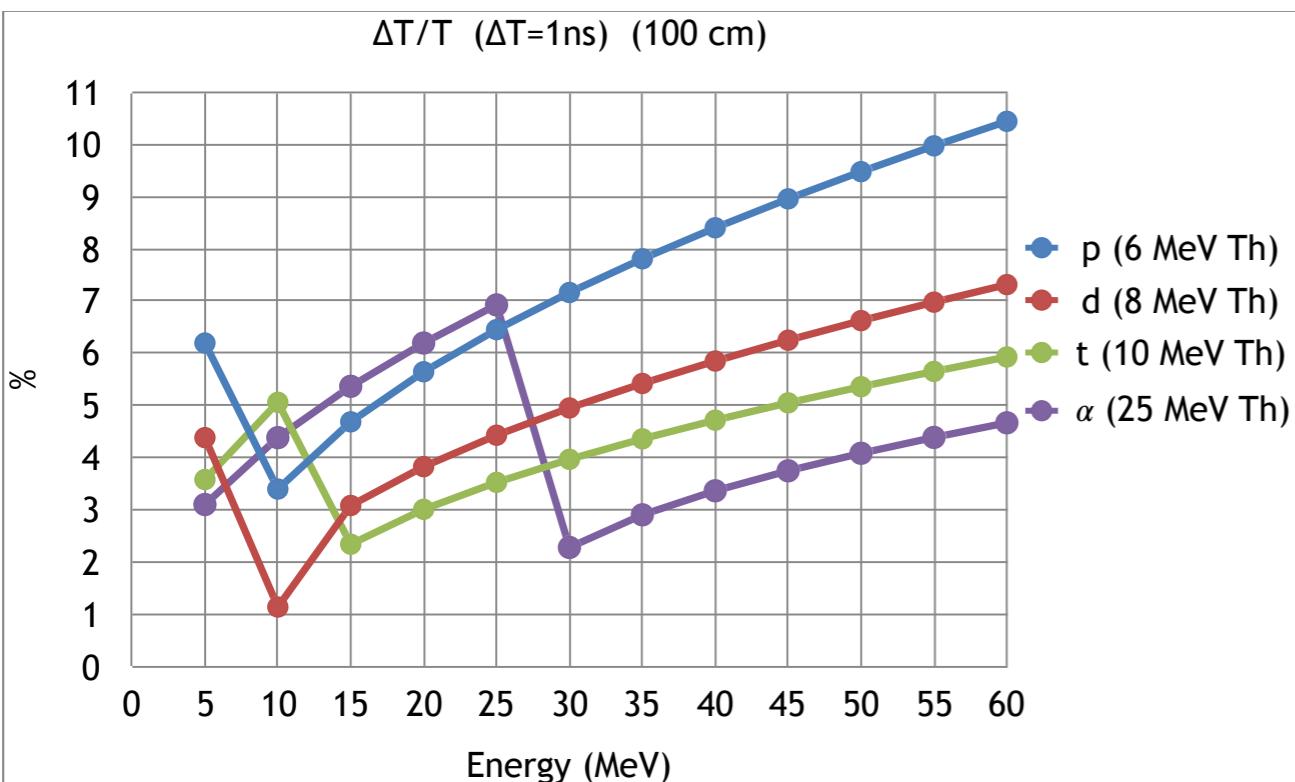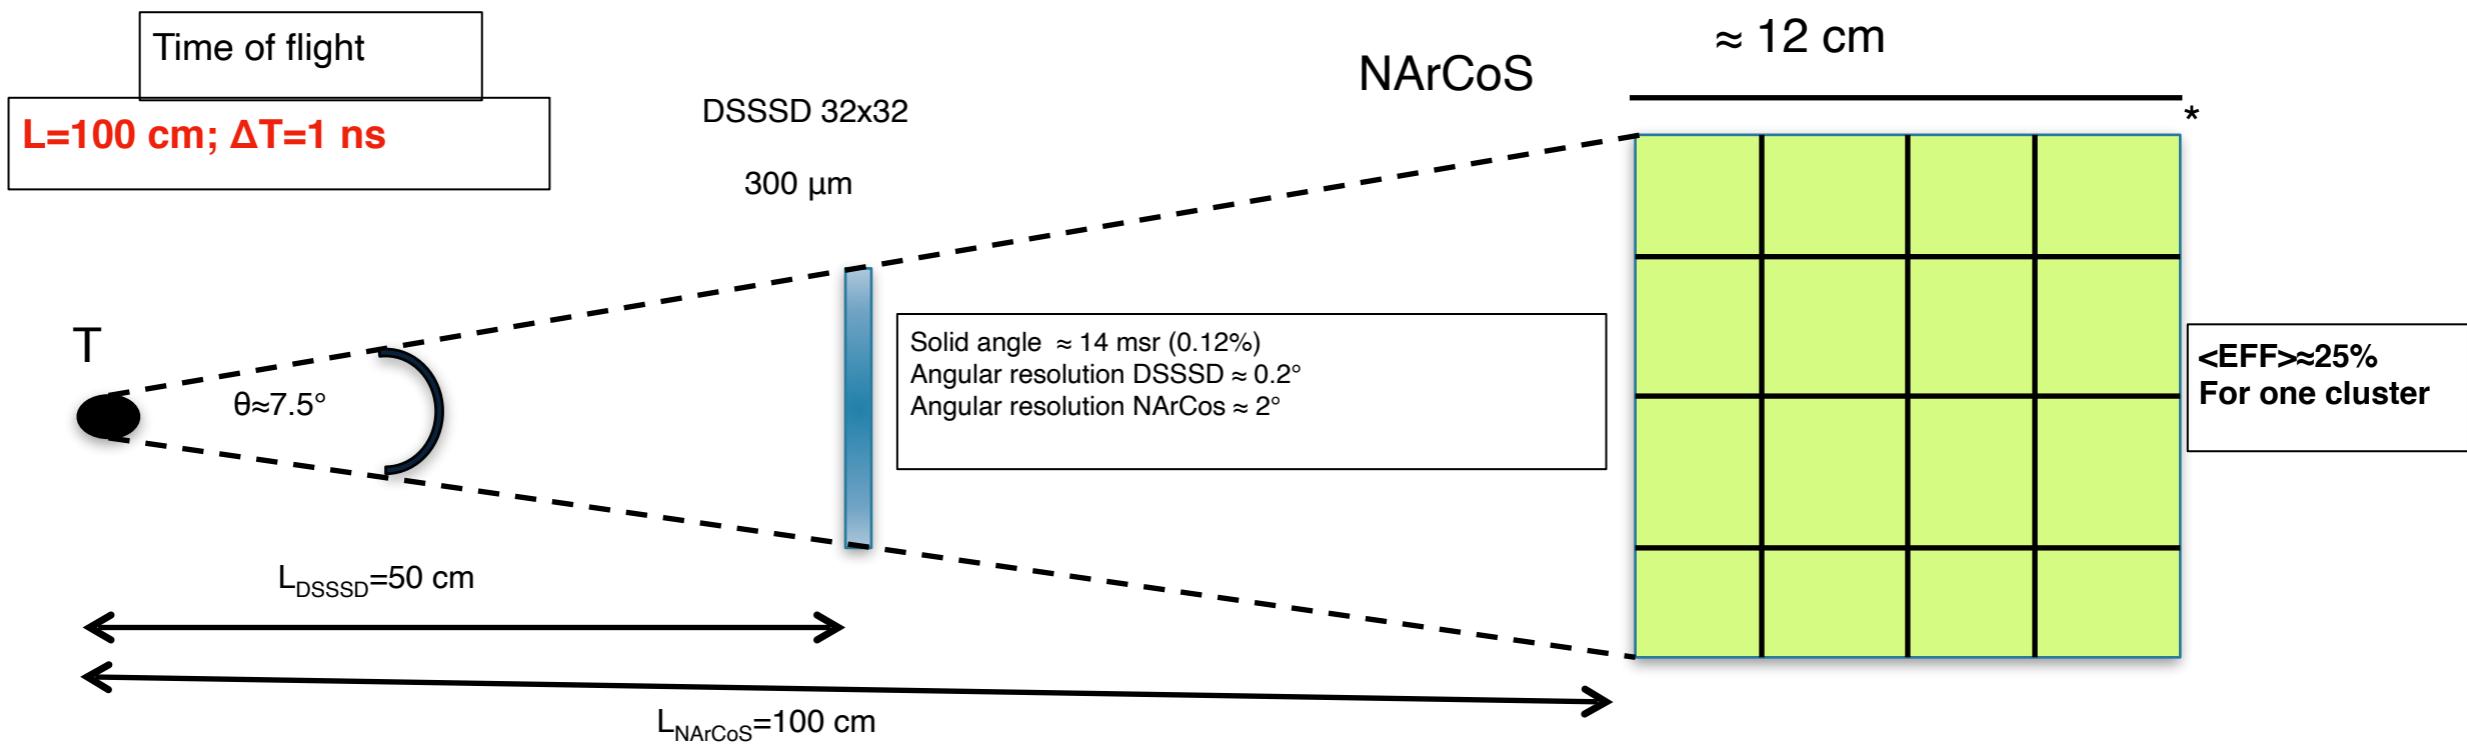




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

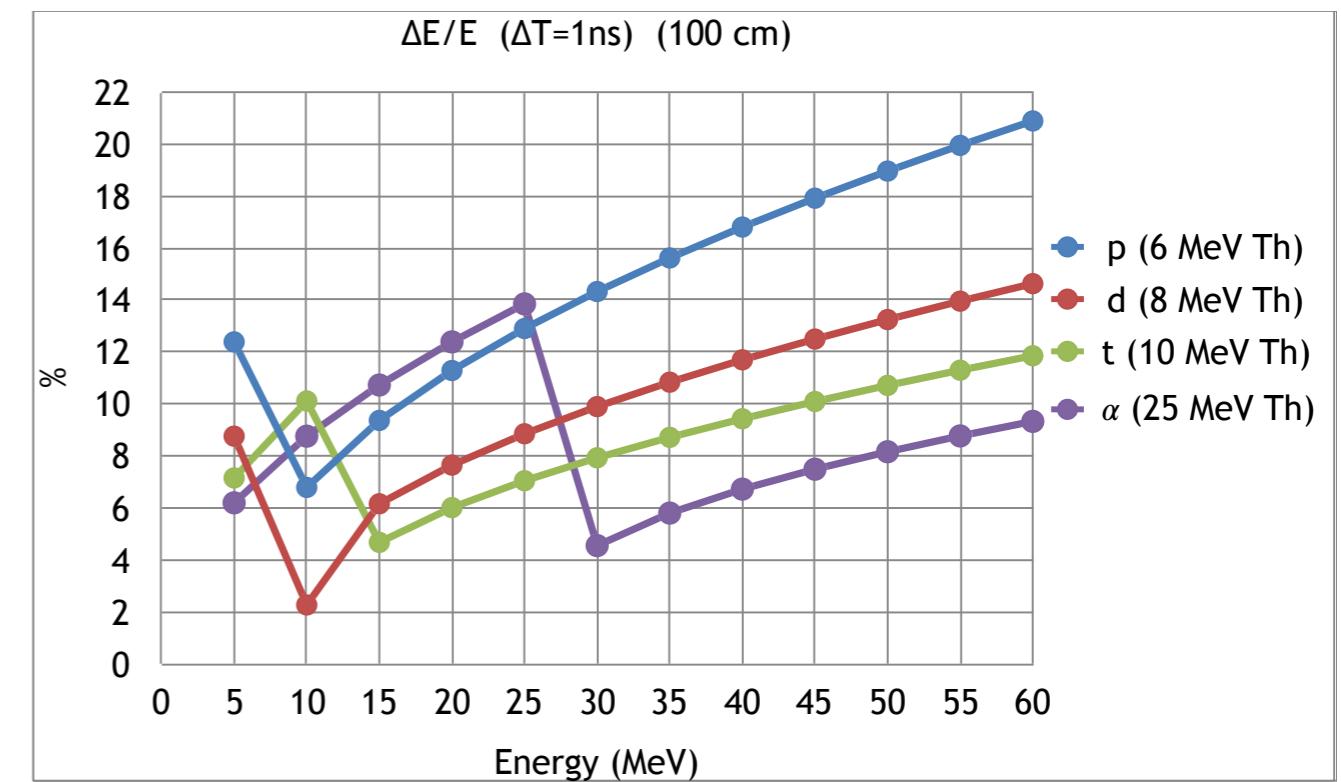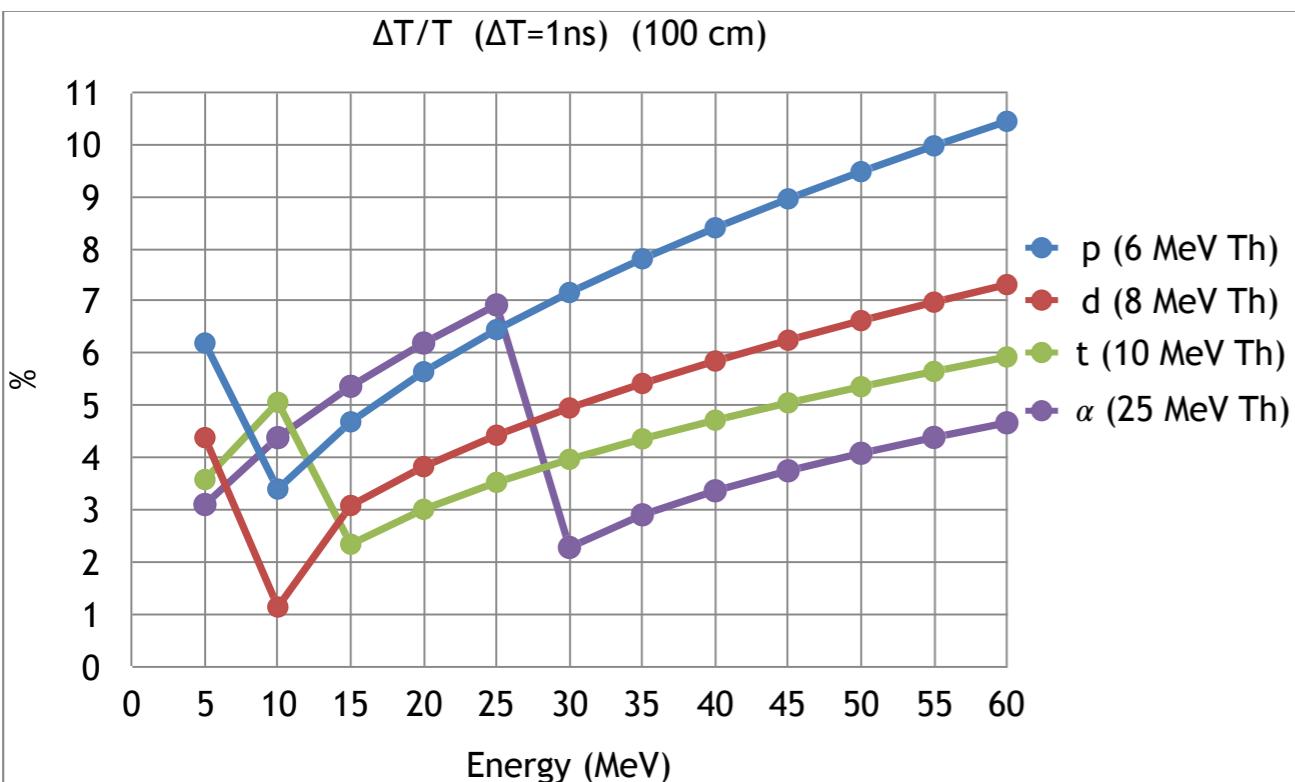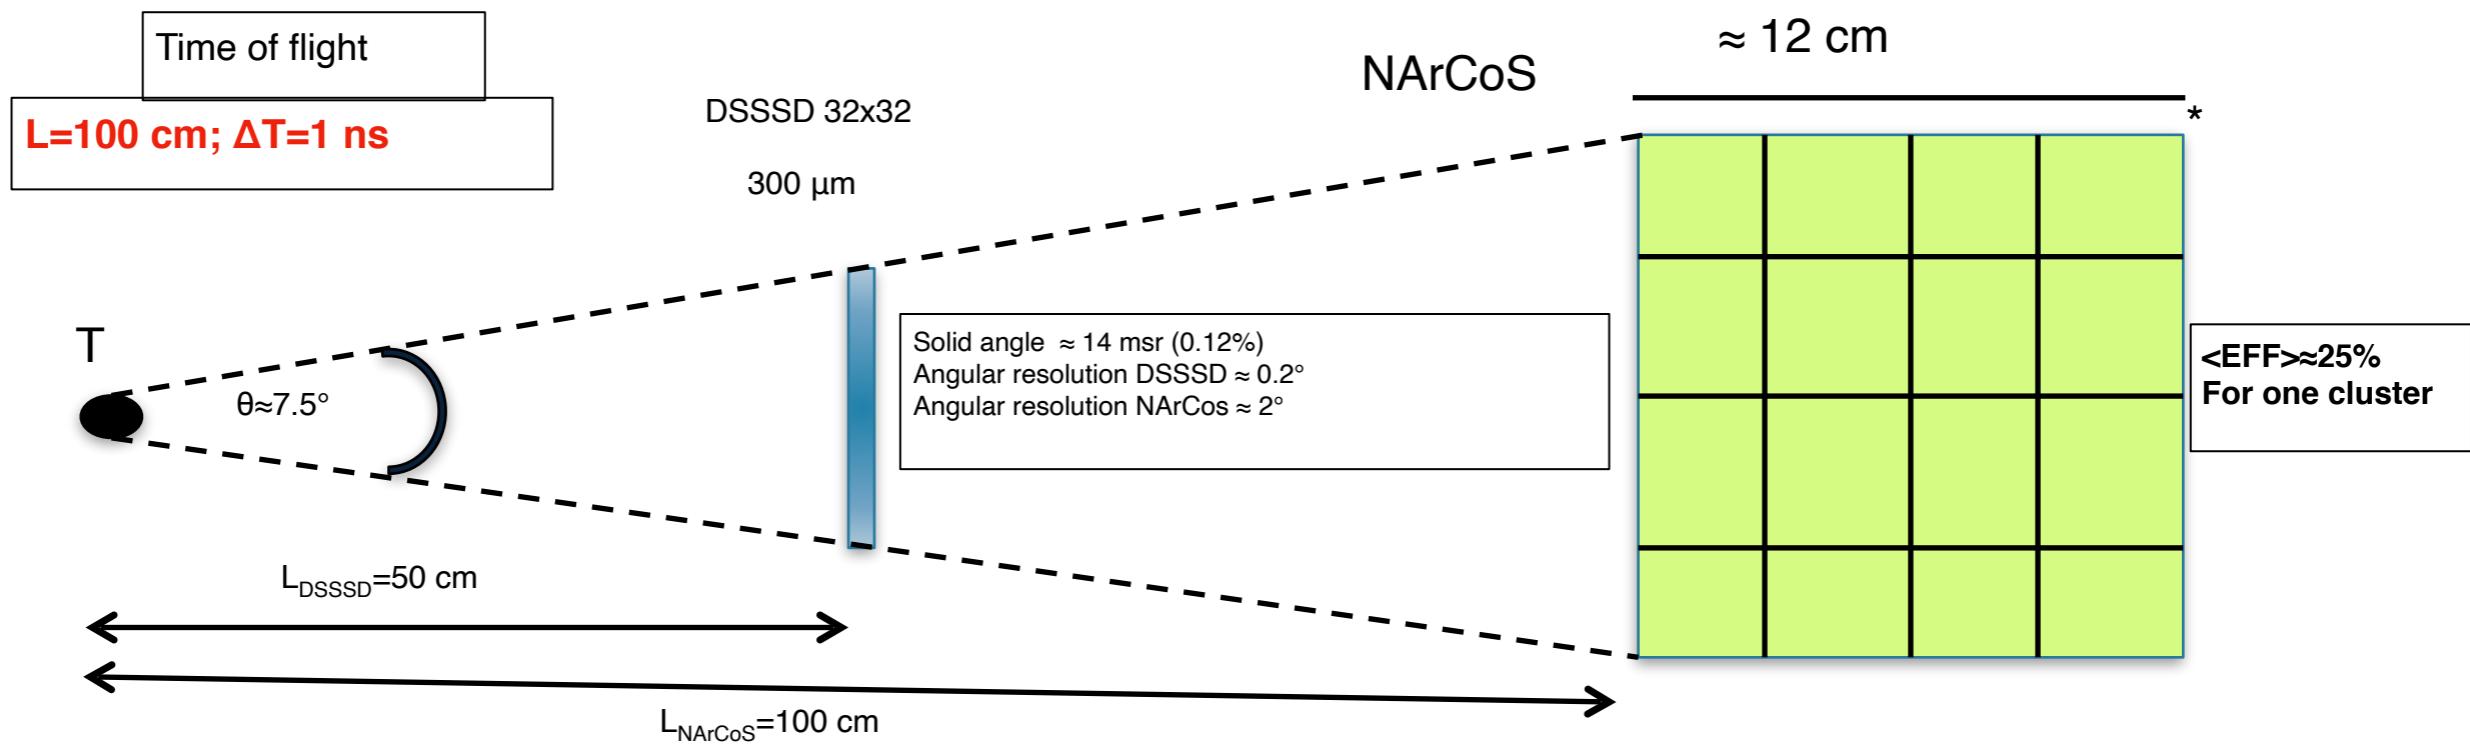




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

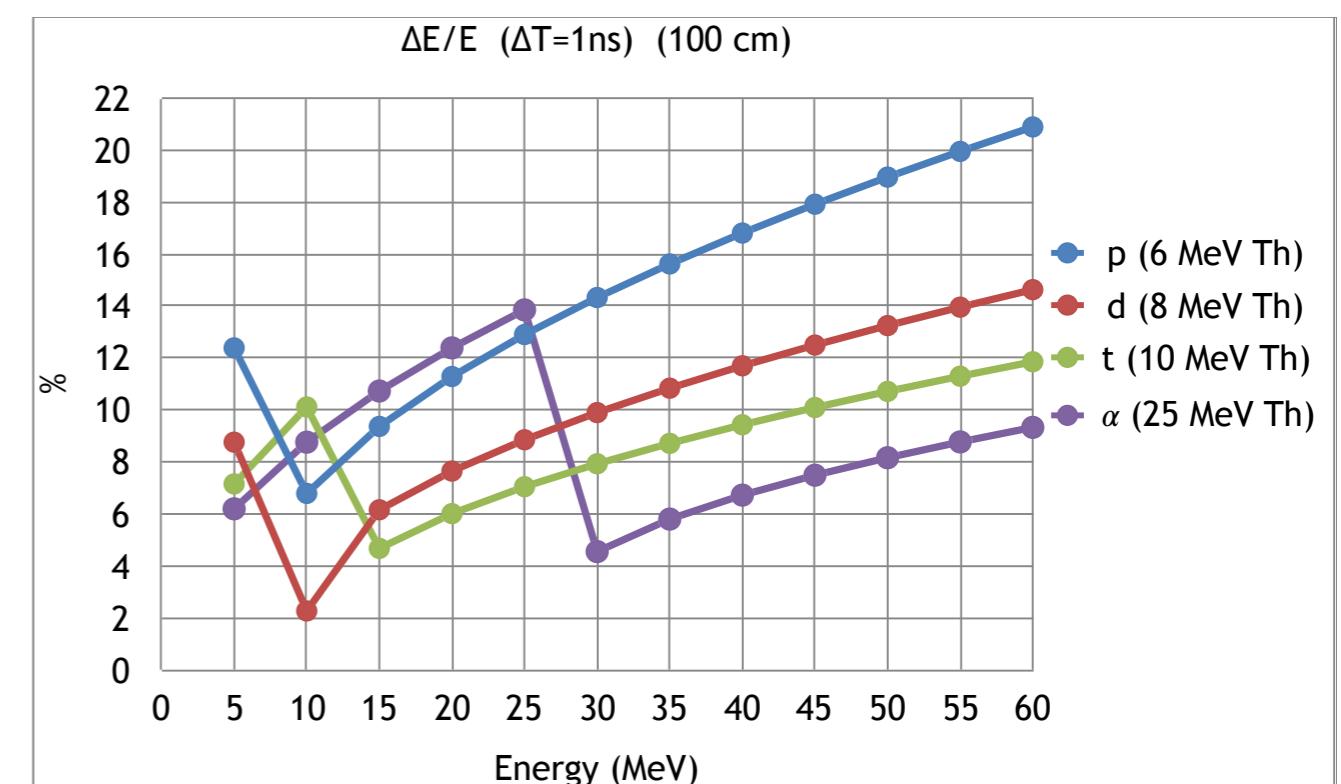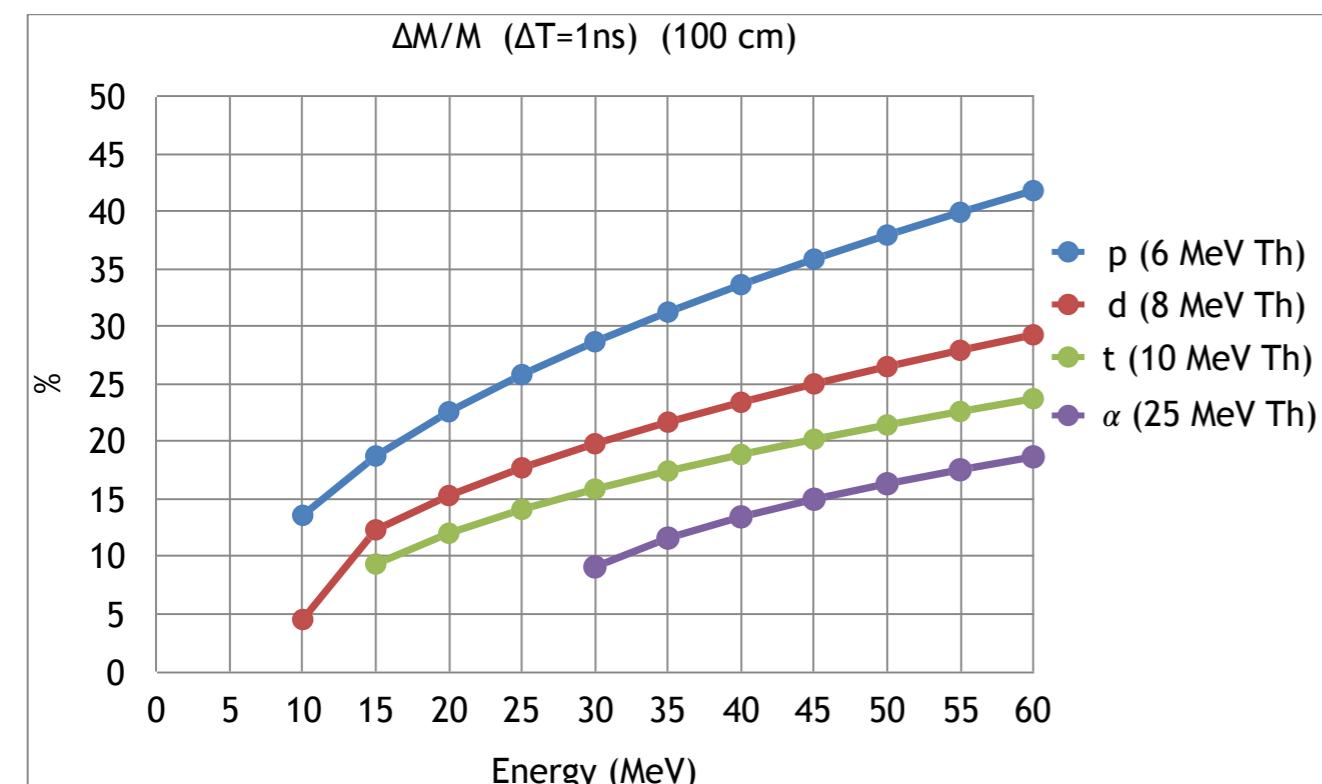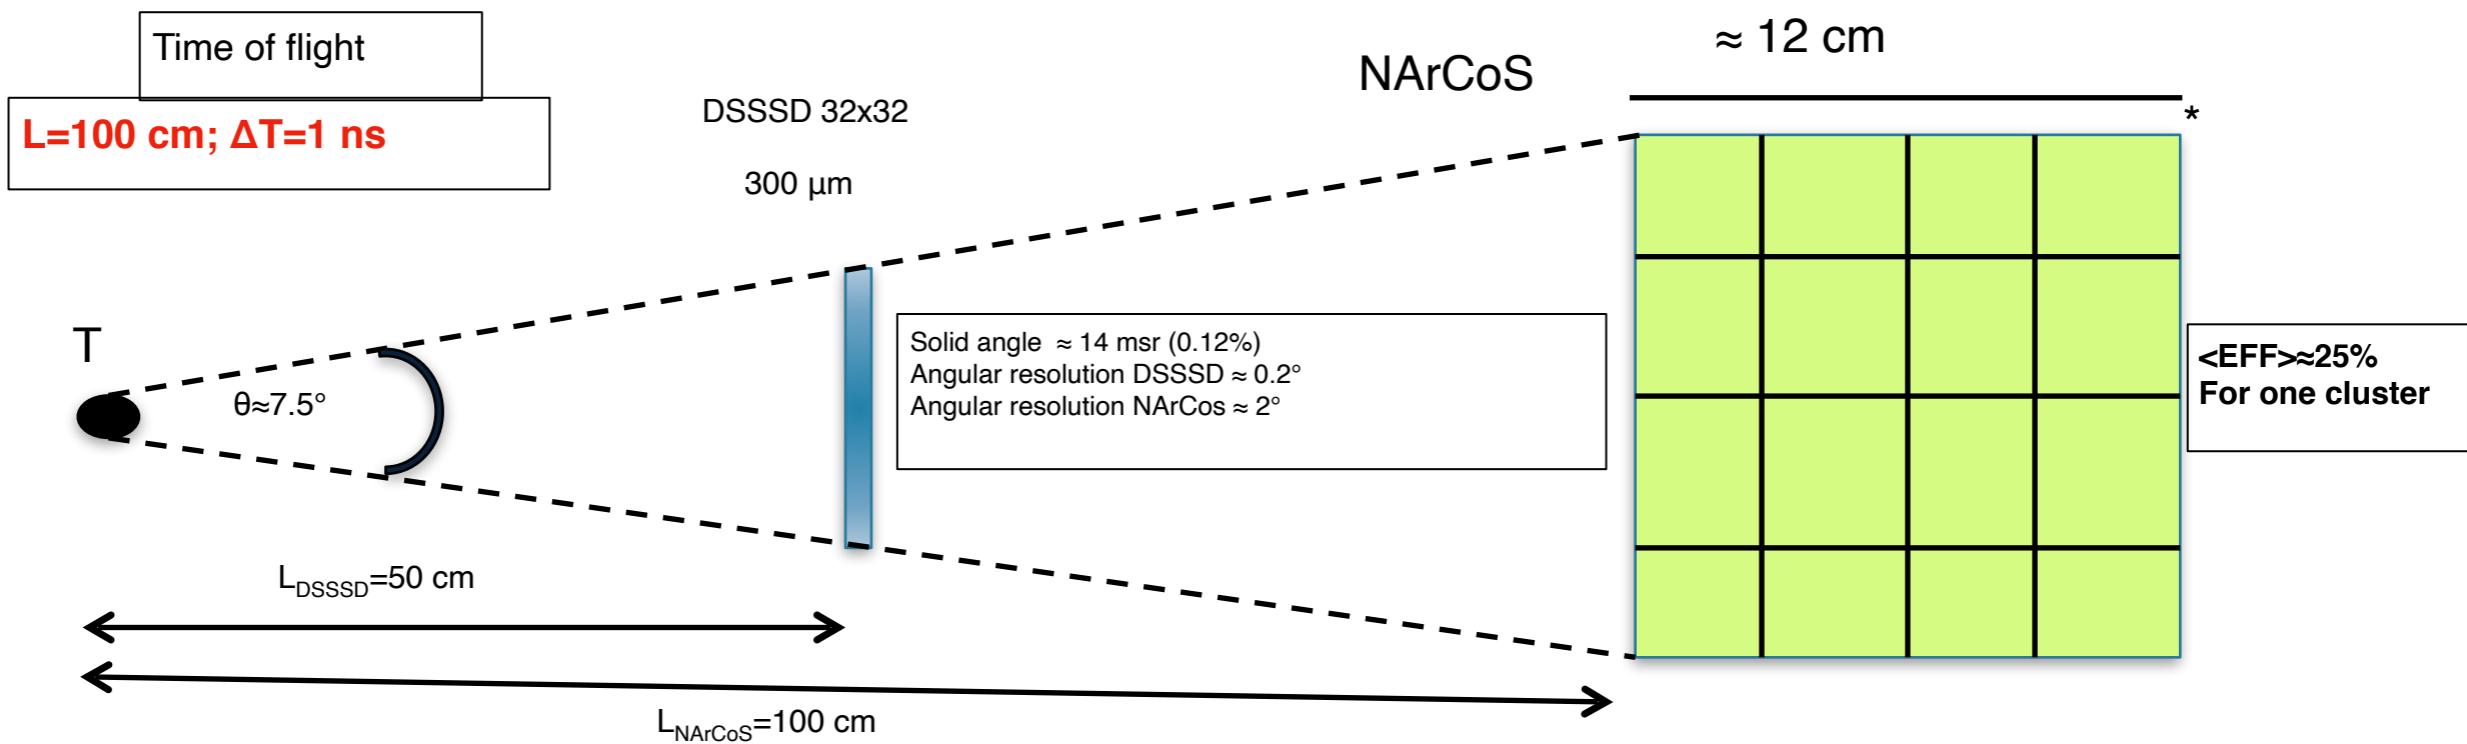




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

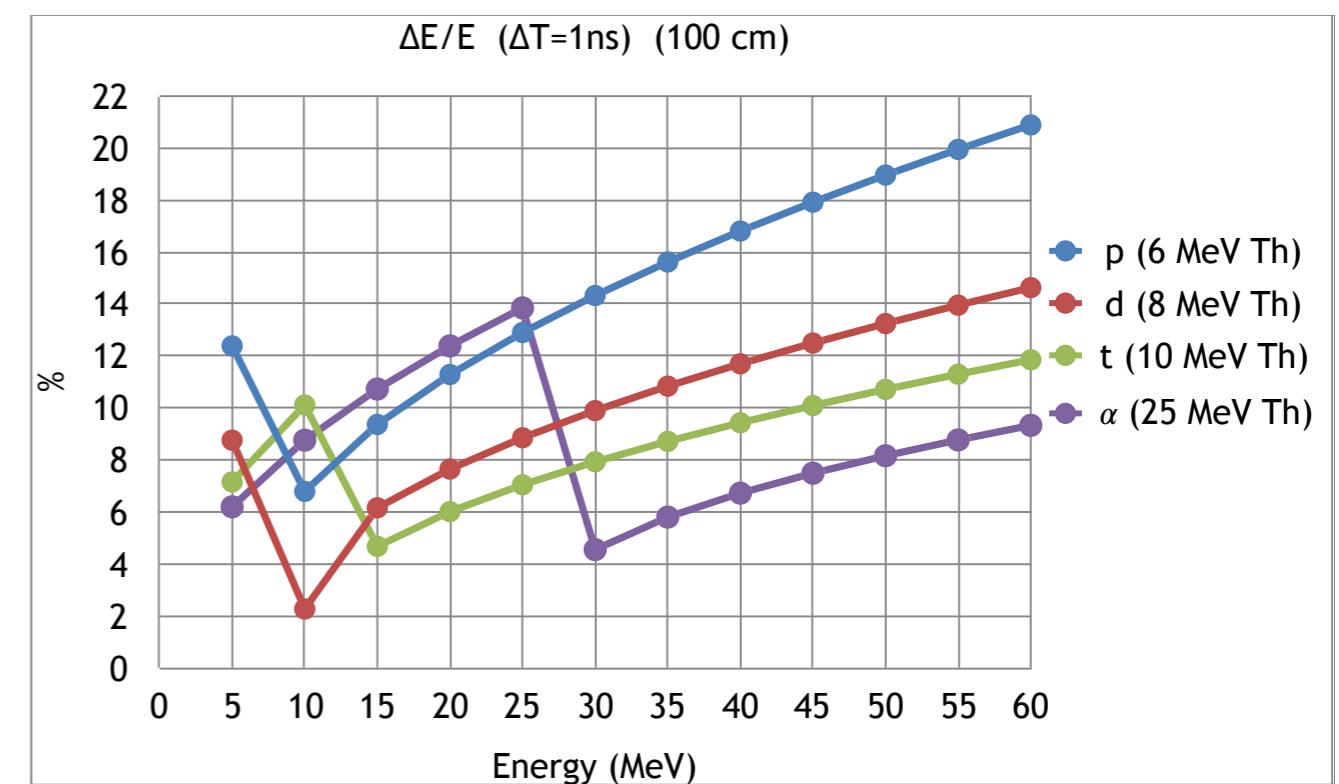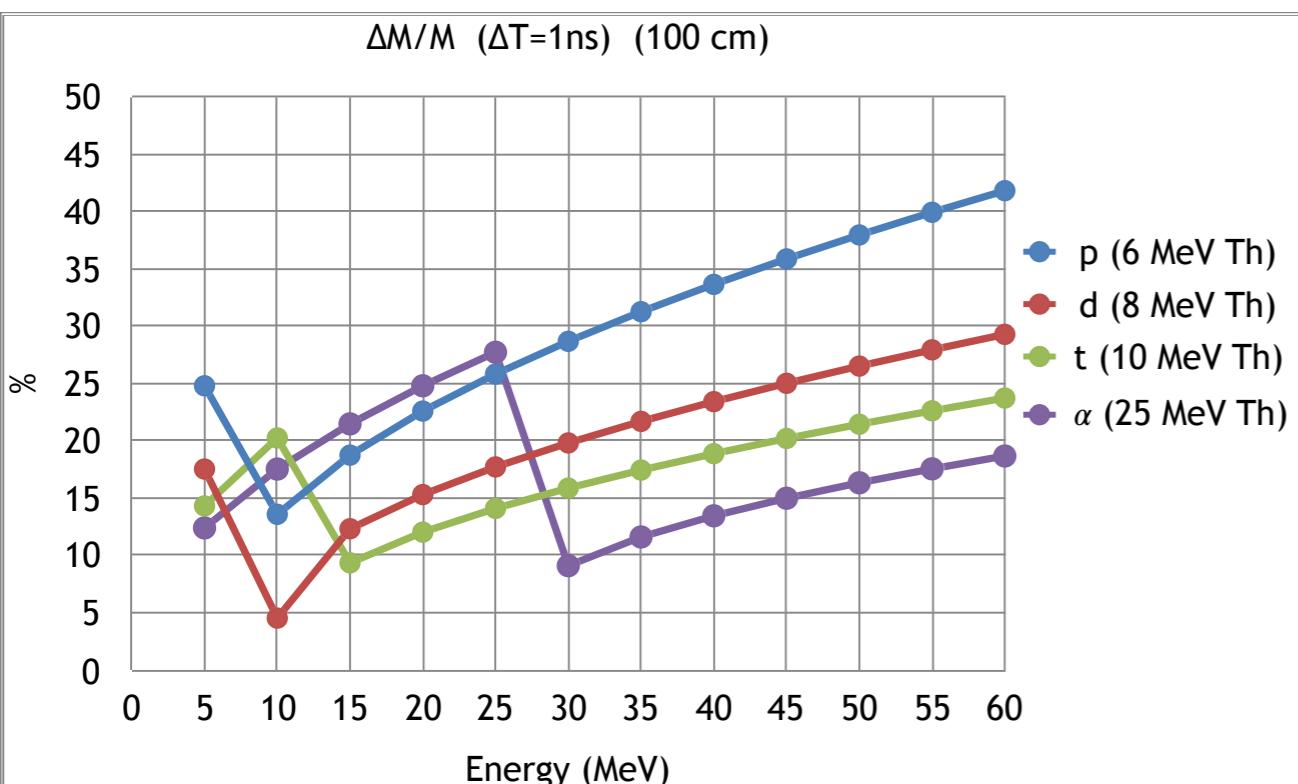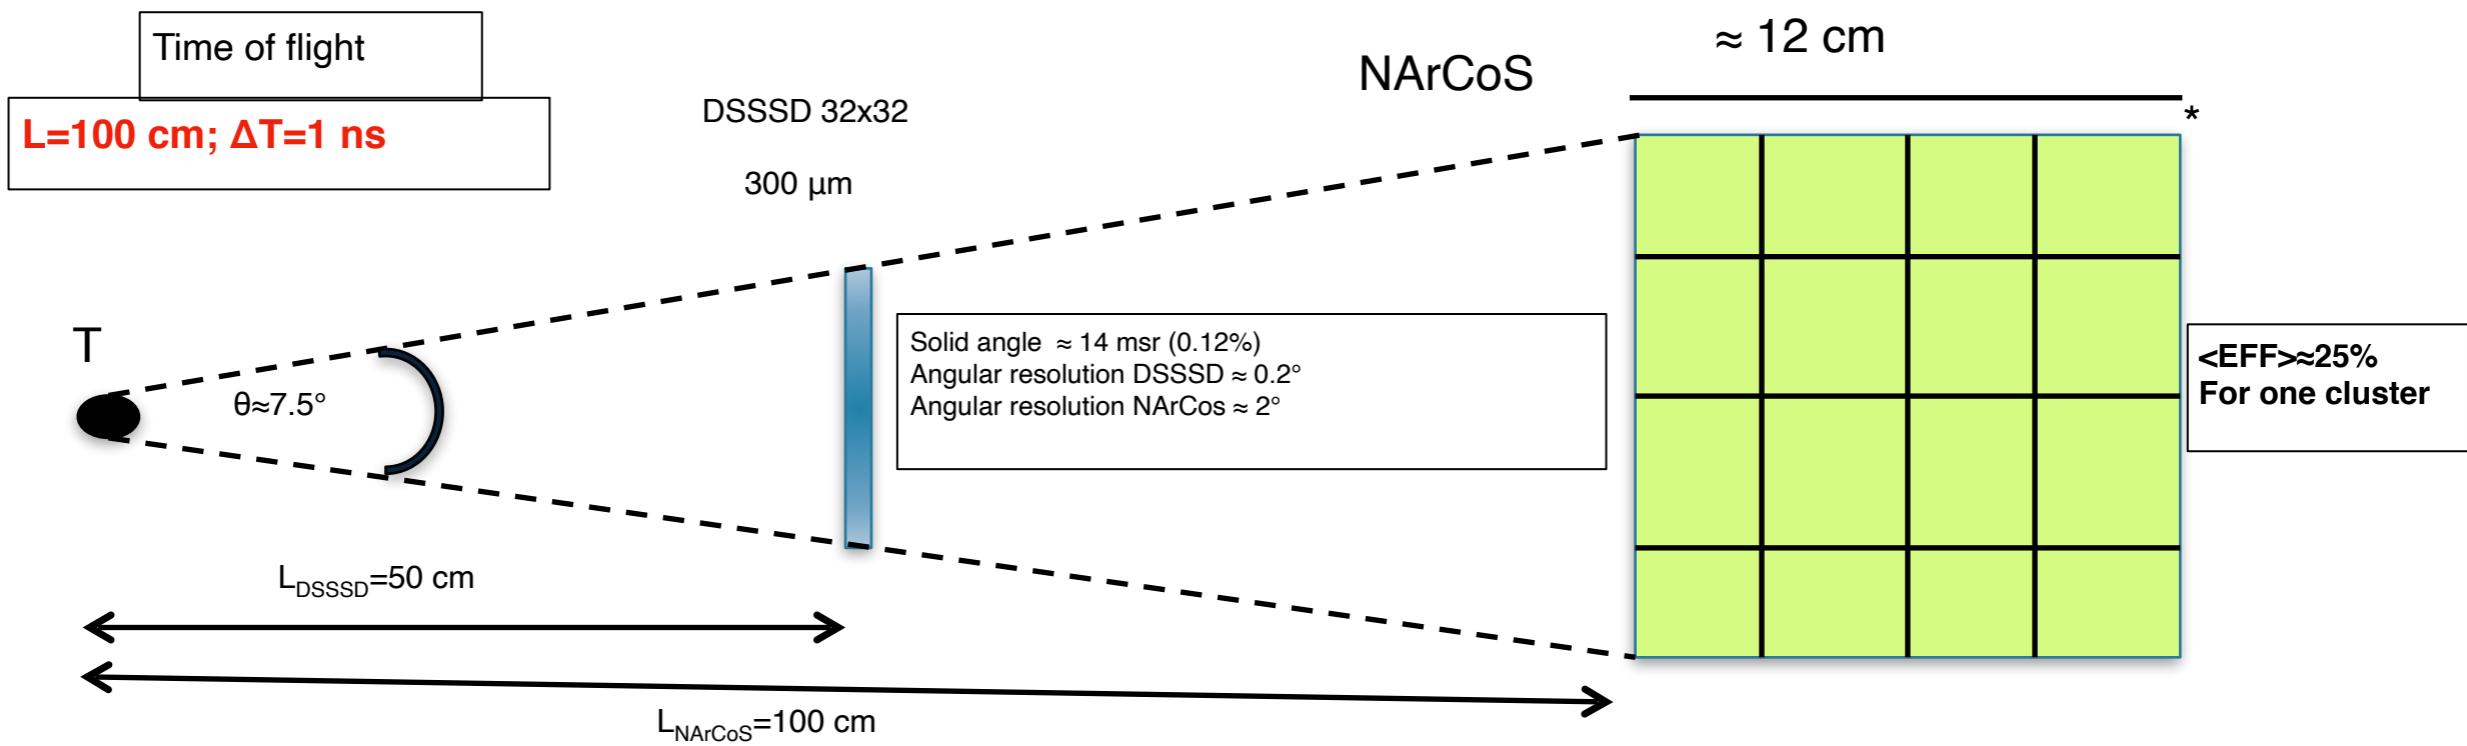

*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

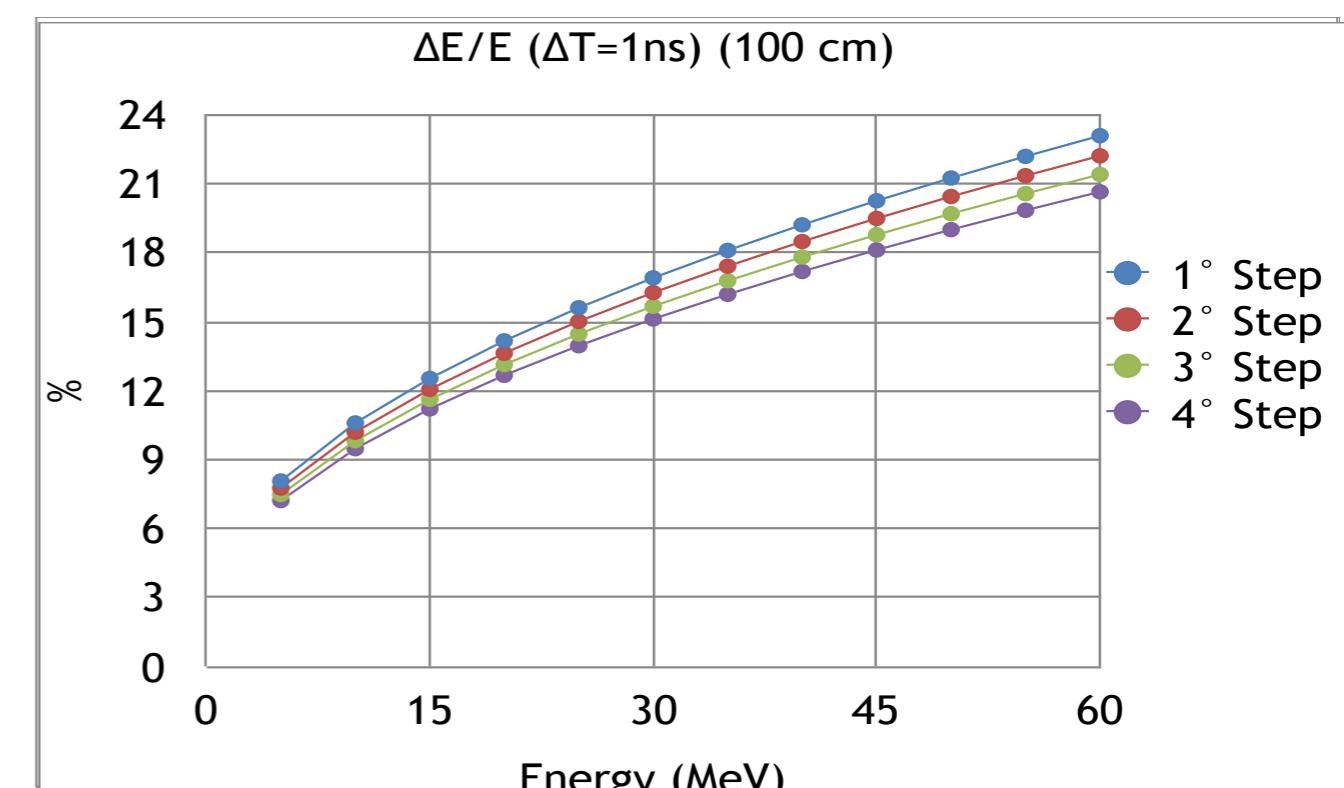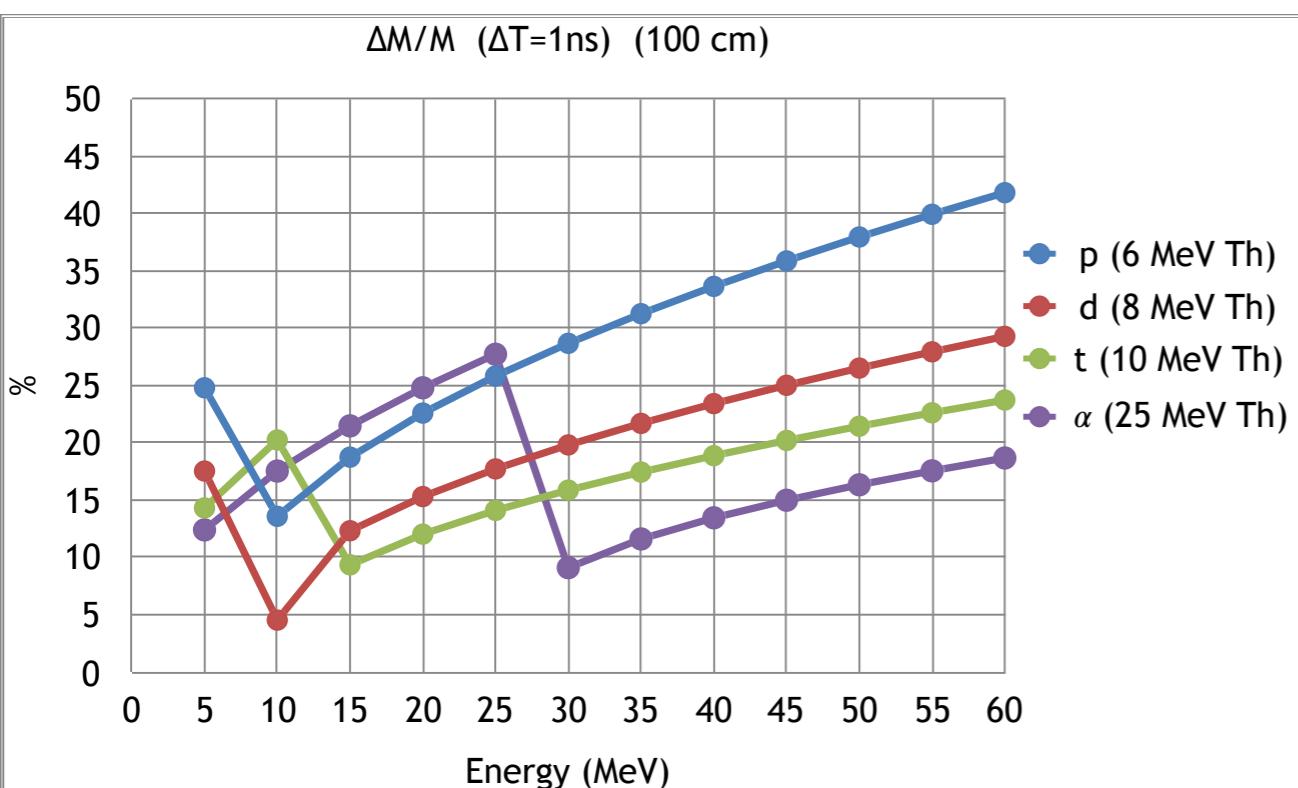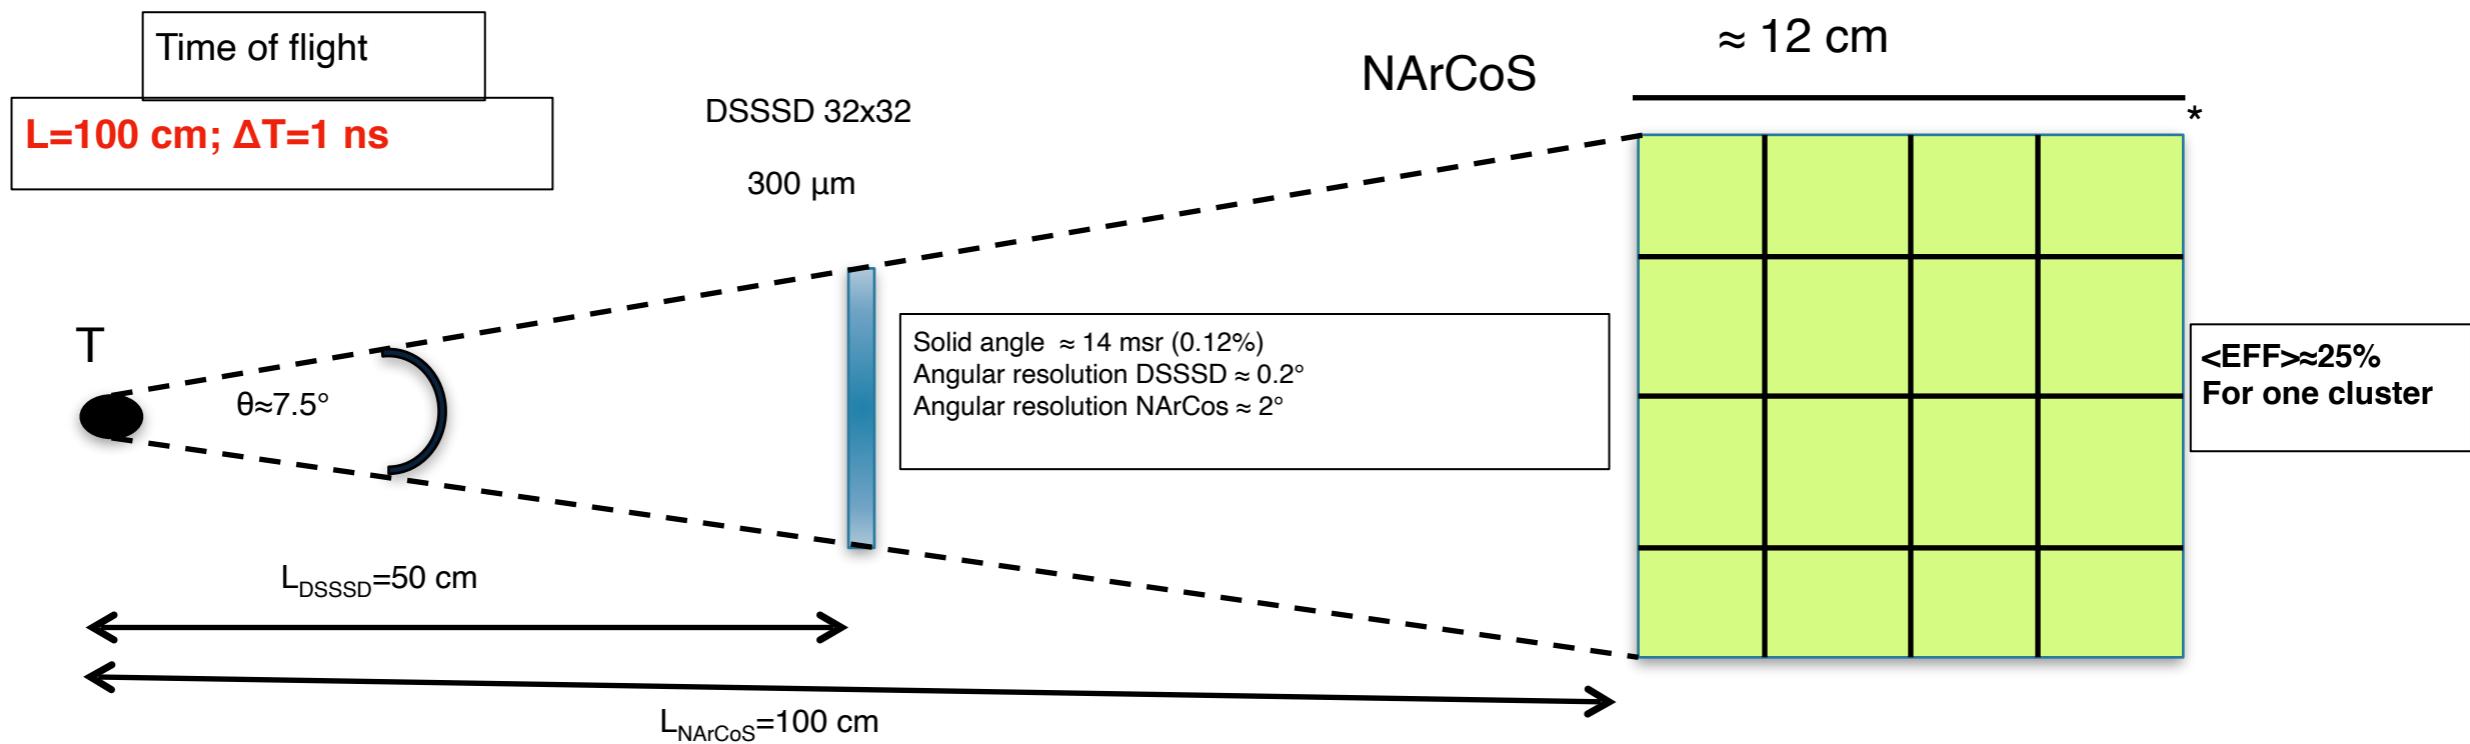

*the mechanical structure will have the possibility of an angular movimentation

External interest for the project

External interest for the project



Science & Technology
Facilities Council

Science and Technology Facilities Council

STFC Rutherford Appleton Laboratory
Harwell Campus
Didcot OX11 0QX
United Kingdom

Tel +44 (0)1235 445000 Fax +44 (0)1235 445808
www.stfc.ac.uk

Dr Emanuele Vincenzo Pagano
Università degli Studi di Catania
and INFN Laboratori Nazionali del Sud
via Santa Sofia 62
95123 Catania
Italy

Direct line +44 (0)1235 445649
Mobile +44 (0) 7712403568
E-mail triestino.minniti@stfc.ac.uk

Date: 10-July-2017

Research Project: Neutron Array for Correlations Studies (NArCoS)

The aim of the “Neutron Array for Correlations Studies” (NArCoS) research project focuses on the development of a neutron detector prototype for neutron spectroscopy. We believe that it will benefit from the experience about neutrons detection that is available at the ISIS spallation neutron source (UK) and from the availability of neutron beam time required for testing purpose. Moreover, this project can represent a further extension in neutron detection for applications at ISIS and in general for neutron spallation sources.

For these reasons, we are pleased to express with this letter our interest and research involvement.

Yours sincerely,

Dr. Triestino Minniti
Dr. Carlo Cazzaniga
Staff Scientist, STFC

Two handwritten signatures in black ink. The top signature is "Triestino Minniti" and the bottom signature is "Carlo Cazzaniga".

External interest for the project



DIPARTIMENTO DI
SCIENZE MATEMATICHE E INFORMATICHE
SCIENZE FISICHE E SCIENZE DELLA TERRA



Prof. Salvatore Magazù
Full Professor of Experimental Physics
Dipartimento di Scienze Matematiche e Informatiche, Scienze Fisiche e Scienze della Terra
Università di Messina
Viale Ferdinando Stagno D'Alcontres n°31, S. Agata, P.O. Box: 55, 98166 Messina, Italy
Phone: +39 090 6765025
Fax: +39 090 395004

Messina, 6th July 2017



**Science & Technology
Facilities Council**

Science and Technology Facilities Council

STFC Rutherford Appleton Laboratory
Harwell Campus
Didcot OX11 0QX
United Kingdom

Tel +44 (0)1235 445000 Fax +44 (0)1235 445808
www.stfc.ac.uk

Dr Emanuele Vincenzo Pagano
 Università degli Studi di Catania
 and INFN Laboratori Nazionali del Sud
 via Santa Sofia 62
 95123 Catania
 Italy

Direct line +44 (0)1235 445649
 Mobile +44 (0) 7712403568
 E-mail triestino.minniti@stfc.ac.uk

Date: 10-July-2017

Research Project: Neutron Array for Correlations Studies (NArCoS)

The aim of the “Neutron Array for Correlations Studies” (NArCoS) research project focuses on the development of a neutron detector prototype for neutron spectroscopy. We believe that it will benefit from the experience about neutrons detection that is available at the ISIS spallation neutron source (UK) and from the availability of neutron beam time required for testing purpose. Moreover, this project can represent a further extension in neutron detection for applications at ISIS and in general for neutron spallation sources.

For these reasons, we are pleased to express with this letter our interest and research involvement.

Yours sincerely,


Dr. Triestino Minniti
 Dr. Carlo Cazzaniga
 Staff Scientist, STFC

To whom it may concern, in charge of Full Professor of Experimental Physics since 2002 at the Department of Mathematical and Computer Science, Physical Sciences and Earth Sciences of the Messina University (Italy), of President of the Interuniversity Consortium for Applied Physics, of previous chairman of the Scientific Committee on Glass Forming Systems at the European Synchrotron Radiation Facility (ESRF, Grenoble), member of several Scientific Committees of synchrotron radiation and neutron scattering at ESRF and at Institute Laue Langevin (ILL, Grenoble), and member of the italian team for the neutron scattering project VESPA for the European Spallation Source, I strongly support the project leaded by Dr. Emanuele Pagano and I declare that the portable neutron source hosted at the Department of Mathematical and Computer Science, Physical Sciences and Earth Sciences of the Messina University is available for all the experimental tests requested in the project Dr. E. Pagano will be dealing with.



Prof. Salvatore Magazu'

Esempio di accoppiamento con correlatore per particelle cariche

Accoppiamento FARCOS + NArCoS

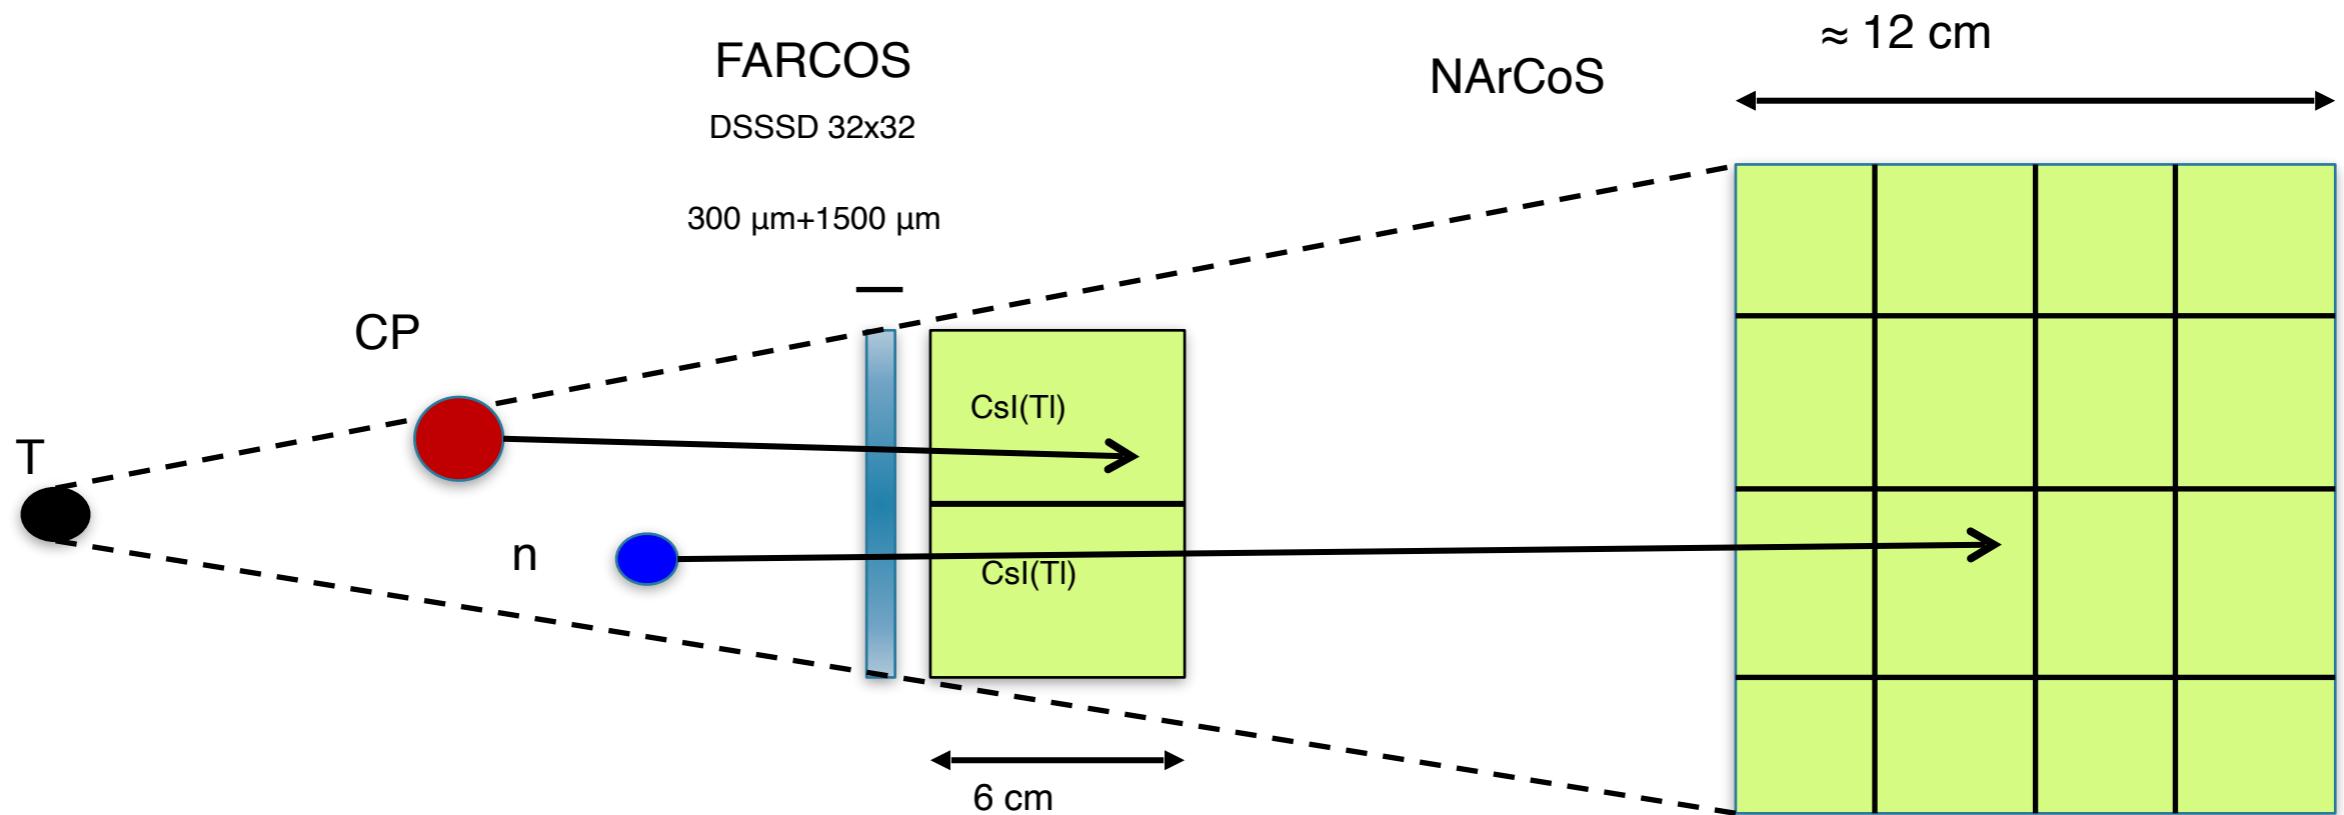

Energy resolution of the 8,7 alpha peak

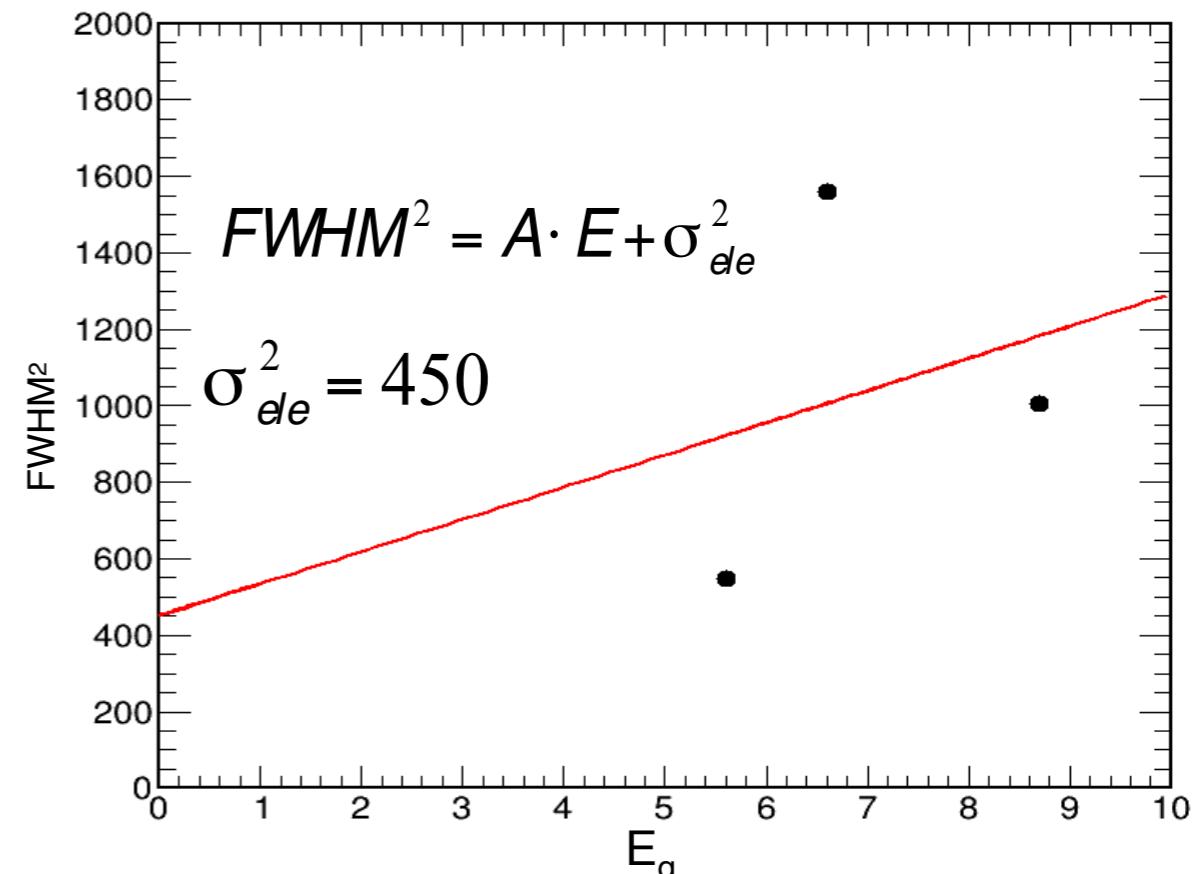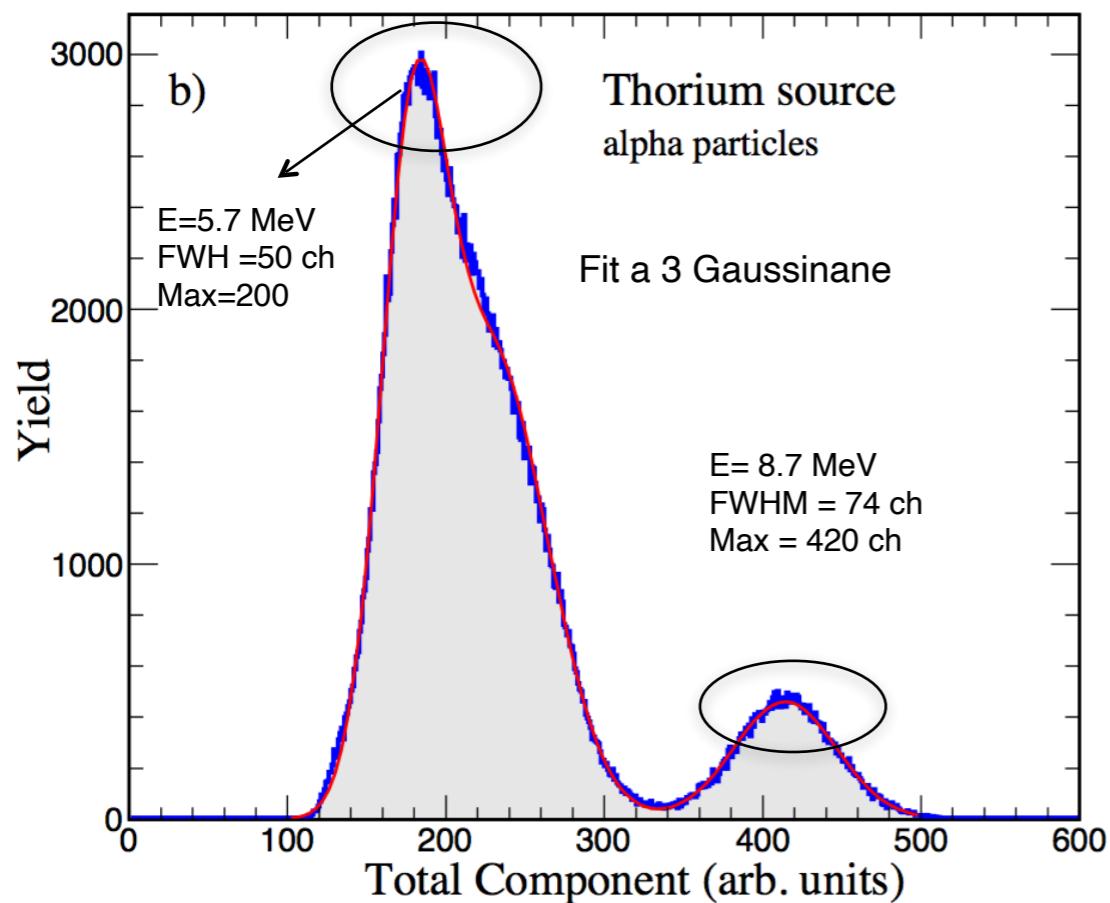

For $E_\alpha=8.7$ MeV


$$\sigma_{tot}^2 = \sigma_{int}^2 + \sigma_{e/e}^2 \rightarrow \sigma_{int}^2 = \sigma_{tot}^2 - \sigma_{e/e}^2 \rightarrow \sigma_{int} = \sqrt{\sigma_{tot}^2 - \sigma_{e/e}^2}$$

$$\sigma_{e/e}^2 = 450; \quad \sigma_{tot}^2 = 1000 \rightarrow \frac{\Delta E_{tot}}{E} \approx 11\%$$

$$\sigma_{int} = 23 \rightarrow FWHM = 55$$

$$\Delta E_{bin} = 13.6 \text{ KeV}/ch \rightarrow \Delta E = 750 \text{ KeV} \rightarrow \frac{\Delta E_{int}}{E} \approx 8.5\%$$

THE AGET ASIC in the ASAD board

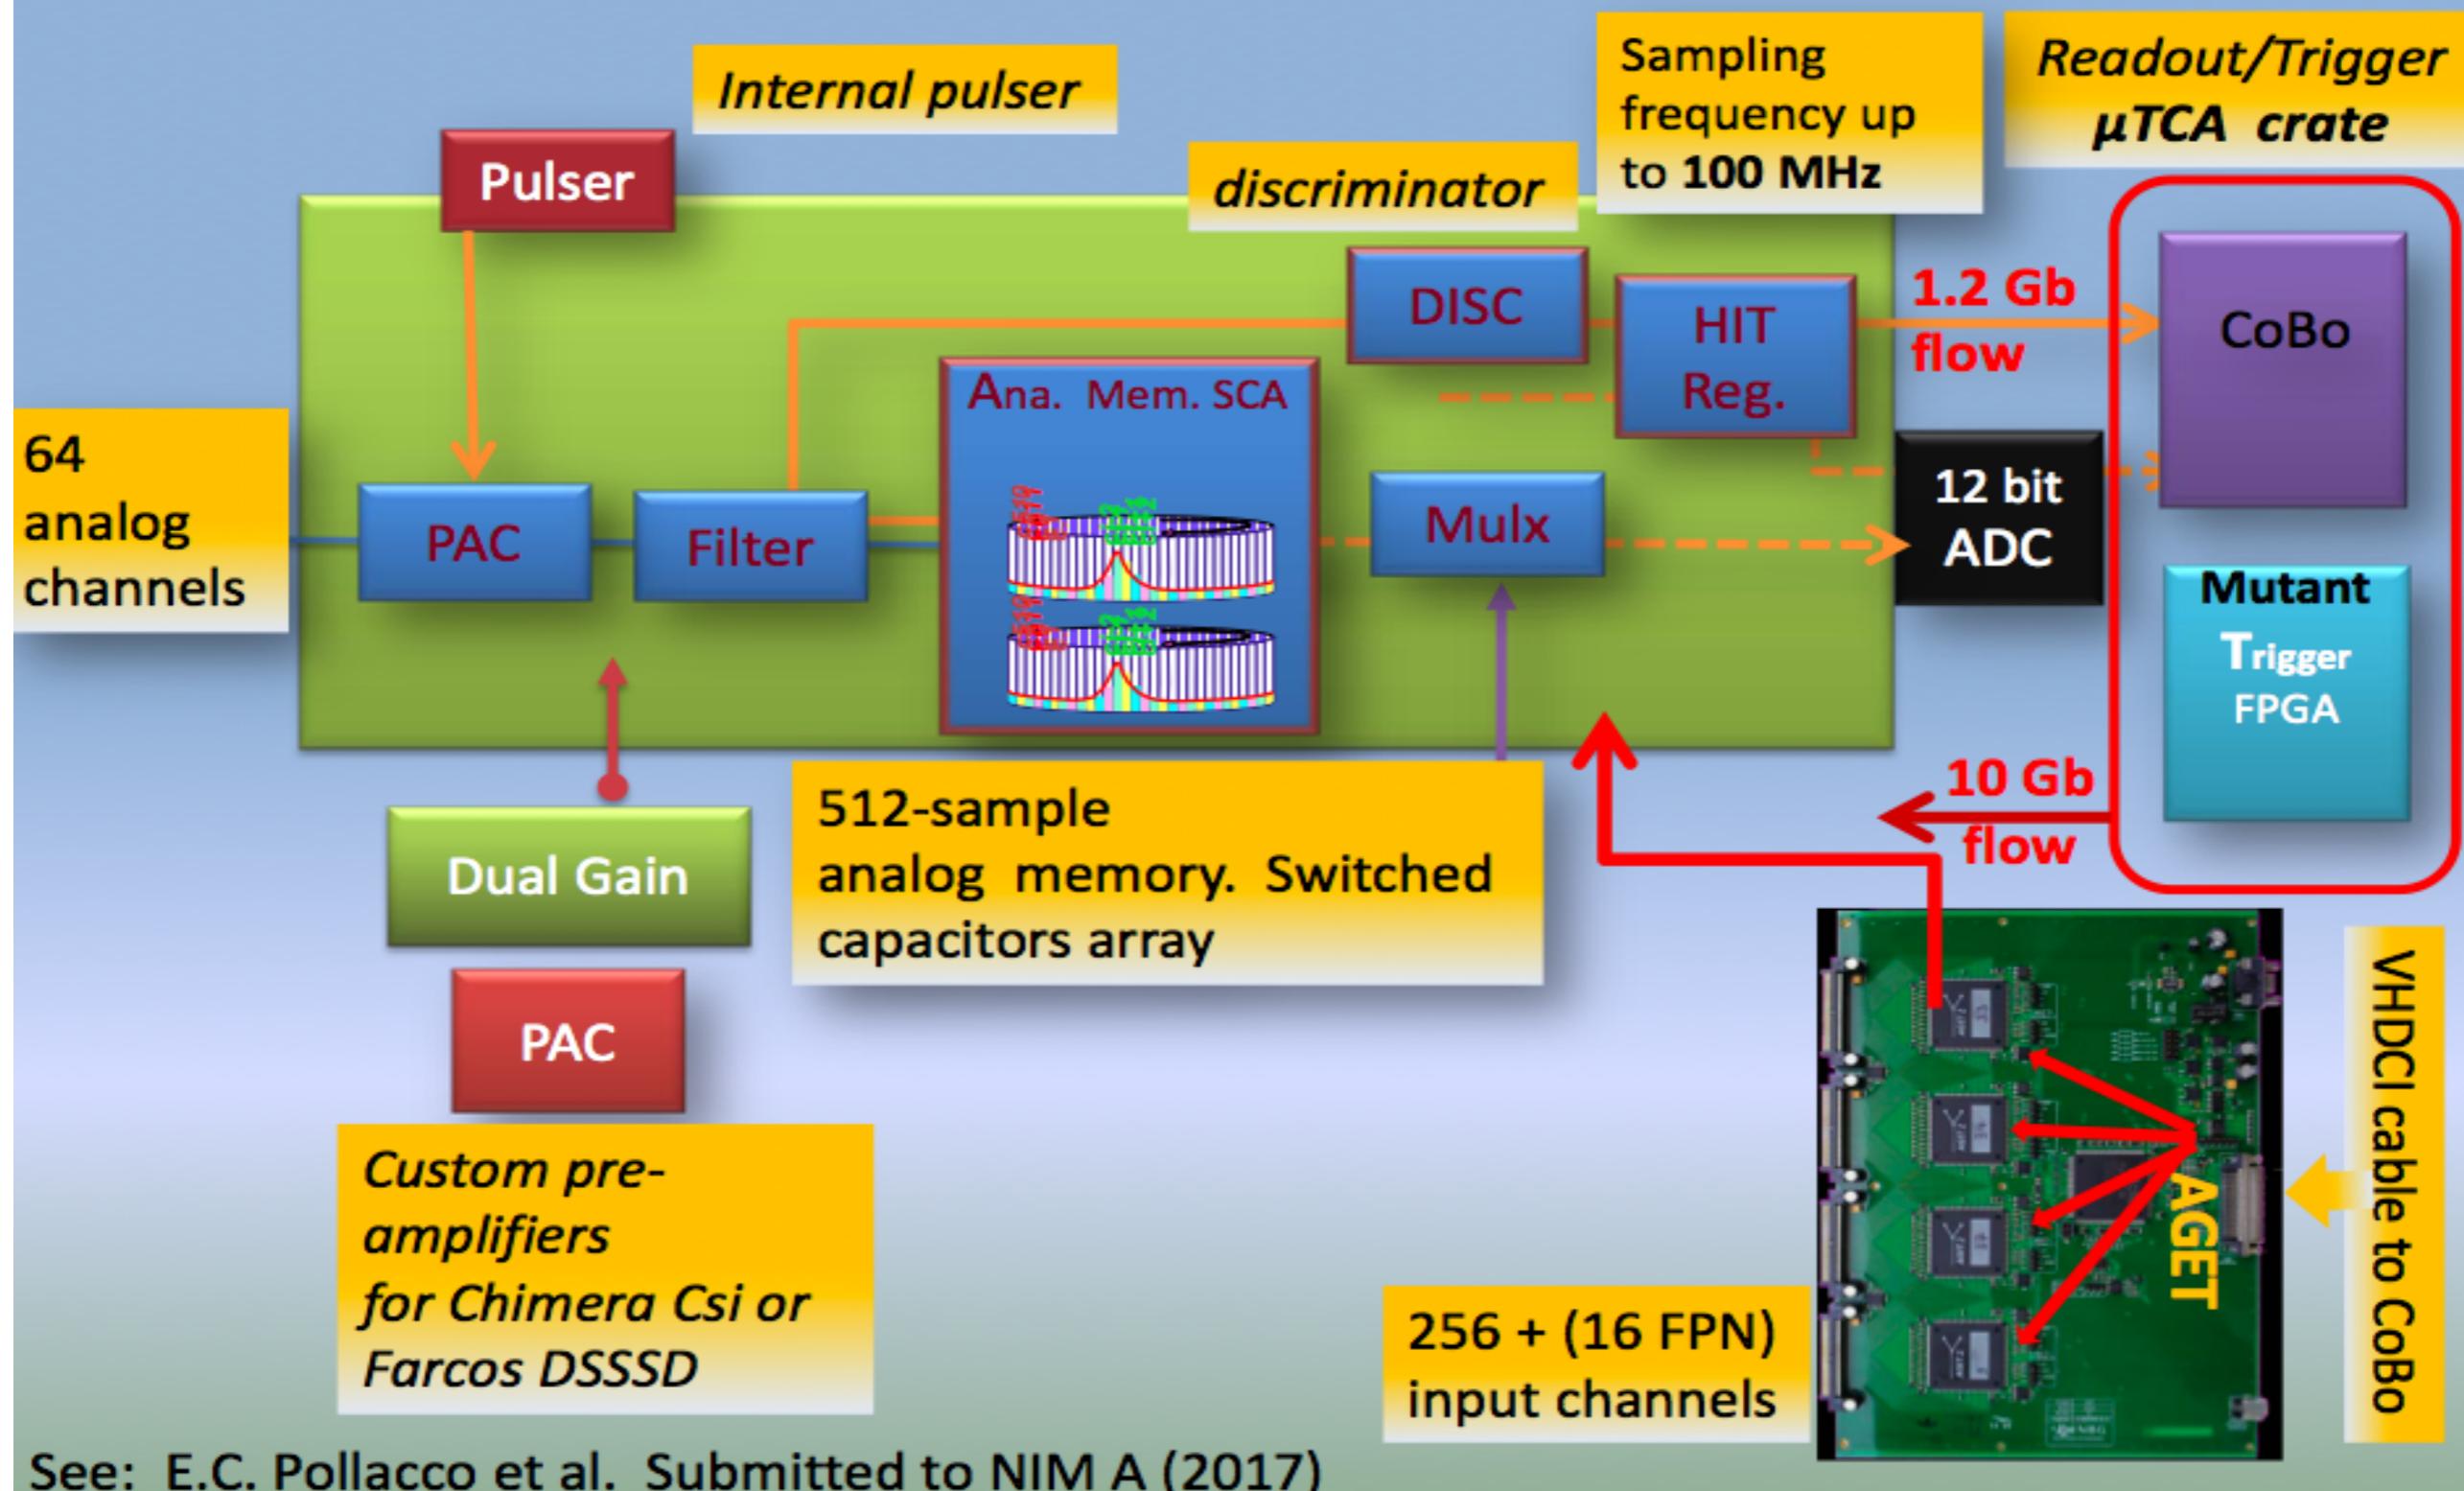

See: E.C. Pollacco et al. Submitted to NIM A (2017)

AGET: Asic for GET – 64 analog channels (+4 FPN) - 512 cells/channel


ASAD: AGET Support for Analog to Digital – 4 AGET

COBO: Collection BOard – 4 ASAD - 1024 digital channels

MUTANT: MUtiplicity, Trigger ANd Time (3 trigger levels)

MicroTCA: Micro Telecommunications Computing Architecture

MCH: Carrier Hub with 10 Gb and 1 Gb ethernet link

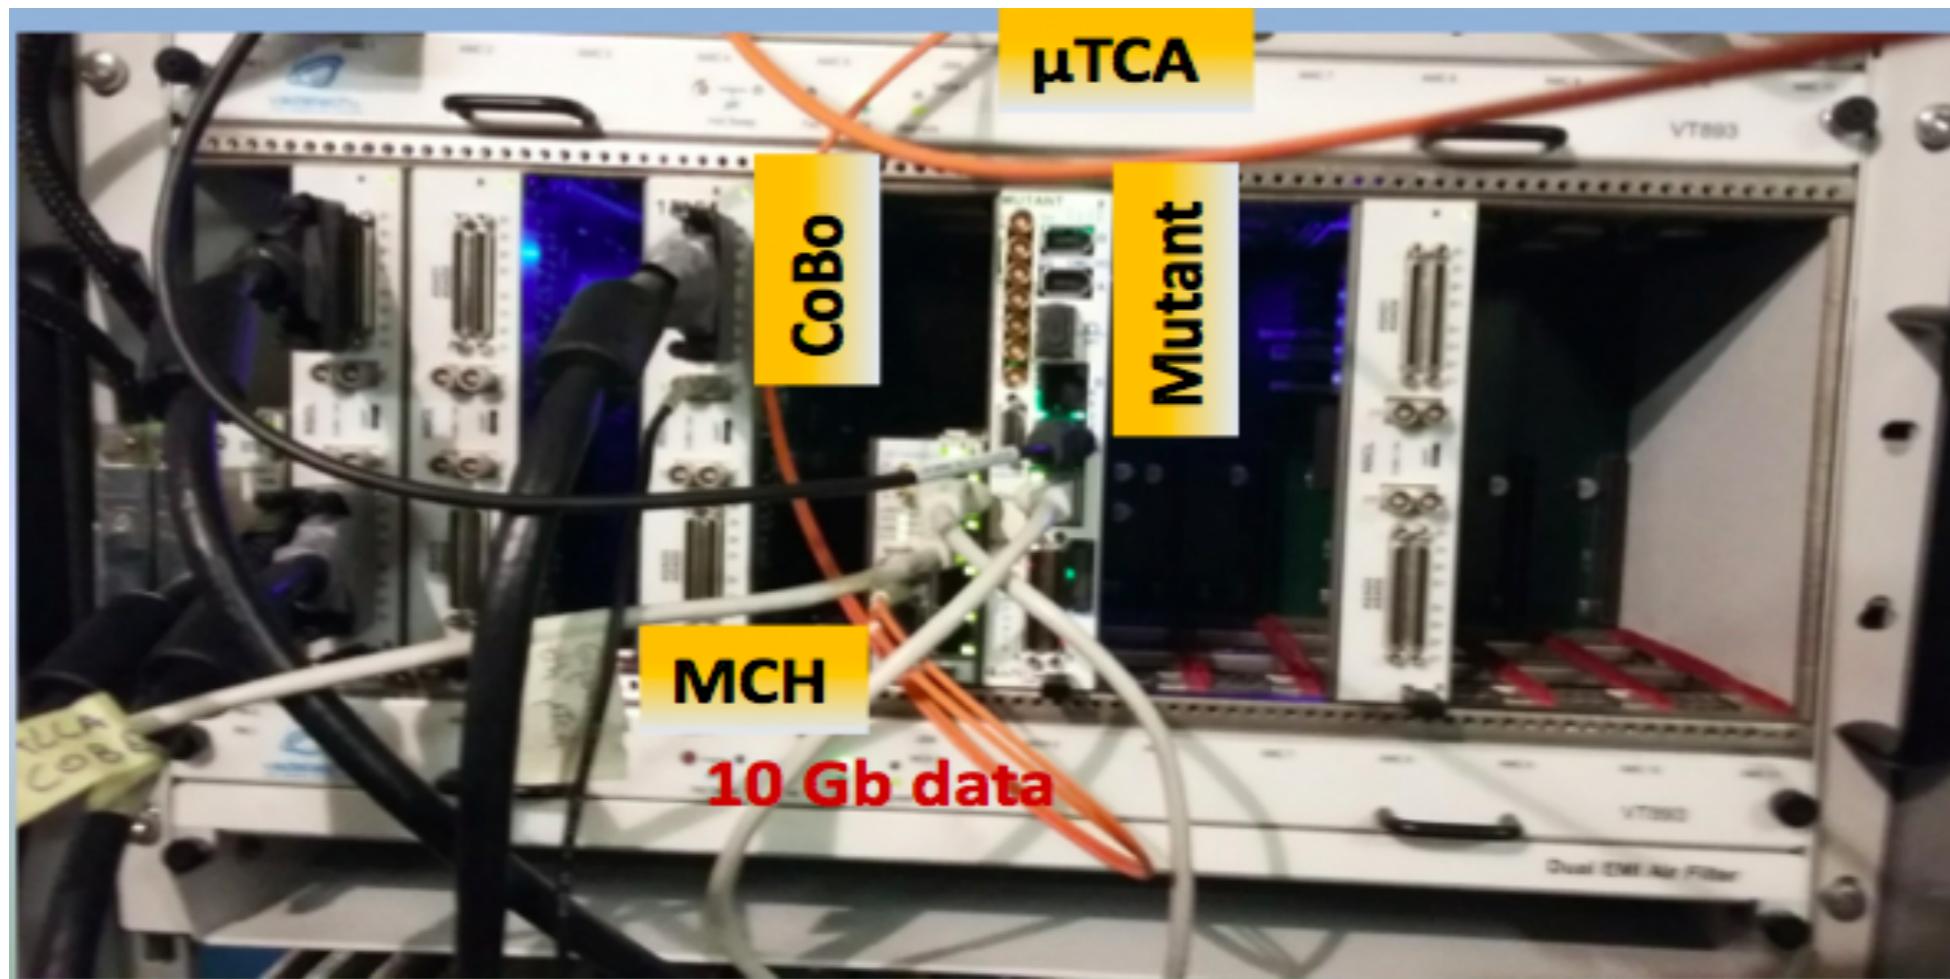

Cross talk

È un problema poco rilevante in misure in singola mentre non si può sottovalutare per misure in coincidenza e soprattutto a piccoli impulsi relativi!

N. Colonna et al., NIM A 381 (1996) 472-480

$$E_{\text{diff}} = E_i - \frac{1}{2} m(d_{\text{min}} / \Delta t)^2$$

E_i è l'energia del neutroni più veloce

d_{min} è la minima distanza tra due rivelatori colpiti


Δt è la differenza temporale tra i due rivelatori colpiti

E_{diff} rappresenta l'energia persa dal neutrone le primo detector


L'energia minima che dovrebbe possedere il neutrone scatterato dal primo detector per raggiungere il secondo detector nel tempo Δt

Se $E_{\text{diff}} < 0$ la coincidenza è reale


Se $E_{\text{diff}} > 0$ ulteriori analisi statistiche sono necessarie

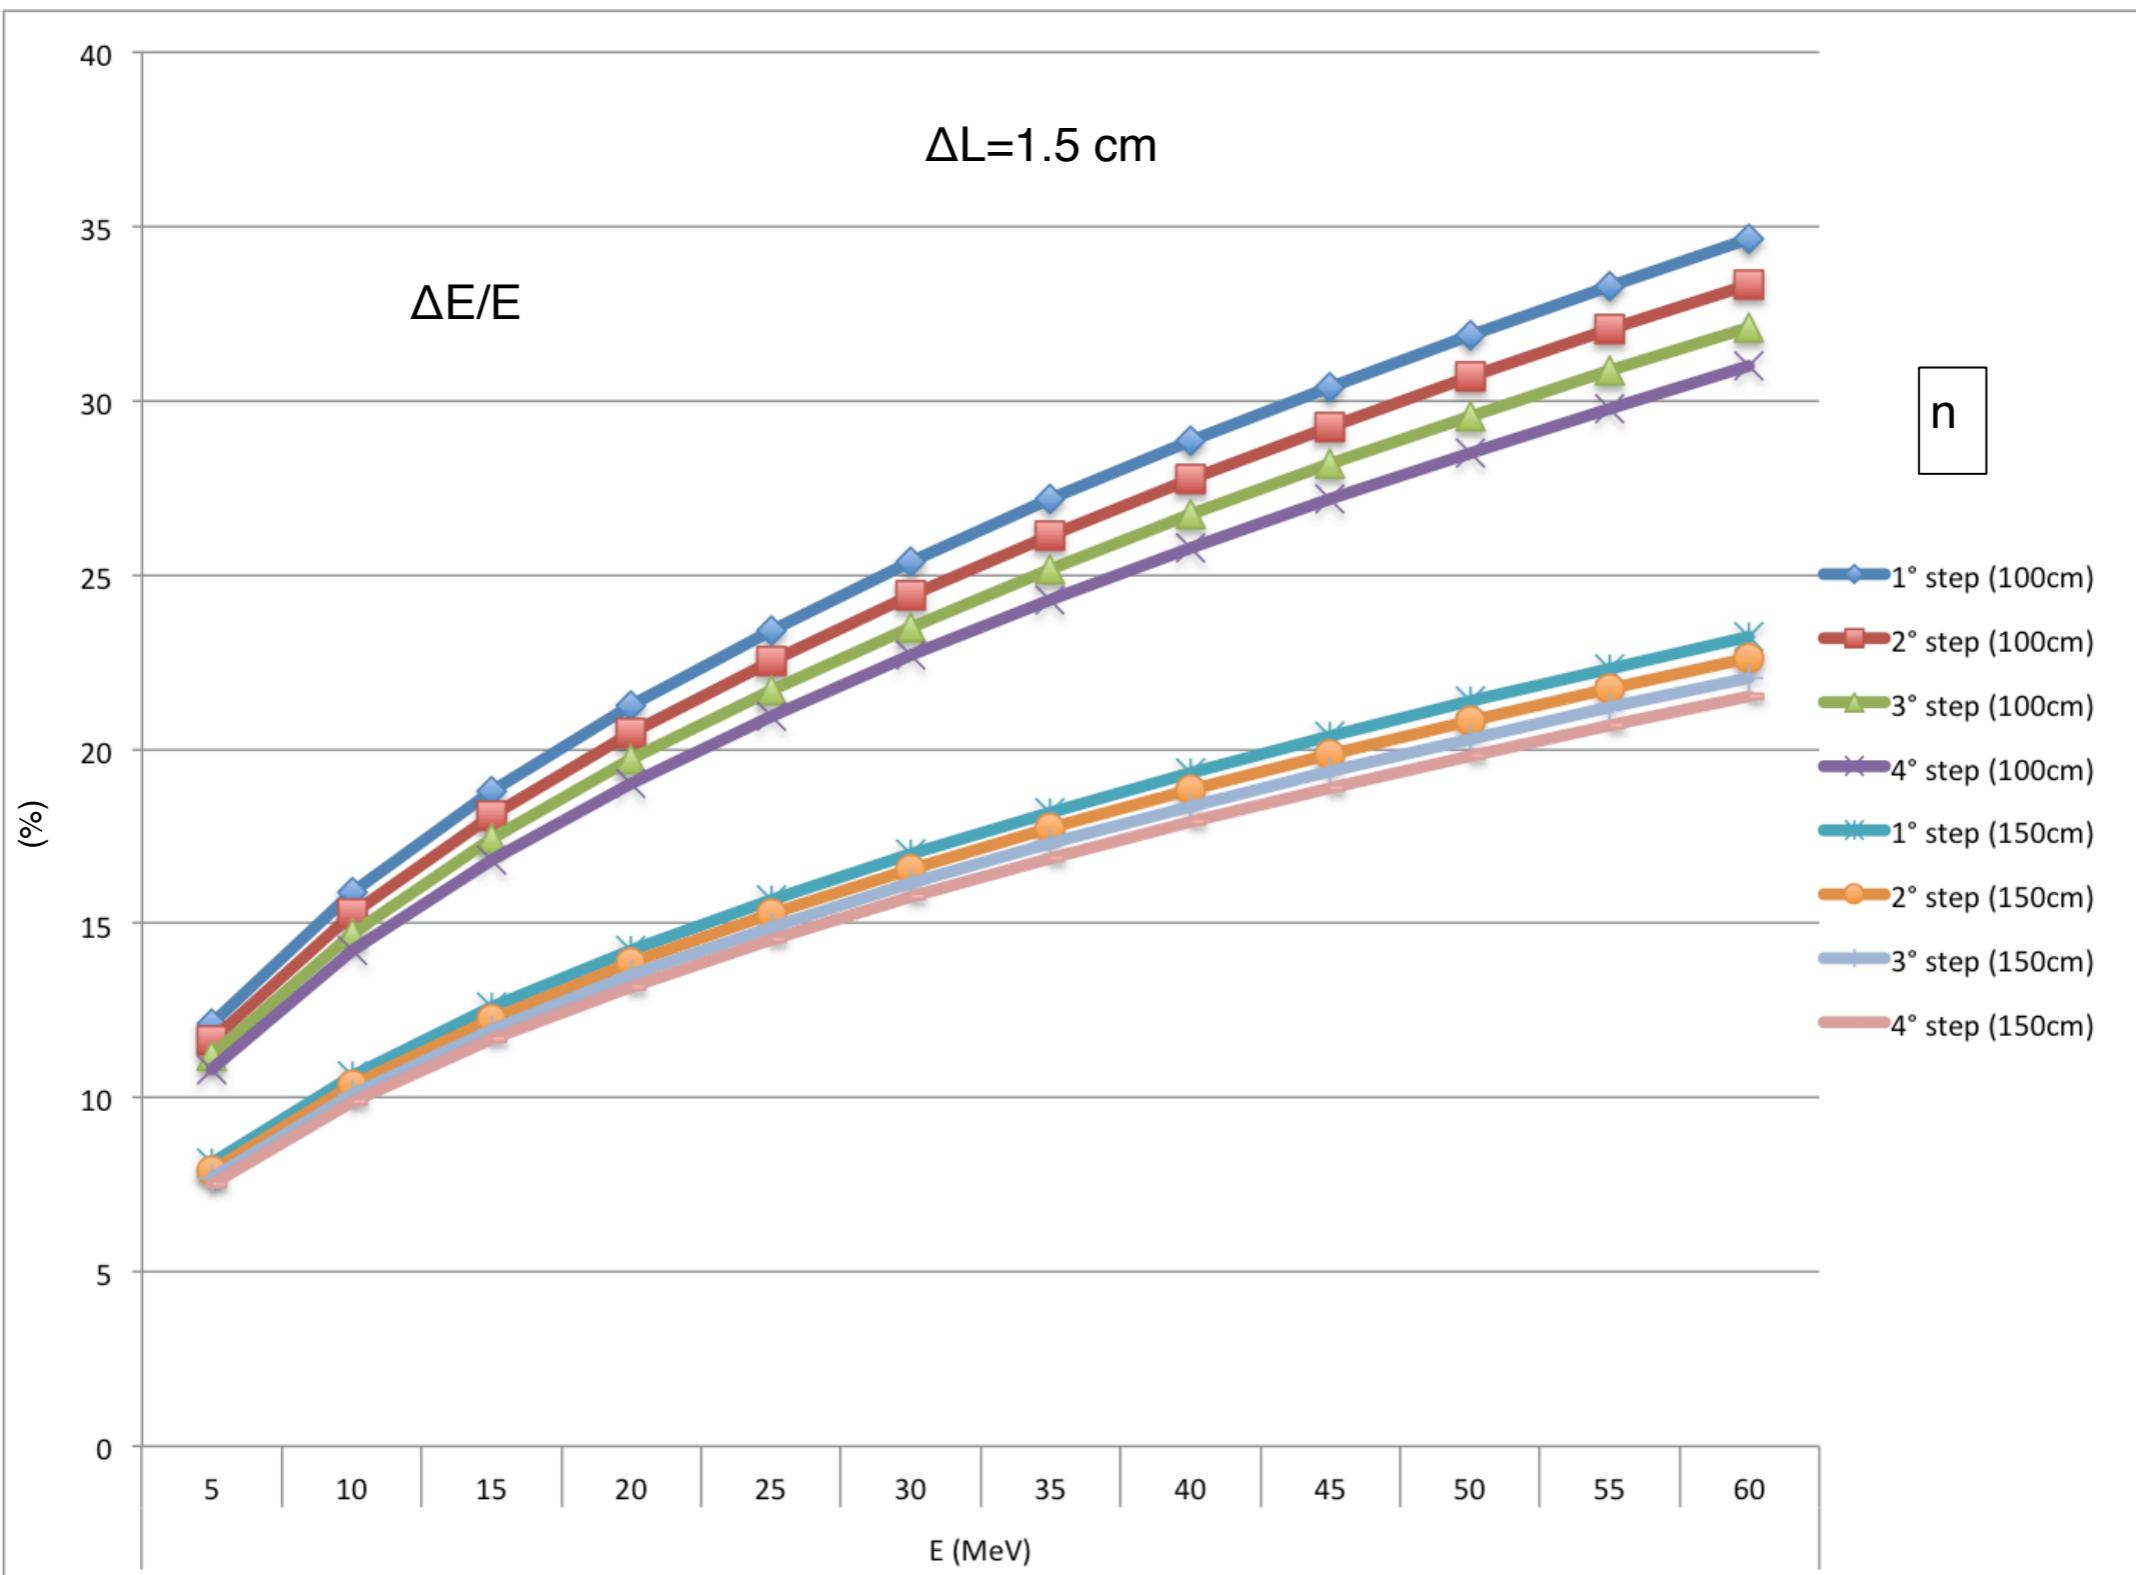

L_{out} Vs E_{dep}

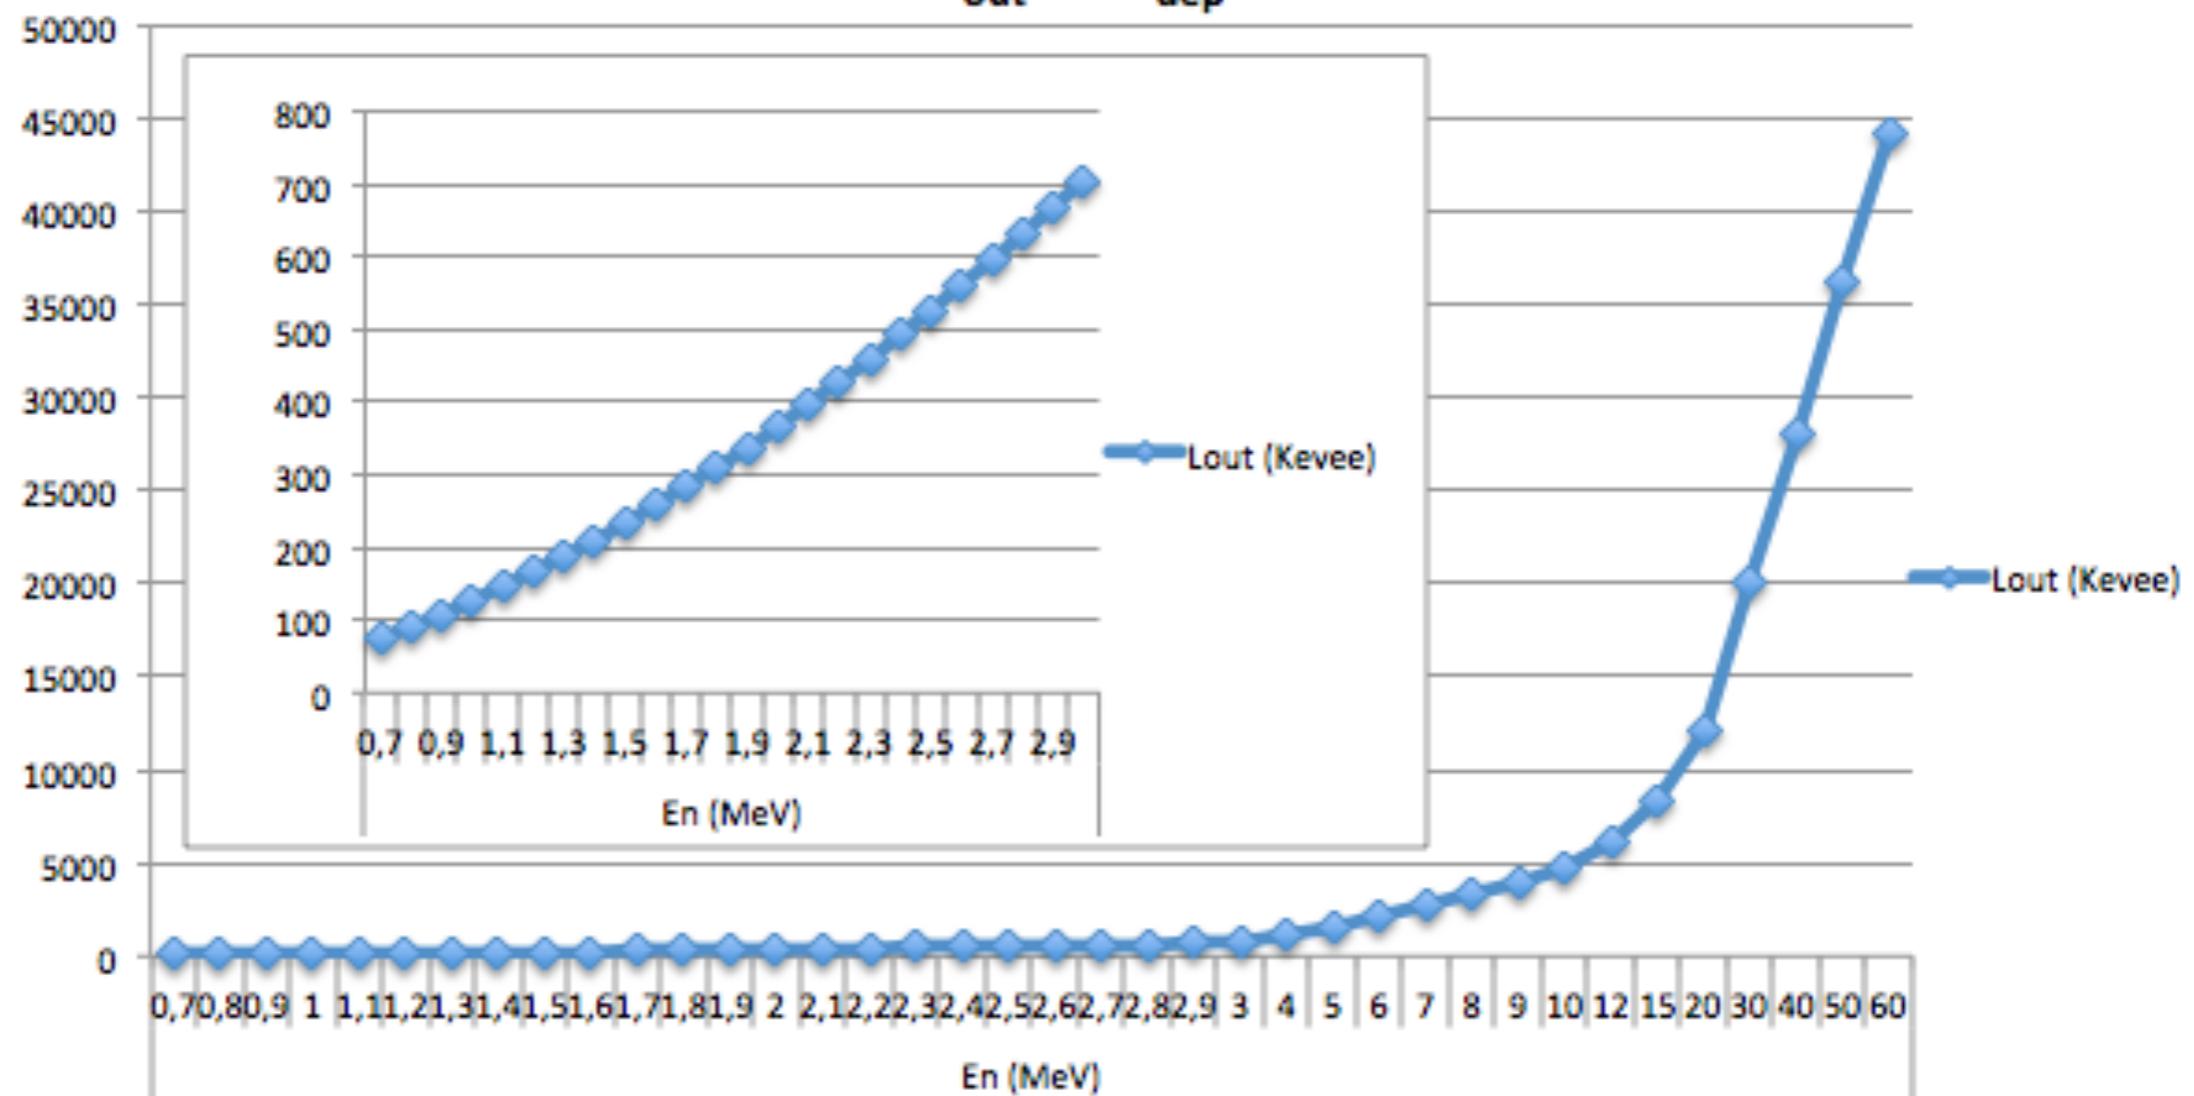

Sorgente portatile di neutroni (Messina)

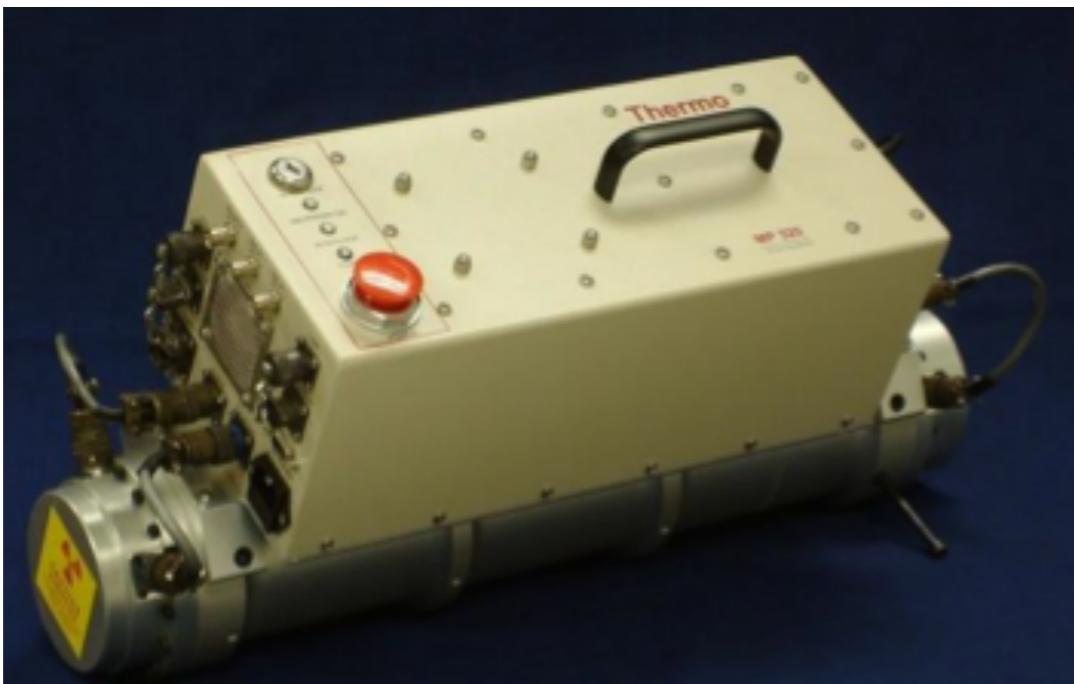



reactions:

d+d -> n da 2.5 MeV 10^6 n/s

d+t -> n da 14 MeV 10^8 n/s



Attributes	MP 320
D-T Maximum Yield, n/s	1.0E+08
D-D Maximum Yield, n/s	1.0E+06
Maximum High Voltage, kV	-90
Typical Tube Life, Hrs	1,200
Operating Temperature, °C	50
Potential of Target	HV
Continuous Operation	Yes
Pulsing Range, kHz	0.50 to 20
Duty Cycle	5-95%
Minimum Pulse Width, μ sec	5
Control	Digital
Keylock for Neutrons On/Off	Yes
HV Insulating Material	SF-6 Gas, 99.99% pure or better
Other Safety Interlocks	Yes
Input Power, Watts	< 75
Input Voltage	120/220 VAC or 24 VDC
Accelerator Head Weight, Kg	10
System Weight, Kg	12
Accelerator Head length and diameter, in.	22" L x 4.75" dia.

Just few numbers

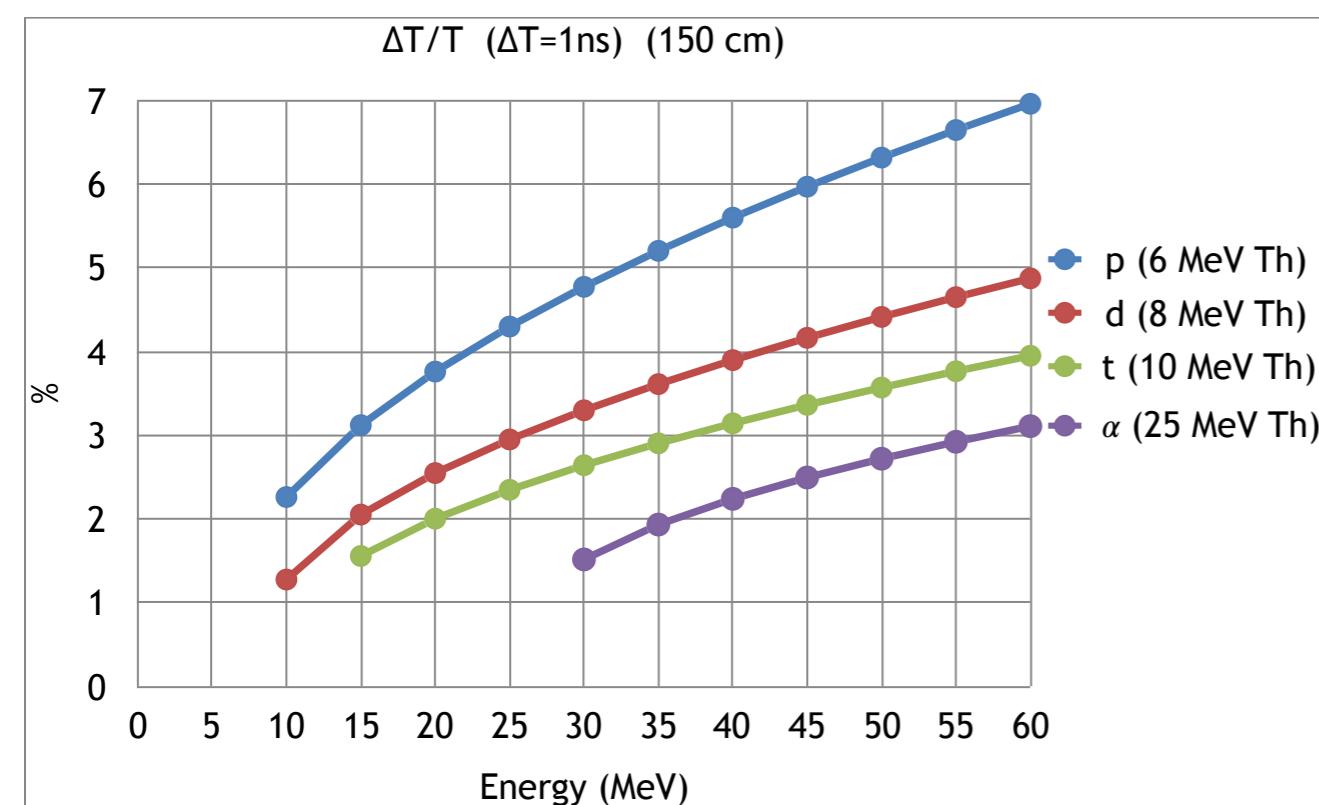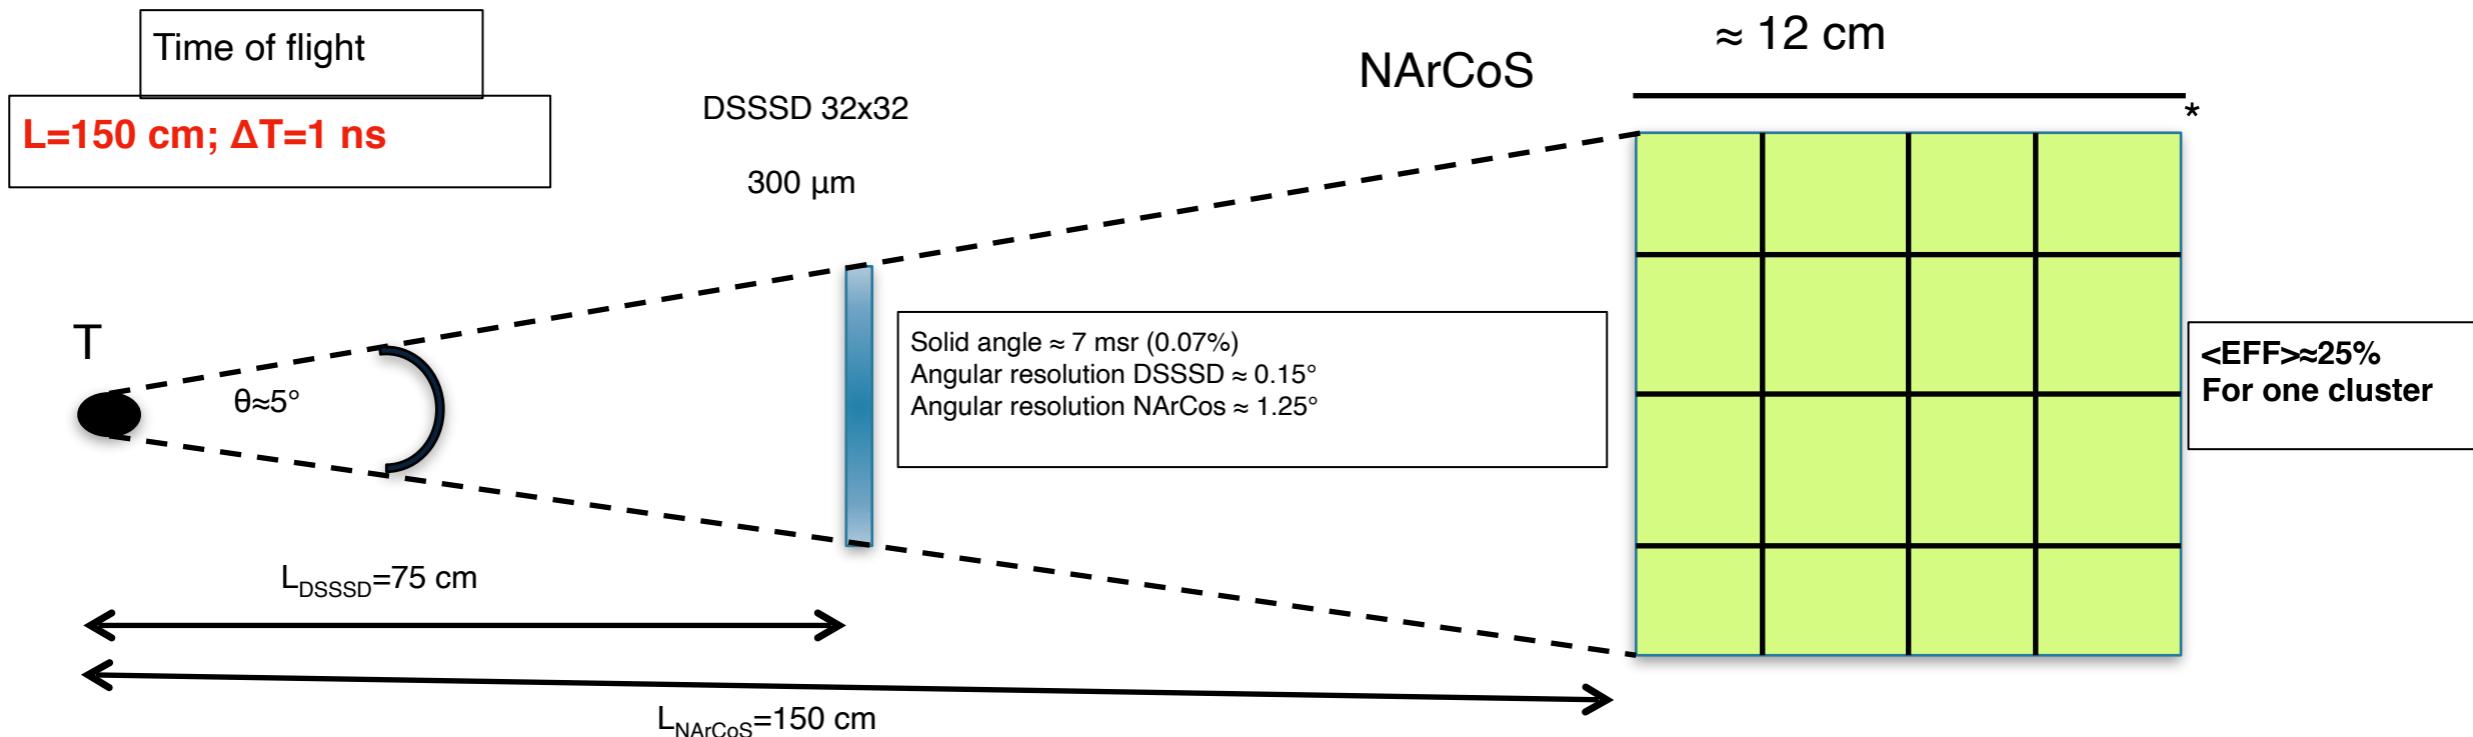




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

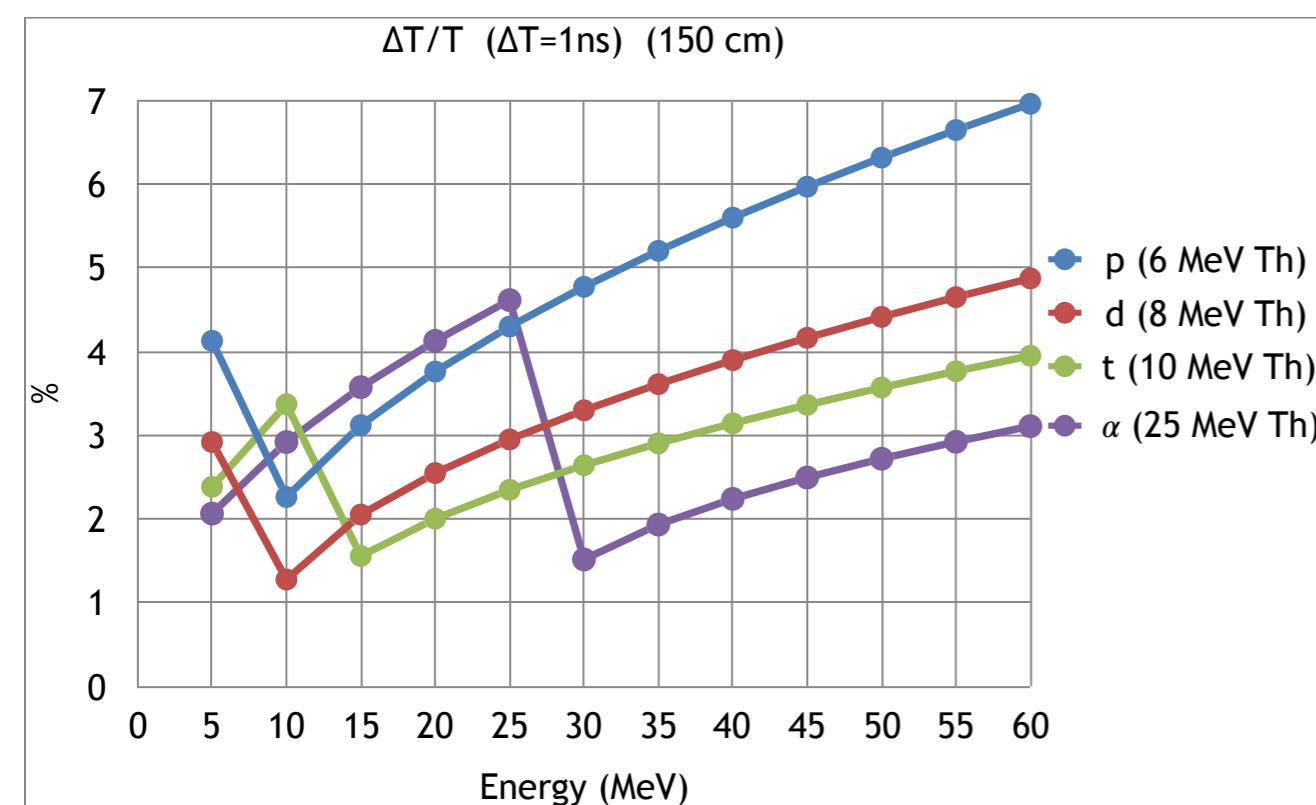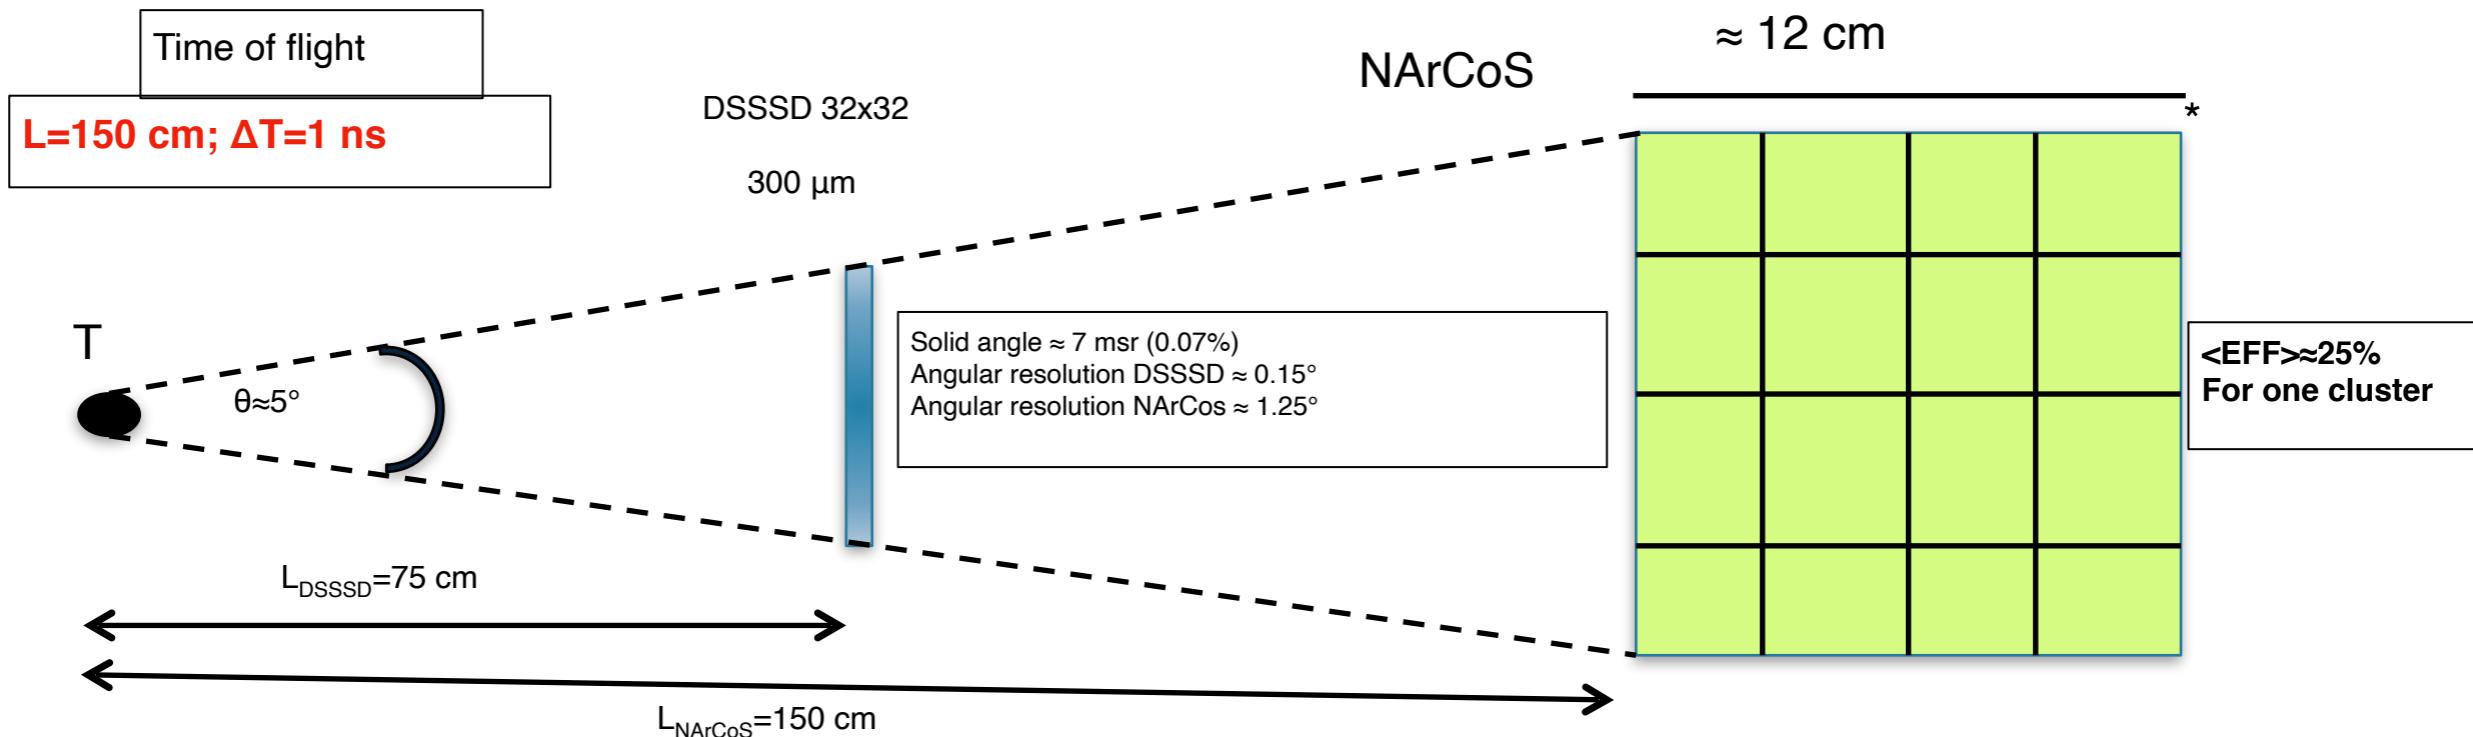




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

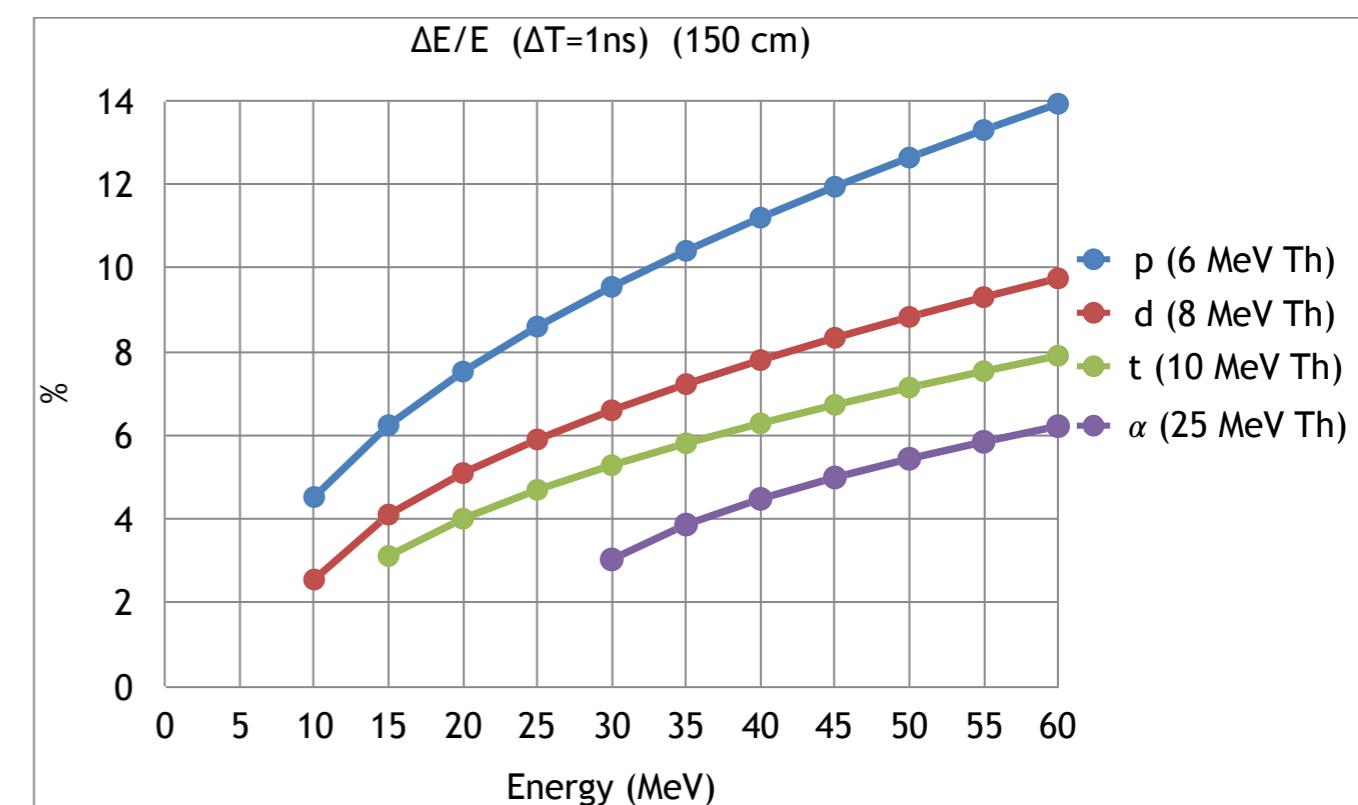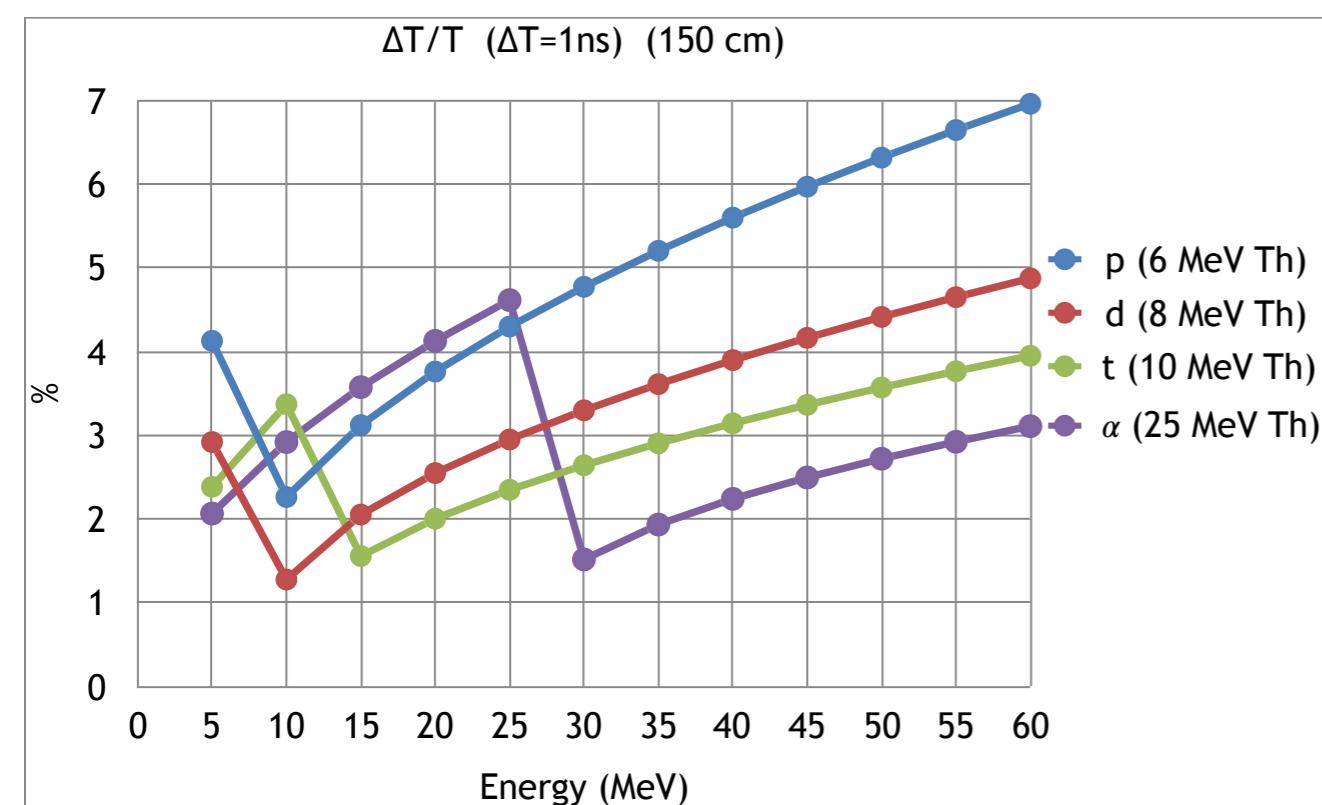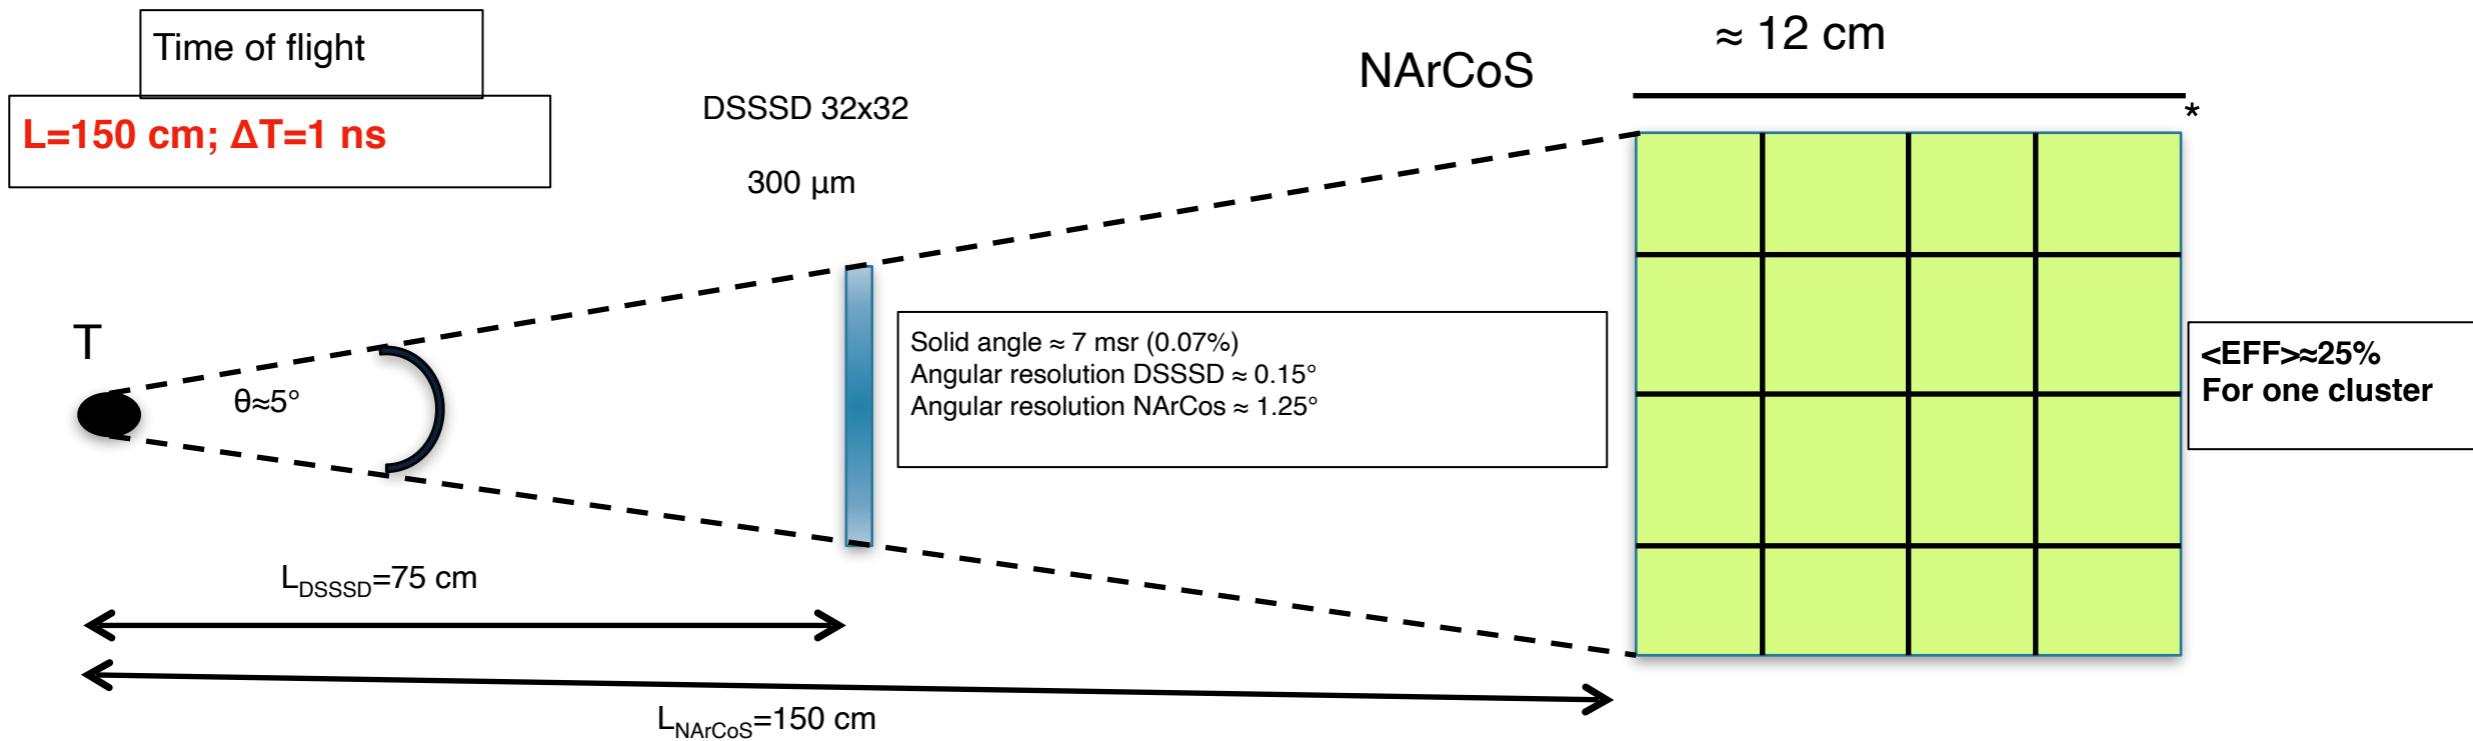




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

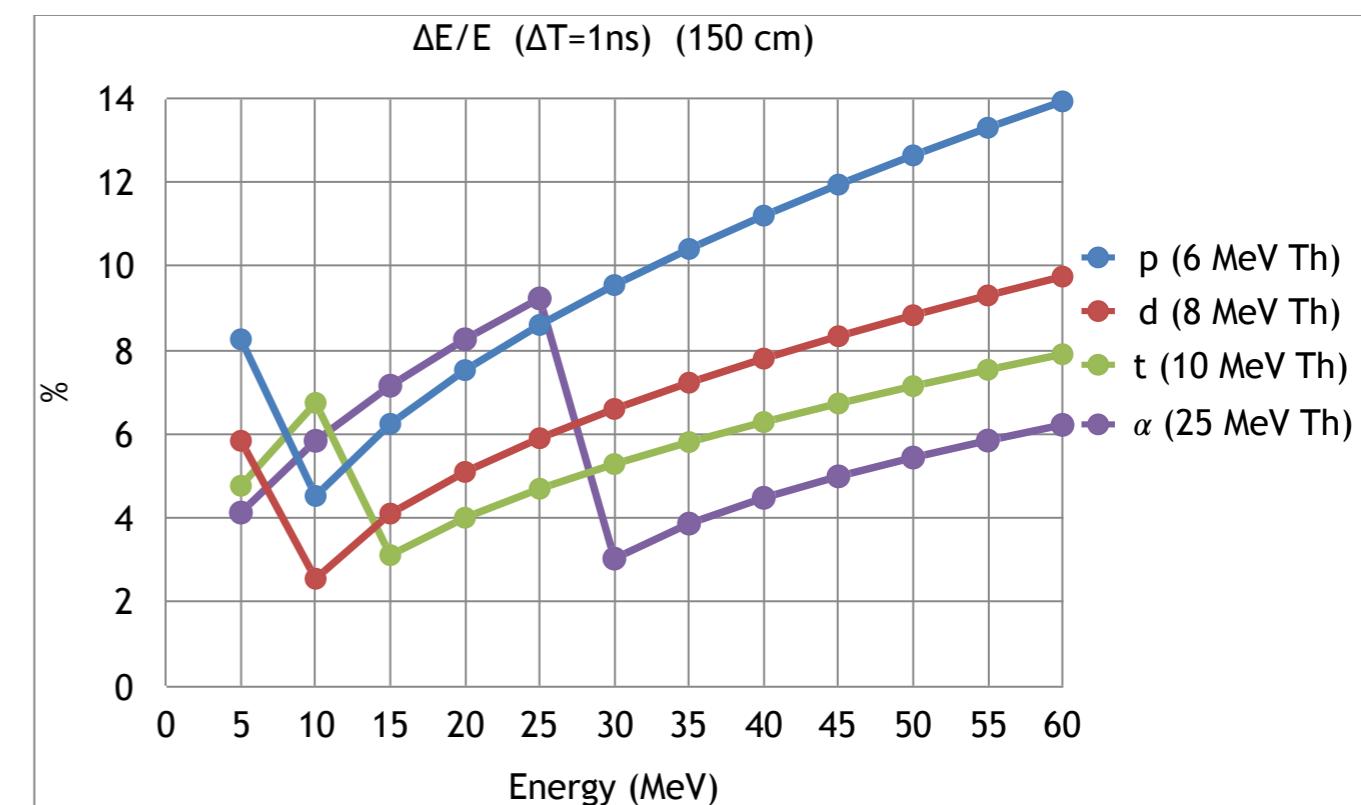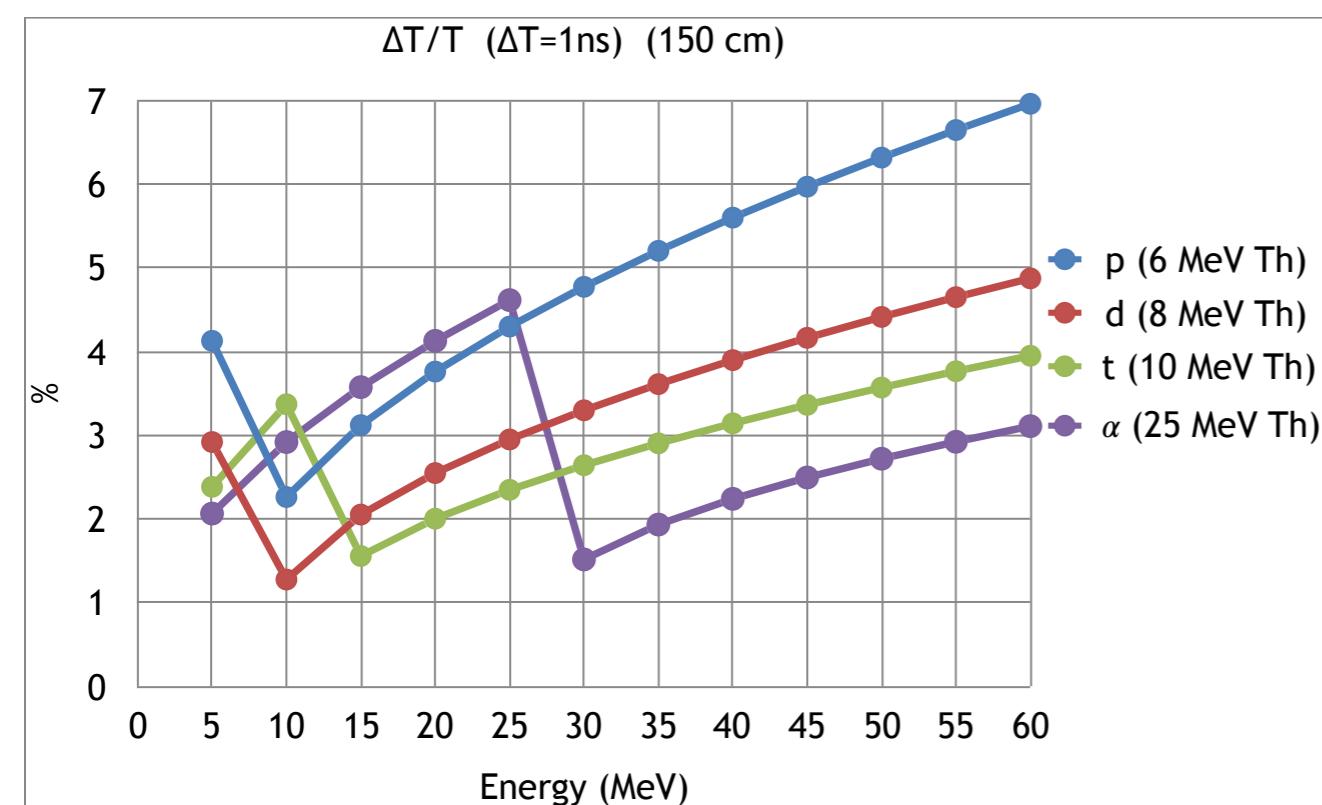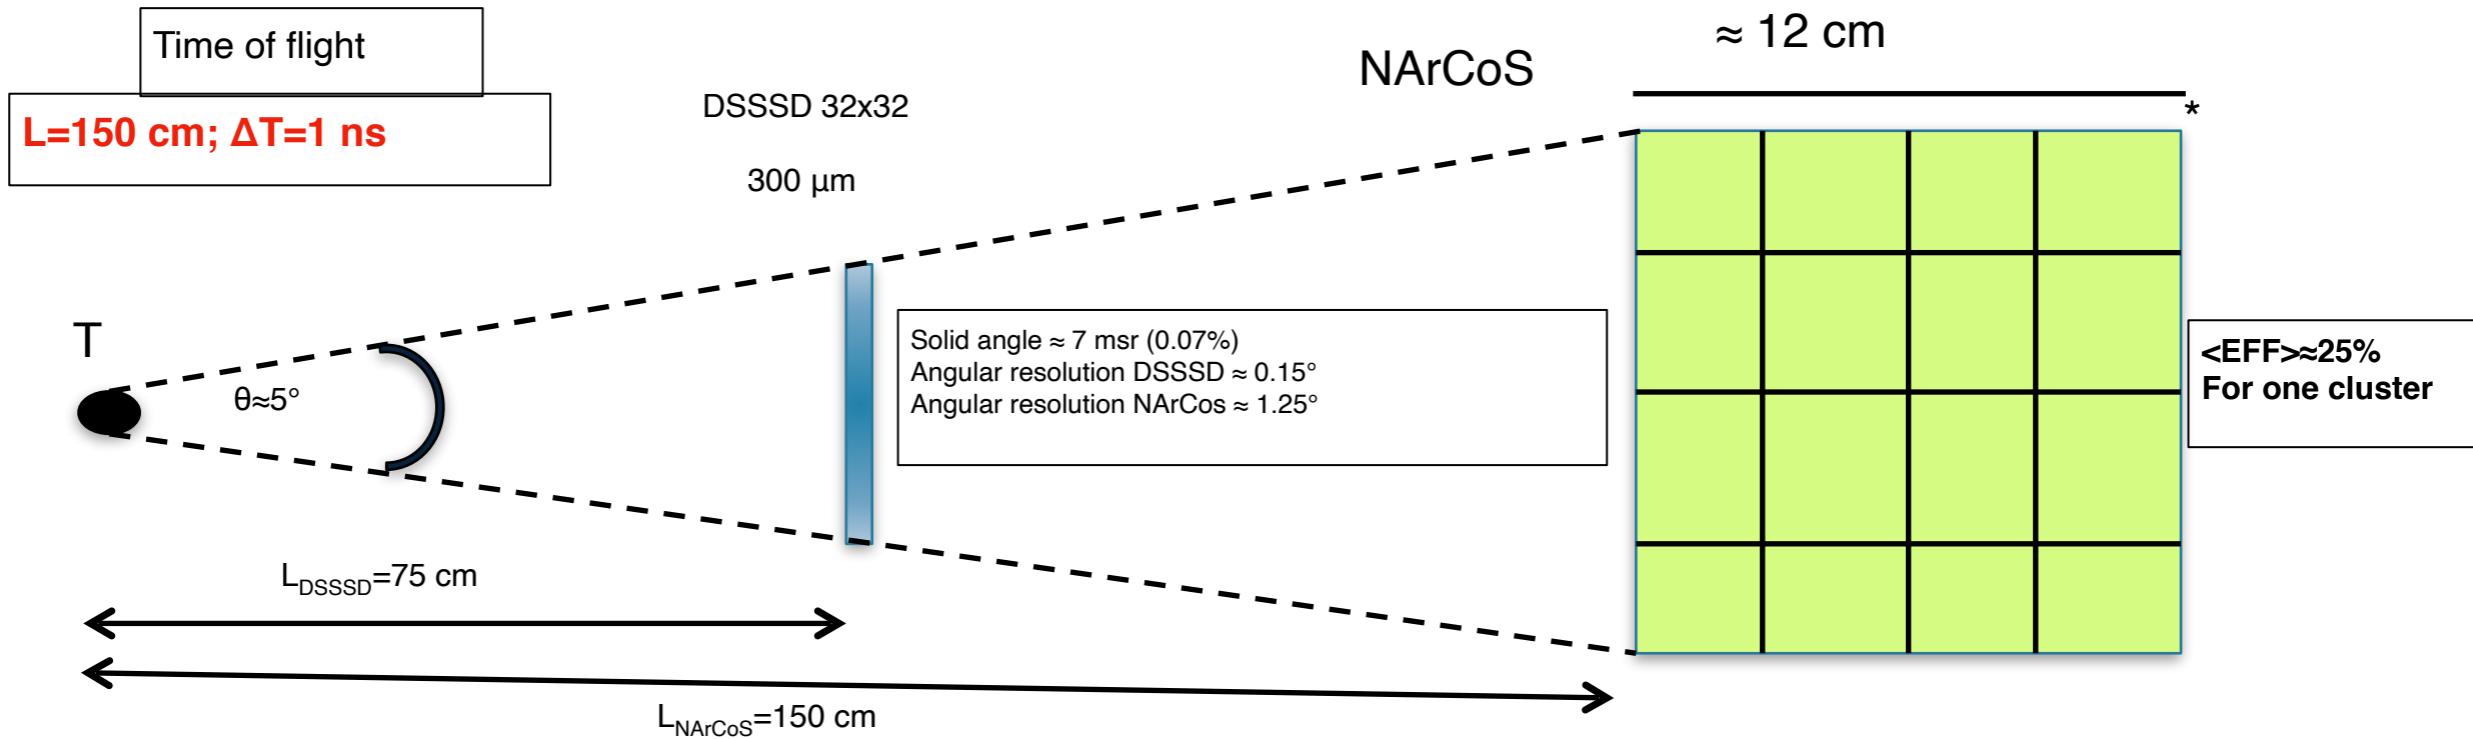




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

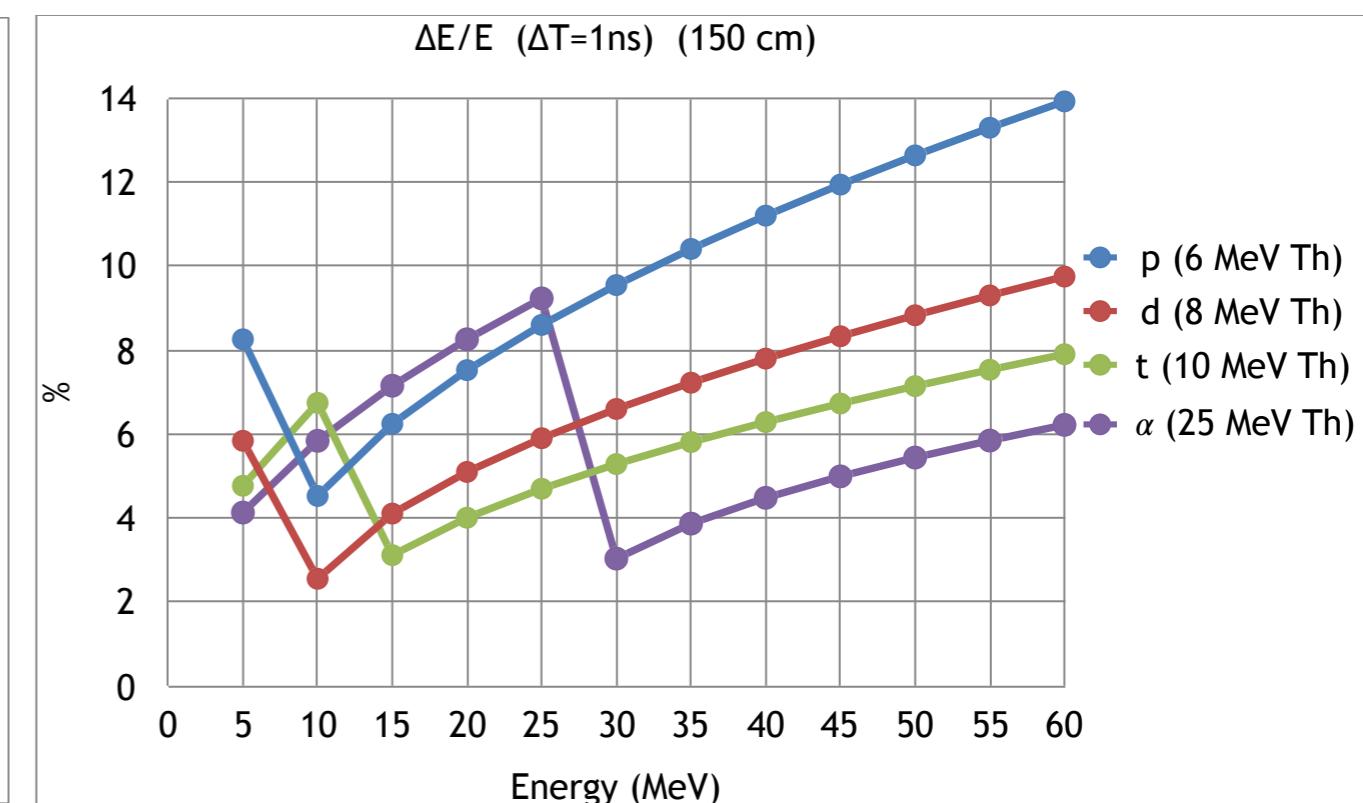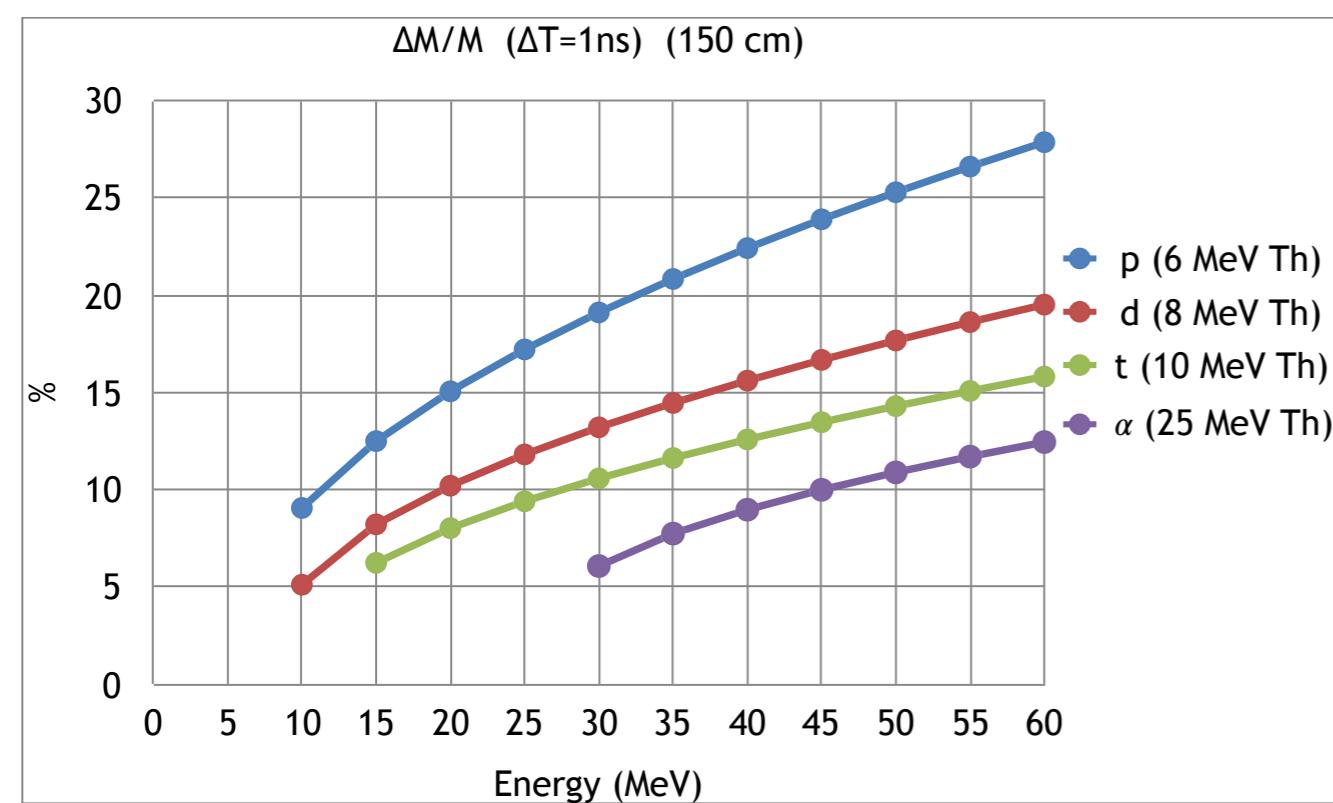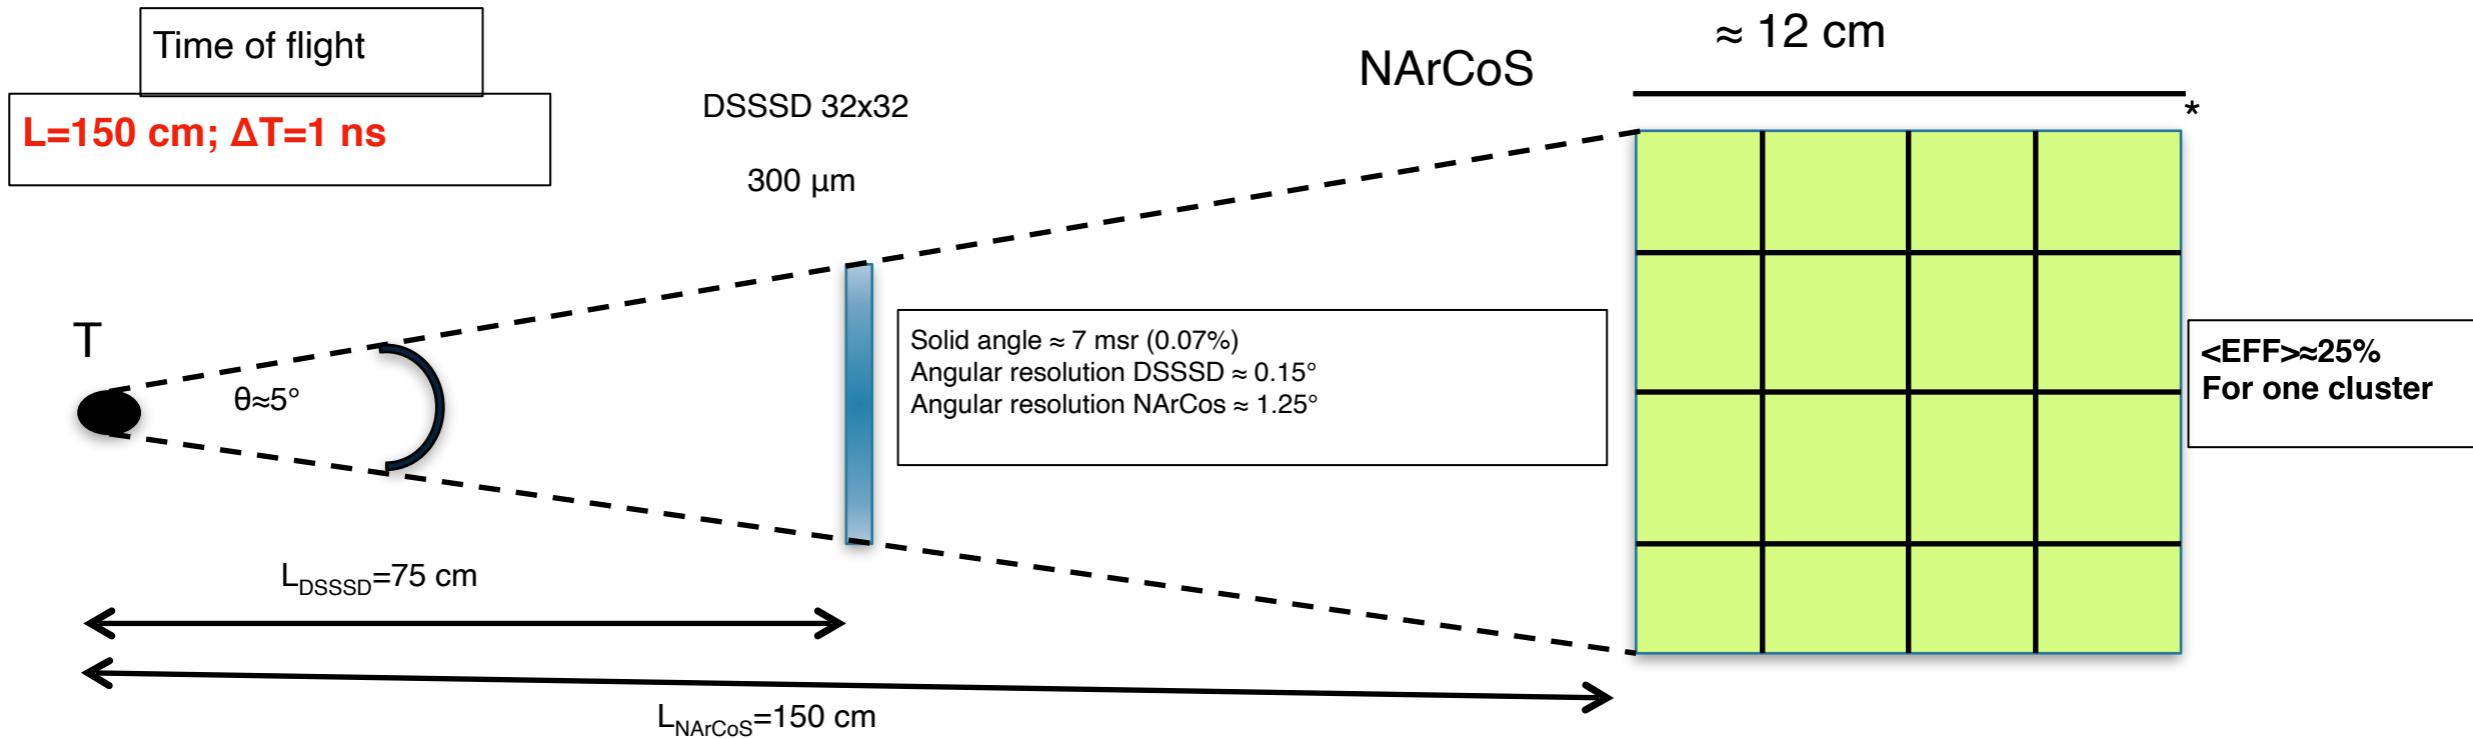




*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

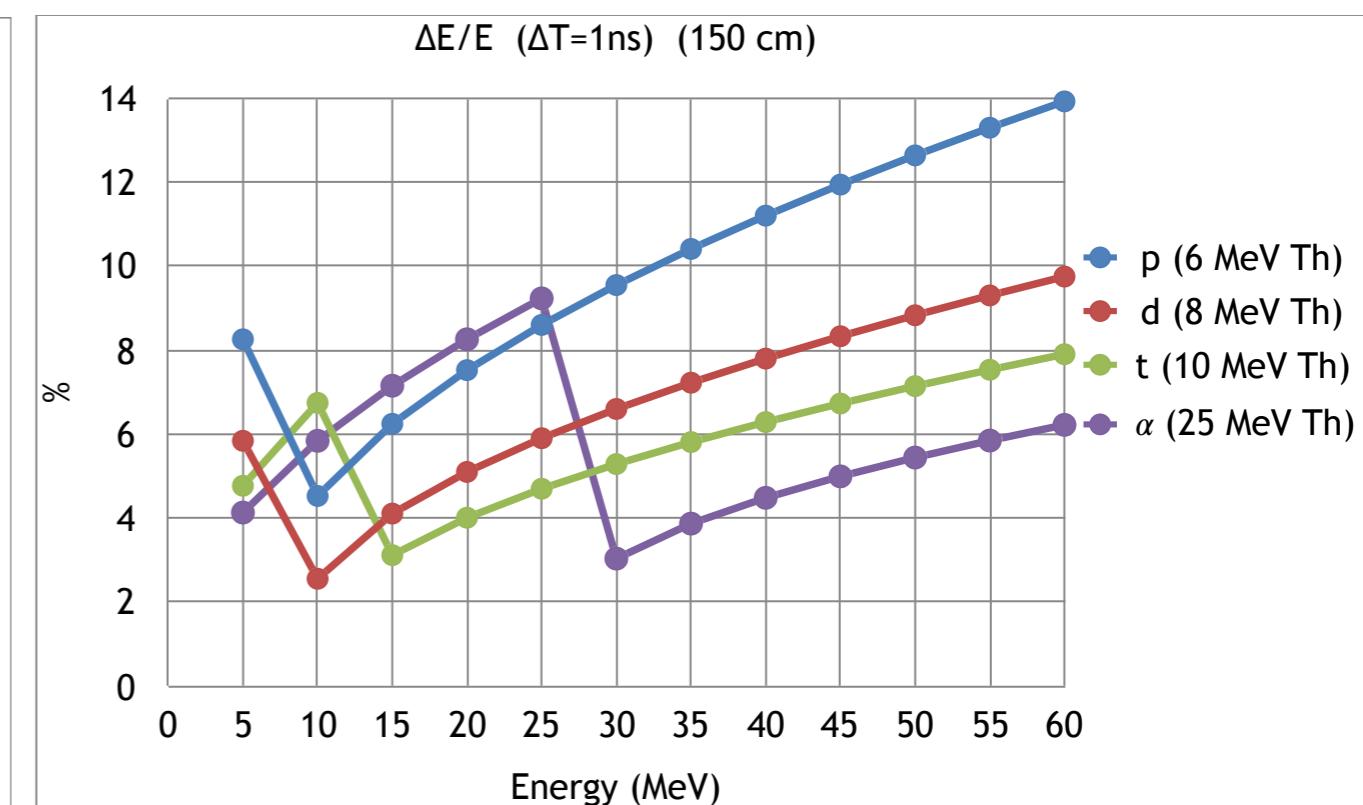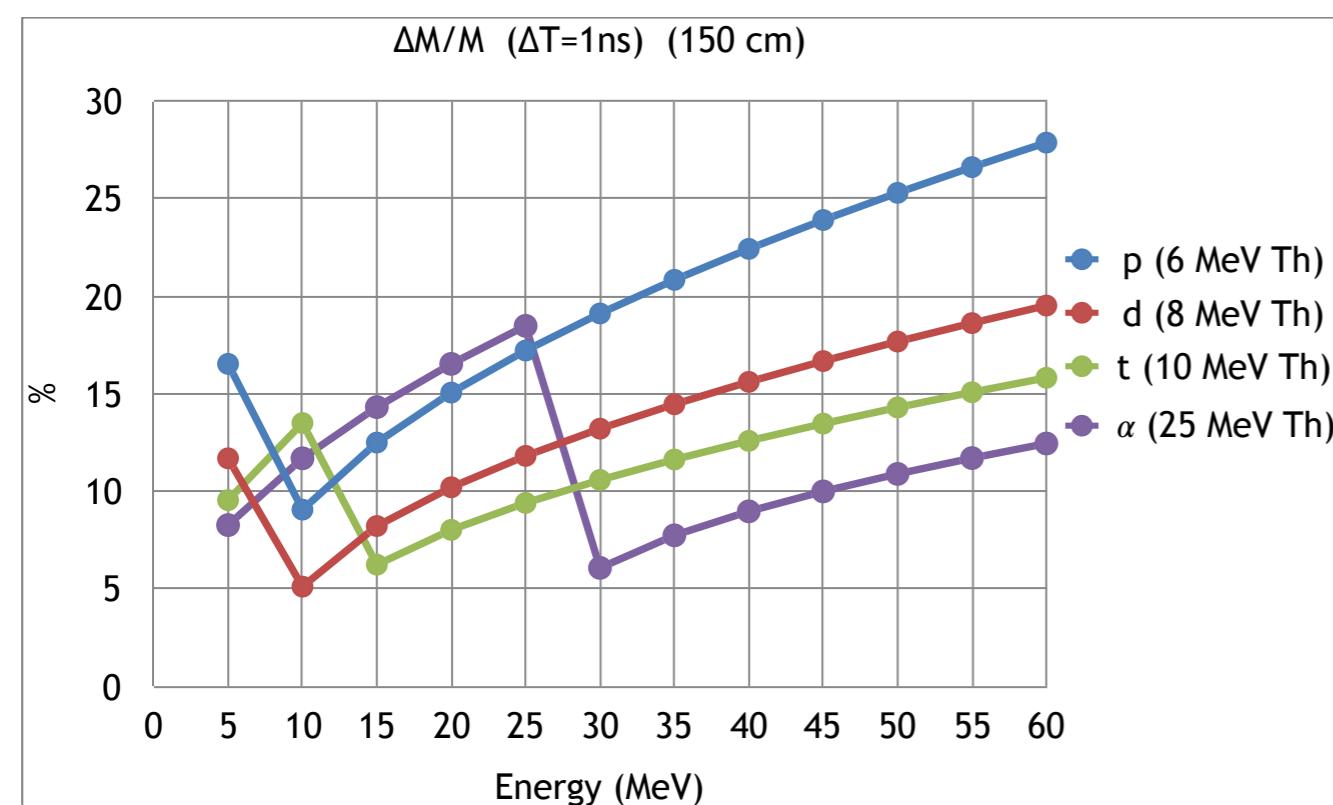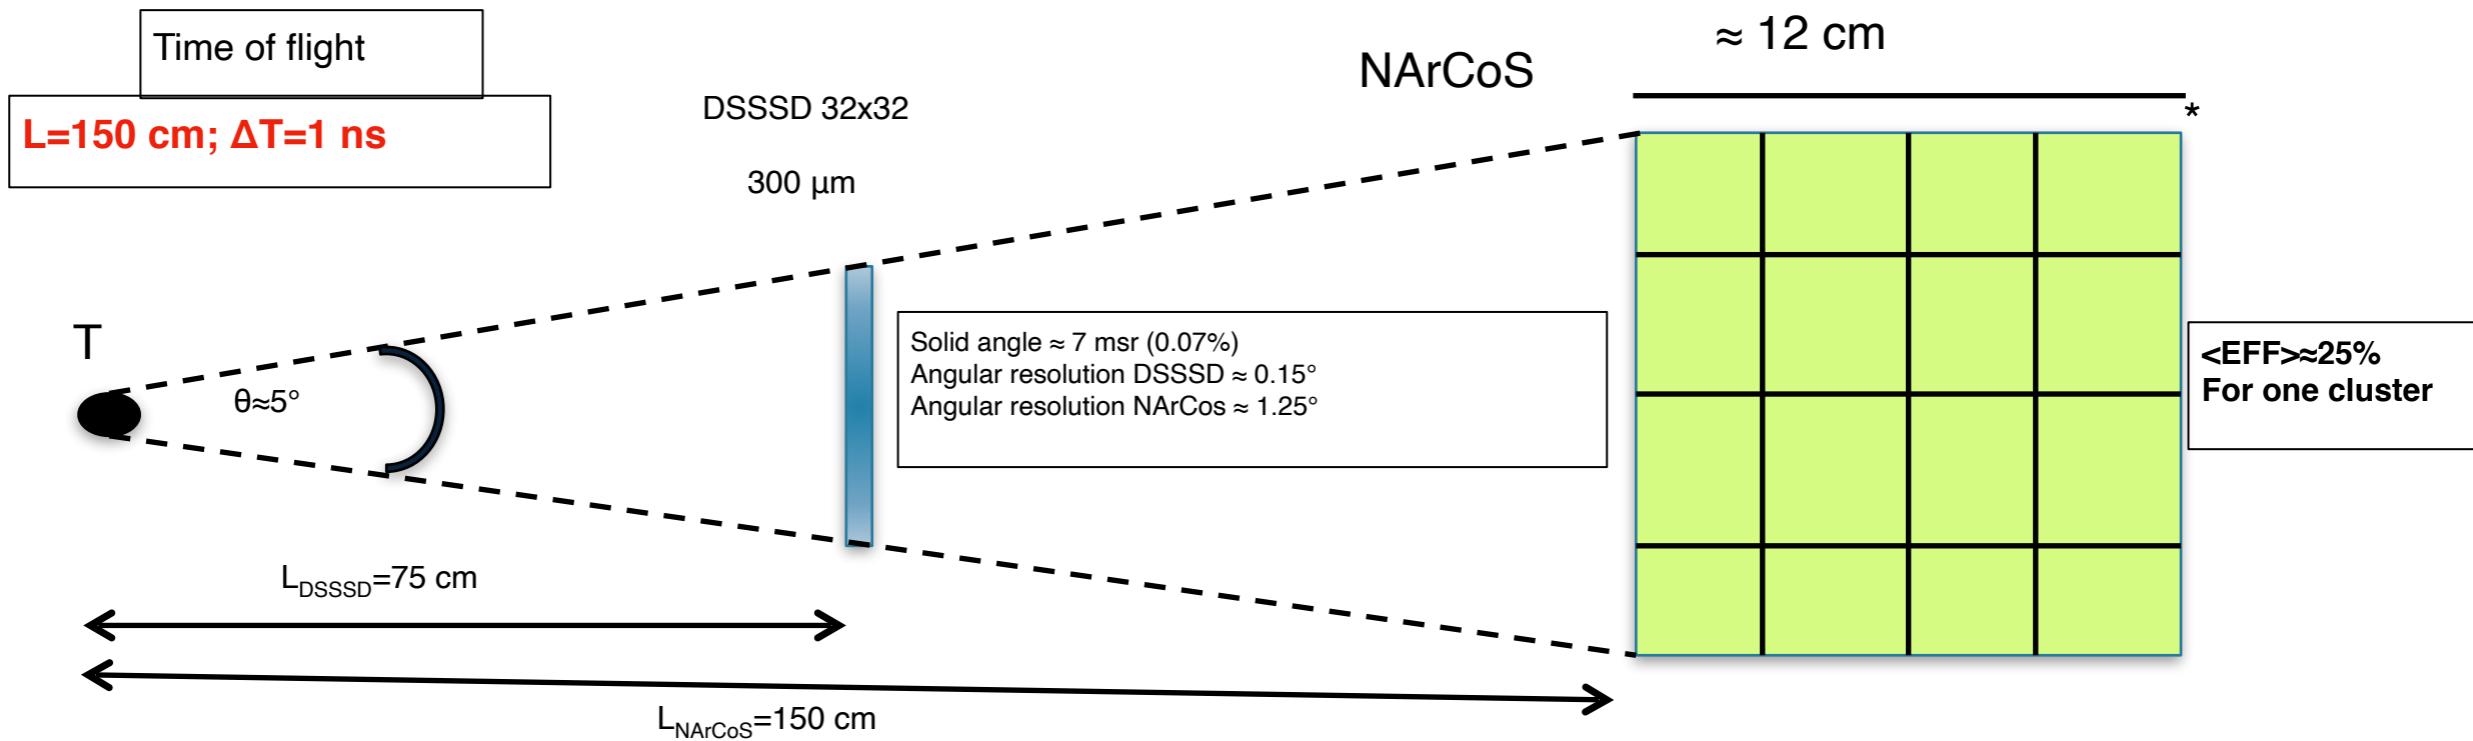


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

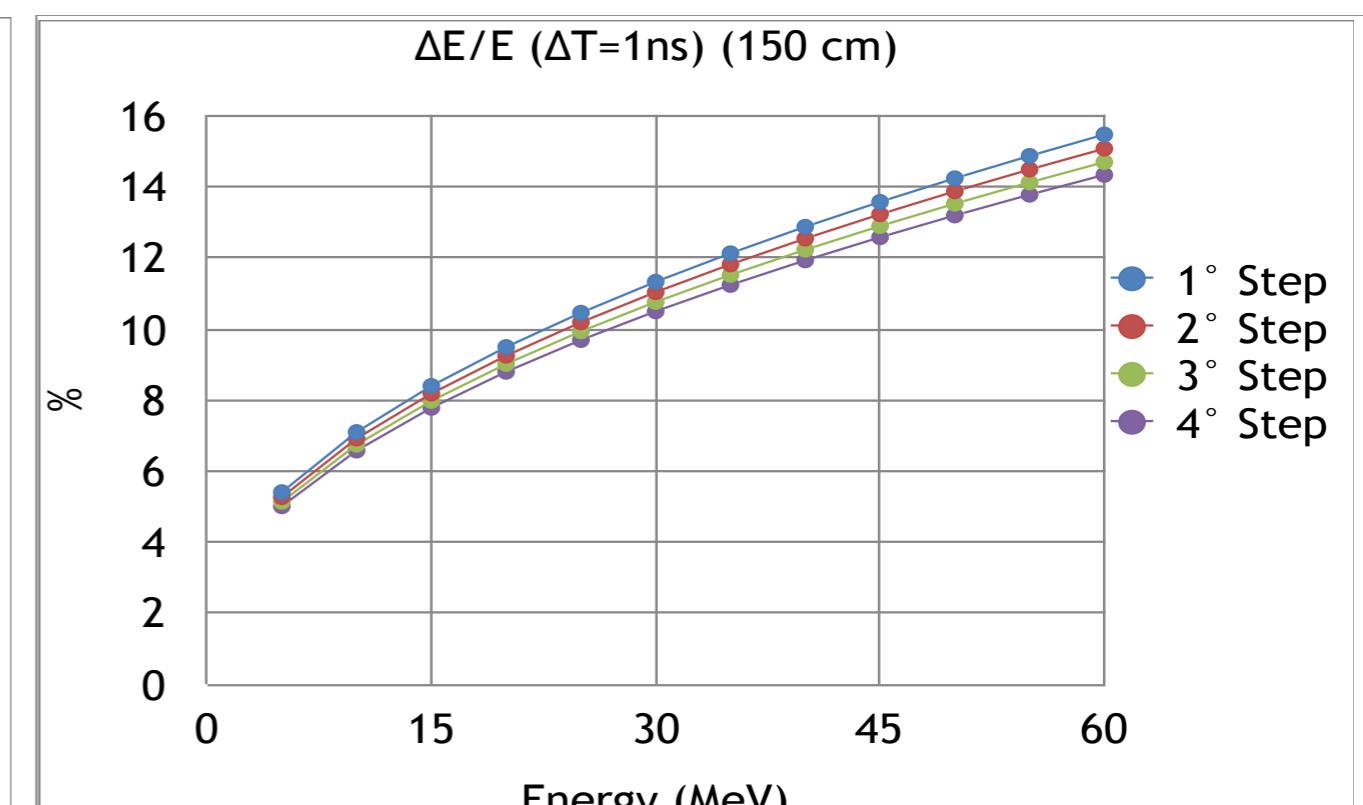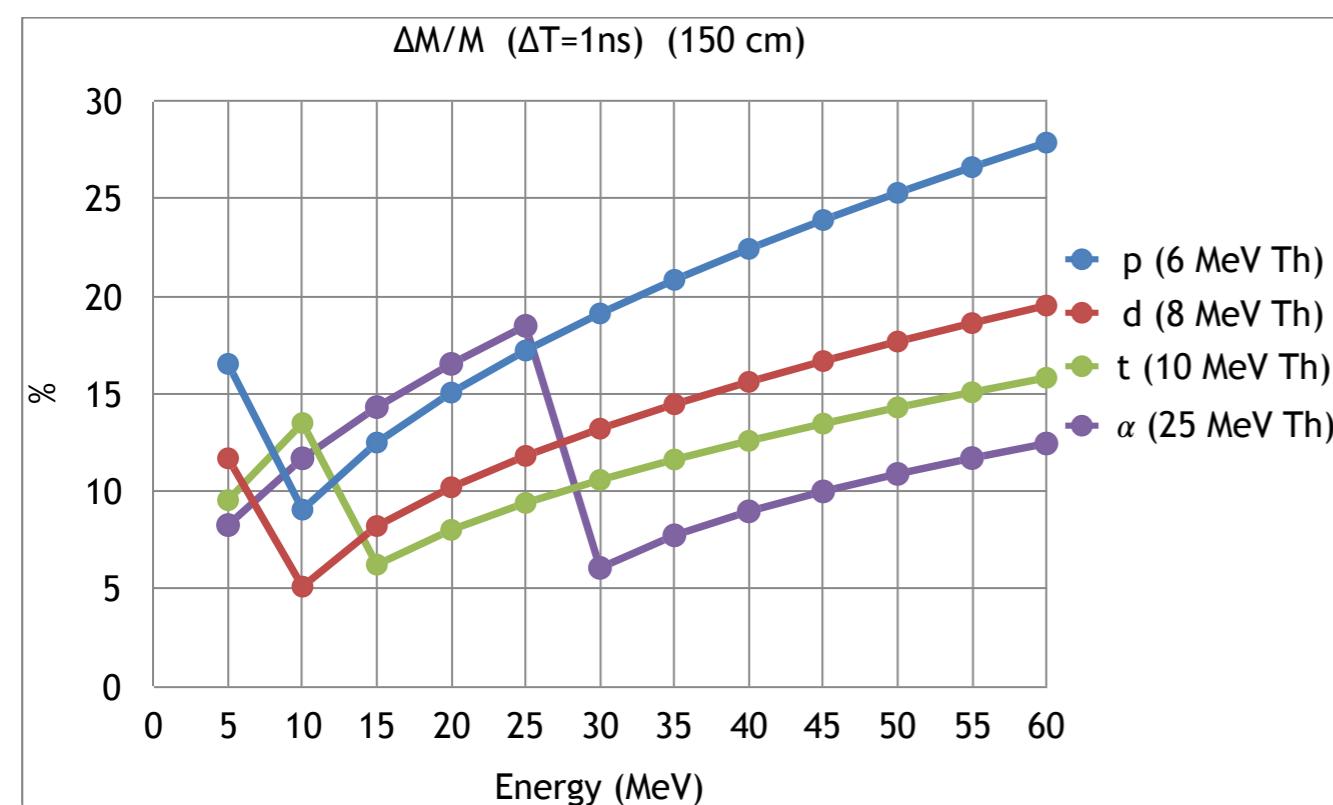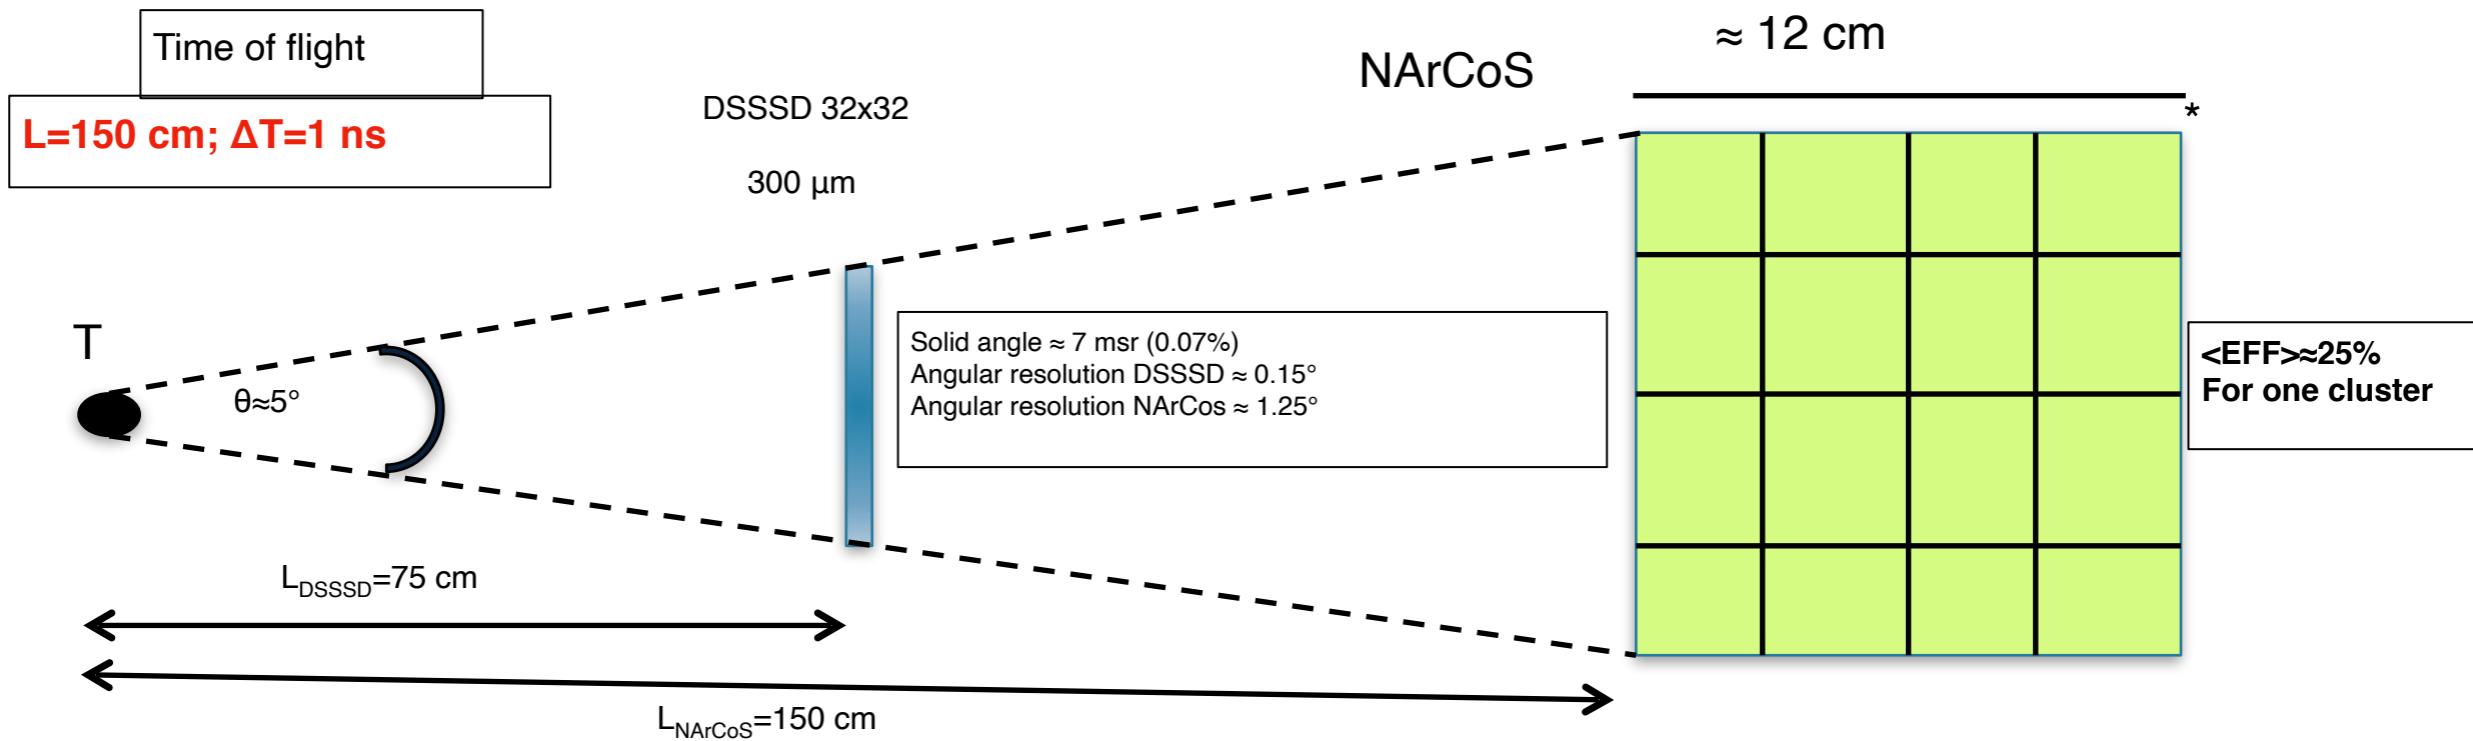


*the mechanical structure will have the possibility of an angular movimentation




Just few numbers

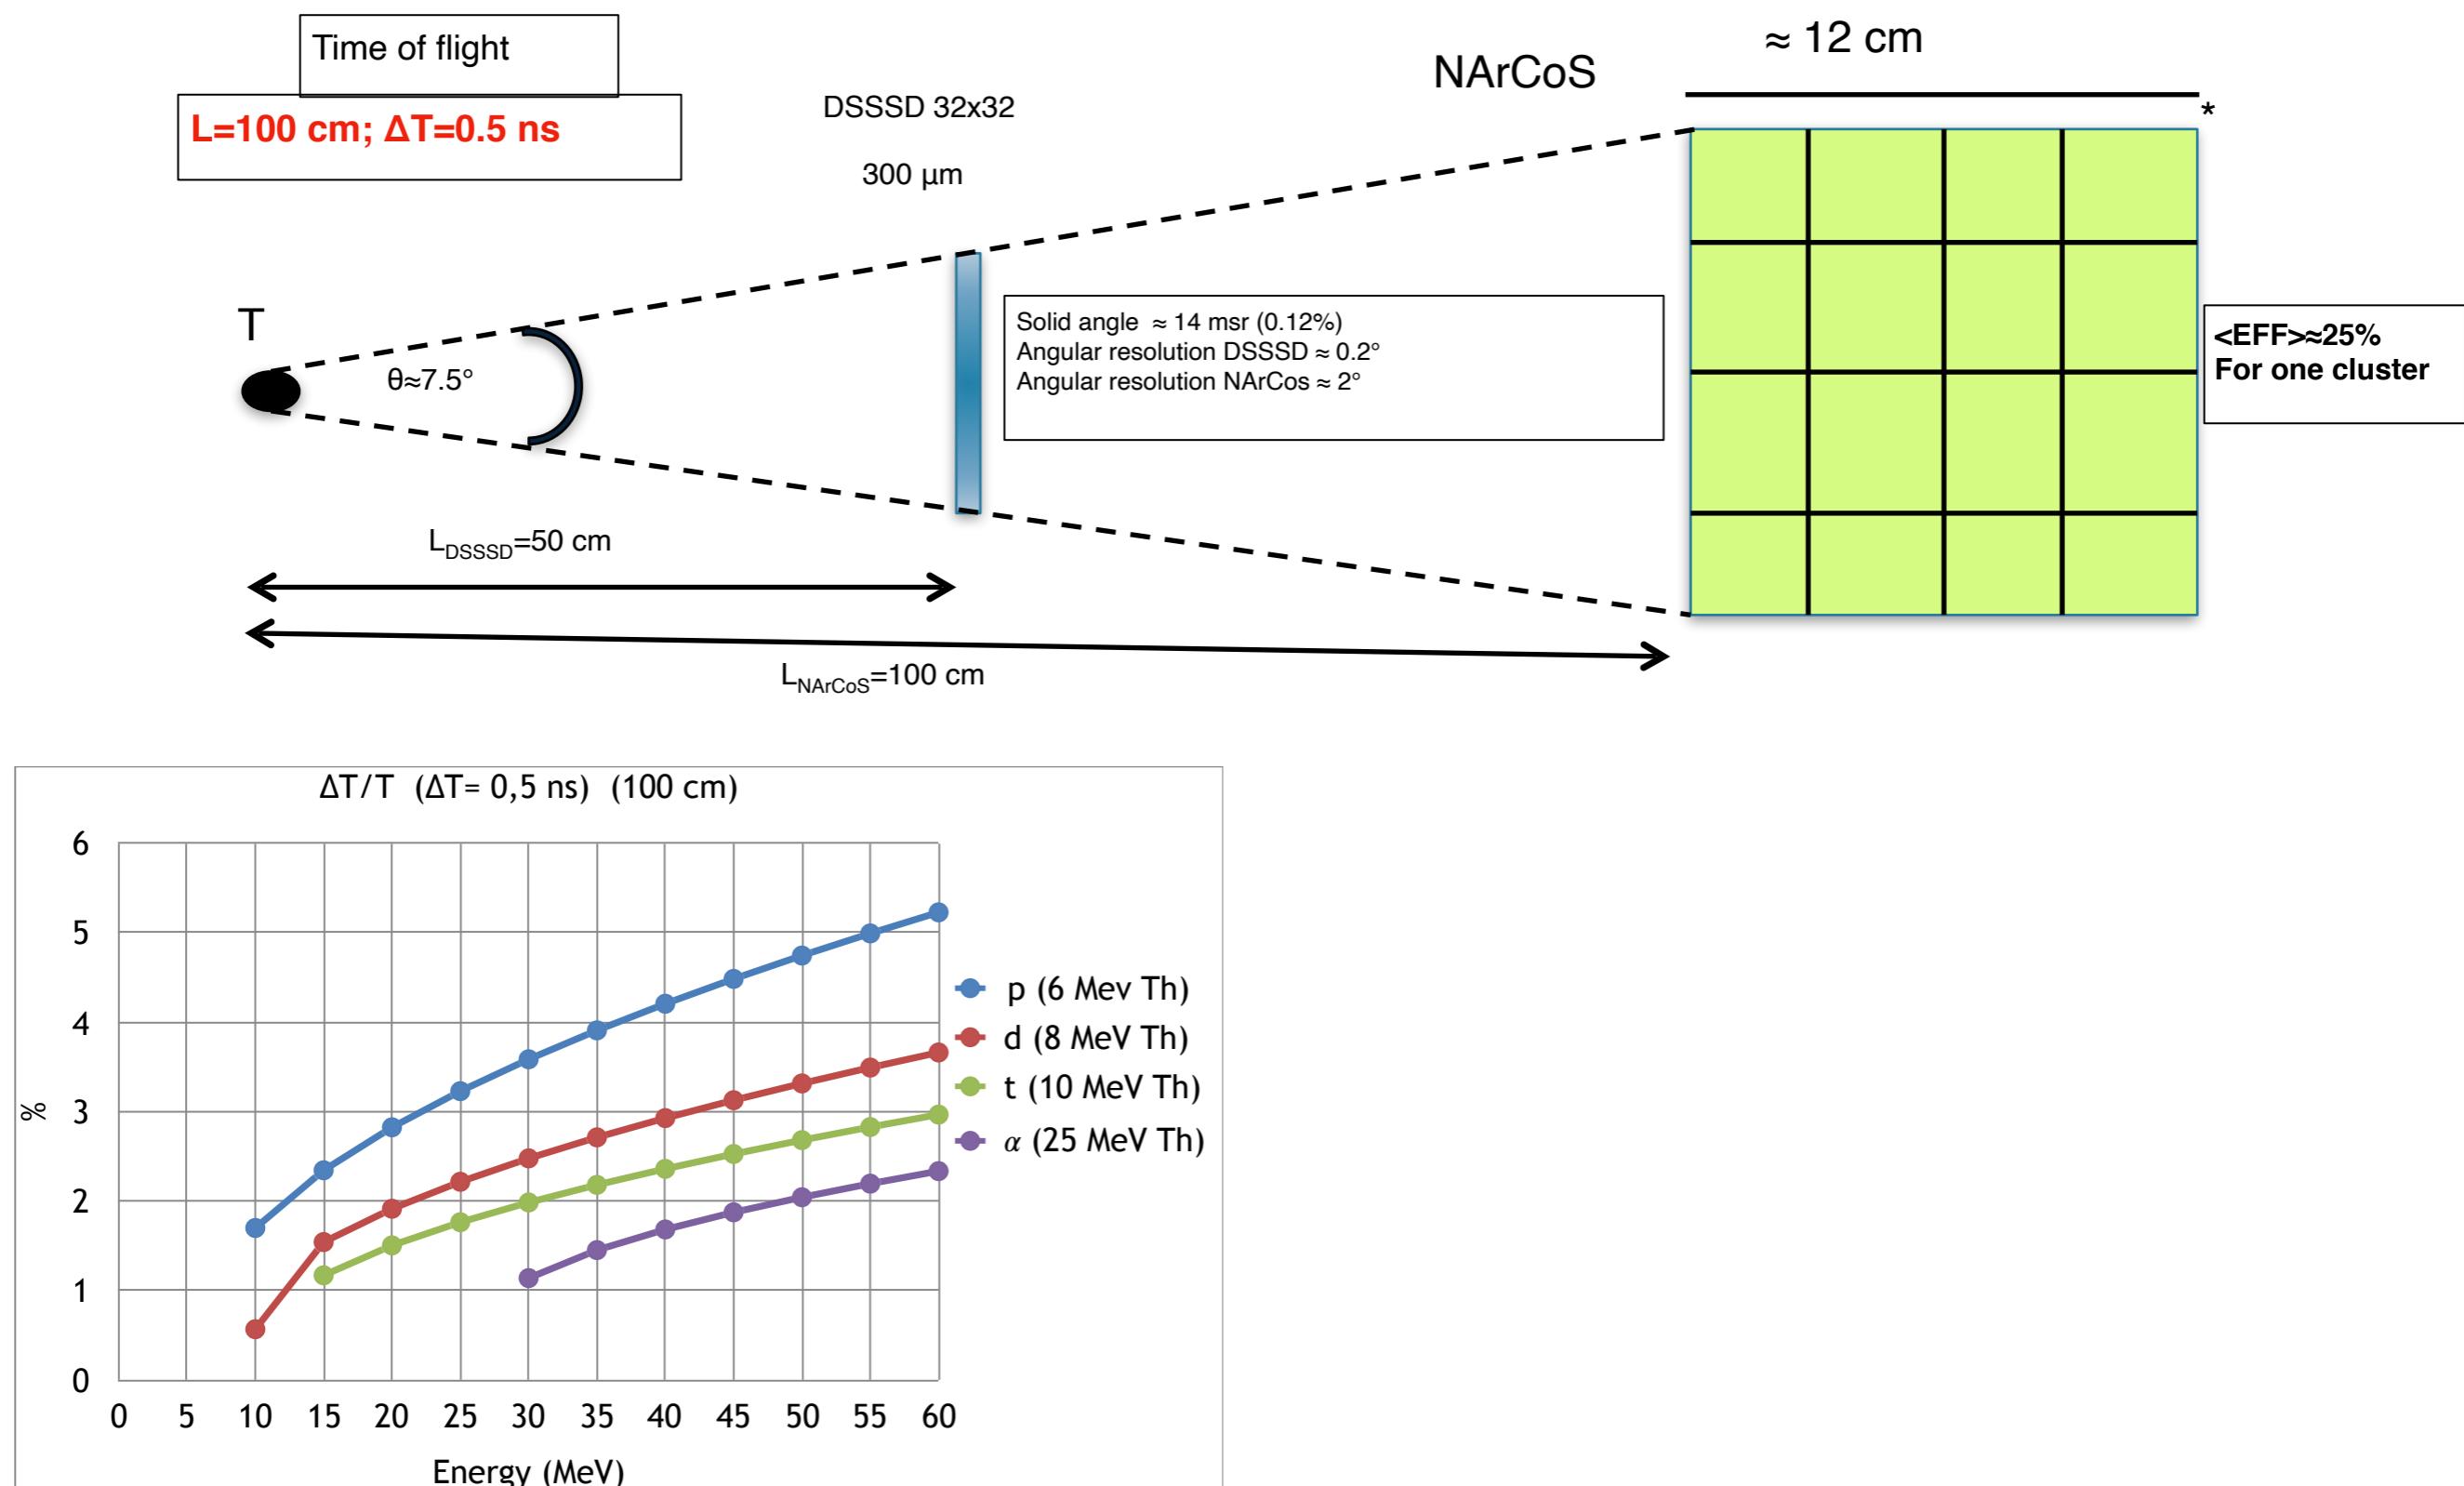

Just few numbers



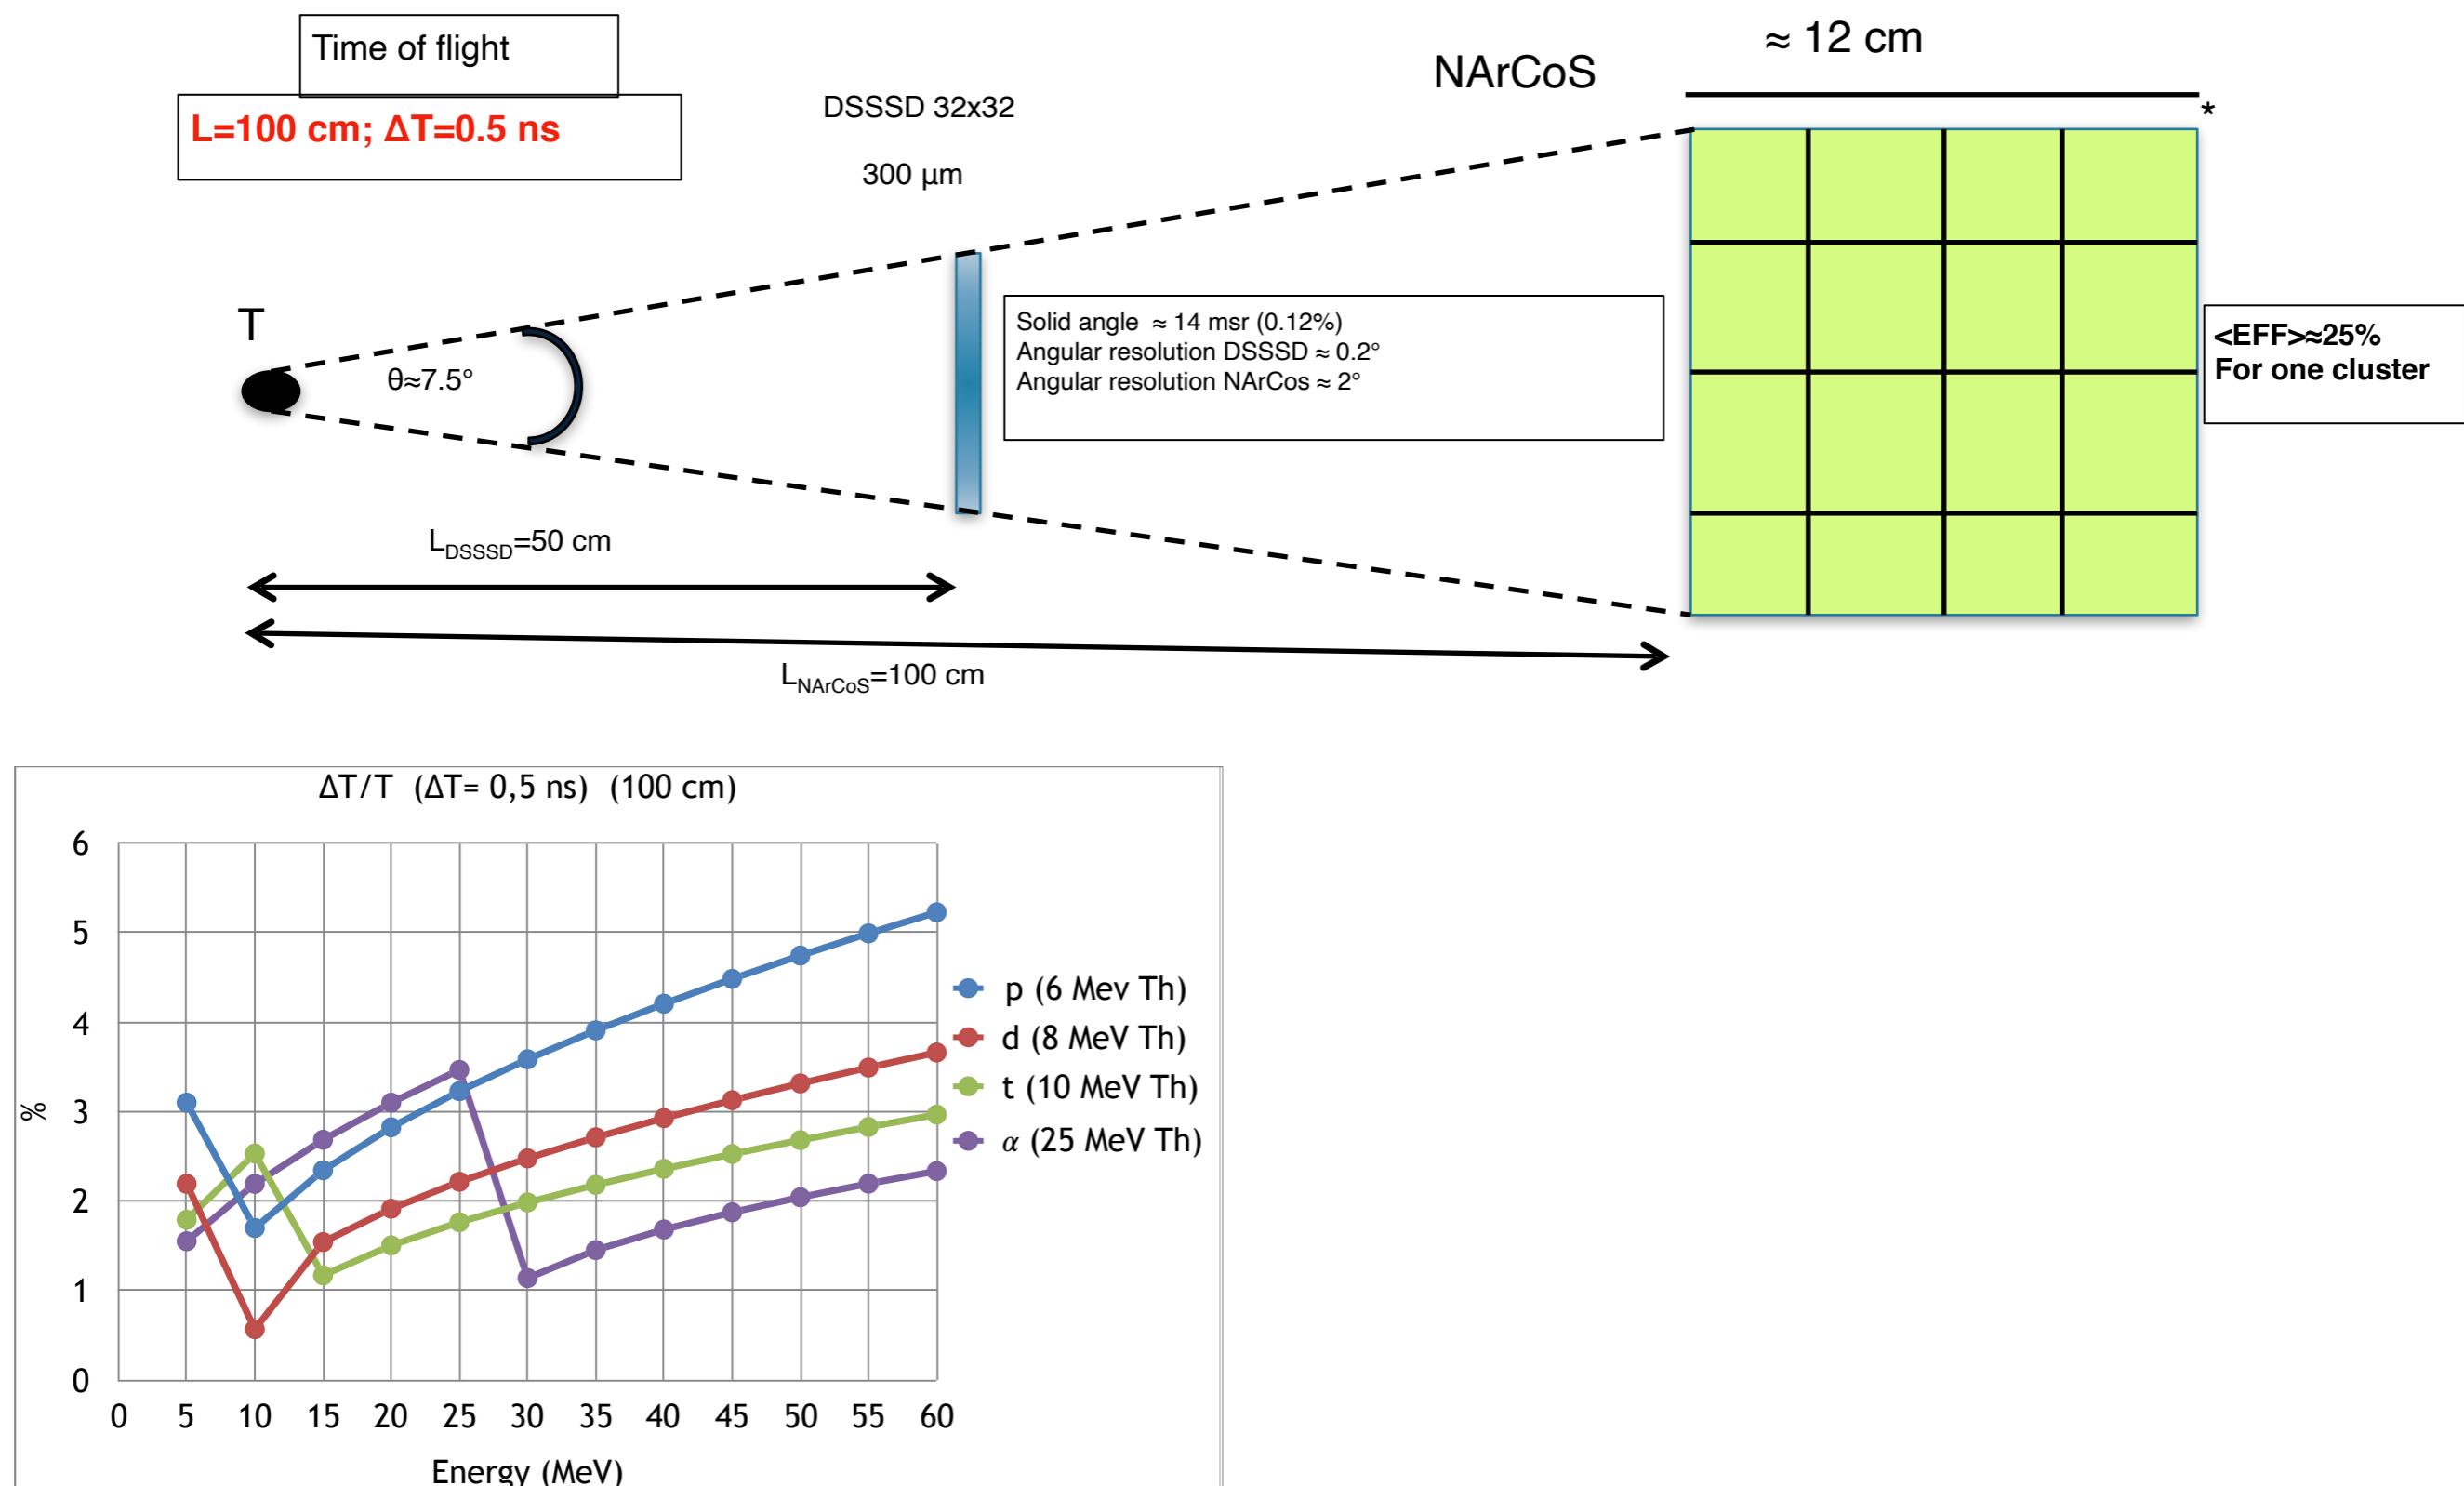


Just few numbers

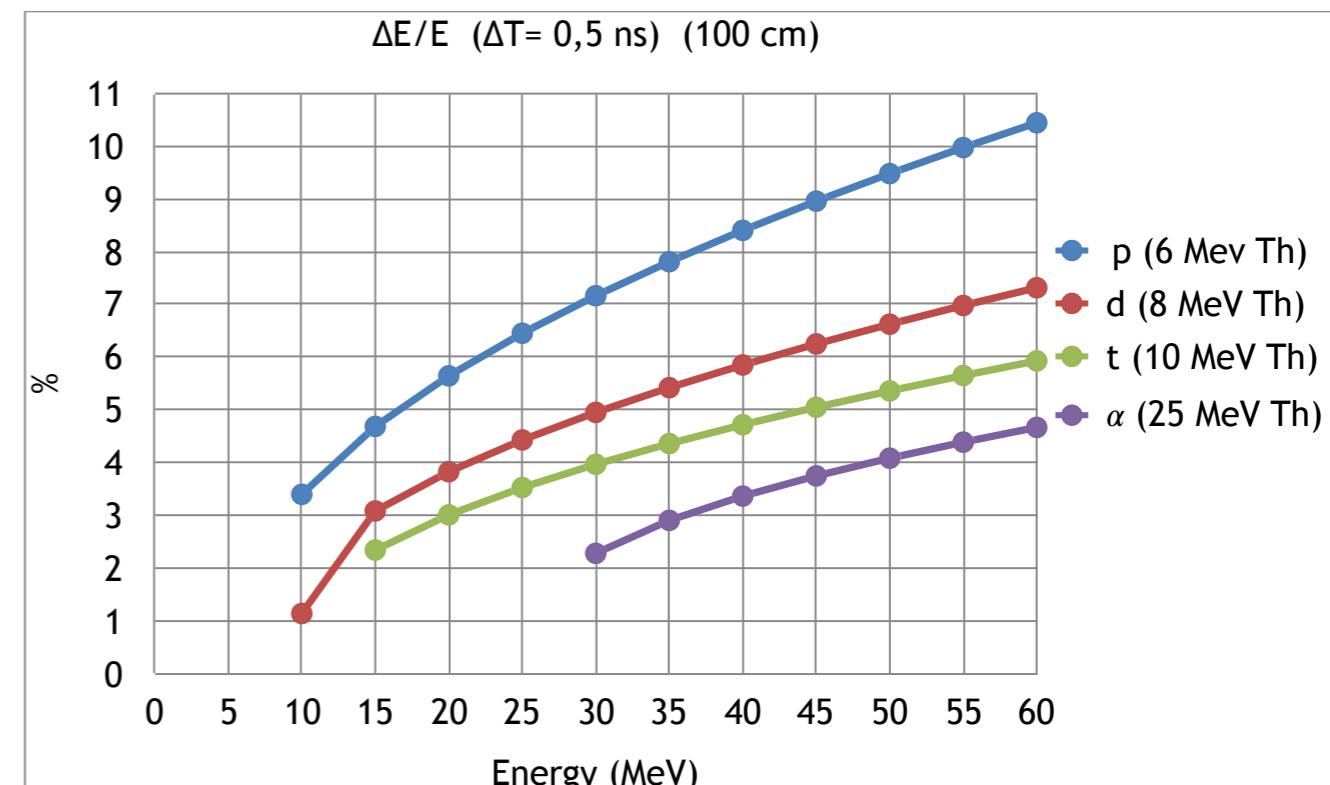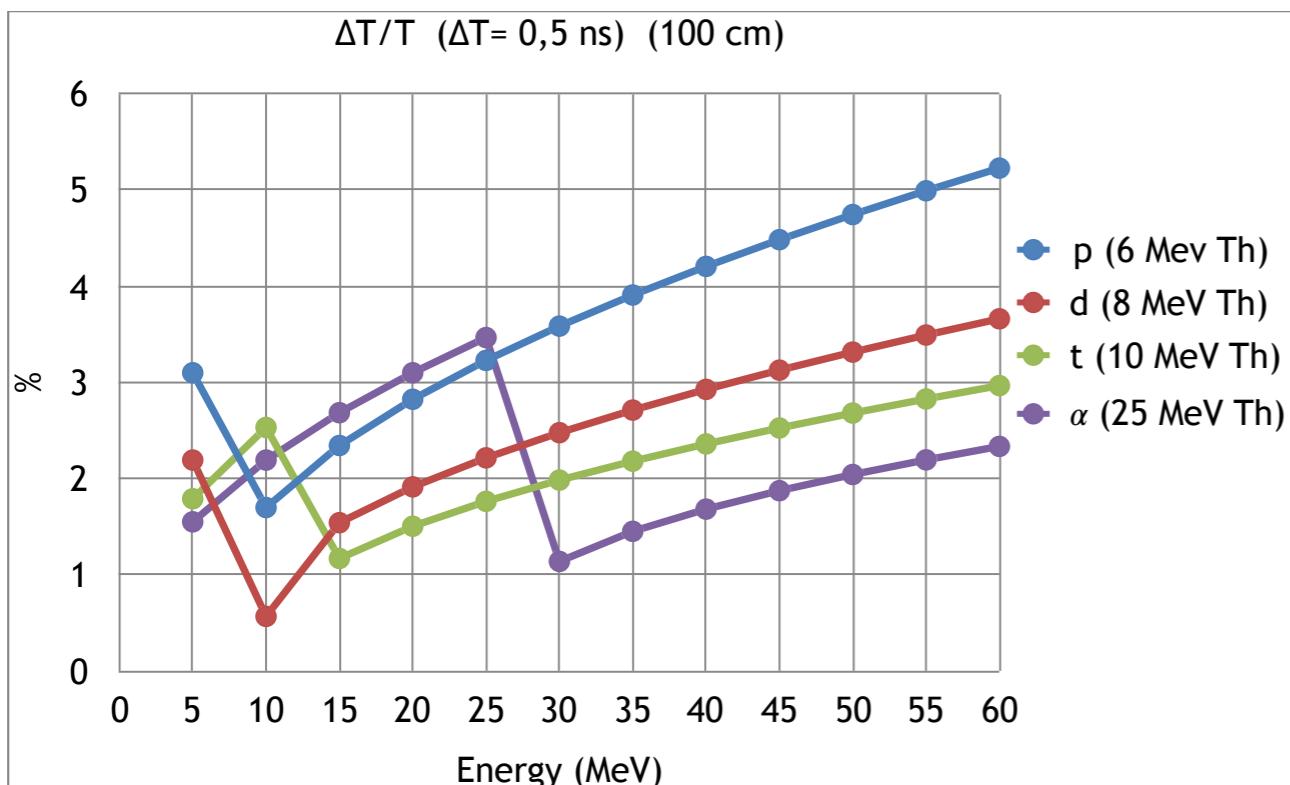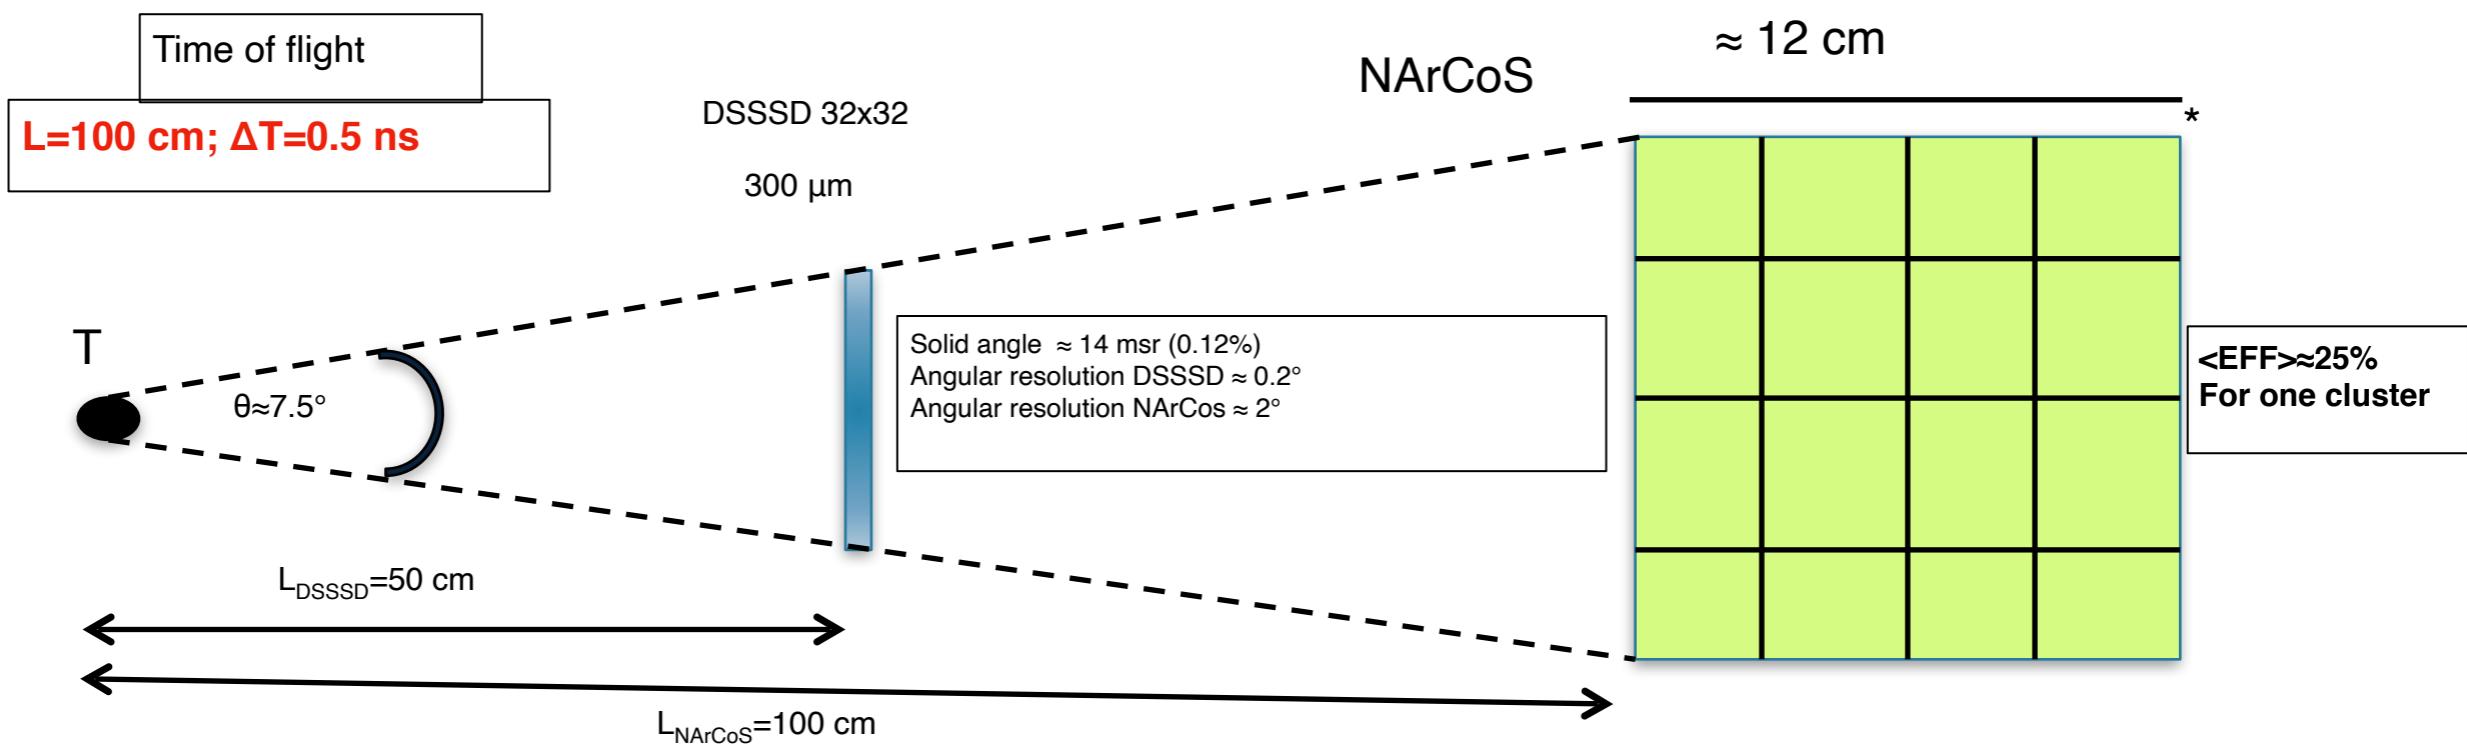


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

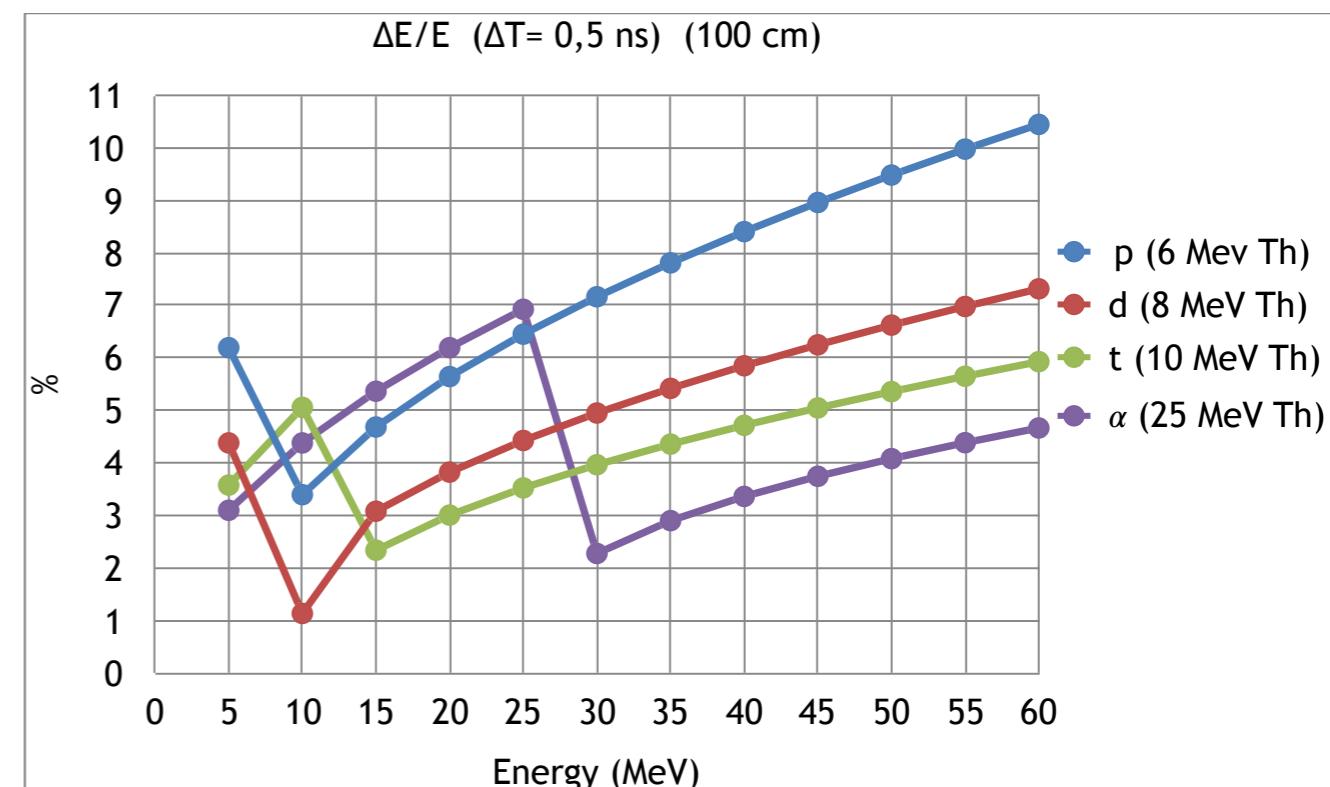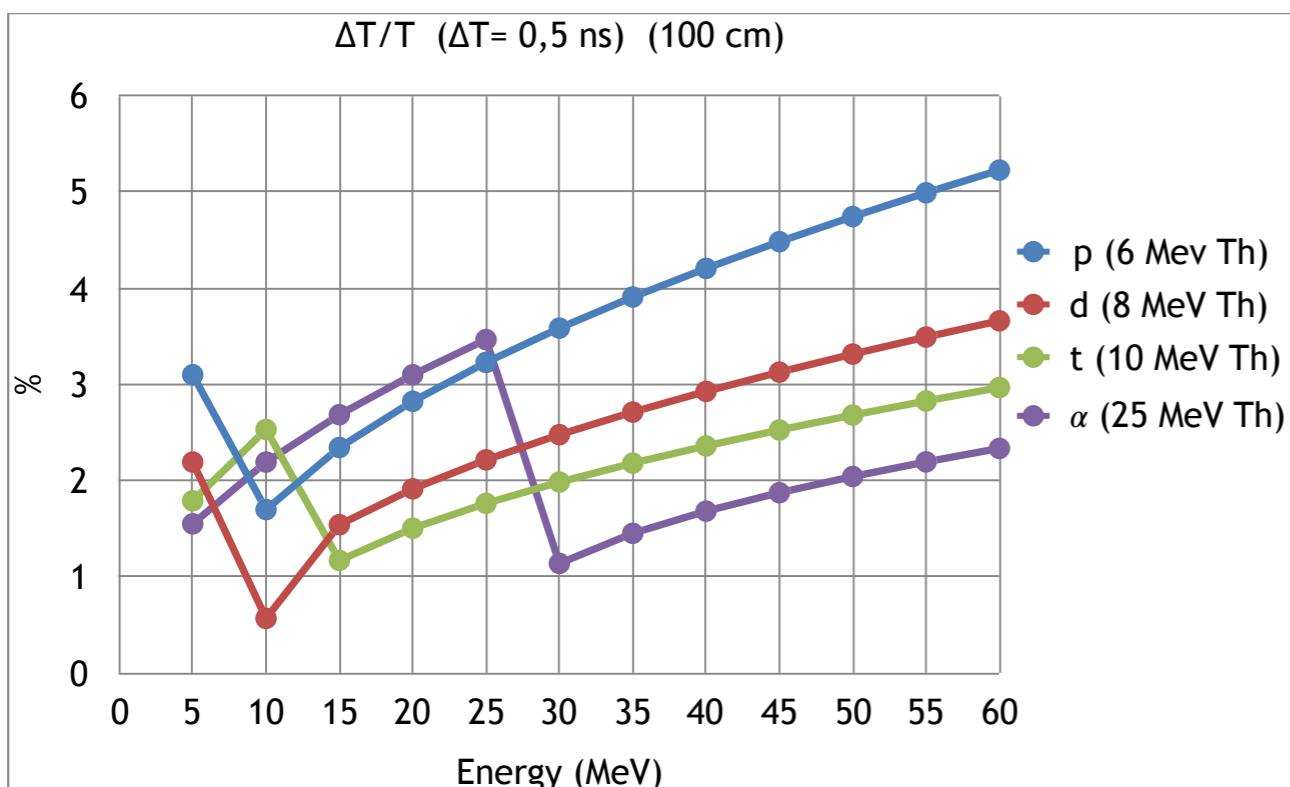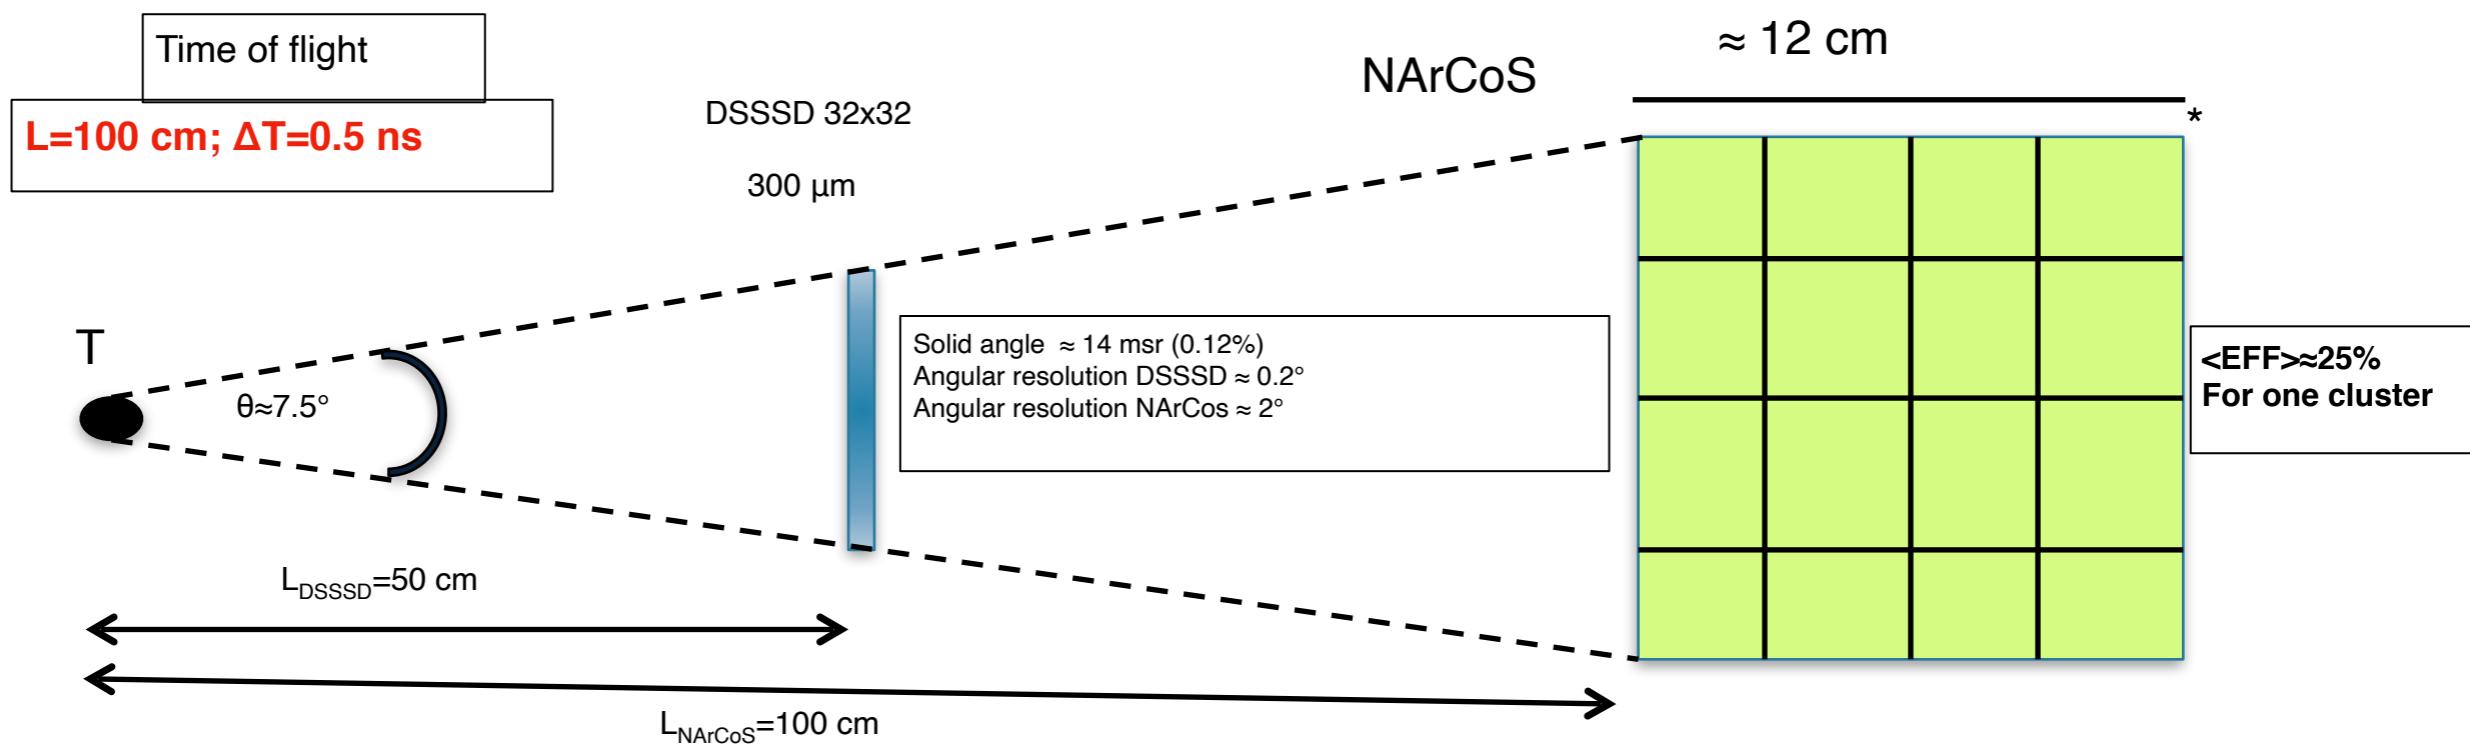


*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

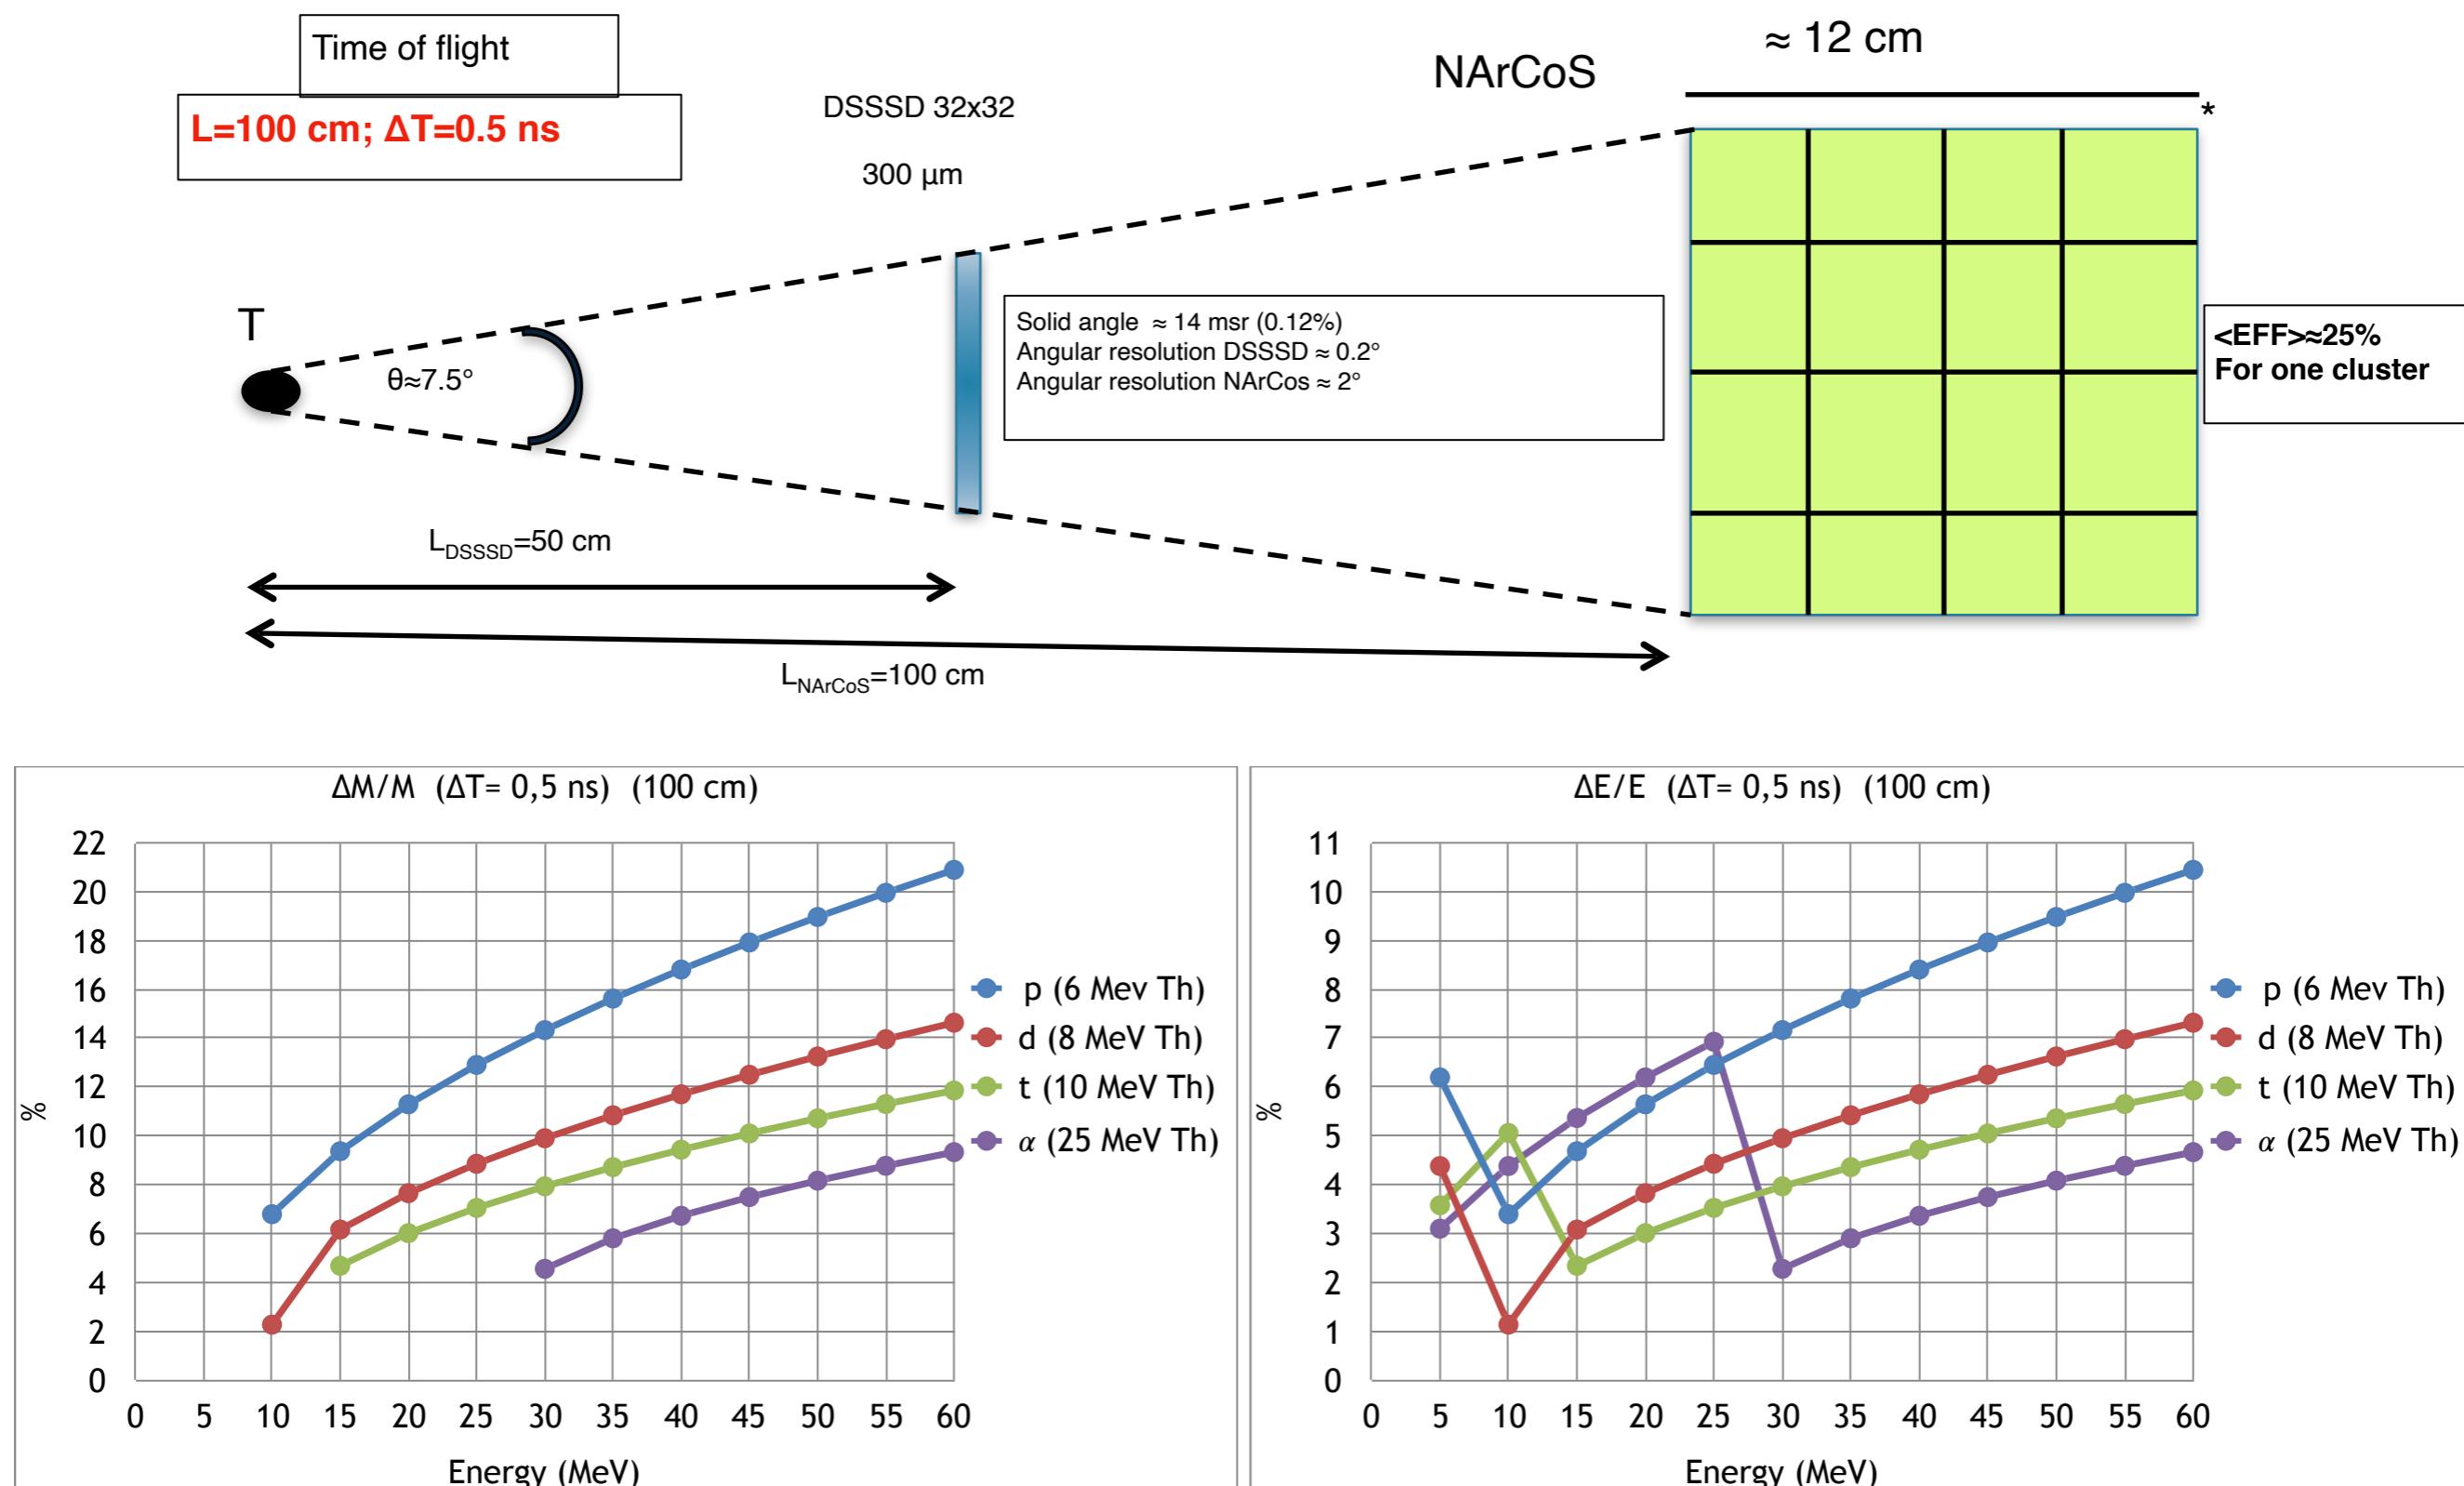

*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

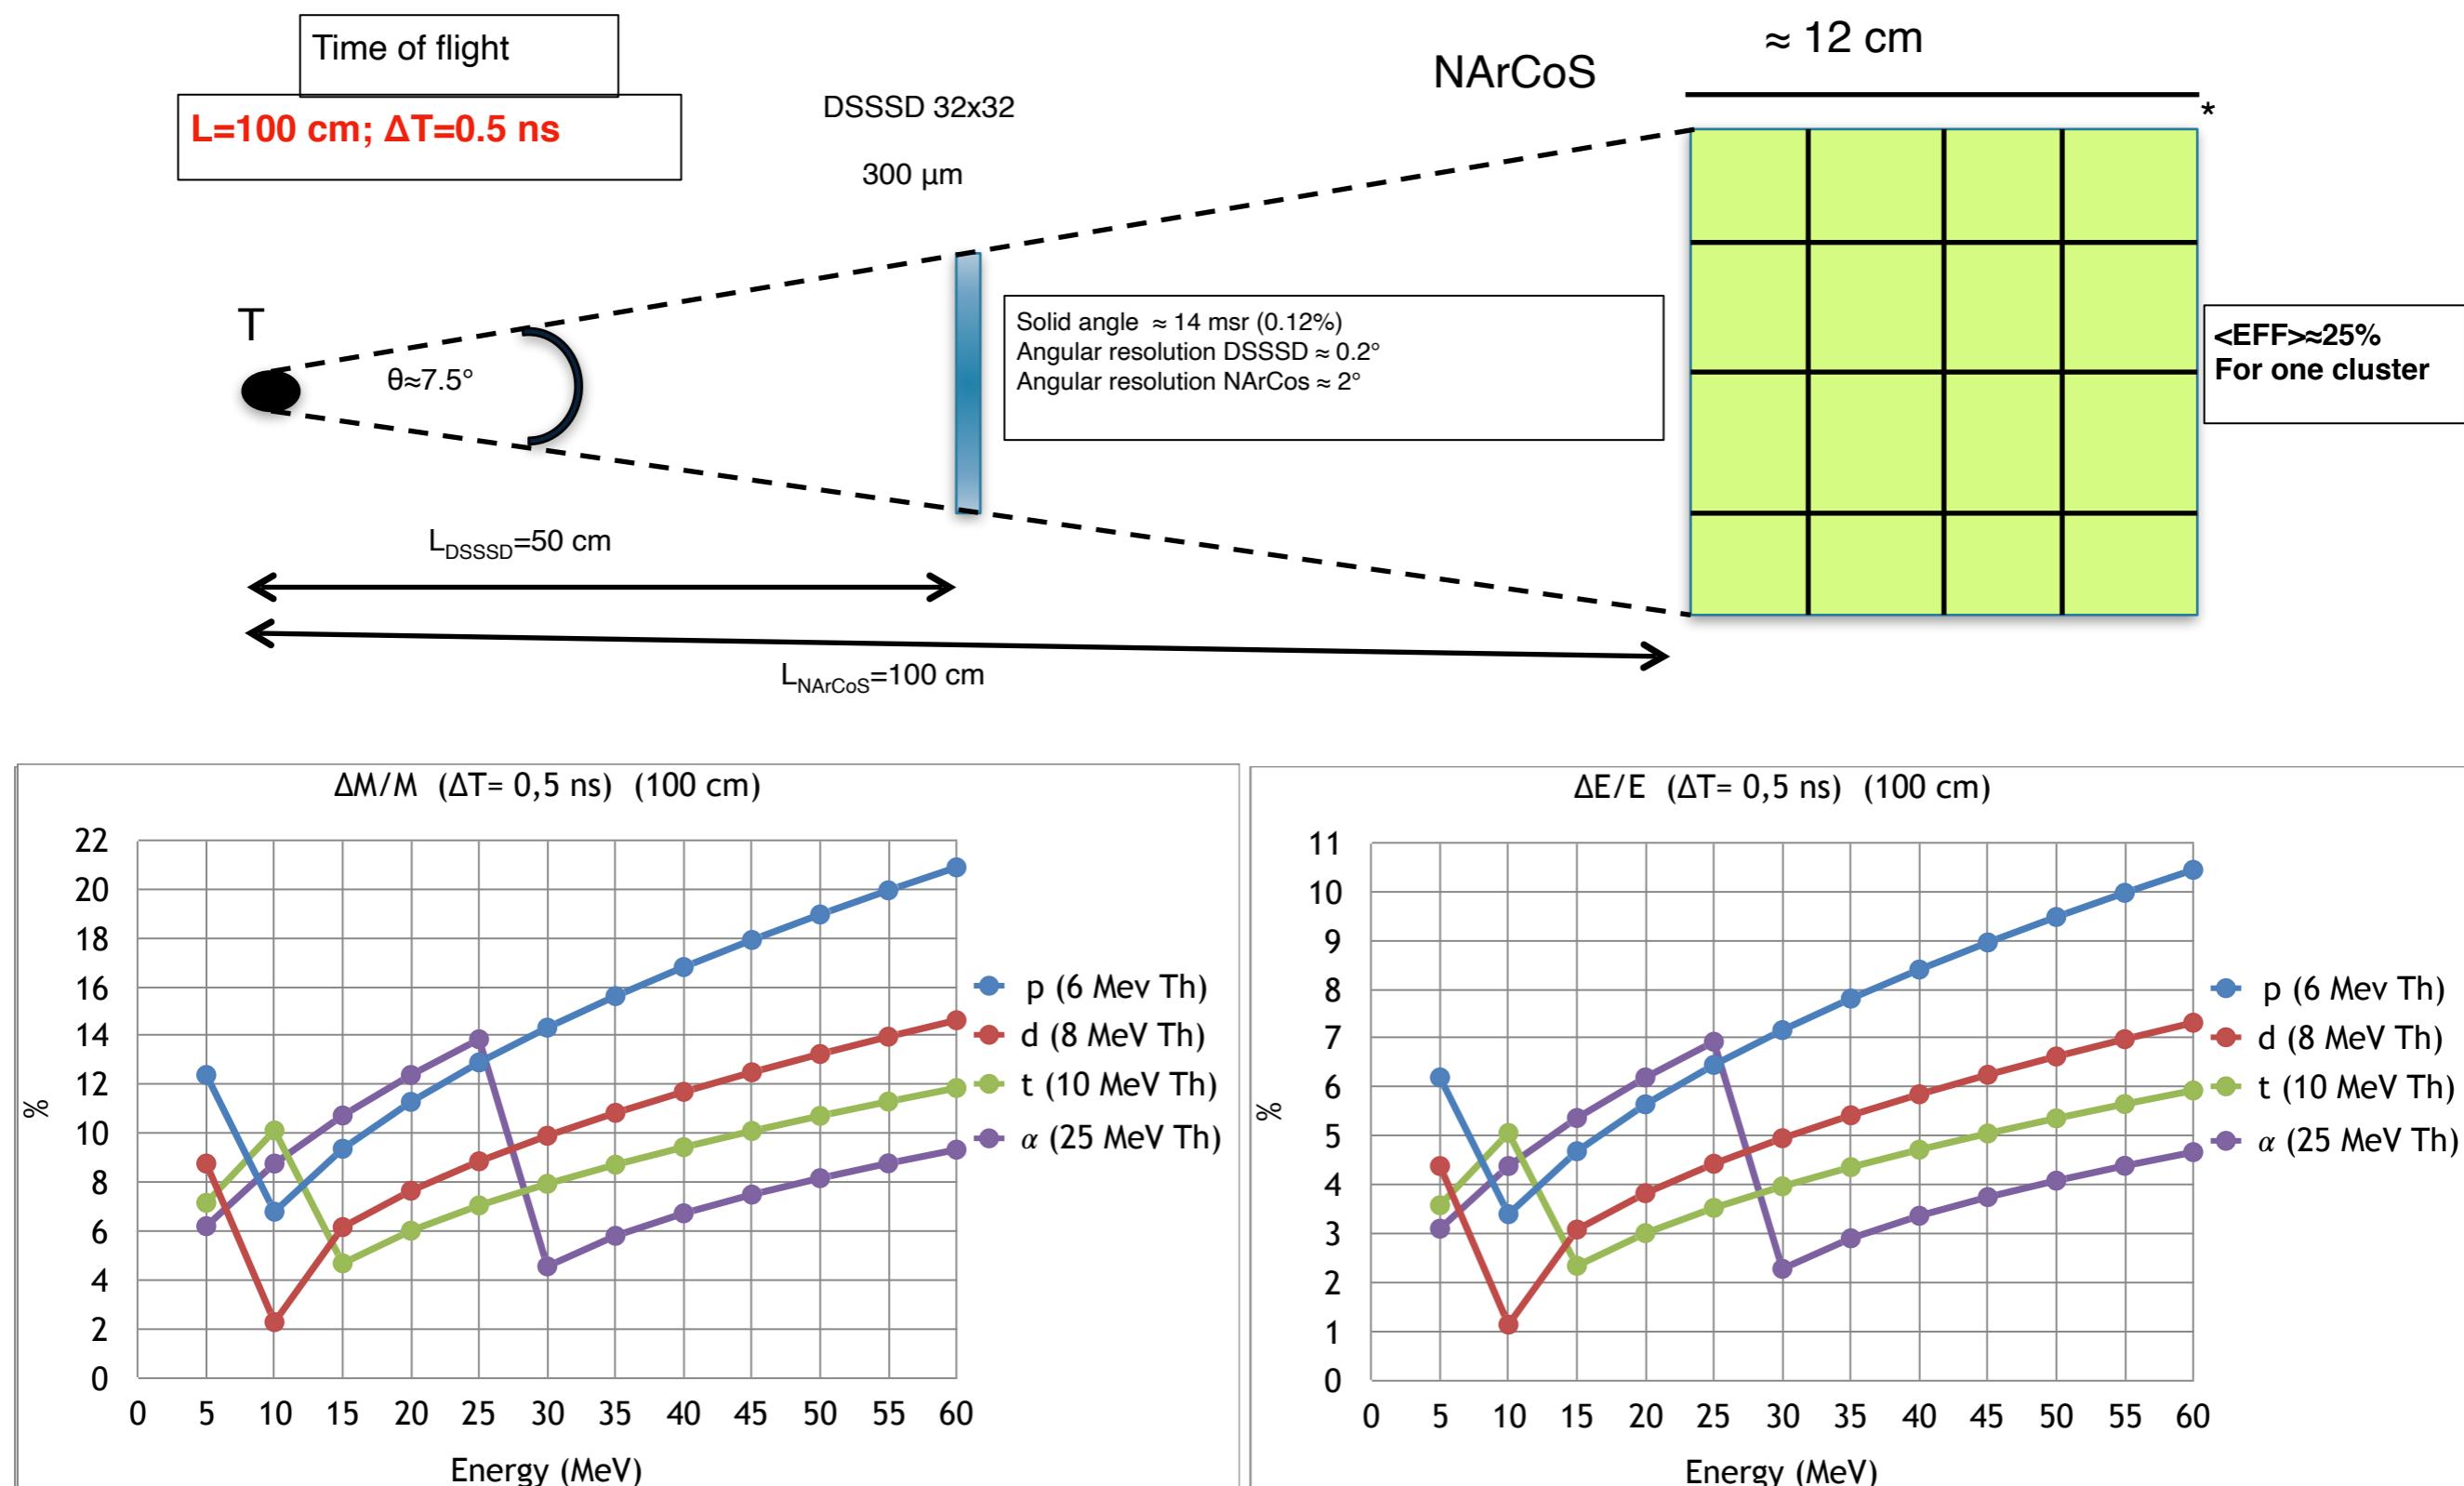

*the mechanical structure will have the possibility of an angular movimentation

Just few numbers

