



Development of a L1 tau lepton trigger algorithm using the CMS high-granularity calorimeter information

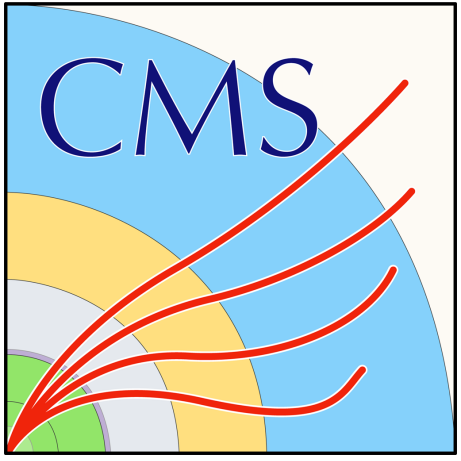

Jona Motta on behalf of the CMS Collaboration
Laboratoire Leprince-Ringuet, IPP École Polytechnique, France
jona.motta@cern.ch

HL-LHC AND THE CMS PHASE-2 UPGRADE

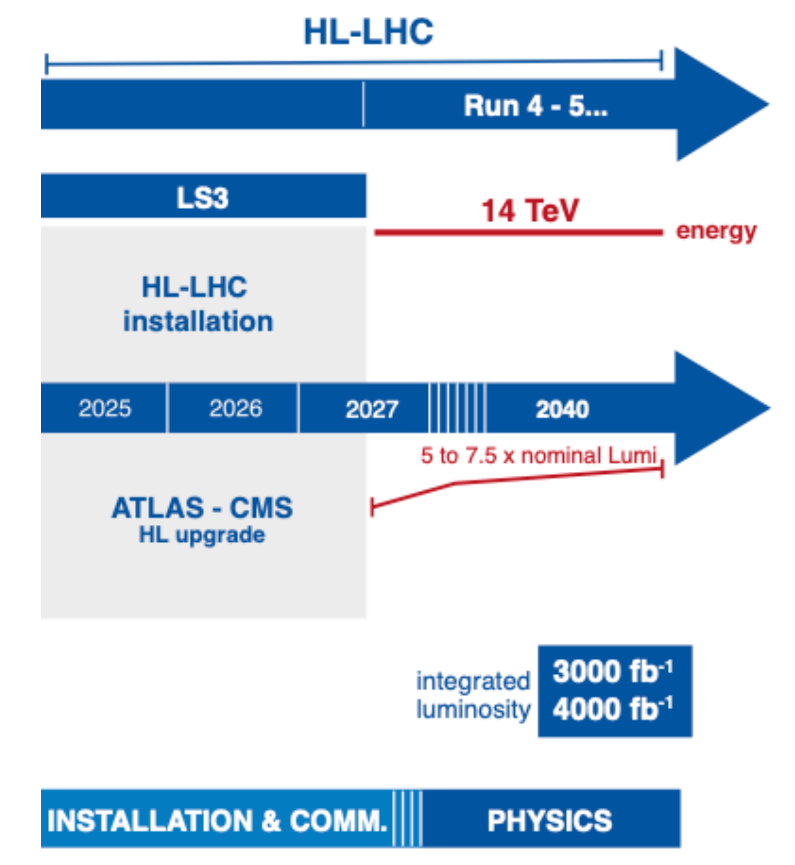


The **HL-LHC** will integrate 10 times the current LHC luminosity, and have an **instantaneous luminosity 3 times** the Run 2 peak value.

This will result in unprecedented levels of radiation and **high pileup (PU)** collision rate.

The CMS Collaboration will replace:

- * the tracking detectors
- * the barrel backend electronics
- * the muon detectors
- * the endcap calorimeter

THE HGCAL DETECTOR

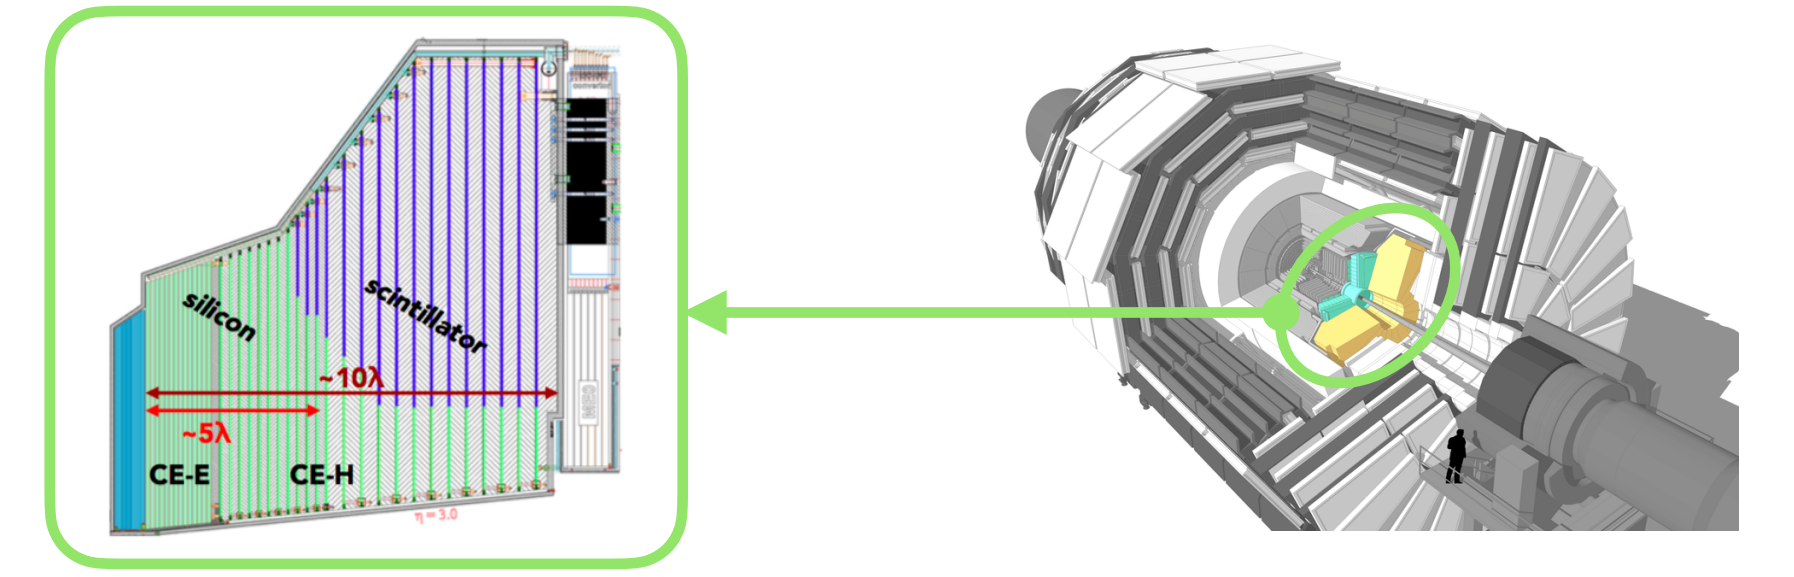

The **high-granularity calorimeter (HGCAL)** will be a **5D (x, y, z, E, t) sampling calorimeter**; its main features are:


- * silicon-based electromagnetic compartment ($\sim 25X_0$)
- * silicon-based + scintillator tiles hadronic compartment ($\sim 10\lambda$)

THE PHASE-2 CMS TRIGGER SYSTEM

The Phase-2 trigger system implements the well-established **two-level trigger architecture** with **Level-1 (L1)** and **High-Level-Trigger (HLT)**, targeting a **7.5 kHz** output rate.

The L1 trigger will operate at hardware level implementing custom processor boards and **FPGAs**, using the CMS detector enhanced granularity and fully reconstructed tracks.

The HLT will operate at software level using as input the CMS detector **full-granularity information** and more sophisticated algorithms.

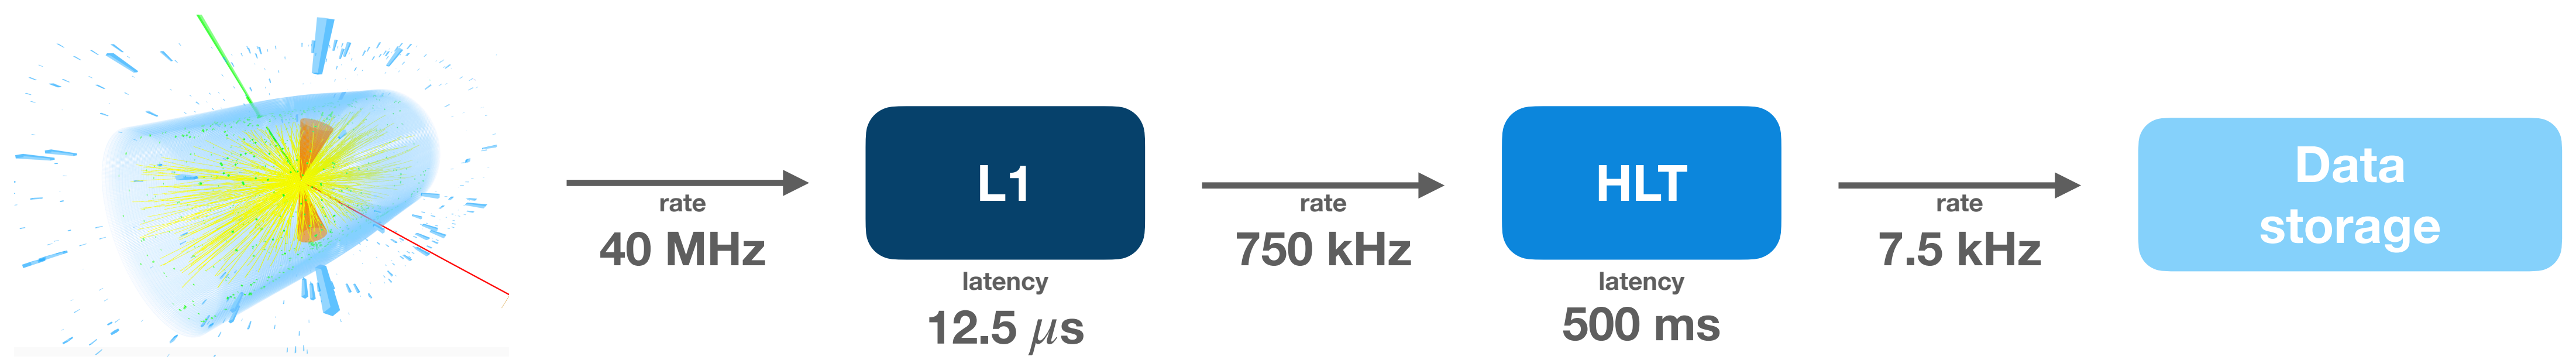


THE PHASE-2 LEVEL-1 TRIGGER ARCHITECTURE

The **main hardware improvements** for the L1 Phase-2 system, w.r.t. the current system, will be:

- * the extensive use of **state-of-the-art FPGA** boards and processors for optimised reconstruction
- * the use of **high-speed optical links** to facilitate the aggregation of data
- * the implementation of a **highly modular architecture** to meet different HL-LHC running conditions

The **main new features** of the L1 Phase-2 system will be:


- * the implementation of the **correlator trigger** where higher level variables can be computed to introduce PU mitigation and providing an L1 output with performance closer to offline reconstruction.
- * the **first ever inclusion of tracker information**
- * the inclusion of the **HGCAL trigger information**. Its trigger primitive generator takes trigger cells (sums of silicon/scintillator tiles) as input and with a two-staged architecture clusters them in **3D-clusters** (HGCAL trigger primitives)

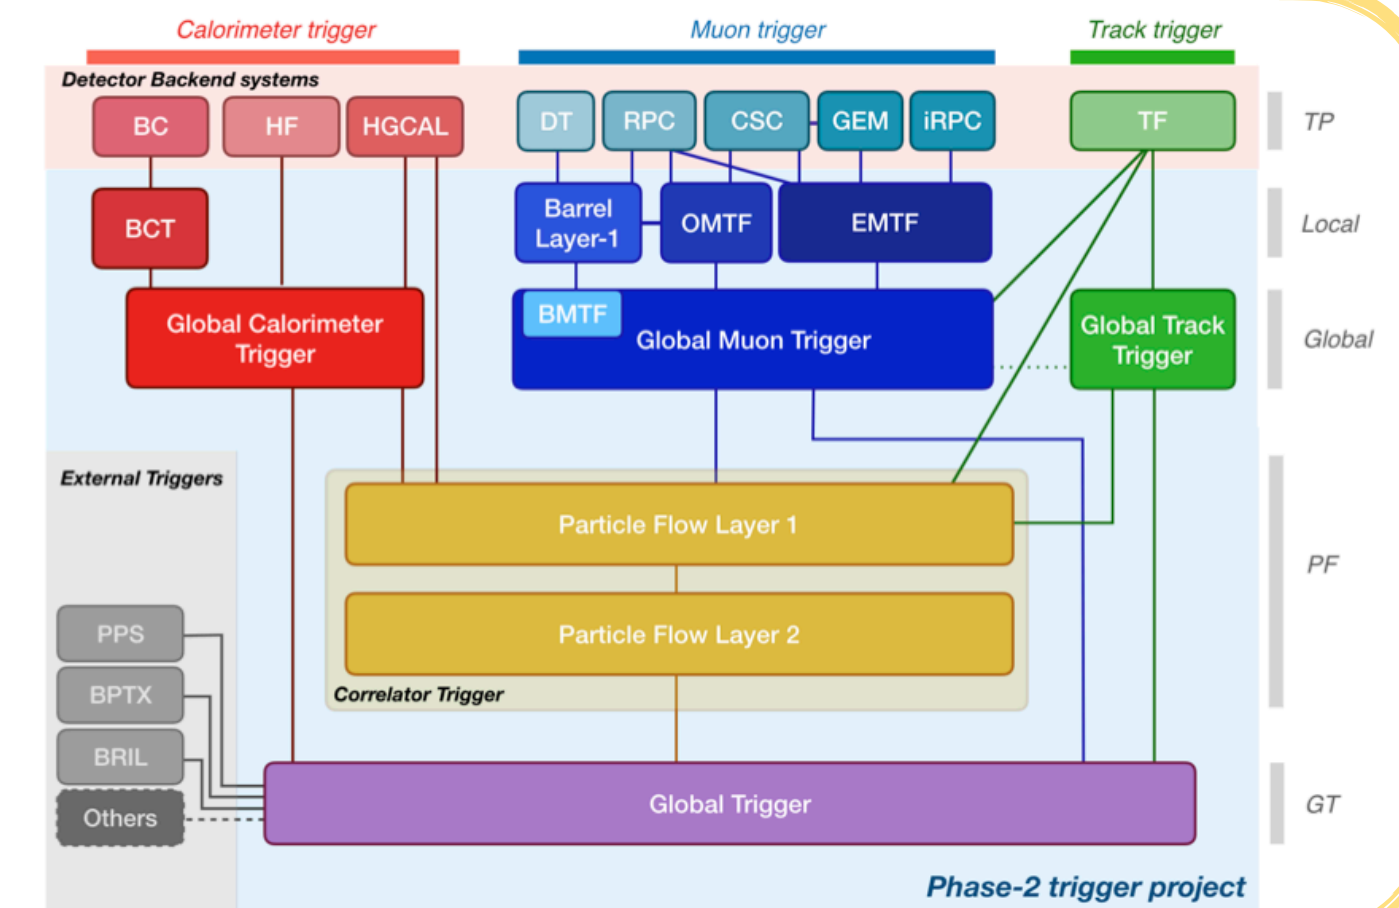

THE HGCAL LEVEL-1 TAU TRIGGER ALGORITHM

This algorithm targets **hadronically decaying tau leptons** (τ_h) detected by HGCAL and it is developed foreseeing its implementation in the **calorimeter trigger** section of the L1.


The algorithm takes as an **input** the **3D-clusters** produced by the HGCAL trigger primitive generator and assumes a **tau-to-cluster one-to-one correspondence**. The minimal requirement $E_T^{\text{clust.}} \geq 4 \text{ GeV}$ is applied to form the L1 candidates.

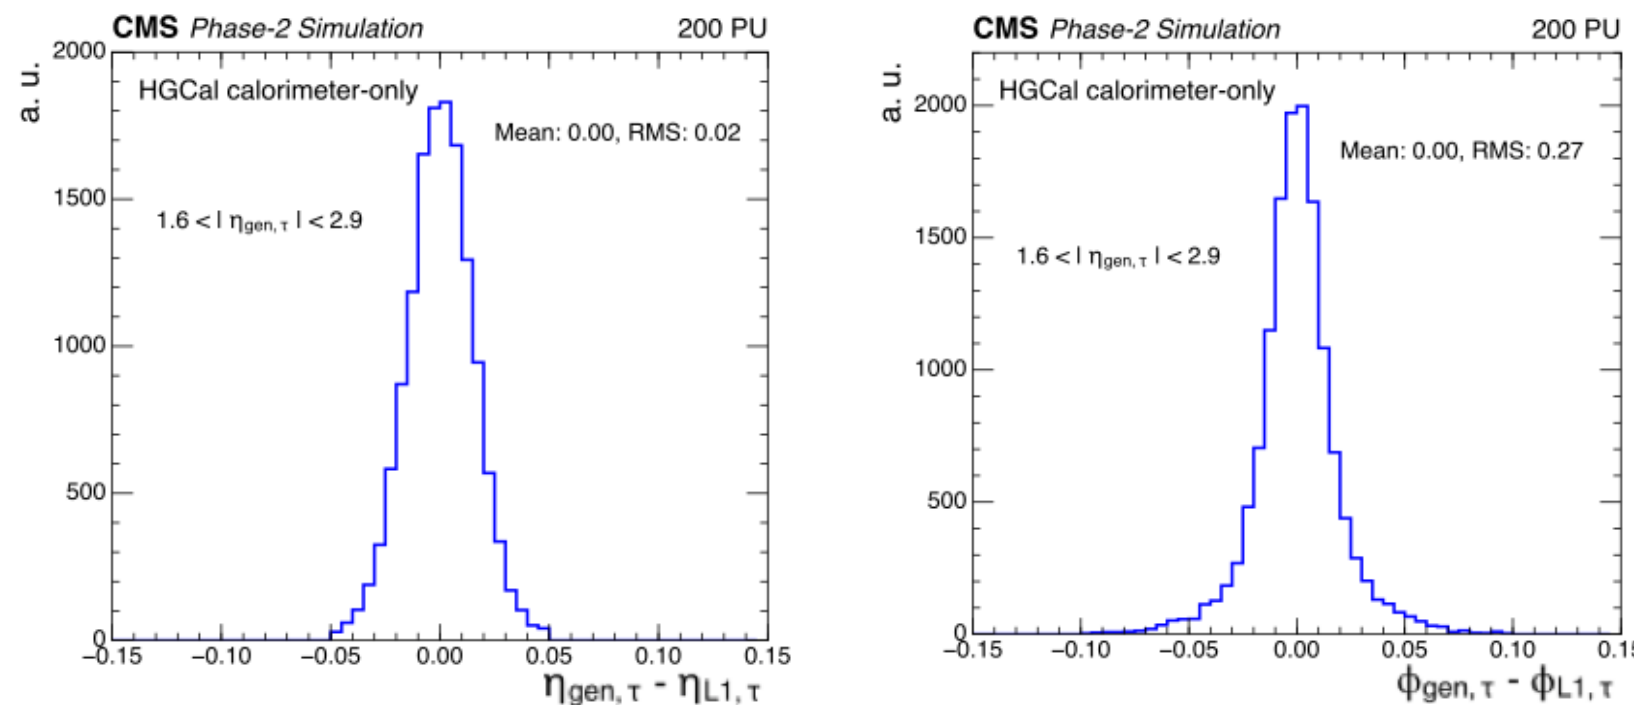


The first step is the application of a **boosted decision tree (BDT)** for the rejection of PU exploiting the clusters' shape variables. Clusters passing the 99% efficiency point are retained.

Next is a **clusters three stage calibration**:




- η -dependent PU subtraction
- ↳ clusters' shape dependent correction
- ↳ energy dependent correction

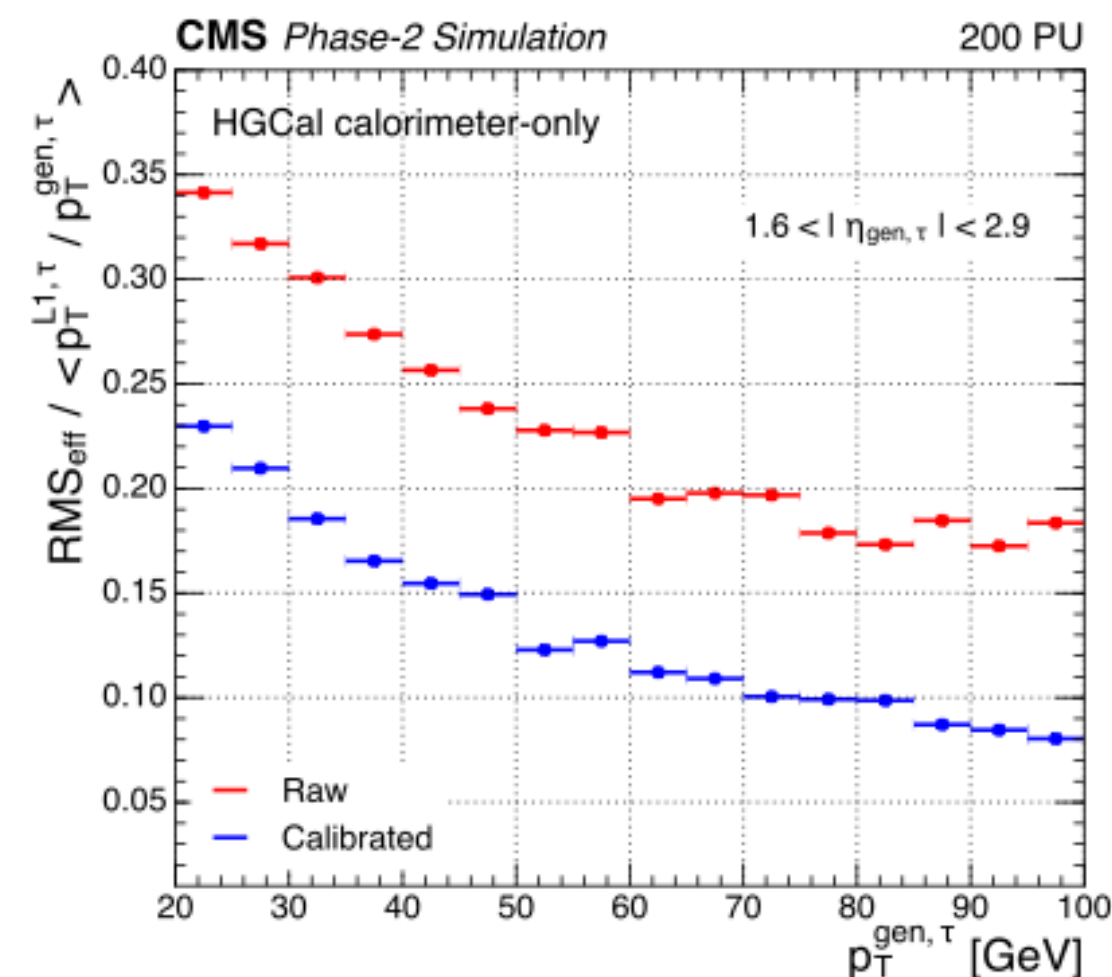

The last step is the identification of the **hadronic decay mode** in three categories using a **Random Forest Classifier** exploiting the clusters' shape variables.

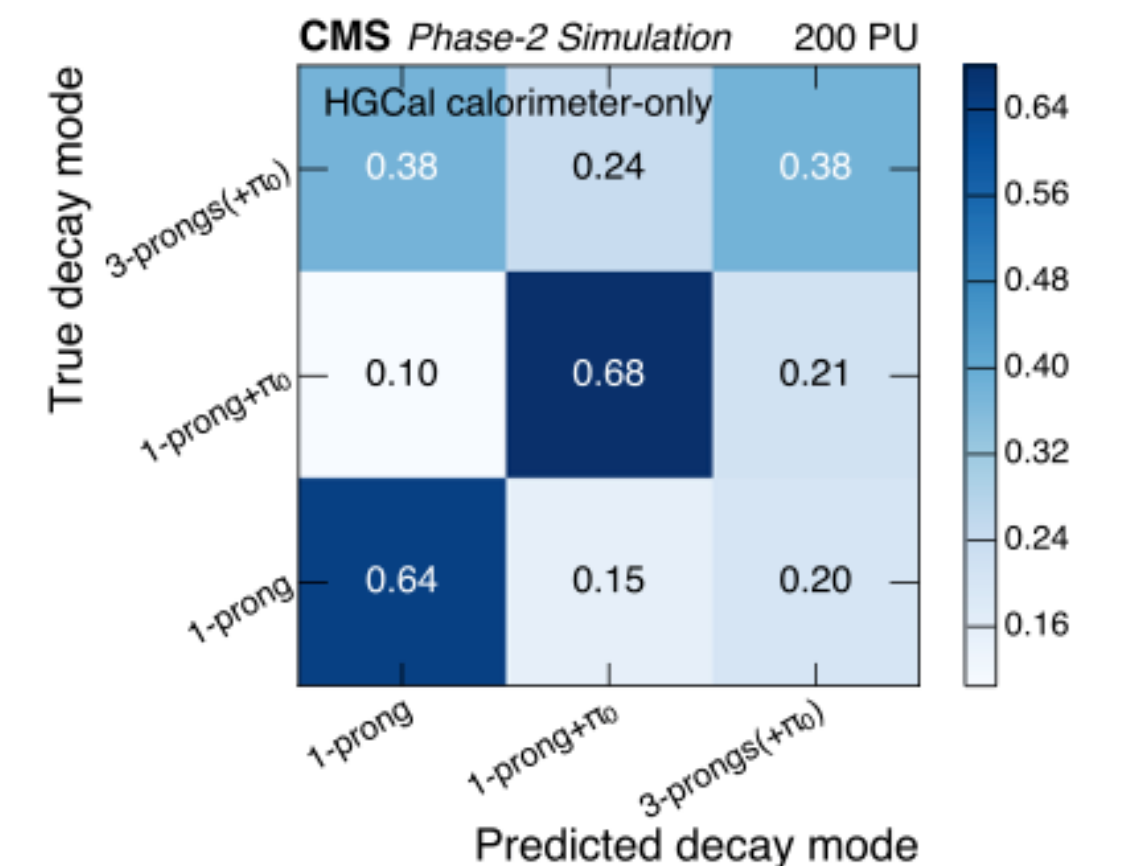

PERFORMANCES

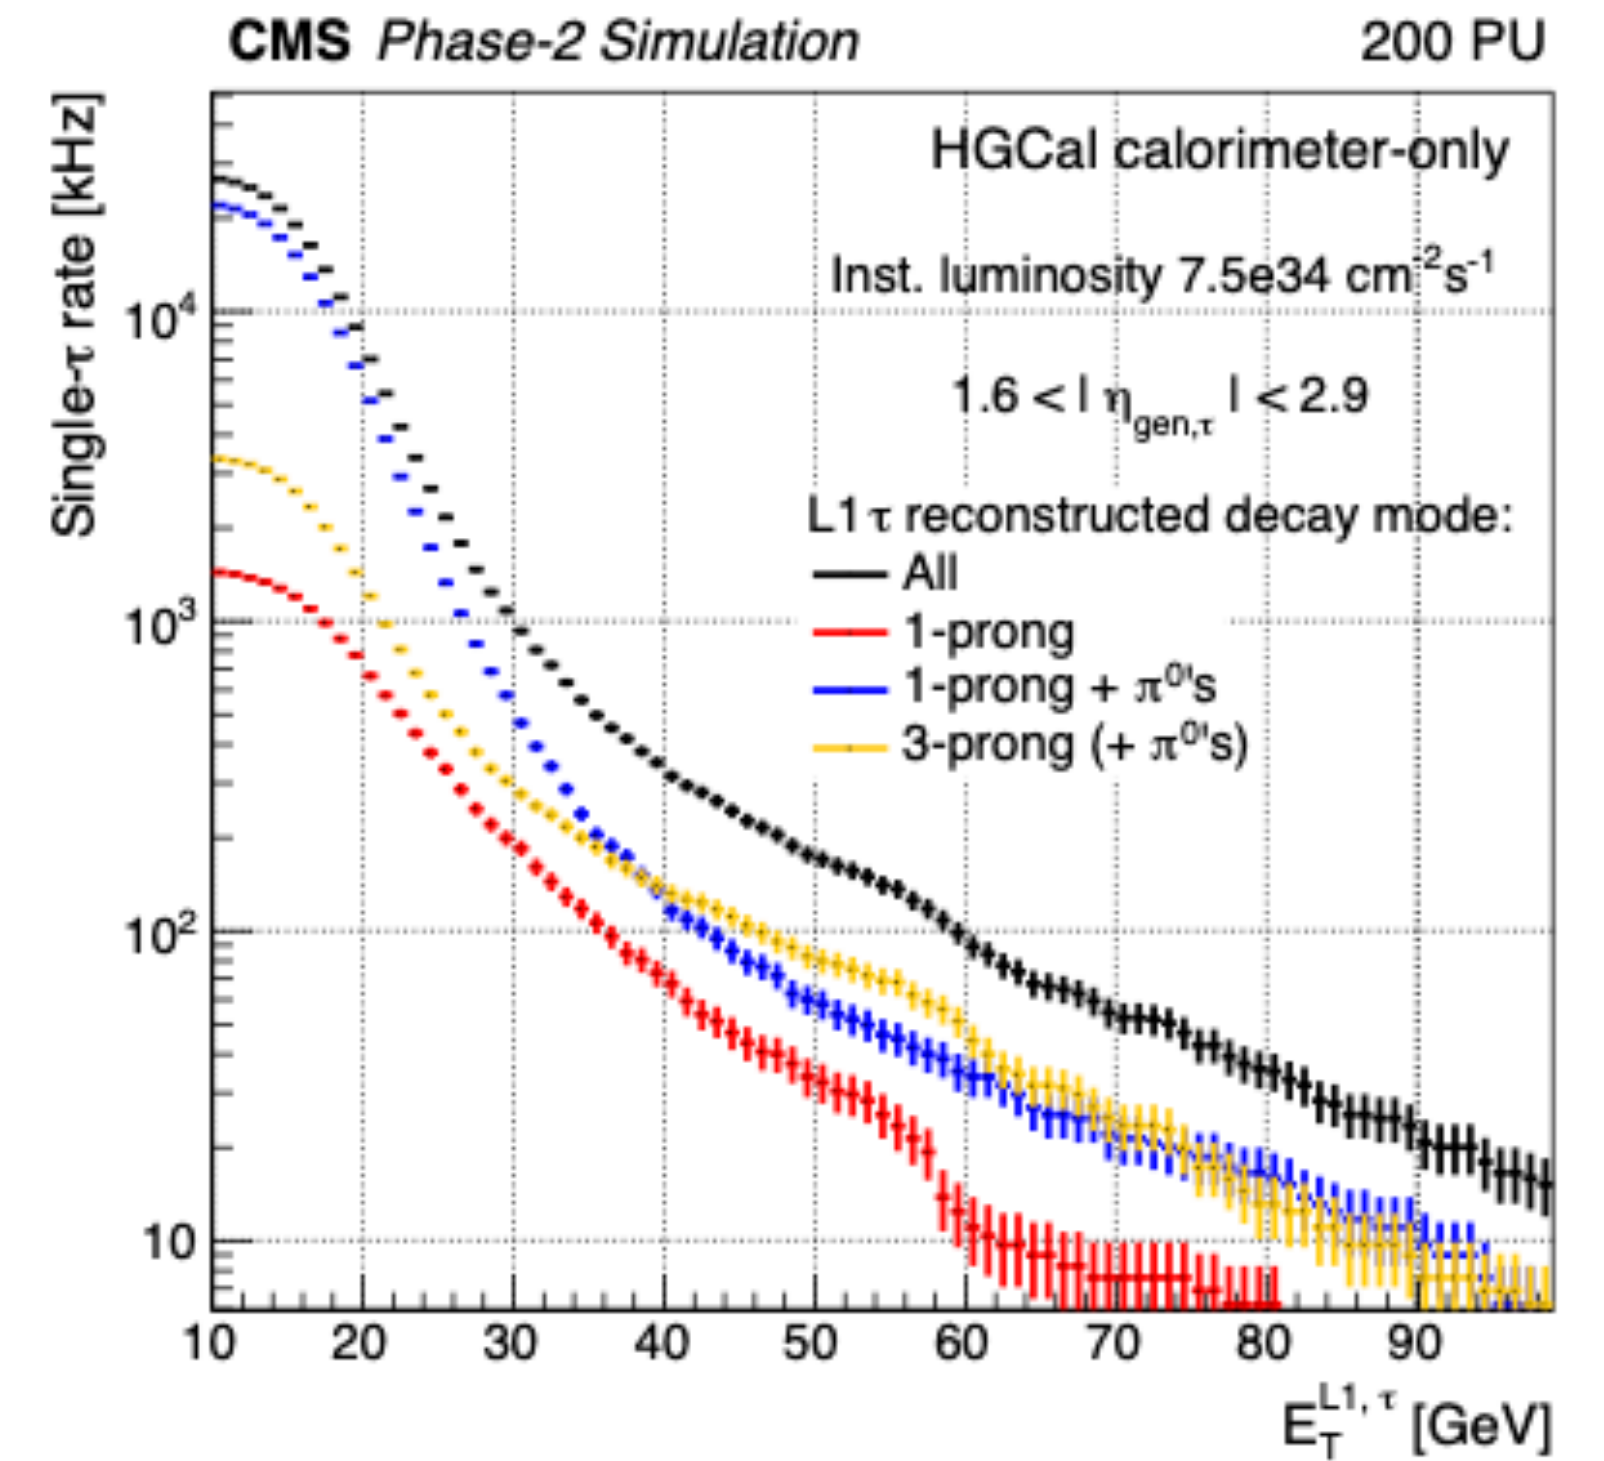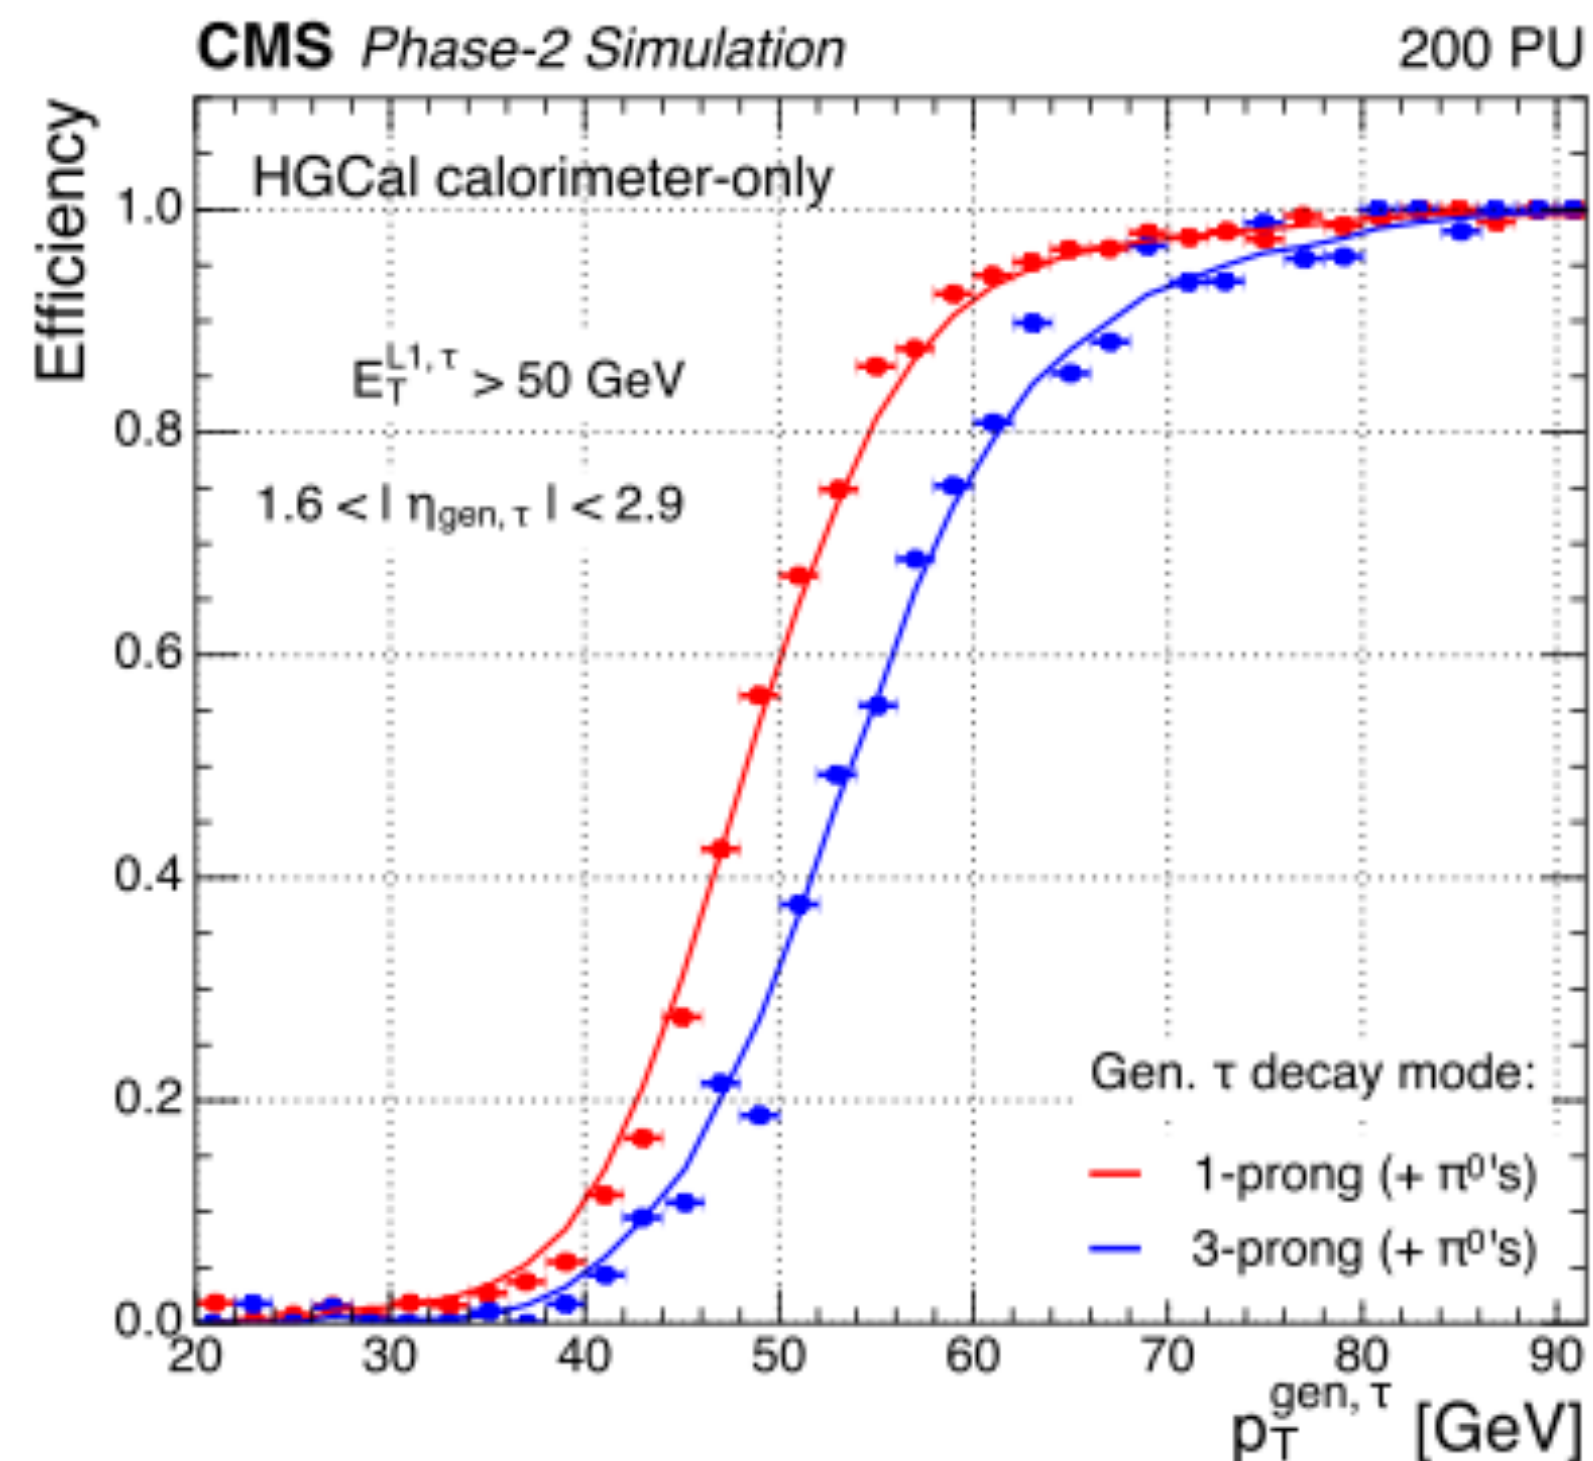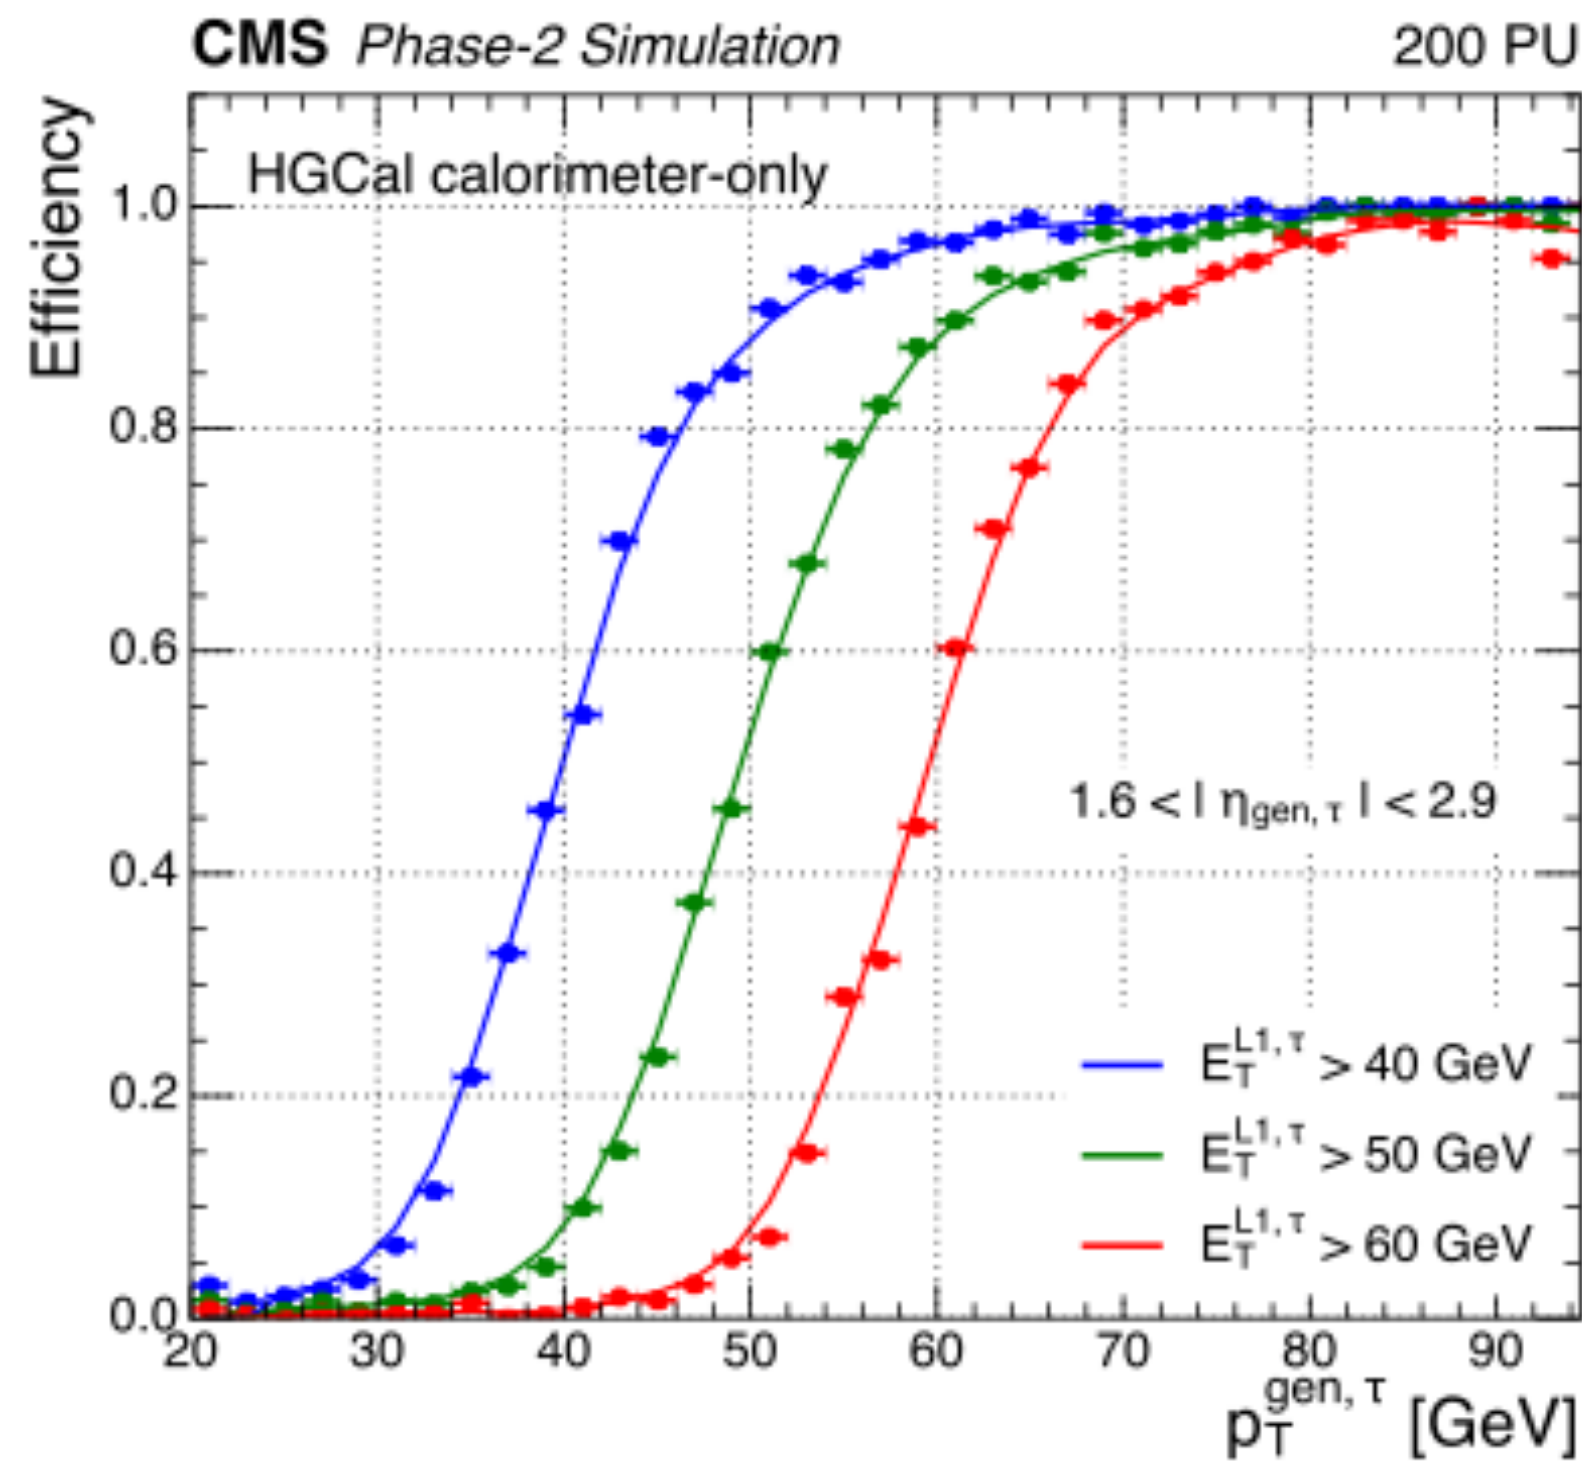

The efficiency of the L1 algorithm is evaluated with simulated collisions with **200 average PU events**. The efficiency as a function of the generated visible τ_h lepton p_T shows a **sharp turn-on**, both for the aggregated and split decay modes cases, that reaches 100% at plateau. The single- τ_h rate corresponding to different L1 threshold shows a large reduction for $p_T \geq 30$ GeV.

CONCLUSIONS

The many L1 trigger upgrades permit substantial improvement in the implementation of τ_h trigger algorithms. A better knowledge of the shower features allows the use of sophisticated **BDT-based trigger primitive selection and calibration**.

The discussed algorithm shows great preliminary performance, namely:

- * a 19% energy resolution ($\sim 14\%$ better than the Run 2 performance)
- * a **sharp selection efficiency** that reaches 100% at plateau
- * the possibility to separate the **decay modes at L1 level**

OUTLOOK

The main undergoing and future developments of the discussed τ_h algorithm are:

- * the calculation and exploitation of quality and **isolation** variables (**undergoing**)
- * the inclusion of **QCD-jet rejection** (**undergoing**)
- * the exploitation of the L1 **track trigger information**
- * the **firmware implementation** (**planned for this summer/autumn**)