CMS Report

S. Banerjee (Fermilab), V. Ivantchenko (CERN & Tomsk State University, Russia) on behalf of CMS Collaboration

Geant4 Technical Forum

January 21, 2021



Introduction



- CMS Simulation application is based on Geant4
 - Currently CMS uses the version Geant4.10.6.p02 by default
 - CMS is doing ultra-legacy MC production for Run2 data sets using the version Geant4.10.4.p03
 - CMS is considering to use Geant4.10.7 for Run3 MC production. This version is available since December 2020
 - CMS continually evaluates Geant4 developments and reports here the performance of the release version
 - Starting from Geant4.10.7.beta version, some of the reference releases of Geant4 are included in a dedicated git branch of CMSSW for detailed validation
 - CMSSW has been adopted for updated Geant4 versions (tiny modifications were required)
 - All problems incurred were reported to the Geant4 team



CMS Physics List



- CMS is planning to use the same physics list for ultra legacy as well as for the Run3 production
 - FTFP_BERT_EMM
- The list FTFP_BERT uses FTFP and Bertini Cascade models with slightly different transition regions in the two versions. For the version Geant4,10.4.p03 (Run2):
 - Bertini Cascade valid at \leq 12 GeV
 - FTFP valid at \ge 3 GeV
 - and in version Geant4.10.6.p02 and Geant4.10.7 (Run3):
 - Bertini Cascade valid at \leq 12 GeV for pions and \leq 6 GeV for all other hadrons
 - FTFP valid at \geq 3 GeV
- EMM specifies the physics models for electromagnetic processes
 - EMM uses the default multiple scattering model for regions of the sampling calorimeters (HCAL and HGCAL) and a simplified multiple scattering model elsewhere
- Coefficients of Birk's law for plastic scintillator are retuned for the versions Geant4.10.6.p02 and Geant4.10.7
 - Default values for Birk's constants for HCAL in Run2:
 - C1 = 0.0052; C2 = 0.142; C3 = 1.75
 - The tuned set for Run3:
 - C1 = 0.006; C2 = 0.142; C3 = 1.75




Validation of Geant4




- Adaptation of a new Geant4 version or a new Physics List requires validation of the model predictions with some of the existing data
- The validation is carried out using 2 sources of data:
 - 2006 test beam with CMS calorimeter prototypes (hadron beams of different types and different energies)
 - Collision data from the CMS experiment utilizing zero bias or minimum bias triggers from low luminosity runs
 - The methods are described in Eur. Phys. J. Web Conf. 214 (2019) 02012
- The comparisons may be used to improve the quality of Geant4 predictions in future releases
 - Results shown here are focussed on preparation for Run3



CMS 2006 TestBeam

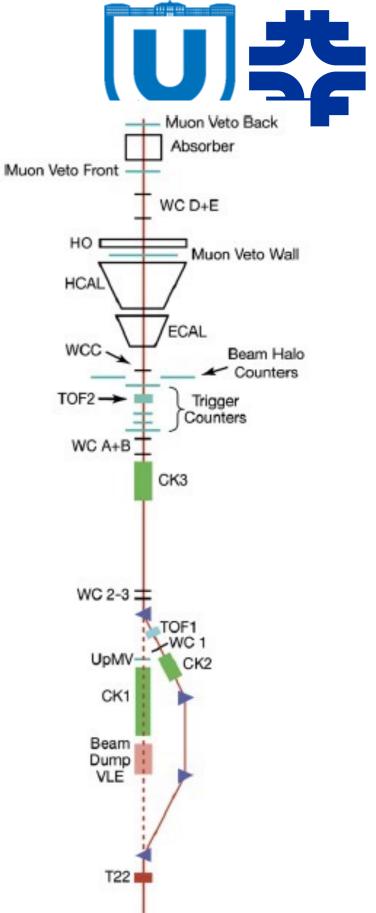

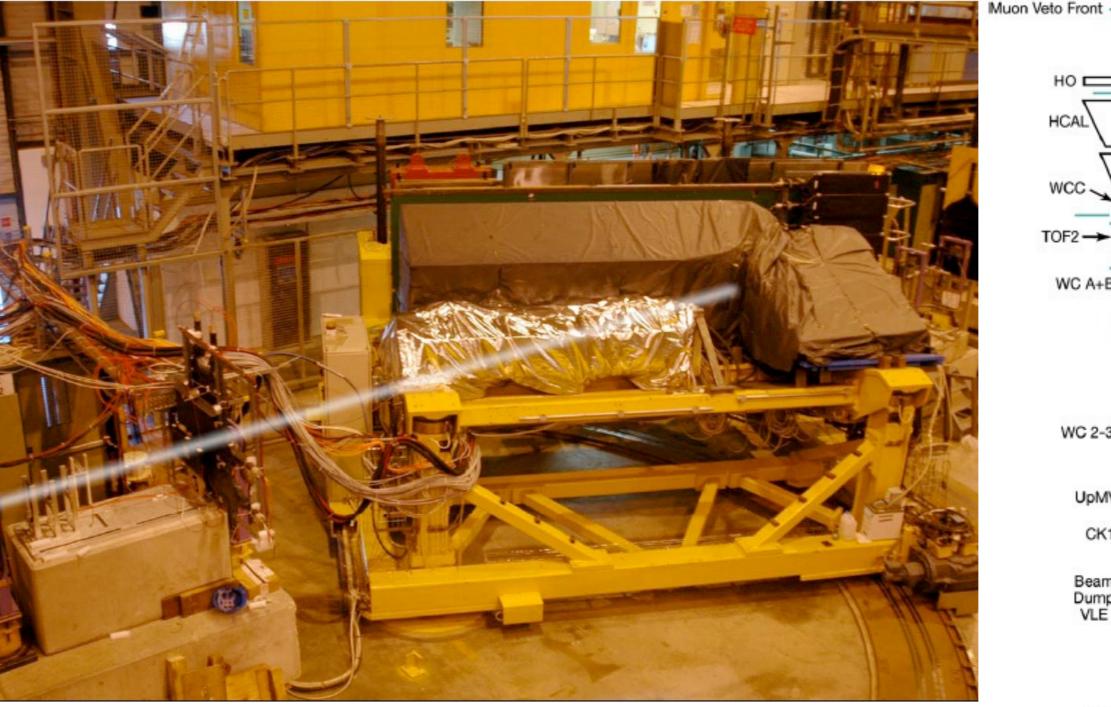

Geant4 Technical Forum




2006 TestBeam Data




- CMS collected data with prototype of Hadron Calorimeter Barrel and a supermodule of the barrel Electromagnetic Calorimeter in the H2 test beam area at CERN during 2006.
- Special action was taken to go to low energy hadron beam down to 1 GeV using a secondary target
- The analysis utilized particle identification using data from TOF counters and Cherenkov detectors up to energy of 9 GeV
- The results consist of mean energy response (measured as the ratio of the total energy in the calorimeter to the beam momentum) as a function of beam momentum for different beam types, the energy resolution and some energy distributions for particles of a given type at a given momentum
- Results from this test beam were published and used in many comparisons presented in earlier conference



Mean response with pions

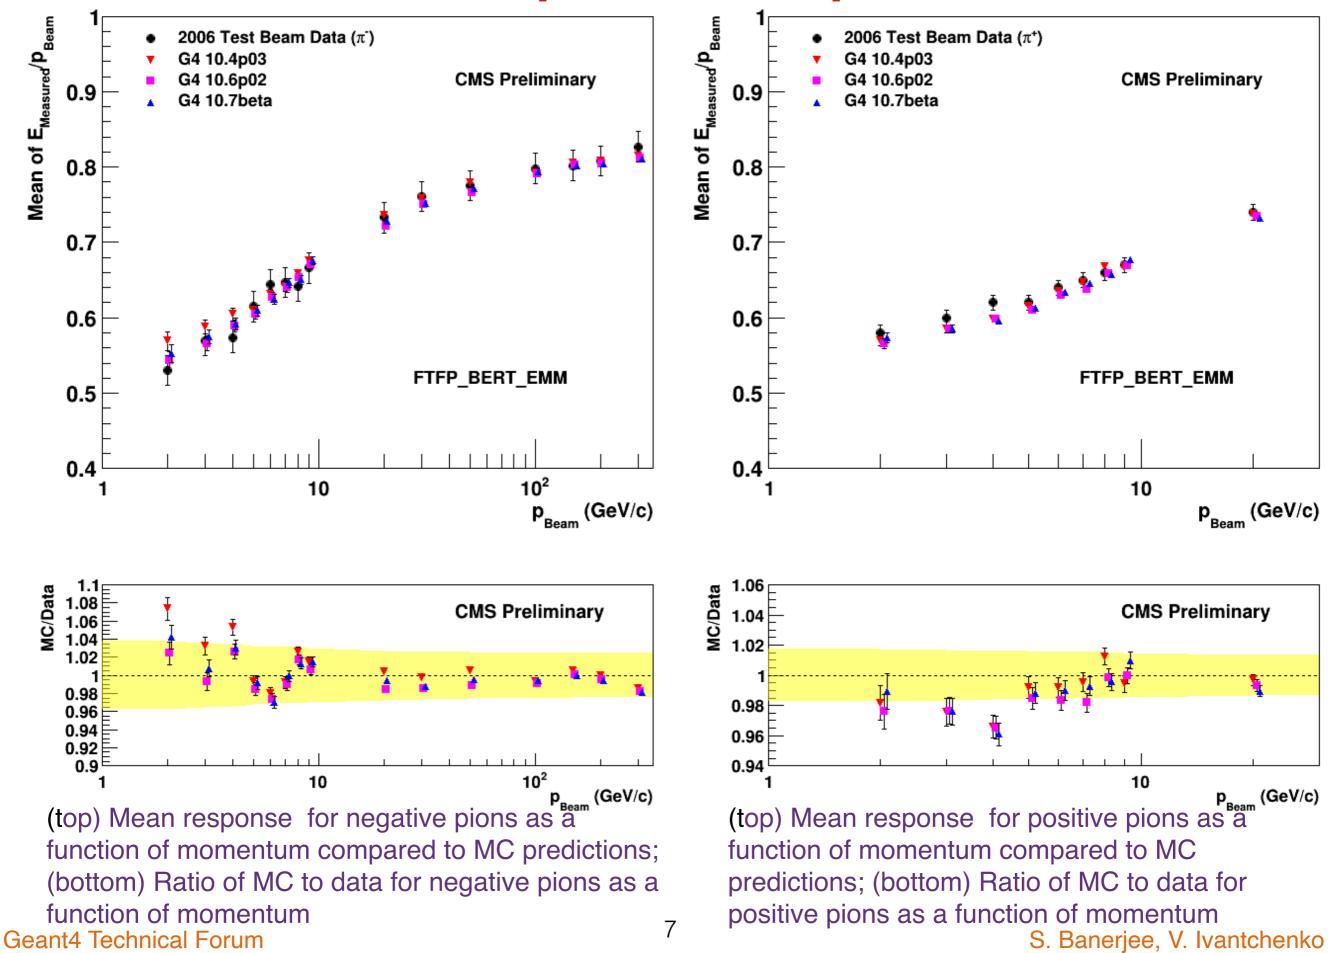


Mean response with protons/antiprotons

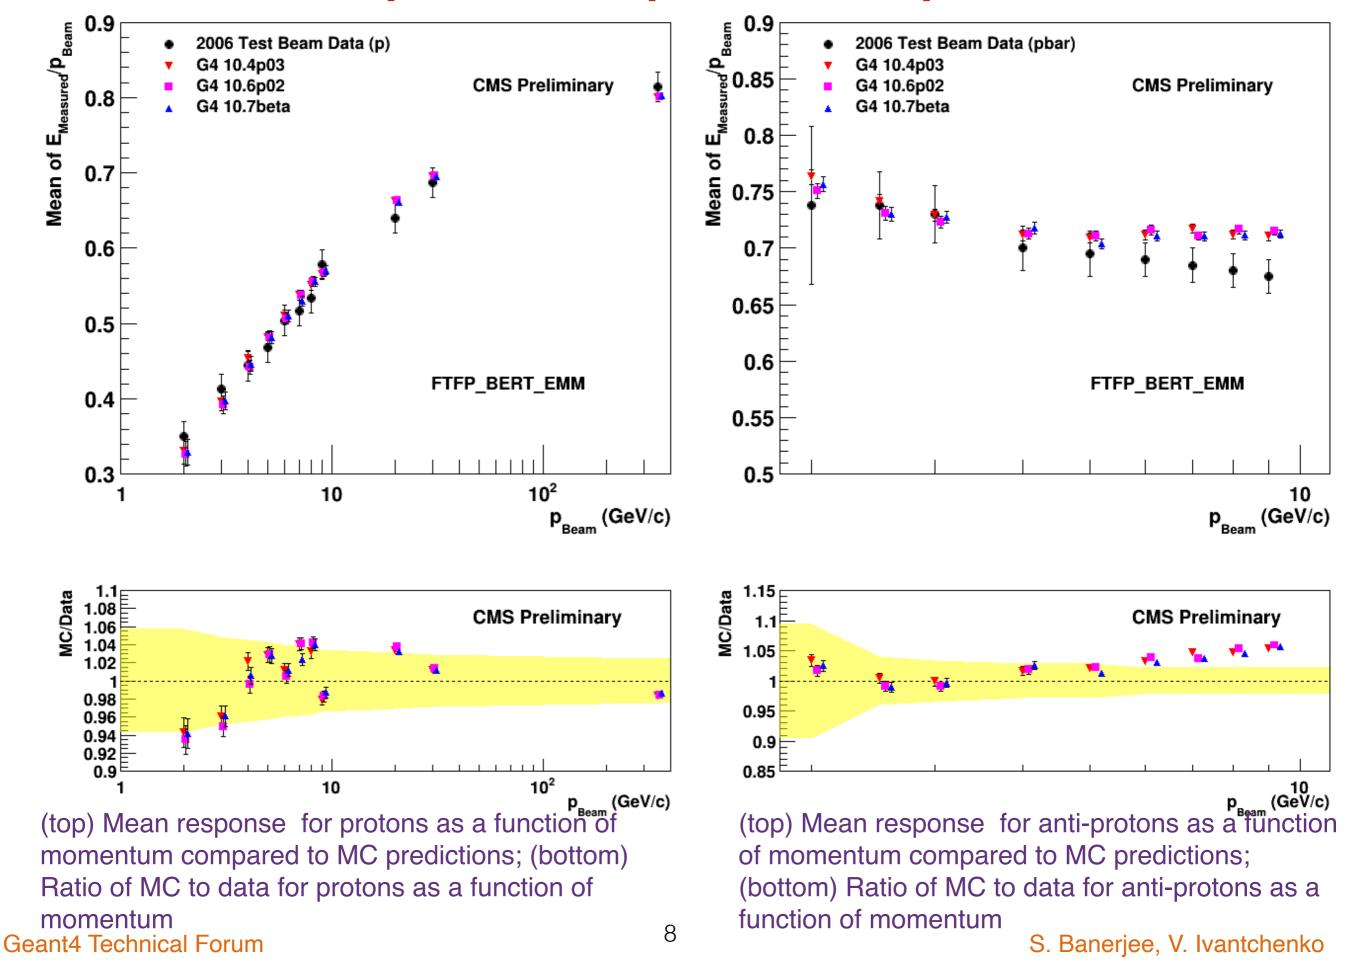



Mean Response for kaons

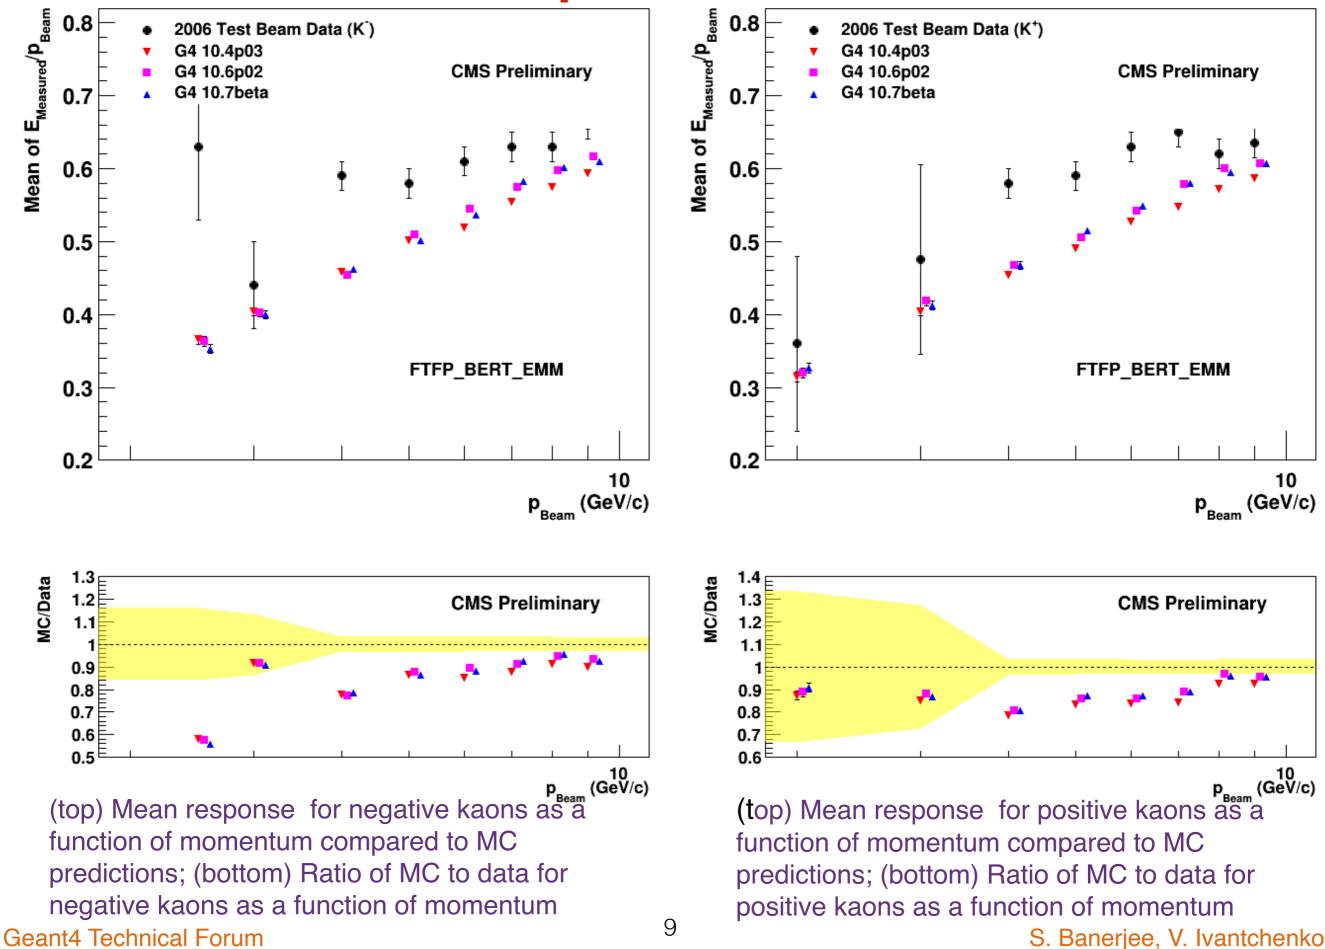



Summary from Mean Response



 χ^2 /d.o.f. between data and Monte Carlo


| | negative pions | positive pions | negative kaons | positive kaons | protons | anti- protons |
|-------------------------------|-------------------|-------------------|-------------------|-------------------|---------|------------------|
| G4 10.4.p03 FTFP_BERT_EMM | 0.54 | 0.96 | 24.5 | 25.0 | 0.61 | 1.93 |
| G4 10.6.p02 FTFP_BERT_EMM | 0.26 | 1.29 | 19.4 | 15.8 | 0.73 | 2.19 |
| G4.10.7.beta FTFP_BERT_EMM | 0.31 | 1.14 | 14.4 | 19.4 | 0.53 | 1.81 |
| G4.10.7 FTFP_BERT_EMM | 0.28 | 0.87 | 15.8 | 21.2 | 0.53 | 3.51 |

- Level of agreement is good for pions and protons, while it is not good for kaons. Response for pions and kaons are very similar in the data but not in MC.
- The predictions from 10.6.p02. and 10.7.beta show some improvement for kaons, some deterioration for positive pions, and acceptable agreement for negative pions, protons and anti-protons. The predictions from 10.7 show improvements for all particles with the exception of anti-protons.
- pp collisions at high energies produce mostly pions. So one expects to have a reasonable agreement between data and MC with the current physics list in the Geant4 version 10.6.p02, 10.7.beta and 10.7

Geant4 Technical Forum




Energy spectrum for negative pions and protons

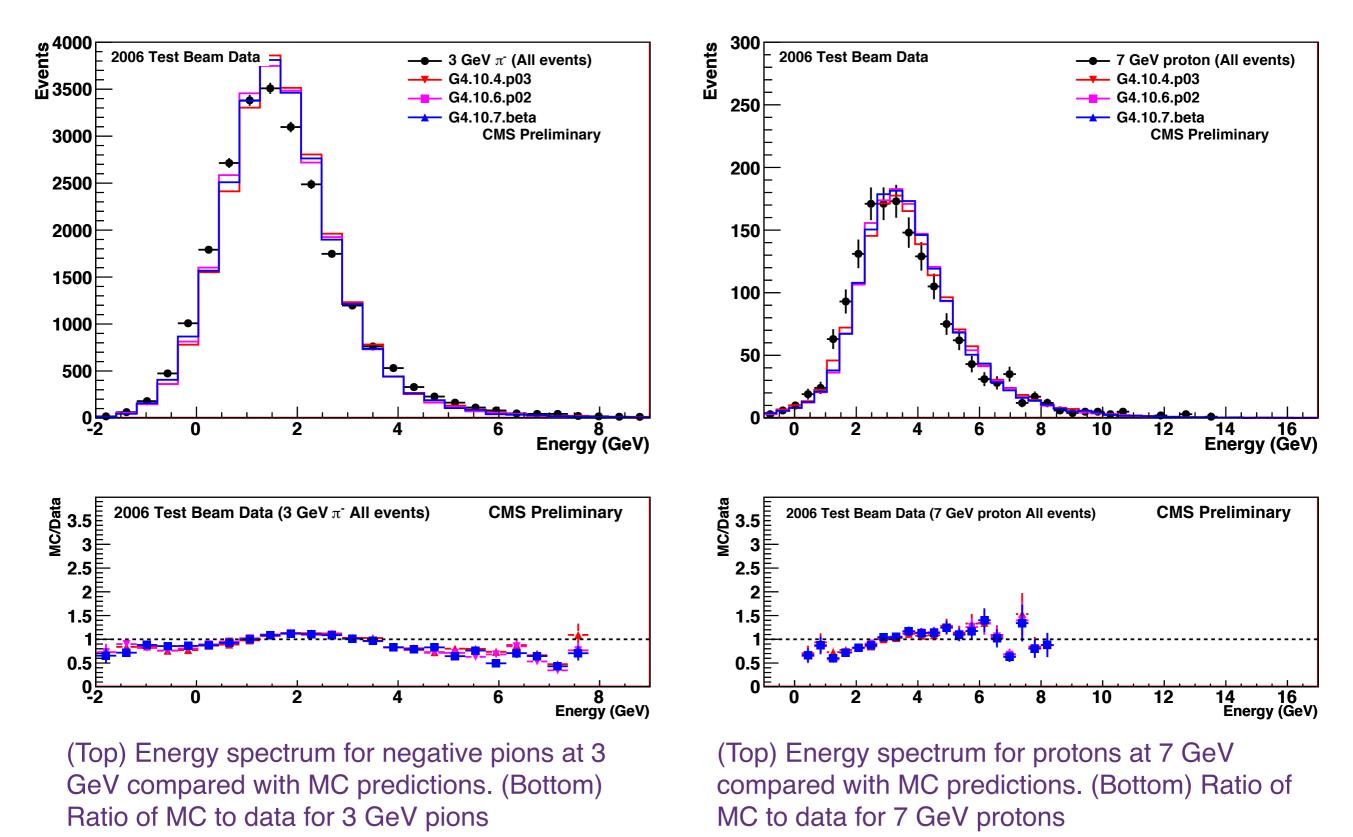





Energy Resolutions

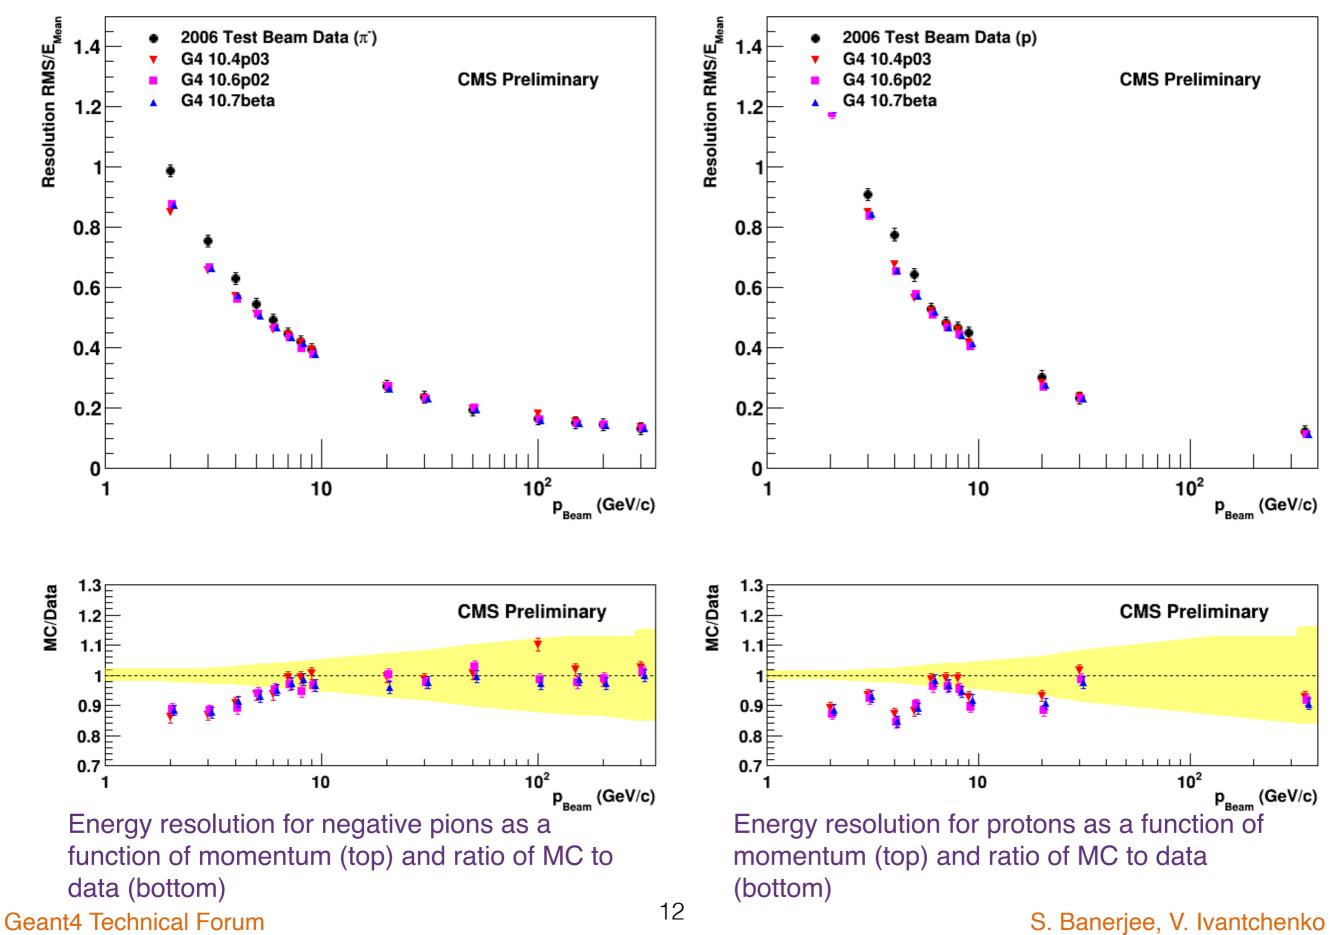



Isolated Charged Particles




- Compare ratio of calorimeter energy measurement to track momentum for isolated charged hadrons between data and MC
- Select good charged tracks reaching the calorimeter surface
- Impose isolation of these charged particles
 - propagate all tracks to the calorimeter surface and study momentum of tracks (selected with looser criteria) reaching ECAL (HCAL) within a matrix of 31x31 (7x7) around the impact point of the selected track. Demand no other track in the isolation region.
 - study energy deposited in an annular region in ECAL (HCAL) between 15x15 and 11x11 (7x7 and 5x5) matrices for neutral isolation. Demand energy in either annular region to be less than 2 GeV
- Measure the energy in a matrix of NxN cells around the point of impact. Two versions of NxN matrix are defined for ECAL and HCAL
 - ECAL uses 7x7 or 11x11 matrix
 - HCAL uses 3x3 or 5x5 matrix
- The methodology was developed using 7 TeV data (PAS: JME-10-008) and analysis of the 2016 low pileup data plus the comparisons with earlier Geant4 model predictions were presented in earlier CHEP conferences.



Quadrant of the CMS



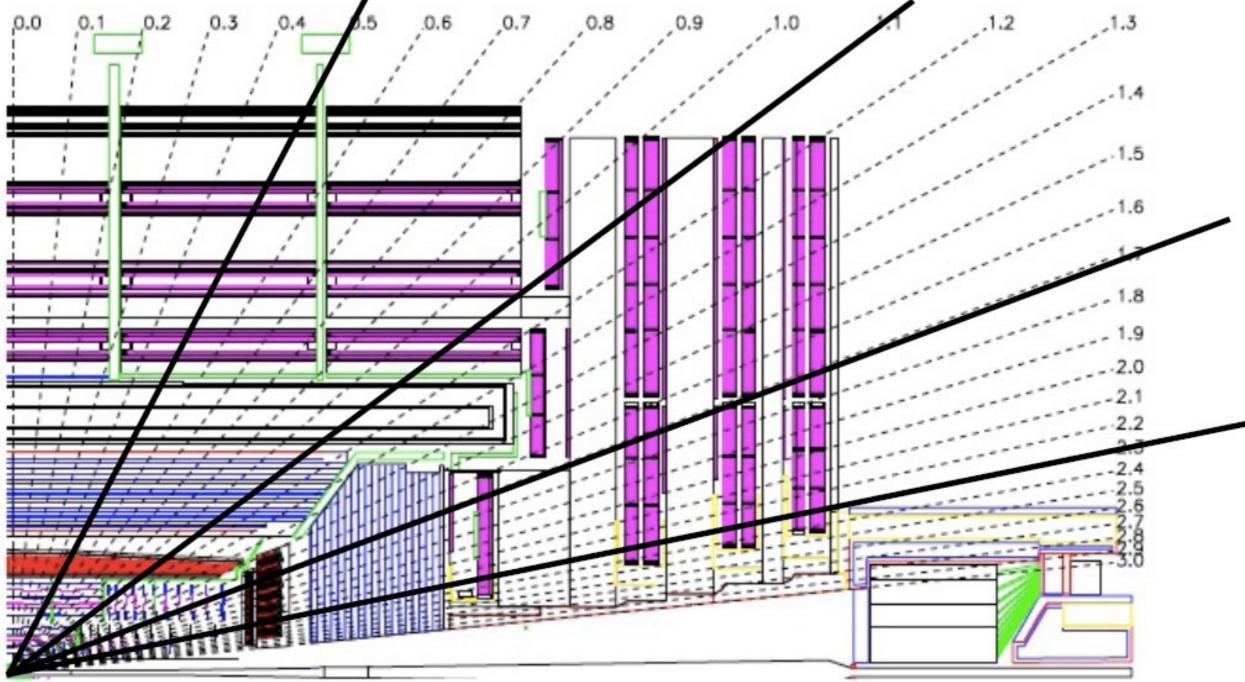


Four partitions in the CMS detector are used in the measurement of calorimeter response



Energy in ECAL and HCAL

Narrow Matrix (ECAL) 7-9 GeV



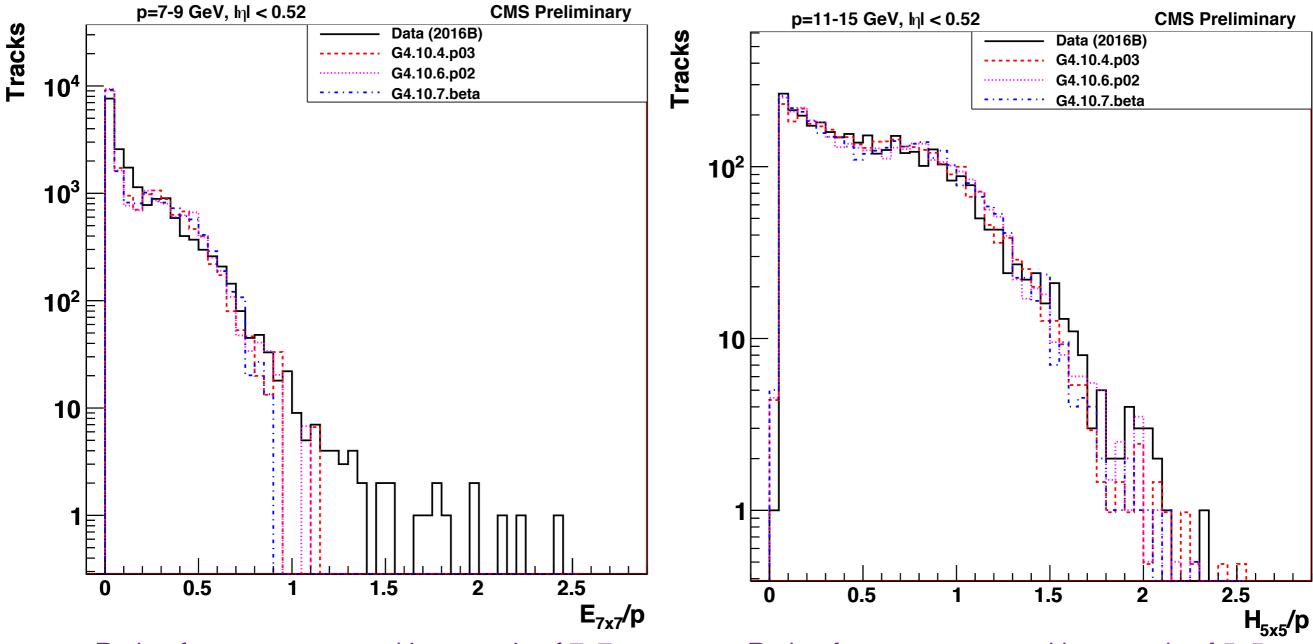


Ratio of energy measured in a matrix of 7x7Ratio of energy measured in a matrix of 5x5crystals around the hit point in the barreltowers around the hit point in the endcap hadronelectromagnetic calorimeter for tracks ofcalorimeter for tracks of momentum between 11momentum between 7 and 9 GeV.and 15 GeV.

Geant4 Technical Forum

S. Banerjee, V. Ivantchenko



Energy in the ECAL (11x11 matrix)

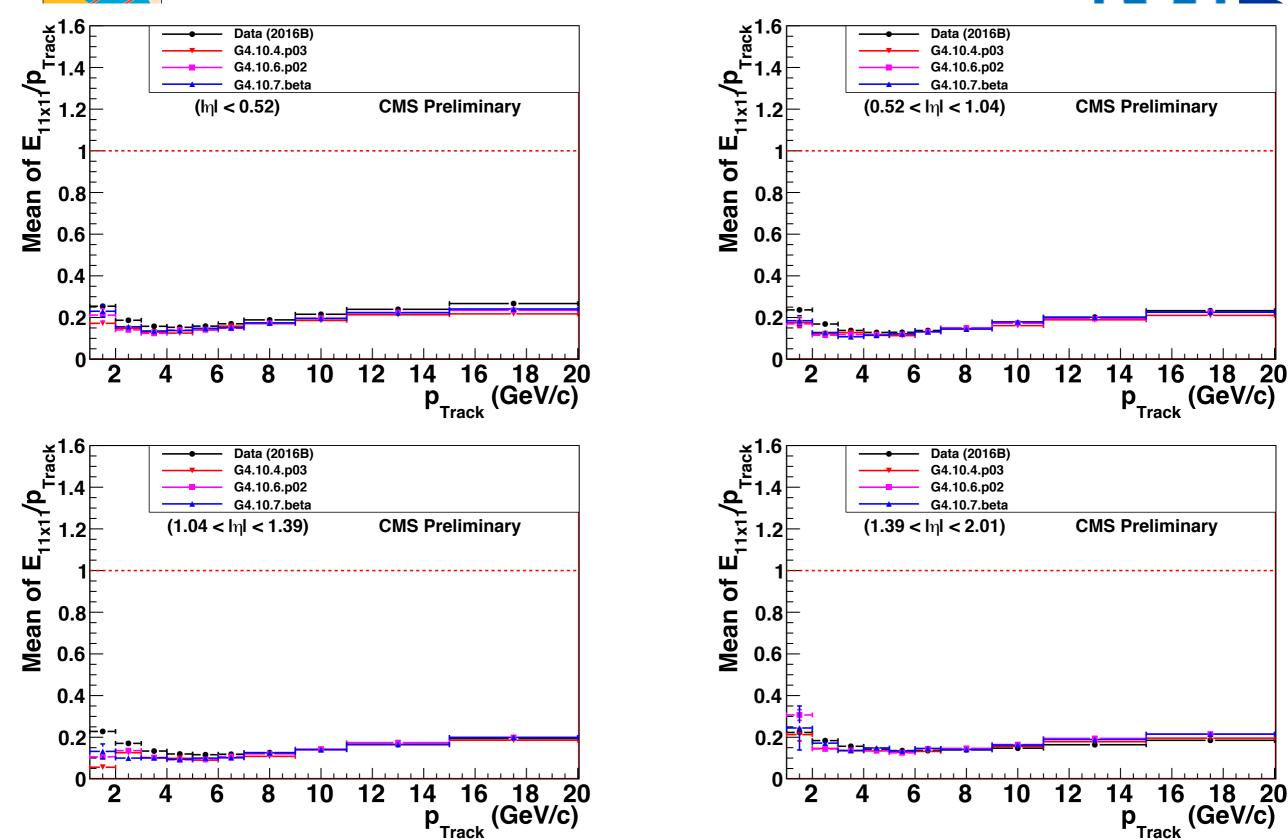


Mean of the ratio of energy measured in a 11x11 matrix in the ECAL to track momentum in 4 regions of the detector: central barrel ((top left); side barrel (top right); transition region (bottom left); endcap (bottom right)

Geant4 Technical Forum




Energy in the HCAL (5x5 matrix)

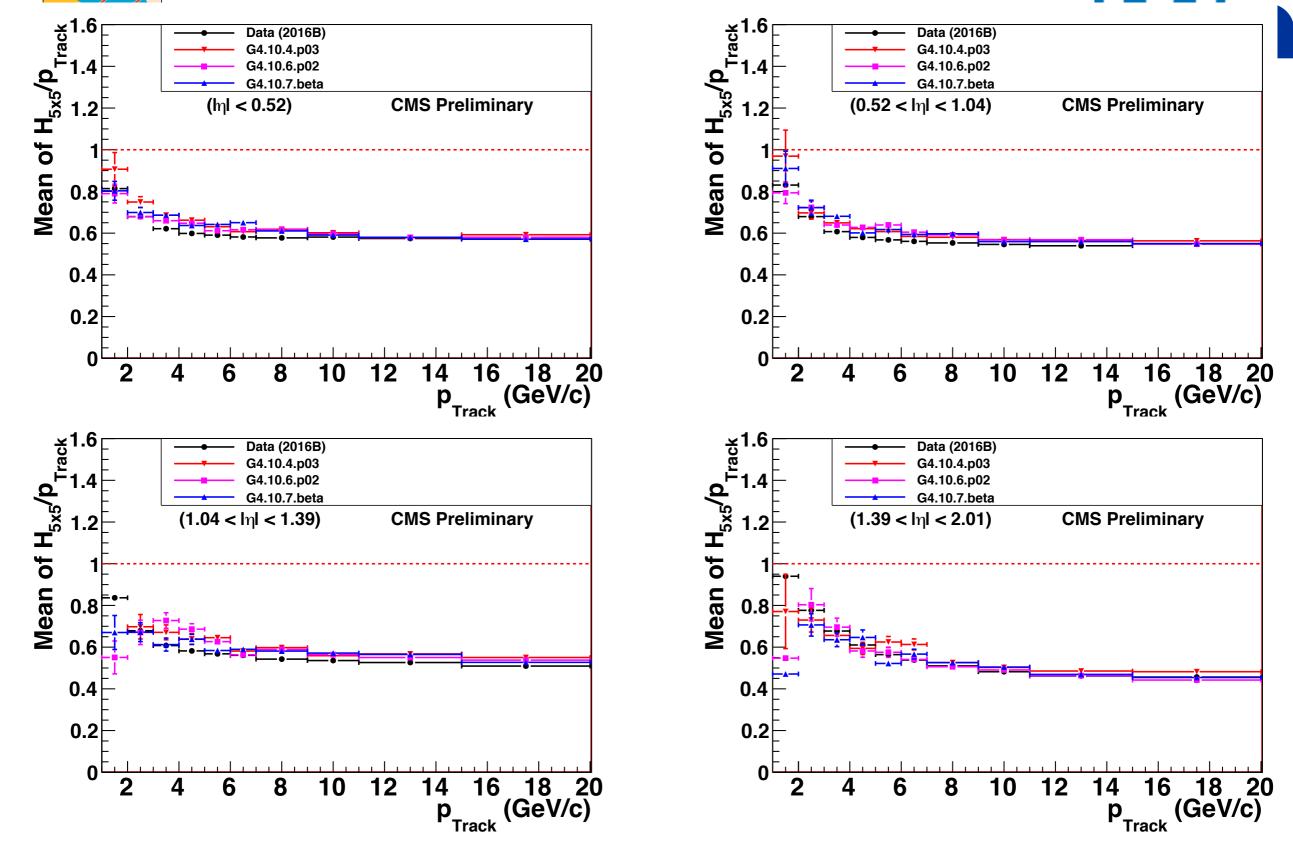

Mean of the ratio of energy measured in a 5x5 matrix of the HCAL to track momentum in 4 regions of the detector: central barrel (top left); side barrel (top right); transition region (bottom left); endcap (bottom right)


Geant4 Technical Forum

Combined Calorimeter Energy Ratio (Narrow Matrix)

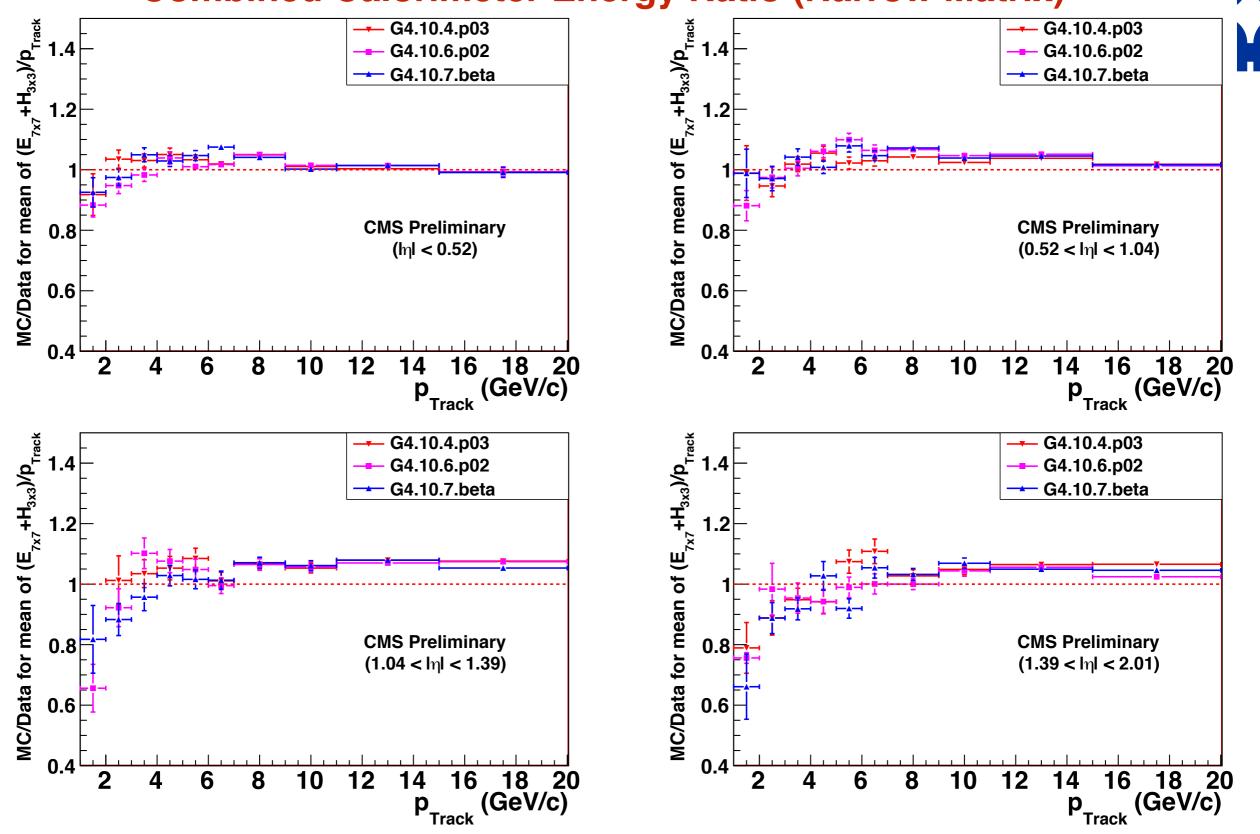

Ratio of the mean energy response in a narrow matrix of ECAL and HCAL between MC and data for four regions of the calorimeter: central barrel (top left); side barrel (top right); transition region (bottom left); endcap (bottom right) 18 **Geant4 Technical Forum** S. Banerjee, V. Ivantchenko

Combined Calorimeter Energy Ratio (Wide Matrix)

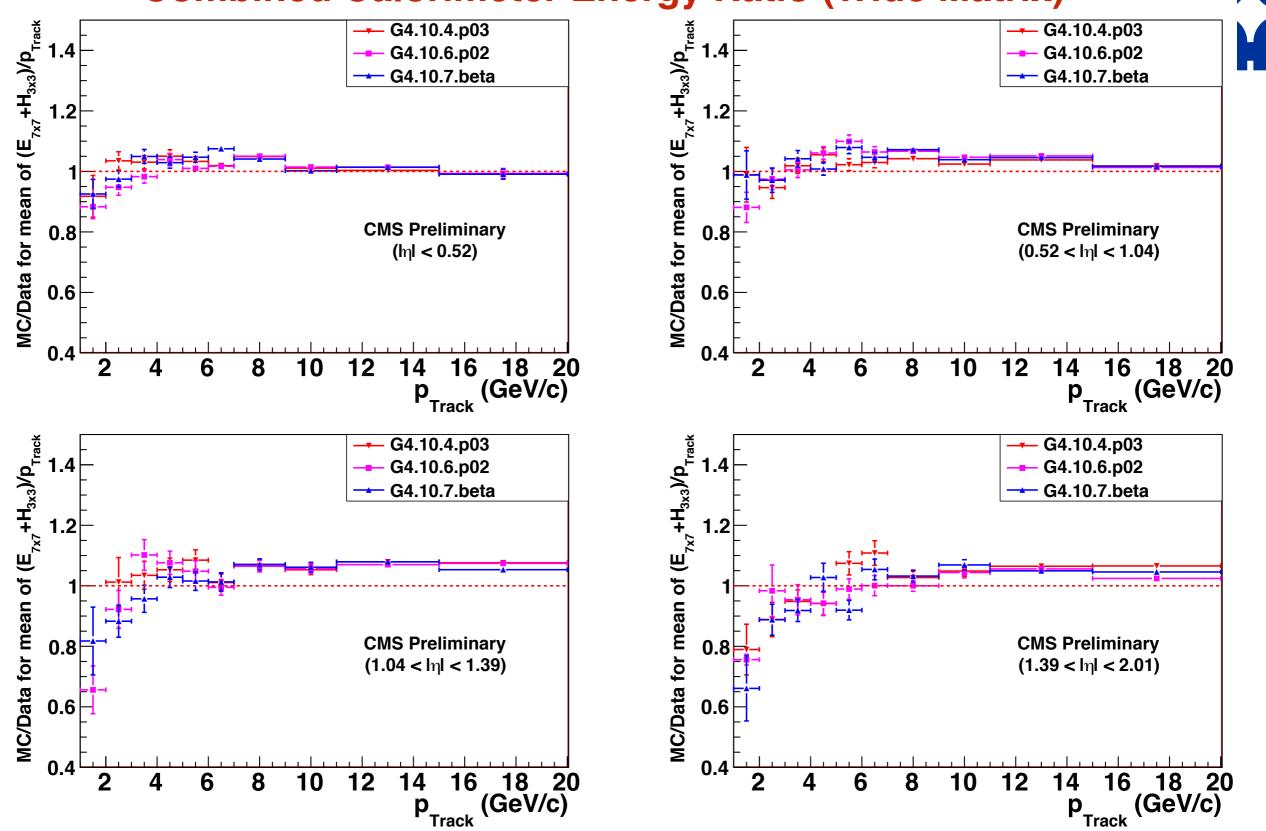

Ratio of the mean energy response in a wide matrix of ECAL and HCAL between MC and data for four regions of the calorimeter: central barrel (top left); side barrel (top right); transition region (bottom left); endcap (bottom right) 19 **Geant4 Technical Forum** S. Banerjee, V. Ivantchenko



Level of Disagreement



- Level of (dis)agreement is calculated from the deviation of the ratio (Data/MC) from 1.0
- The mean level of disagreement between data and MC is between 0.9% and 3.0% in the version 10.6.p02 and between 1.3% and 3.5% for 10.7, depending on the region of the detector. It is at a similar level for the version 10.4.p03

| | (E _{7x7} +H _{3x3})/p 10.4.p03 | (E _{7x7} +H _{3x3})/p 10.6.p02 | (E _{7x7} +H _{3x3})/p 10.7 | (E _{11x11} +H _{5x5})/p 10.4.p03 | (E _{11x11} +H _{5x5})/p 10.6.p02 | (E _{11x11} +H _{5x5})/p 10.7 |
|------------|---|---|---|---|---|---|
| Barrel 1 | (2.3±0.4)% | (2.5±0.4)% | (1.8±0.4)% | (2.7±0.4)% | (2.6±0.4)% | (1.9±0.4)% |
| Barrel 2 | (3.1±0.4)% | (1.0±0.4)% | (1.8±0.4)% | (2.1±0.4)% | (0.9±0.4)% | (1.5±0.4)% |
| Transition | (6.5±0.5)% | (1.3±0.5)% | (3.5±0.5)% | (4.7±0.5)% | (1.2±0.5)% | (3.0±0.5)% |
| Endcap | (5.8±0.5)% | (3.0±0.5)% | (1.7±0.5)% | (5.3±0.5)% | (1.9±0.5)% | (1.3±0.5)% |



Level of Disagreement



• Level of (dis)agreement is calculated also for the physics list QGSP_FTFP_BERT_EML. The two physics lists provide similar level of agreement

| | | ∕+H _{3x3})/p .4.p03 | (E _{7x7} +H _{3x3})/p 10.6.p02 | | (E _{7x7} +H _{3x3})/p 10.7 | | ^{11x11} +H₅x₅)/p 10.4.p03 | (E _{11x11} +H 10.6.p | | (E _{11x11} +H _{5x5})/p 10.7 | |
|--------------------|-------------------|----------------------------------|---|------|---|----------------------------------|---------------------------------------|----------------------------------|------------|---|--|
| Barrel 1 | (1.6±0.4)% (2 | | (2.6±0.4)% | | (1.8±0.4)% | (2.1±0.4)% | | (2.5±0.4)% | | (2.2±0.4)% | |
| Barrel 2 | (4.1 | ±0.4)% | (0.9±0.4)% | /0 (| (2.1±0.4)% | (2 | .8±0.4)% | (0.6±0. | 4)% | (1.6±0.4)% | |
| Transition | (4.9 | ±0.5)% | (2.5±0.5)% | /0 (| (3.6±0.5)% | (2 | .9±0.5)% | (2.5±0. | 5)% | (2.9±0.5)% | |
| Endcap | (4.7±0.5)% | | (2.3±0.5)% | | (2.3±0.5)% | (4.0±0.5)% | | (4.0±0.5)% | | (2.1±0.5)% | |
| - | | | /+H _{3x3})/p /(FTFP) | | (E _{7x7} +H _{3x3})/p 10.7(QGSP) | (E _{11x11} +H 10.7(F | | | | 11x11+H5x5)/p | |
| Barrel 1 (1.8± | | ±0.4)% (1.8±0.4)% | | | (1.9±0.4)% | | | (2.2±0.4)% | | | |
| Barrel 2 (1.8±0.4) | | ±0.4)% | (2.1±0.4)% | | | (1.5±0.4)% | | (* | (1.6±0.4)% | | |
| Transition (3.5±0 | | ±0.5)% |).5)% (3.6±0.5)% | | | (3.0±0.5)% | | (2 | (2.9±0.5)% | | |
| Endcap | Endcap (1.7±0.5)% | | ±0.5)% | (| (2.3±0.5)% | | (1.3±0.5)% | | (2 | (2.1±0.5)% | |

Geant4 Technical Forum




Summary



- CMS has been using Geant4 as the simulation tool for comparing data with predictions from known physics models
- Geant4 has evolved over time. For most of the Run2 physics studies, the version 10.4.p03 was used. Currently CMS has moved to 10.6.p02 and is planning to move to 10.7 for Run3 physics studies
- Different Geant4 versions are tested by comparing their predictions with some controlled measurements of single particle response
- 2006 test beam data of combined CMS barrel calorimeter (prototype hadron calorimeter and electromagnetic calorimeter) and low luminosity collision data at $\sqrt{s} = 13$ TeV are used for this comparison
- All 3 versions (10.4.p03, 10.6.p02 and 10.7) provide good agreement with the data.

Additional Slides




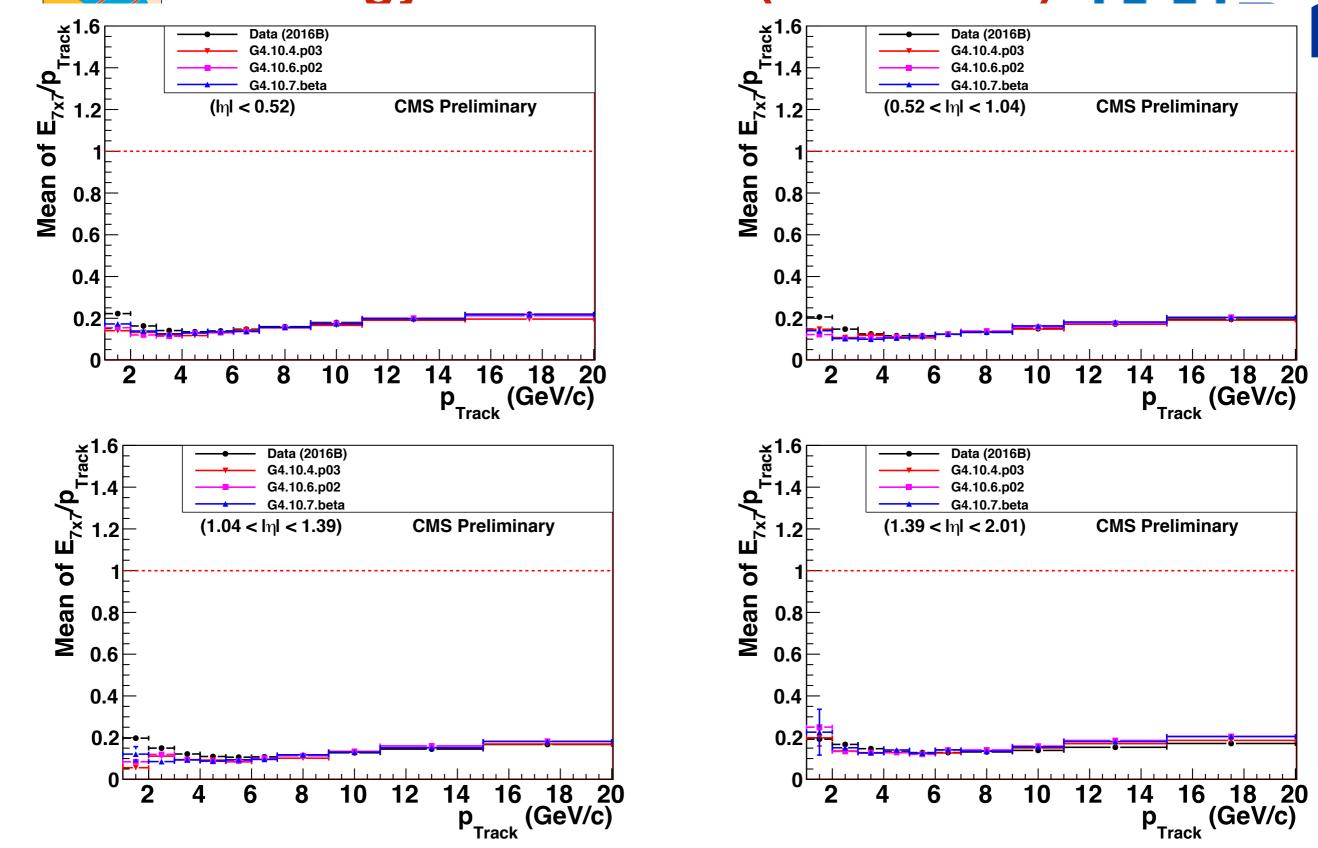

Mean of the ratio of energy measured in a 7x7 matrix in the ECAL to track momentum in 4 regions of the detector: central barrel (top left); side barrel (top right); transition region (bottom left); endcap (bottom right)

Geant4 Technical Forum

Energy in the HCAL (3x3 matrix)

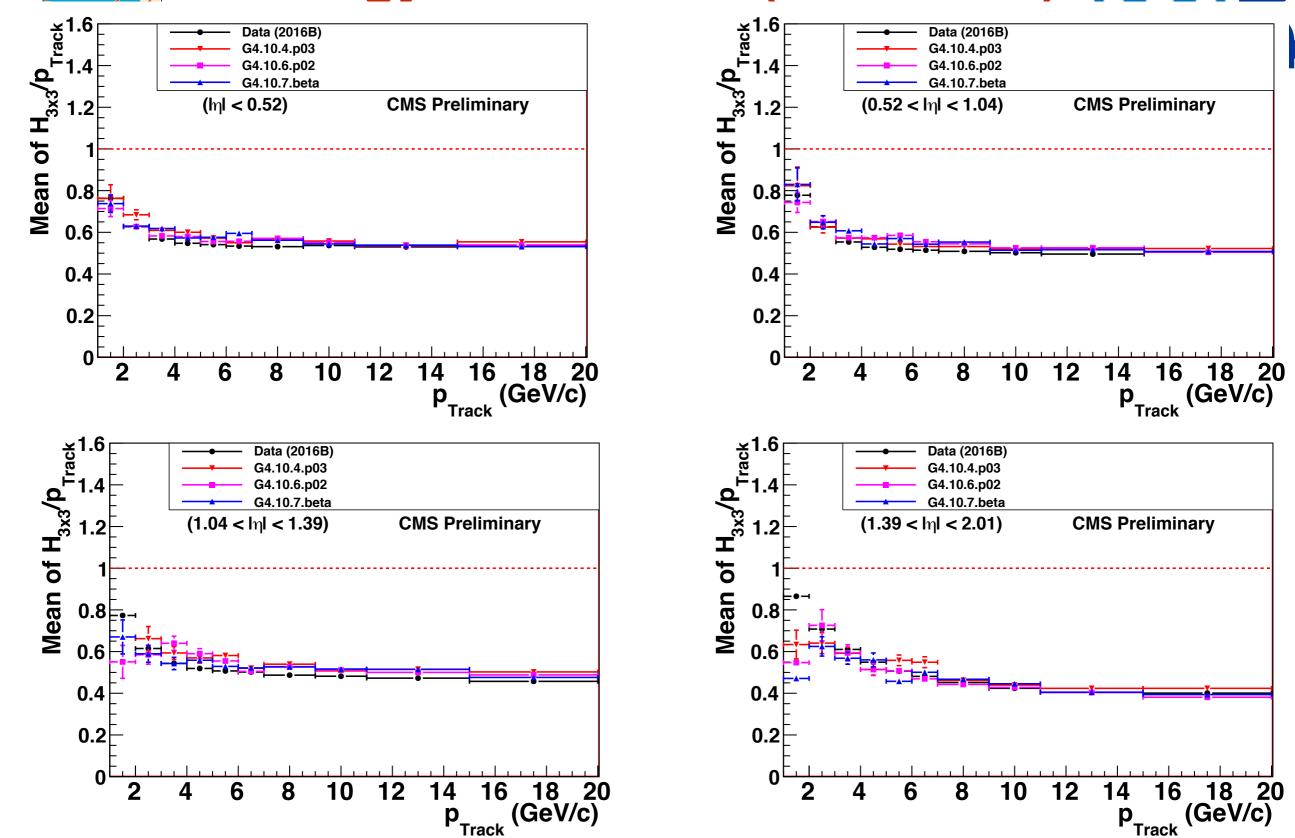

Mean of the ratio of energy measured in a 3x3 matrix in the HCAL to track momentum in 4 regions of the detector: central barrel (top left); side barrel (top right); transition region (bottom left); endcap (bottom right)

Geant4 Technical Forum