



清華大學  
Tsinghua University

ACCELERATOR LABORATORY  
of TSINGHUA UNIVERSITY 

# Development of a parallel-coupled structure for short filling time


Yuliang Jiang

Tsinghua University

2022/5/17




# Why parallel-coupled structure?




## ➤ Traditional structure

- **Typical input pulse length > 100 ns**




## ➤ Parallel-coupled structure

- **The input pulse length can be shortened to 10-ns scale.**

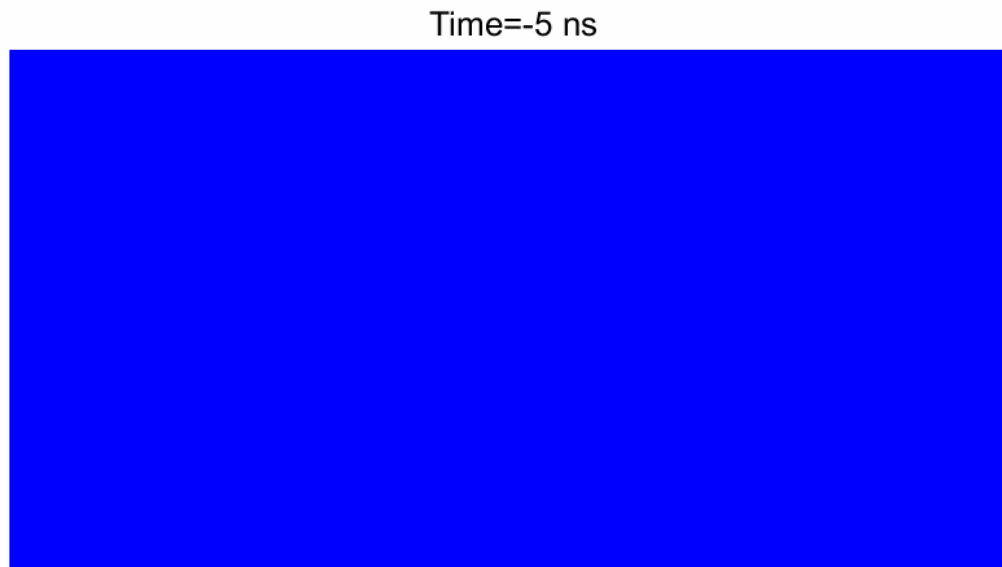




# Theory and Design



## ➤ Coupling coefficient of the whole structure


$$\beta' = (2N\rho)^{\mp 1} \beta = \left( 2N \frac{1 - |S_{33}|}{1 + |S_{33}|} \right)^{\mp 1} \beta$$


Structure's coupling coefficient  $\beta'$   
 The number of manifolds  $2N$   
 Port 3's reflection of a T-junction  $|S_{33}|$   
 Cell's coupling coefficient  $\beta$

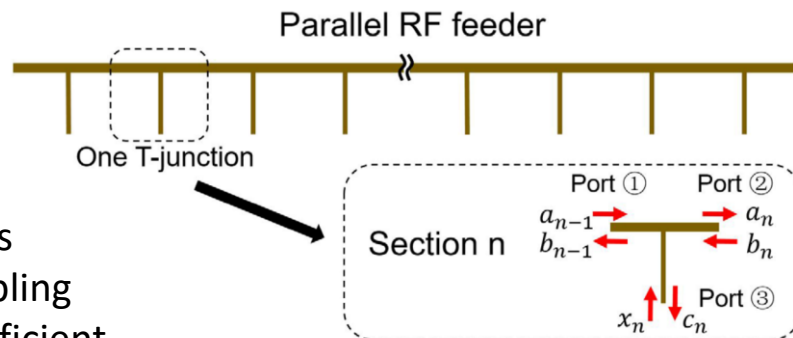


## ➤ Parallel-coupled structure based on corrugated waveguides

Parameters of 125 MV/m	
Pulse length	40 ns
Input power	100 MW
Iris aperture	2.75 mm
Max E-field	330 MV/m
Max Sc	12 MW/mm <sup>2</sup>
Average shunt impedance	90 MΩ/m


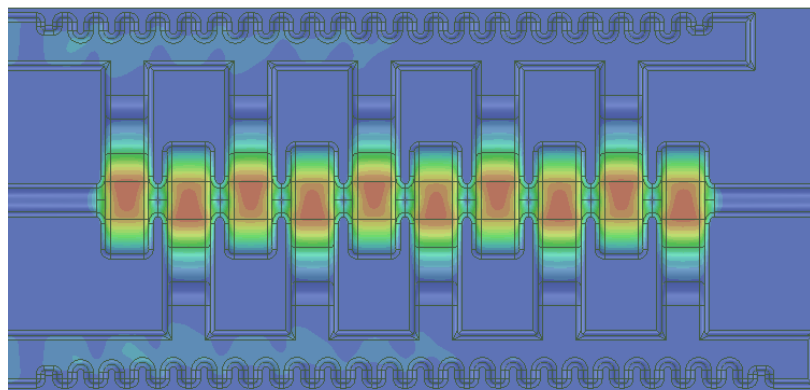





## 1. Frequency tuning

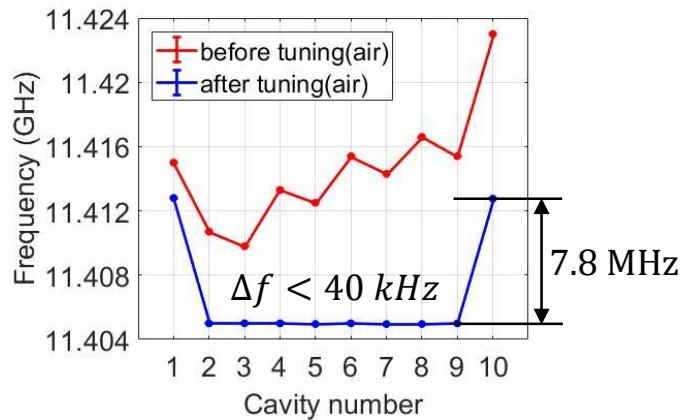


## 2. S-parameter (whole structure)

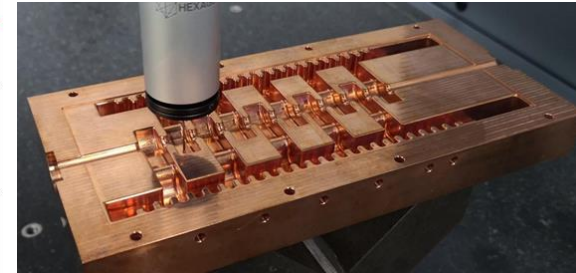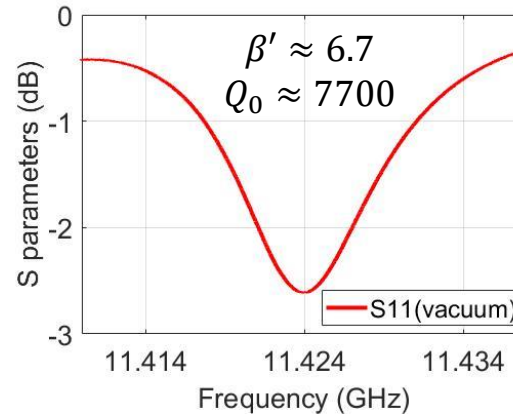

## 3. E-field distribution measurement (non-resonant method)

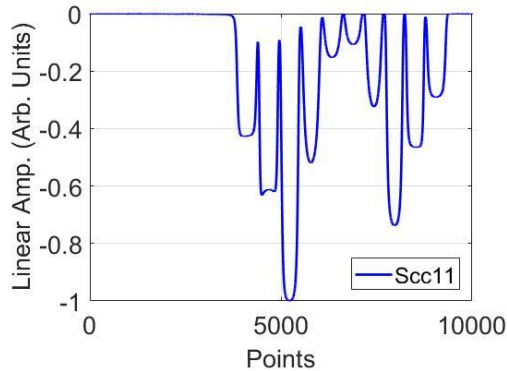

Measurement

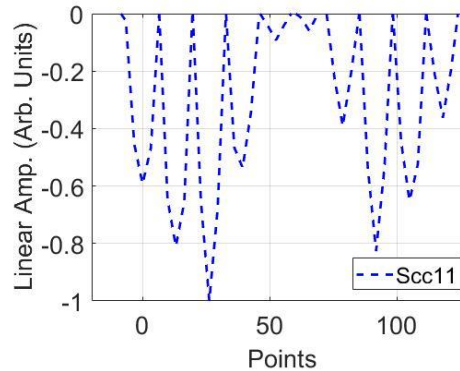


Simulation




The relative change of the total reflection during bead-pulling can not indicate the field distribution directly due to inter-cavity power coupling.




# High power tests




- $1 \times 10^7$  pulses, 125 MV/m achieved at 40 ns, BDR  $\sim 5 \cdot 10^{-4}$ /pulse
- Conditioning based on two-stage pulse compression is ongoing...

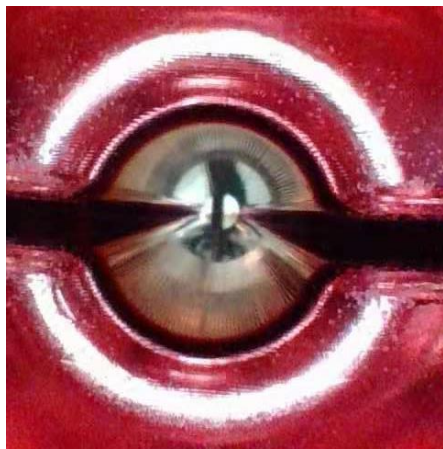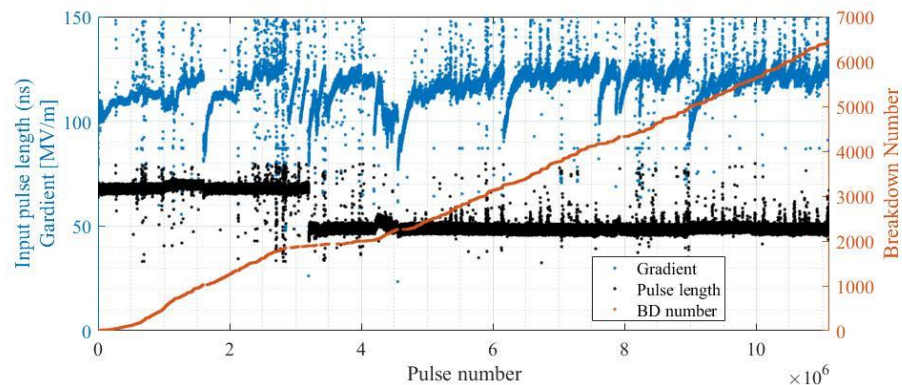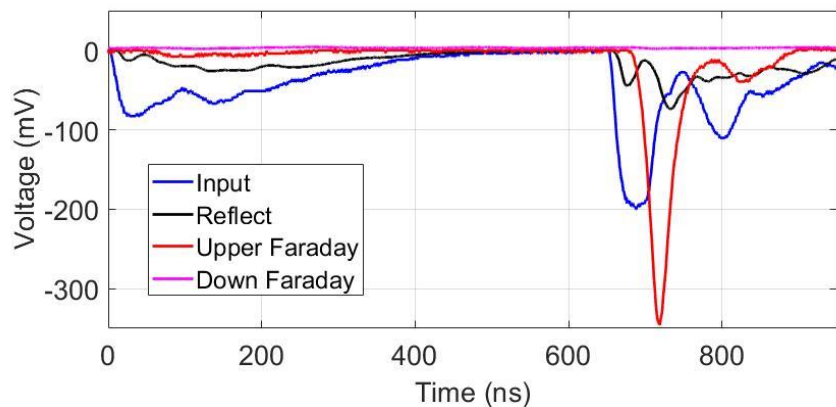

Cell 1 (left)

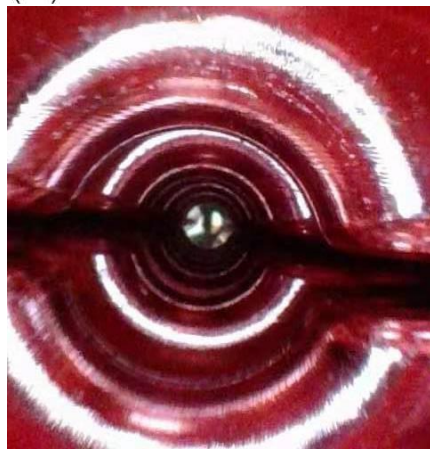

Cell 5 (left)

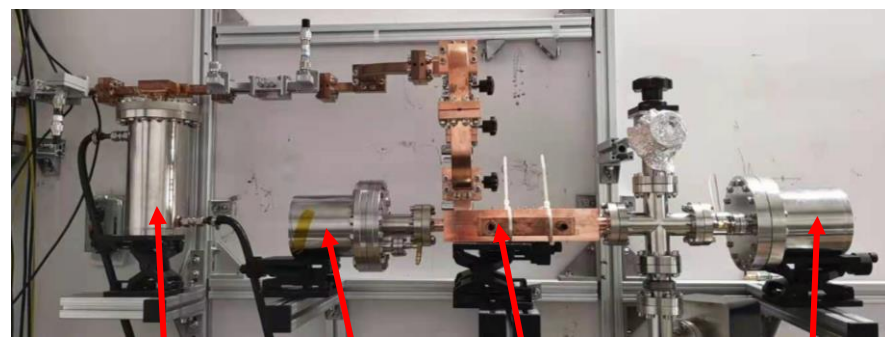

Pulse compressor Faraday cup Parallel-coupled structure Faraday cup