


Recent Developments in the ROOT I/O and TTree

CANAL, Philippe (FERMILAB)



ROOT I/O History

2000

- Version 2.25 and older
 - Only hand coded and generated streamer function, Schema evolution done by hand
 - I/O requires : ClassDef, ClassImp and CINT Dictionary

2001

- Version 2.26
 - **Automatic schema evolution**
 - **Use TStreamerInfo (with info from dictionary) to drive a general I/O routine.**

2002

- Version 3.03/05
 - **Lift need for ClassDef and ClassImp** for classes not inheriting from **TObject**
 - **Any non TObject class** can be saved inside a **TTree** or as part of a **TObject**-class

2004

- Version 4.00/08
 - Automatic versioning of 'Foreign' classes
 - Non **TObject** classes can be saved directly in **TDirectory**

2005

- Version 4.04/02
 - Large **TTrees**, **TRef** autoload
 - TTree interface improvements, **Double32** enhancements

2006

- Version 5.08/00
 - Fast **TTree** merging, Indexing of **TChains**, **Complete STL support.**

2007

- Version 5.12/00
 - Prefetching, **TRef** autodereferencing
- Version 5.16/00
 - Improved modularization (libRio)



Outline

■ General I/O

- *Major Enhancements*
- libRIO
- STL and Double32_t
- File Utilities
- Asynchronous Open
- Consolidations

■ Trees

- Autodereferencing
- Fast Merging
- Indexing of **TChains**
- **TTree** Interface enhancements
- New Features



Major Enhancements

- Improved Modularity
 - *“From ROOT to BOOT, from BOOT to ROOT”* Rene Brun
 - libTree and libRIO no longer loaded by default.
- Improvement in support TSQLFile and TXMLFile
 - *“Status of SQL and XML I/O in ROOT”* Sergey Linev
 - Added support of ODBC
 - postgres support of new functionality upcoming
- TEntryList
 - *“A new class to support large and scalable event lists.”* Anna Kreshuk
- Prefetching
 - *“Recent Improvements in the ROOT Tree cache.”* Leandro Franco
- XROOTD
 - xrootd performance improvement (30') Fabrizio Furano

libRIO

- New library containing all the ROOT classes to do basic Input/Output (ROOT 5.15/04 and above)
 - Includes **TFile**, **TKey**, **TBufferFile**, the Collection Proxies (for STL), etc.
 - **TDirectory**, **TBuffer** are now a pure abstract interface.
 - **TDirectoryFile**, **TBufferFile** are the concrete implementation
 - **TFile** derives from **TDirectoryFile** instead of **TDirectory**.
 - **These change may be backward incompatible:**
 - If you creates a **TDirectory** object, replace with **TDirectoryFile**
 - If you creates a **TBuffer** object, replace with **TBufferFile**
 - Dictionaries are NO longer dependent on any of the classes in libRIO

```
#if ROOT_VERSION_CODE >= ROOT_VERSION(5,15,0)
#include <TBufferFile.h>
#else
#include <TBuffer.h>
#endif
#if ROOT_VERSION_CODE >= ROOT_VERSION(5,15,0)
    TBufferFile b(TBuffer::kWrite,10000);
#else
    TBuffer b(TBuffer::kWrite,10000);
#endif
```

Streamer code update

- Change calls to TClass object into calls to TBuffer
- Removes direct dependency on TClass.

```
void Myclass::Streamer(TBuffer &R__b)
{
    // Stream an object of class Myclass.
    if (R__b.IsReading()) {
        Myclass::Class() ->ReadBuffer(R__b,this);
    } else {
        Myclass::Class() ->WriteBuffer(R__b,this);
    }
}
```

Old

New

```
void Myclass::Streamer(TBuffer &R__b)
{
    // Stream an object of class Myclass.
    if (R__b.IsReading()) {
        R__b.ReadClassBuffer(Myclass::Class(),this);
    } else {
        R__b.WriteClassBuffer(Myclass::Class(),this);
    }
}
```

Float, double and space...

- Math operations very often require double precision, but on saving single precision is sufficient...

- Data type: **Double32_t**

In memory: double


On disk: float or integer

- Usage (see tutorials/io/double32.C):

```
Double32_t m_data; // [min,max<,nbits>]
```

- No nbits,min,max
 - saved as float
- min, max
 - saved as int 32 bits precision explicit values or expressions of values known to Cint (e.g. "pi")
- nbits present
 - saved as int with nbit precision higher precision than float for same persistent space

Float, double and space... (2)

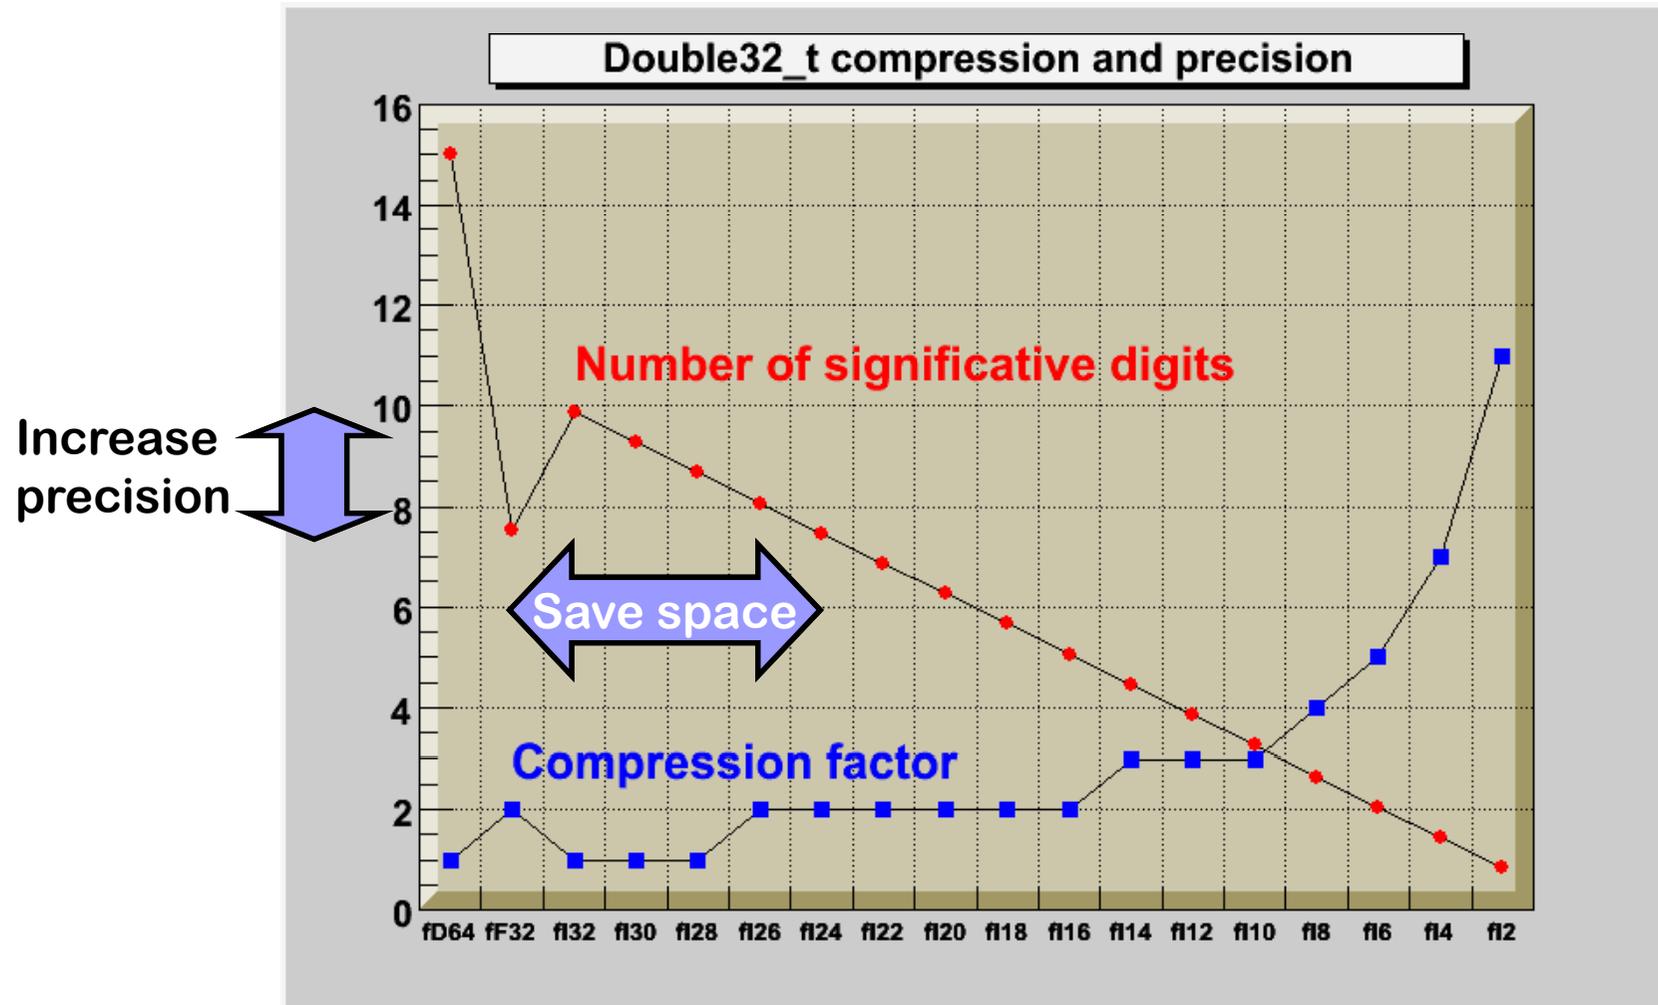

STL containers and Double32_t

- Support for `Double32_t` extended to the case where it is a template parameter.
 - Allow storing of the content of `vector<Double32_t>` as float instead of double (and any other STL containers).
 - Supported only for data members and when going via the “*string based*” interfaced.
 - Compilers and C++ RTTI can not distinguish between a `mytemp<double>` and a `mytemp<Double32_t>`.
 - Restriction could be lifted with the new C++ feature ‘opaque typedef’
 - Dictionary for `mytemp<double>` and `mytemp<Double32_t>` must be in two different dictionary files.

```
Event* eventptr; std::vector<Double32_t> *myvect;  
tree->Branch("event", &eventptr);  
tree->Branch("myvect", "vector<Double32_t>", &myvect);
```

- Support schema evolution from a container of double to the **same** container of `Double32_t` and vice et versa.



Remote File Utilities

- New static function `TFile::Cp()`
 - Allows **any** files (including non-ROOT files) to be copied via any of the many ROOT remote file access plugins.
- New Class `TFileMerger`
 - Similar to *hadd*
 - Easy copying and merging of two or more files using the many `TFile` plugins (i.e. it can copy from **Castor** to **dCache**, or from **xrootd** to **Chirp**, etc.).

```
TFileMerger m;  
m->AddFile("url1");  
m->AddFile("url2")  
m->Merge();
```

- The `AddFile()` and `Merge()` use the `Cp()` to copy the file locally before making the merge, and if the output file is remote the merged file will be copied back to the remote destination.

Remote File Utilities

- “CACHEREAD” option for `TFile::Open()`
 - First use `TFile::Cp()` to copy the file locally to a cache directory
 - Open the local cache file.
 - If the remote file already exists in the cache this file will be used directly, unless the remote file has changed.

```
root [] TFile::SetCacheFileDir("/tmp/userid");
root [] TFile *f = TFile::Open("http://root.cern.ch/files/aleph.root",
"CACHEREAD");
[TFFile::Cp] Total 0.11 MB      |=====| 100.00 % [8.8 MB/s]
Info in : using local cache copy of http://root.cern.ch/files/aleph.root
[/tmp/userid/files/aleph.root]
root [] f->GetName();
(const char* 0x41dd2d0)"/tmp/userid/files/aleph.root"
root [] TFile::ShrinkCacheFileDir();
```

- New interface `TFileStager` defining the interface to a generic stager.


```
stg = TFileStager::Open("root://lxb6046.cern.ch")
stg->Stage("/alice/sim/2006/pp_minbias/121/168/root_archive.zip")
stg->IsStaged("/alice/sim/2006/pp_minbias/121/168/root_archive.zip")
```

Asynchronous Open

- `TFile::AsyncOpen` never blocks
 - returns an opaque handle (a `TFileOpenHandle`).
 - Also support string base lookup.
 - Active only for **xrootd** connection.

```
TFile::AsyncOpen(fname);

// Do something else while waiting for open readiness
EAsyncOpenStatus aos = 0;
while ((aos = TFile::GetAsyncOpenStatus(fname)) == TFile::kAOSInProgress) {
    // Do something else
    ...
}
// Attach to the file if ready ... or open it if the asynchronous
// open functionality is not supported
if (aos == TFile::kAOSSuccess || aos == TFile::kAOSNotAsync) {
    // Attach to the file
    f = TFile::Open(fname);
}
```




Consolidations

- Improvement in *hadd*
 - Compression level selections
 - Option to copy only histogram (and no **TTree**).
 - Use the new fast merge by default
- Thread safety tweaks
 - Reduced reliance on **gFile/gDirectory** in the ROOT I/O inner code so that only the first level routine (directly called by user code) access **gFile** and **gDirectory**.
 - We enhanced the STL container streaming code to make it thread-safe.



Consolidations

- Extended support for `operator new` in the dictionaries
- Implemented a proper '`destructor`' for 'emulated objects'.
 - This changes allow for proper allocation and deallocation of emulated objects in all cases.
- Enabled I/O for C-style array of strings.
- Add support for `TBuffer`'s `operator<<` and `operator>>` from the CINT command line.



TStreamerInfo::BuildCheck

- The checksum calculation used to check the integrity of a class definition was not using a consistent class name for the STL containers. This led to the appearance of error messages like:

```
Warning in TStreamerInfo::BuildCheck:
    The StreamerInfo of class FitResult read from file t1.root
    has the same version (=1) as the active class but a
    different checksum.
    You should update the version to ClassDef(FitResult,2).
    Do not try to write objects with the current class definition,
    the files will not be readable.
```

- When the 'only' difference was whether or not the dictionary for the stl container was loaded.
- The fix for this problem might lead to similar messages in other cases (where the full typename was used for object already on file). The solution in those cases is to increase the version number of the class (This solution is not an option for the above mentioned cases (where the difference is the presence or not of a dictionary for the stl container))



Autodereferencing

- **TRef** and **TRefArray** are now auto-dereferenced when used in **TTree::Draw**
 - Requires to enable **TRef** autoloading (by calling **TTree::BranchRef**)
 - For collections of references either a specific element of the collections may be specified or the entire collection may be scanned. (example 2.)
- Same framework can be used for any **Reference** classes (eg. POOL Ref)
- The **TTreeFormula** operator **@** applied to a reference object allows to access internals of the reference object itself (example 3.)
- The dereference mechanism even works across distributed files (if supported by the reference type) (example 4.)
- Caveat for **TRefArray** and **TRef**:
 - To know the underlying type, the first entry of the **TTree** is read.
- Special Thanks To Markus Frank
- Special Thanks to DZero for testing the limits of the **TRef** mechanism

```
1: T->Scan ("fLastTrack.GetPx()");  
2: T->Scan ("fMuons.GetPx():fMuons[0].GetPx()");  
3: T->Scan ("fLastTrack.GetUniqueID():fLastTrack@.GetUniqueID()&0xFFFF");  
4: T->Scan ("fWebHistogram->GetRMS()");
```

Autodereferencing (2)

- New Abstract interface **TVirtualRefProxy**
 - Generic interface to return referenced objects and their types.
 - Support both single references and collection of references.
- Concrete implementation must be attached to the corresponding **TClass**.

```
TClass::GetClass("TRef")->AdoptReferenceProxy(new TRefProxy());
```

```
void* TRefProxy::GetObject(TFormLeafInfoReference* info, void* data, int)
{
    if ( data ) {
        TRef*      ref      = (TRef*)((char*)data + info->GetOffset());
        // Dereference TRef and return pointer to object
        void* obj = ref->GetObject();
        if ( obj ) { return obj; }
        ... else handle error or implement failover ....
    }
}
```



Fast Merge of **TTrees**.


- New option, "fast" for **CloneTree** and **Merge**.
 - No unzipping, no un-streaming.
 - Direct copy of the raw bytes from one file to the other.
 - Much higher performance.
 - Only available if the complete **TTree** is being copied.
 - Can also sort the baskets by branch or by sequential read order

```
myChain->CloneTree(-1,"fast");  
myChain->Merge(filename,"fast");
```

TTree Indices

- Use to connect friend **TTrees**.
- Extended for **TChains**
 - Re-use its **TTrees**' indexes
 - Requires the **TTrees** to be sorted

```
// Create index using Run and Event numbers  
tree.BuildIndex("Run", "Event");  
// Read entry for Run=1234 and Event=56789  
tree.GetEntryWithIndex(1234, 56789);
```

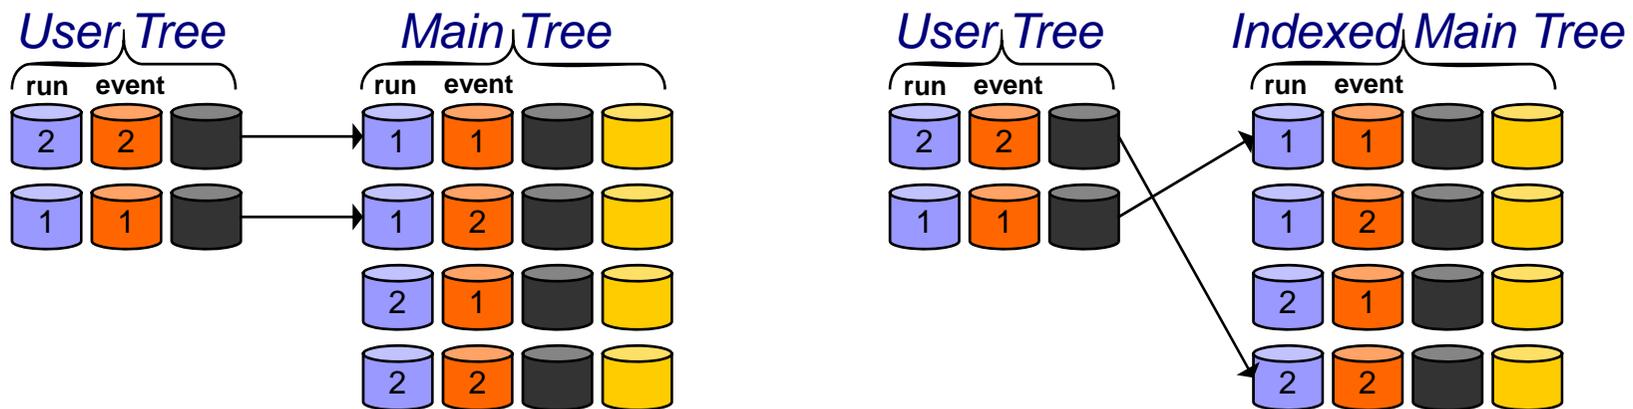



New TTree Features

- Importing ASCII data

- Long64_t TTree::ReadFile(filename,description)
- 'description' gives column layout following 'leaflist' format

```
TTree *T = new TTree("ntuple","data from ascii file");  
Long64_t nlines = T->ReadFile("basic.dat","x:y:z");
```

- TTree::GetEntries

- Number of entries passing the selection

```
Long64_t nevents = T->GetEntries("fPx>2.5");
```



TTree Drawing

- **TString** and **std::string** can now be plotted directly.
 - The following examples all draw an histogram with “string” labels:

```
tree->Draw("mybr.mystring");  
tree->Draw("mybr.mystring.c_str()");  
tree->Draw("mybr.mytstring.Data()");
```

- Object plotting
 - If a class has a method named either **AsDouble** or **AsString** (**AsDouble** has priority), it will be used for plotting.
 - For example with a **TTimeStamp** object:

```
tree->Draw("myTimeStamp");  
tree->Draw("myTimeStamp.AsDouble()");
```

TTree::Scan

- Allow more formatting options for TTree::Scan.
 - In the option parameter, after 'col='
 - Format strings should follow the `printf` format specification but % is implied
 - If no conversion specifier is given, will be suffixed by the letter g.
 - For example with val a `float`, flag an `int`, c a `char` and cstr a `char*`

```
tree->Scan("val:flag:flag:c:cstr", "", "col=:#x:c:");
```

```
*****  
*      Row      *          val *          flag *          flag *          c *          cstr *  
*****  
*          0 *          0 *          1 *          0x1 *          a *          i00 *  
*          1 *          1.1 *          2 *          0x2 *          b *          i01 *
```

TTree::Draw extensions

- TTree::Draw can execute scripts in a context where the name of the branches can be used as a C++ variable.

```
// File hsimple.C
double hsimple()
{
    return px
};
```

```
// File track.C
double track()
{
    int ntrack = event->GetNTracks();
    if (ntrack>2) {
        return fTracks.fPy[2];
    }
    return 0;
};
```

```
tree->Draw("hsimple.C");
```

```
tree->Draw("track.C");
```



TTree::MakeProxy

- Enables `tree->Draw("hsimple.C");`
- Generates a skeleton analysis class inheriting from **TSelector** and using **TBranchProxy**.
 - **TBranchProxy** is the base class of a hierarchy implementing an indirect access to the content of the branches of a TTree.
- Main Features:
 - **on-demand** loading of branches
 - ability to use the 'branchname' as if it was a data member
 - protection against array out-of-bound
 - ability to use the branch data as an **object** (when the user code is available)
 - Gives access to **all** the functionality of **TSelector**
- Example in \$ROOTSYS/tutorials:
h1analysisProxy.cxx , *h1analysProxy.h* and *h1analysisProxyCut.C*



Upcoming Features

- Continue Consolidations ☺
- Splitting STL collection of pointers
- Schema Evolution
 - To and From more combinations of containers (**Double32** vs. **double**, ROOT containers).
- **MakeProxy**
 - Add support for STL containers
 - Add support for CINT-interpretation
- **TTree**
 - Indexing using bitmap algorithm (**TBitMapIndex**) from LBL.
 - **TTree::Draw** performance



Conclusions

- Even after 12 years of ROOT:
 - The I/O area is still improving
 - There were quite a number of developments
 - Remote file performance
 - SQL Support
 - Tree I/O from ASCII, tree indices
 - Auto dereferencing
 - Fast Merge
- There will be certainly some developments in the I/O area
- The “*classical*” stuff however is intended to be kept stable
- Main focus:
Consolidation (*Thread Safety*) and more STL support.



Castor

- New version of TRFIOFile and TCastorFile supporting Castor 2.1.2-4 .
- Added in TCastorFile the possibility to choose the authentication method via URL-option '&rootAuth=3' (or the environment variable ROOTCASTORAUTH) to allow using GSI/Globus authentication.



Consolidations

- Improved ROOT's handling of virtual inheritance by using directly the offset information in CINT rather than the one in ROOT's list of bases classes.
- Cleaned up the treatment of fReadEntry in a TBranch/TBranchElement. It now consistently and predictably remembers the most recent entry number passed to a GetEntry() call. (This is in particular useful when dealing with TRef::Object being called from a streamer and need the BranchRef facility ; This fixes a problem seen by DZero)