



# SuperB: Physics, Accelerator and Detector



Nicola Neri  
INFN - Sezione di Milano  
*on behalf of the SuperB collaboration*

*8th International Meeting on Front-End Electronics  
Bergamo, 24-27 May 2011*

# Outline

---

- ▶ **Physics:**
  - ▶ discovery potential of a SuperB factory.
- ▶ **Accelerator:**
  - ▶ the innovative scheme of SuperB.
- ▶ **Detector:**
  - ▶ general overview of the detector;
  - ▶ vertex detector specifications.
- ▶ **Status of the project:**
  - ▶ project approved and funded. Plans for organization, construction and running.

---

A vertical bar on the left side of the title box, divided into a blue upper section and an orange lower section.


# Physics

[Physics Progress Report](#) [arXiv:1008.1541]

# Data sample


## ▶ $\Upsilon(4S)$ region:

- ▶  $75 \text{ ab}^{-1}$  at the  $\Upsilon(4S)$
- ▶ Also run above / below the  $\Upsilon(4S)$
- ▶  $\sim 75 \times 10^9$  B, D and  $\tau$  pairs

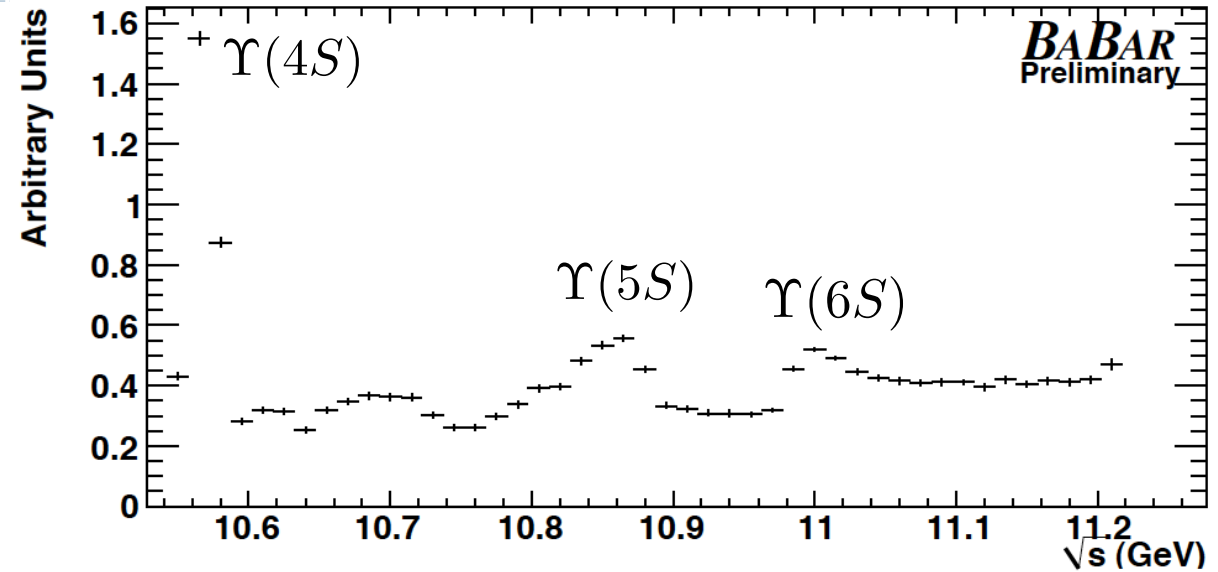

## ▶ $\psi(3770)$ region:

- ▶  $500 \text{ fb}^{-1}$  at threshold
- ▶ Also run at nearby resonances
- ▶  $\sim 2 \times 10^9$  D pairs



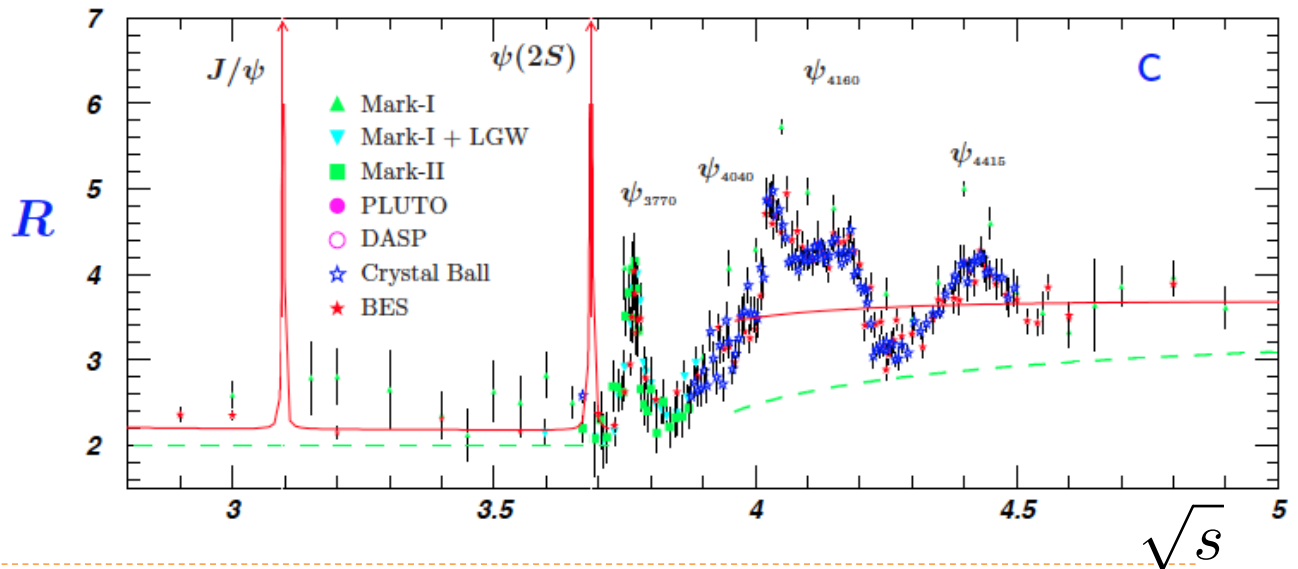




# $B_{u,d}$ physics: Rare Decays

- ▶ Example:  $B^\pm \rightarrow \tau^\pm \nu$
- ▶ Rate modified by presence of  $H^\pm$

$$r_H = \frac{\mathcal{B}_{SM+NP}}{\mathcal{B}_{SM}}$$

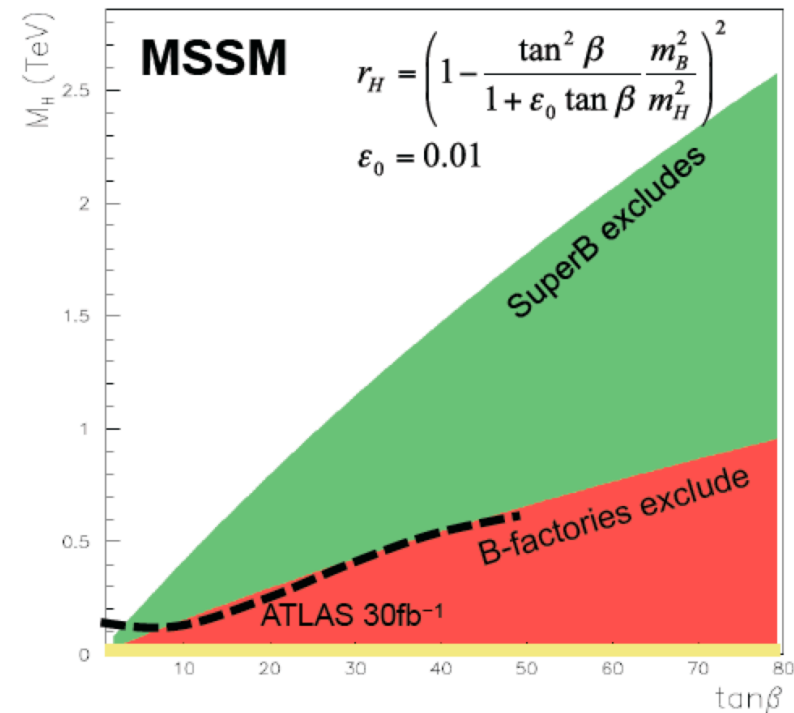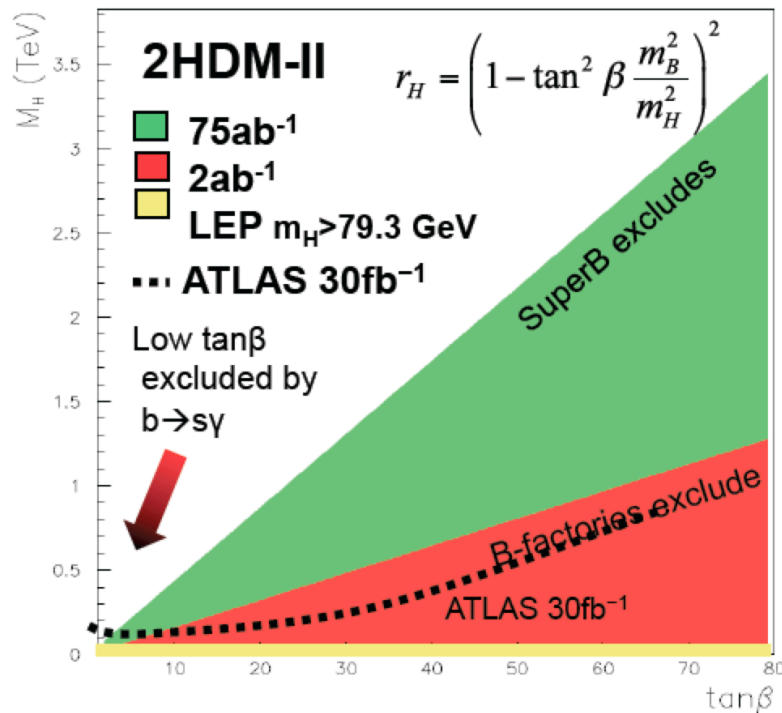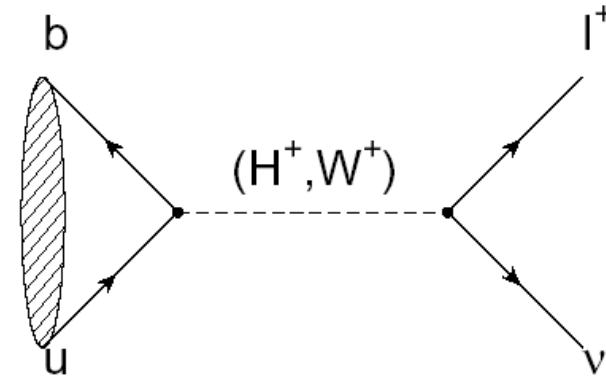

# $B_{u,d}$ physics: Rare Decays



▶ **Example:**  $B \rightarrow K^{(*)} \nu \bar{\nu}$

- ▶ Need  $75\text{ab}^{-1}$  to observe this mode.
- ▶ With more than  $75\text{ab}^{-1}$  we could measure polarization.

$$\epsilon = \frac{\sqrt{|C_L^\nu|^2 + |C_R^\nu|^2}}{|(C_L^\nu)^{\text{SM}}|}, \quad \eta = \frac{-\text{Re}(C_L^\nu C_R^{\nu*})}{|C_L^\nu|^2 + |C_R^\nu|^2}$$

Sensitive to models with Z penguins and RH currents.

e.g. see Altmannshofer, Buras, & Straub *JHEP04(2009)022*

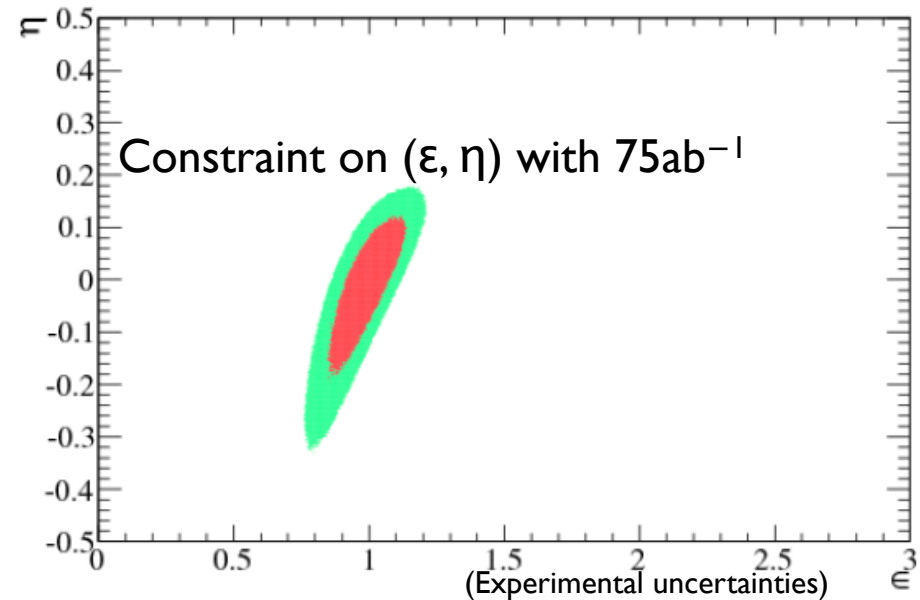
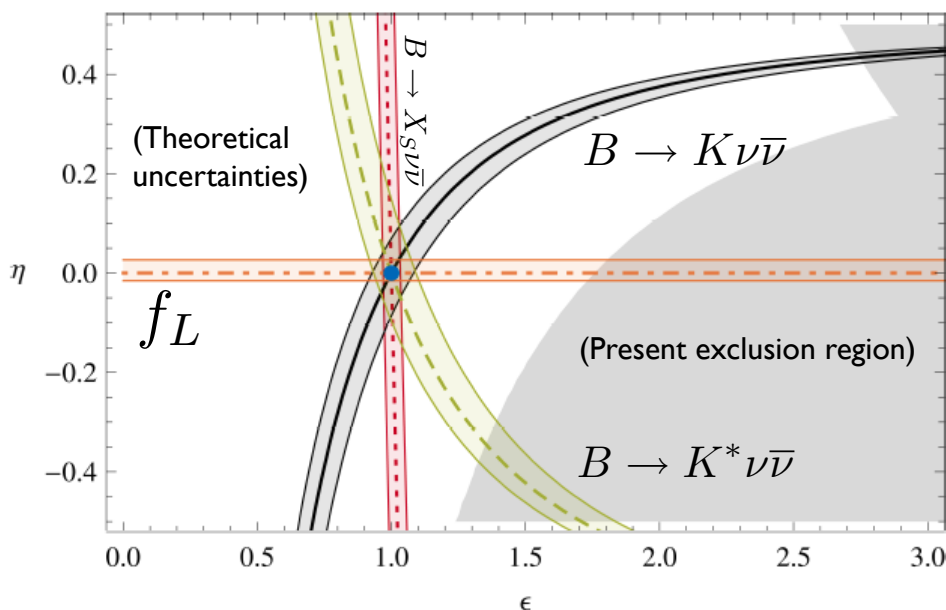


# $B_s$ physics

- ▶ Can cleanly measure  $A_{SL}^s$  using  $\Upsilon(5S)$  data

$$A_{SL}^s = \frac{\mathcal{B}(B_s \rightarrow \bar{B}_s \rightarrow X^- \ell^+ \nu_\ell) - \mathcal{B}(\bar{B}_s \rightarrow B_s \rightarrow X^- \ell^+ \nu_\ell)}{\mathcal{B}(B_s \rightarrow \bar{B}_s \rightarrow X^- \ell^+ \nu_\ell) + \mathcal{B}(\bar{B}_s \rightarrow B_s \rightarrow X^- \ell^+ \nu_\ell)} = \frac{1 - |q/p|^4}{1 + |q/p|^4}$$

$$\sigma(A_{SL}^s) \sim 0.004 \text{ with a few } ab^{-1}$$

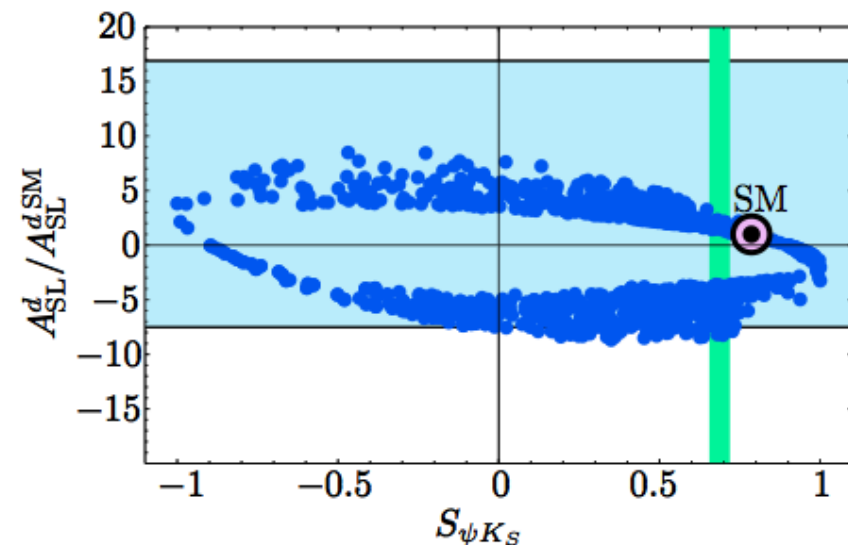
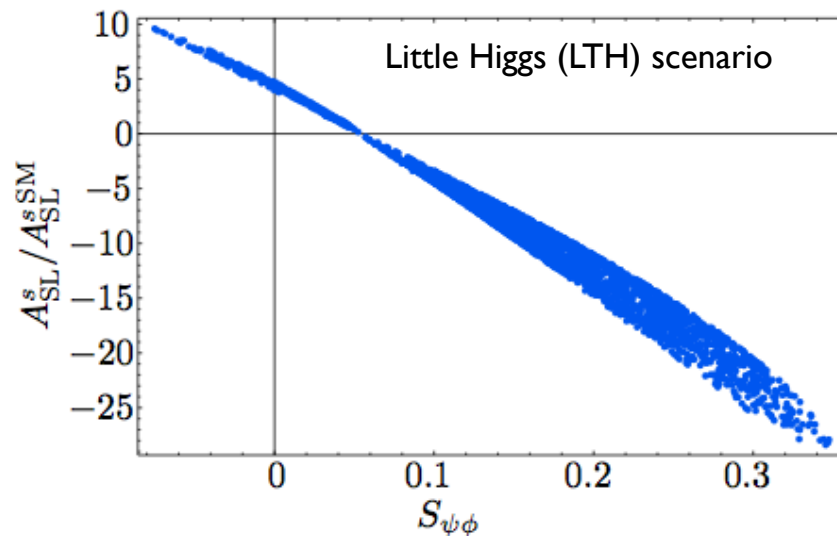


- ▶ SuperB can also study rare decays with many neutral particles, such as  $B_s \rightarrow \gamma\gamma$ , which can be enhanced by SUSY.



# Charm


- ▶ Collect data at threshold and at the  $\Upsilon(4S)$ .
- ▶ Benefit charm mixing and CPV measurements.

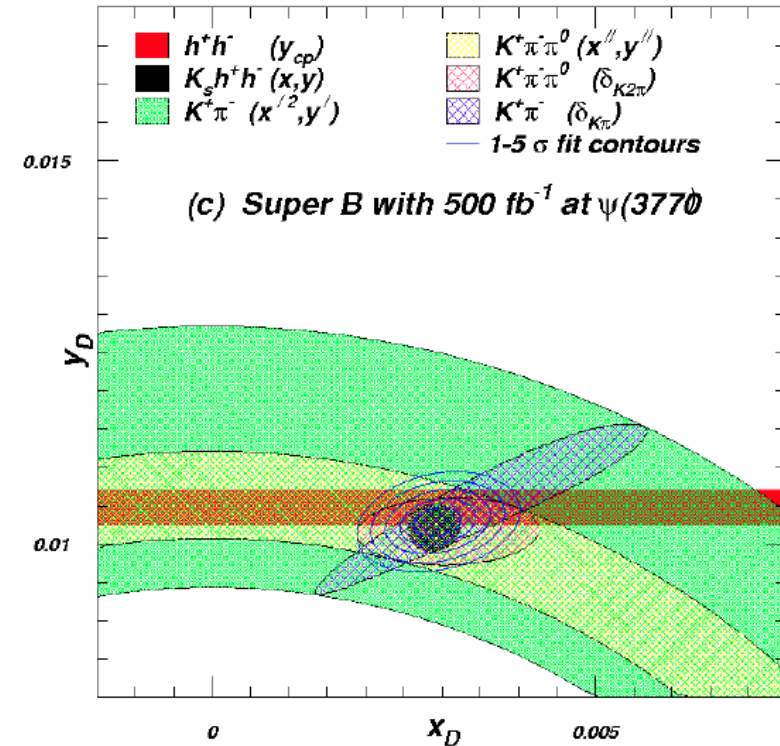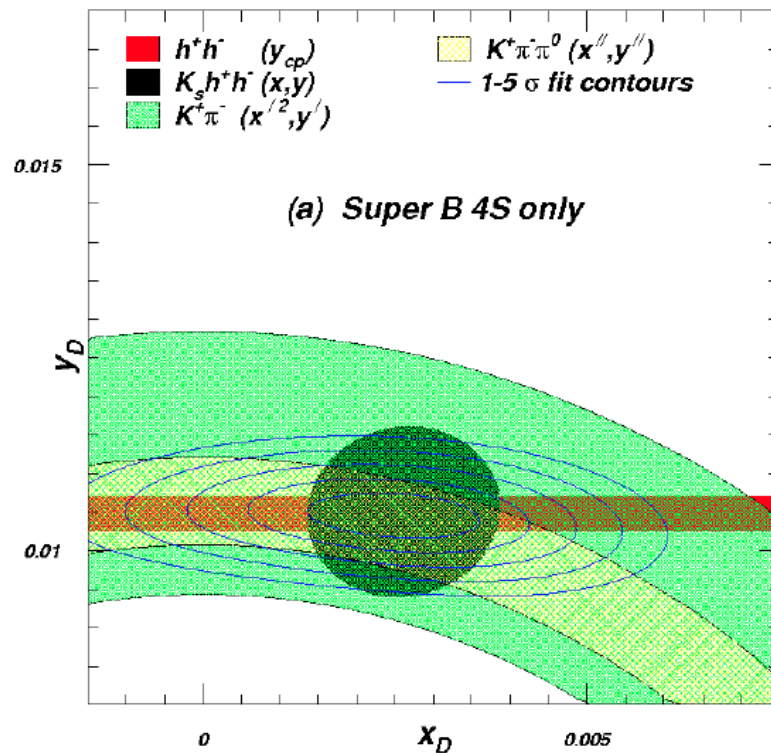

- ▶ Also useful for measuring the Unitarity Triangle angle  $\gamma$  (strong phase in  $D \rightarrow K\pi\pi$  Dalitz plot).

# Precision Electroweak

- ▶  $\sin^2\theta_W$  can be measured with polarized  $e^-$  beam
  - ▶ differential cross-section in  $e^+e^- \rightarrow f^+f^-$  events
  - ▶  $\sqrt{s} = \Upsilon(4S)$  is theoretically clean, c.f. b-fragmentation at Z pole

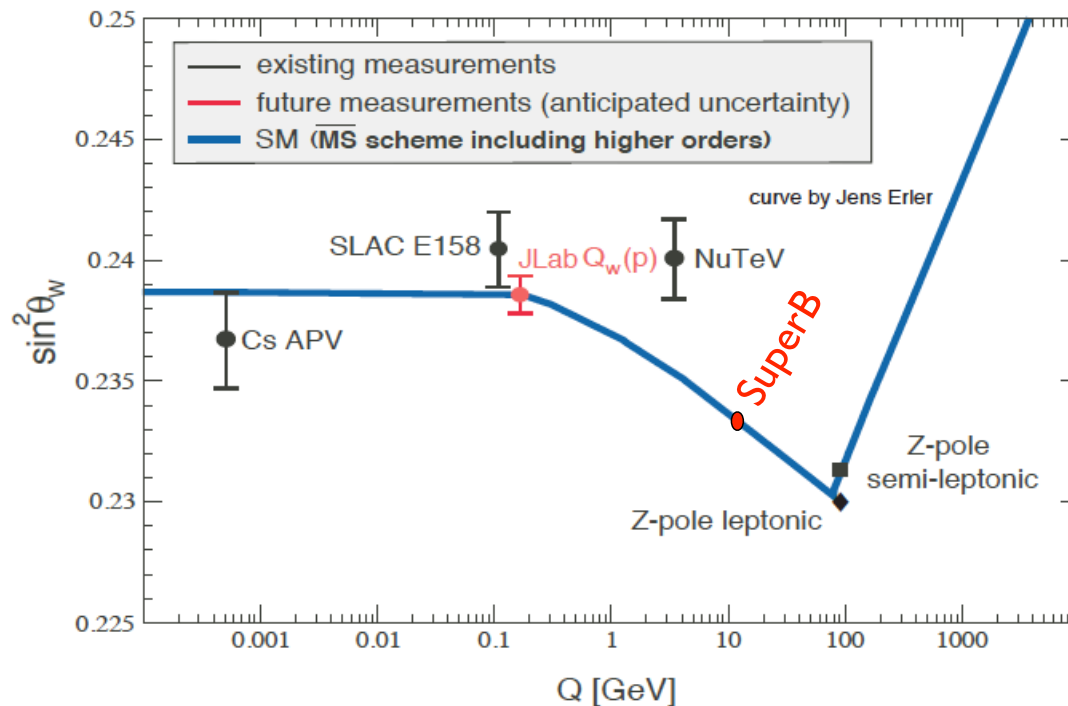

$$A_{LR} = \frac{\sigma(P) - \sigma(-P)}{\sigma(P) + \sigma(-P)} = \frac{16}{\sqrt{2}} \left( \frac{G_F q^2}{4\pi\alpha} \right) \left( \frac{g_A^e g_V^b}{Q_b} \right) P$$

( $P = e^-$  beam polarization)

- Measurable for all  $B^0 \bar{B}^0$  and  $B^+ B^-$  final states, both resonant and continuum.
- All QCD corrections included in the single form factor that cancels in the asymmetry.
- Very clean measurement, no large theoretical corrections (in progress...)

⇒ Excellent opportunity to measure  $g_V$  &  $\sin^2\theta_W$  at SuperB with polarized beams!!

Perform the measurement also at the  $\Psi(3770)$  peak, with polarized beams.

Plot adapted from QWeak proposal (JLAB E02-020)

# Interplay

► Combine measurements to elucidate structure of new physics.

Observable/mode	$H^+$ high $\tan\beta$	MFV	non-MFV	NP Z penguins	Right-handed currents	LTH	SUSY				
							AC	RVV2	AKM	$\delta LL$	FBMSSM
✓ ✓ $\tau \rightarrow \mu\gamma$ $\tau \rightarrow \ell\ell\ell$							***	***	*	***	***
✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ $B \rightarrow \tau\nu, \mu\nu$ $B \rightarrow K^{(*)+}\nu\bar{\nu}$ $S$ in $B \rightarrow K_S^0\pi^0\gamma$ $S$ in other penguin modes $A_{CP}(B \rightarrow X_s\gamma)$ $BR(B \rightarrow X_s\gamma)$ $BR(B \rightarrow X_s\ell\ell)$ $B \rightarrow K^{(*)}\ell\ell$ (FB Asym)	*** (CKM)		*	***			*	*	*	*	*
✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ $B_s \rightarrow \mu\mu$ $\beta_s$ from $B_s \rightarrow J/\psi\phi$ $a_{sl}$			*** (CKM)		***		***	★★	*	***	***
✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ $B_s \rightarrow \mu\mu$ $\beta_s$ from $B_s \rightarrow J/\psi\phi$ $a_{sl}$			***	*	*		*	*	*	***	***
✓ ✓ Charm mixing CPV in Charm	★★						***	*	*	*	*

✓ = SuperB can measure this

\*\*\* signals large effects, ★★ visible but small effects and ★ implies that the given model does not predict sizable effects in that observable.

# Precision CKM constraints


## ▶ Unitarity Triangle Angles

- ▶  $\sigma(\alpha) = 1-2^\circ$
- ▶  $\sigma(\beta) = 0.1^\circ$
- ▶  $\sigma(\gamma) = 1-2^\circ$

## ▶ CKM Matrix Elements

- ▶  $|V_{ub}|$ 
  - ▶ Inclusive  $\sigma = 2\%$
  - ▶ Exclusive  $\sigma = 3\%$
- ▶  $|V_{cb}|$ 
  - ▶ Inclusive  $\sigma = 1\%$
  - ▶ Exclusive  $\sigma = 1\%$
- ▶  $|V_{us}|$ 
  - ▶ Can be measured precisely using  $\tau$  decays
- ▶  $|V_{cd}|$  and  $|V_{cs}|$ 
  - ▶ can be measured at/near charm threshold.

The "dream" scenario with  $75\text{ab}^{-1}$

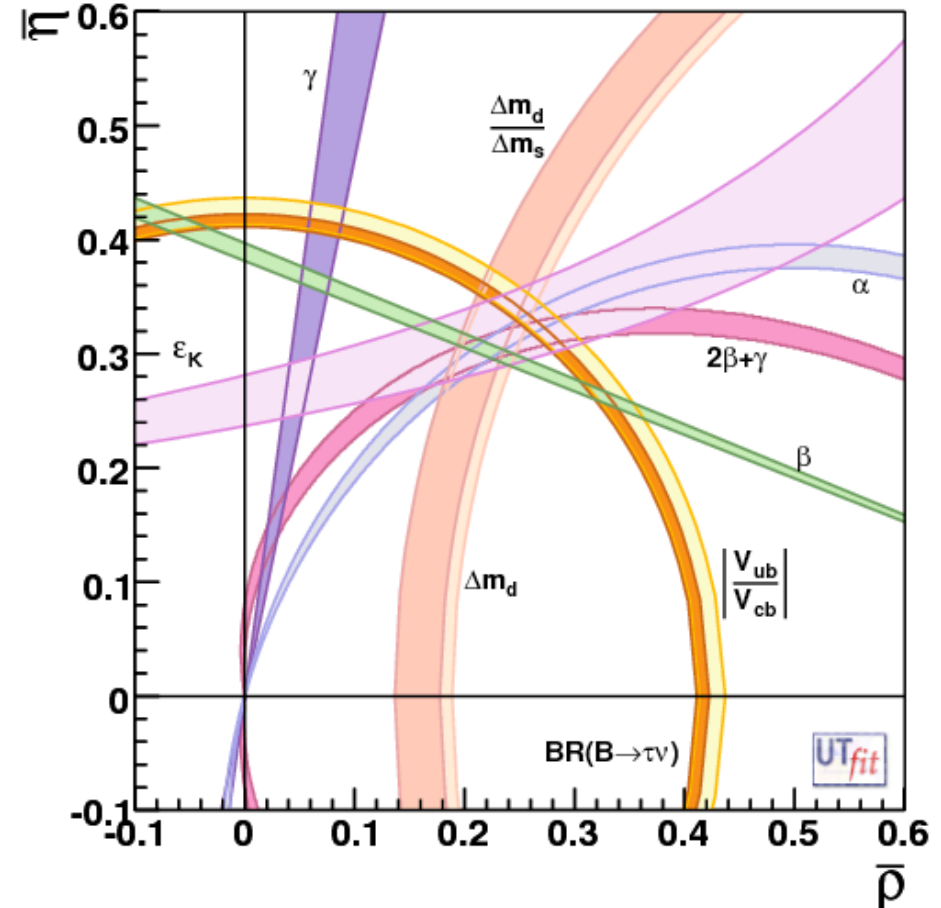

## ▶ SuperB Measures the sides and angles of the Unitarity Triangle

# Golden Measurements: General

Experiment: ■ No Result ■ Moderate Precision ■ Precise ■ Very Precise

Theory: ■ Moderately clean ■ Clean Need lattice ■ Clean

Observable/mode	Current (now)	LHCb (2017)	SuperB (2021)	LHCb upgrade (2030?)	theory
-----------------	---------------	-------------	---------------	----------------------	--------

## $\tau$ Decays

$\tau \rightarrow \mu\gamma$	Yellow	Yellow	Green	Yellow	Green
$\tau \rightarrow e\gamma$	Yellow	Yellow	Green	Yellow	Green

Benefit from polarized  $e^-$  beam

## $B_{u,d}$ Decays

$B \rightarrow \tau\nu, \mu\nu$	Yellow	Red	Blue	Red	Blue
$B \rightarrow K^{(*)}\nu\bar{\nu}$	Red	Red	Green	Red	Green
$S$ in $B \rightarrow K_S^0\pi^0\gamma$	Yellow	Red	Green	Red	Yellow
$S$ in other penguin modes	Yellow	Yellow	Green	Blue	Yellow
$A_{CP}(B \rightarrow X_s\gamma)$	Blue	Yellow	Green	Yellow	Green
$BR(B \rightarrow X_s\gamma)$	Blue	Yellow	Green	Yellow	Yellow
$BR(B \rightarrow X_s\ell\ell)$	Yellow	Red	Green	Red	Green
$BR(B \rightarrow K^{(*)}\ell\ell)$	Yellow	Blue	Green	Green	Yellow

very precise with improved detector

Statistically limited: Angular analysis with  $>75ab^{-1}$

Right handed currents

SuperB measures many more modes

systematic error is main challenge

control systematic error with data

SuperB measures e mode well, LHCb does  $\mu$

## $B_s$ Decays

$B_s \rightarrow \mu\mu$	Red	Blue	Red	Green	Green
$\beta_s$ from $B_s \rightarrow J/\psi\phi$	Red	Blue	Red	Green	Green
$B_s \rightarrow \gamma\gamma$	Red	Blue	Red	Red	Green
$a_{sl}$	Red	Red	Green	Red	Green

## $D$ Decays

mixing parameters	Yellow	Blue	Green	Green	Green
CPV	Red	Blue	Green	Green	Green

Clean NP search

## Precision EW

$\sin^2\theta_W$ at $\Upsilon(4S)$	Red	Red	Green	Red	Green
$\sin^2\theta_W$ at Z-pole	Green	Blue	Red	Green	Yellow

Theoretically clean

b fragmentation limits interpretation

24 May 2011

# Physics program in a nutshell

---

- ▶ **Versatile flavor physics experiment**
  - ▶ Probe new physics observables in wide range of decays.
    - ▶ Pattern of deviation from Standard Model can be used to identify structure of new physics.
    - ▶ Clean experimental environment means clean signals in many modes.
    - ▶ Polarized  $e^-$  beam benefit for precision electroweak measurements and for  $\tau$  LFV searches.
  - ▶ Best capability for precision CKM constraints of any existing/proposed experiment.
    - ▶ Measure angles and sides of the Unitarity triangle
    - ▶ Measure other CKM matrix elements at threshold and using  $\tau$  data.

---

A vertical bar on the left side of the slide, divided into a blue upper section and an orange lower section.

# Accelerator

[Accelerator Progress Report](#) [arXiv:1009.6178]

# A new generation collider

- ▶ SuperB is a second generation flavor factory aiming for a luminosity of  $10^{36} \text{ cm}^{-2}\text{s}^{-1} = 1 \text{ kHz/nb}$
- ▶ The two orders of magnitudes luminosity gain with respect to the first generation B factories is obtained increasing the density of the bunches at the interaction point (IP) by demagnifying their vertical size to  $\sim 30 \text{ nm}$
- ▶ To reach this goal the amplitude of the betatron oscillations must be kept at minimum
  - ▶ optimal ring lattice design to minimize the radial emittance
  - ▶ precise magnets alignment and machine tuning to minimize the emittance coupling
  - ▶ large Piwinsky angle,  $\phi = \frac{\sigma_z}{\sigma_x} \tan \frac{\theta}{2}$  and crab waist collision scheme to overcome the beam-beam luminosity limit



# Path to high luminosity

---

$$\mathcal{L} \sim f_{\text{coll}} \frac{N^+ N^-}{4\pi \sigma_x \sigma_y} = 10^{36} \text{ cm}^{-2} \text{ s}^{-1}$$



A. Numerator ↗ (Currents) 1÷2 A ↗ 10÷20 A

- ▶ Wall plug power (Electric monthly bill) ~ proportional to current, Longitudinal Fast Instability: limit ~  $5 \cdot 10^{35} / \text{cm}^2 \text{s}$




B. Denominator ↘ (bunch size)

PEP-II  $100 \times 3 \mu\text{m}^2$  ↘ SuperB  $100 \mu\text{m} \times 30 \text{ nm}$

- ▶ How to squeeze the vertical bunch size to 30 nm ?


# Hour glass shaped bunch @ $\sigma_y=30$ nm

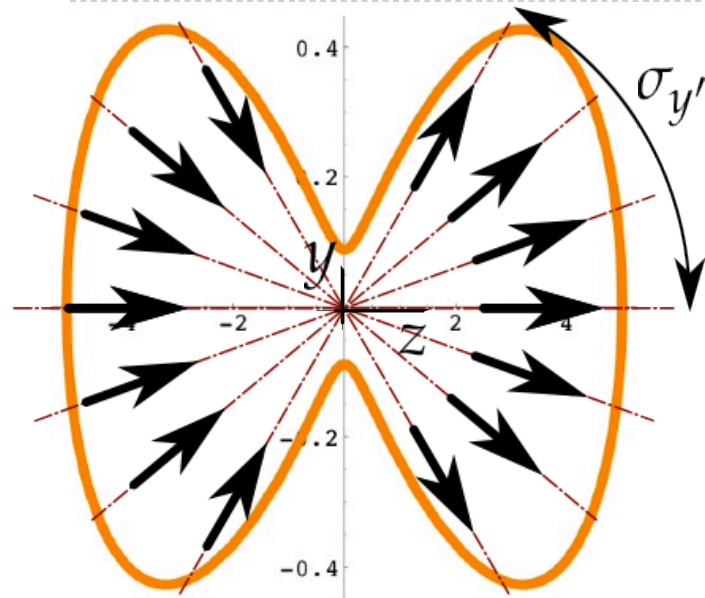

$$\sigma_y \times \sigma_{y'} = \epsilon_y$$

**CROSS SECTION**  
**X**  
**ANGULAR DIVERGENCE @ IP**  
**=**  
**EMITTANCE (CHARACTERISTIC OF THE RING)**


Bunch shape at the IP

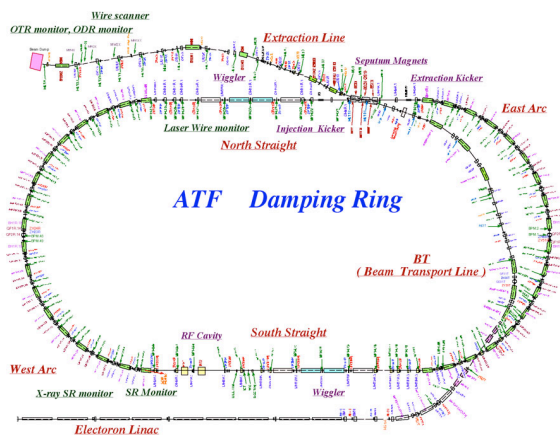

- ▶ PEP-II emittance = 1.5nm x Rad  
 Angular divergence ~ 50 mRad = 50 micron / mm  
 Bunch collision length should be ~ 2 μm
  
- ▶ ATF state of the art emittance = 2pm x Rad  
 Angular divergence ~ 67 microRad = 67 nm / mm
  
- ▶ SuperB emittance ~ 5pm x Rad  
 Angular divergence ~ 166 microRad = 166 nm / mm  
 Bunch collision length ~ 0.6 mm



# Large crossing angle collision scheme

$\beta$  is the amplitude of the betatron oscillation

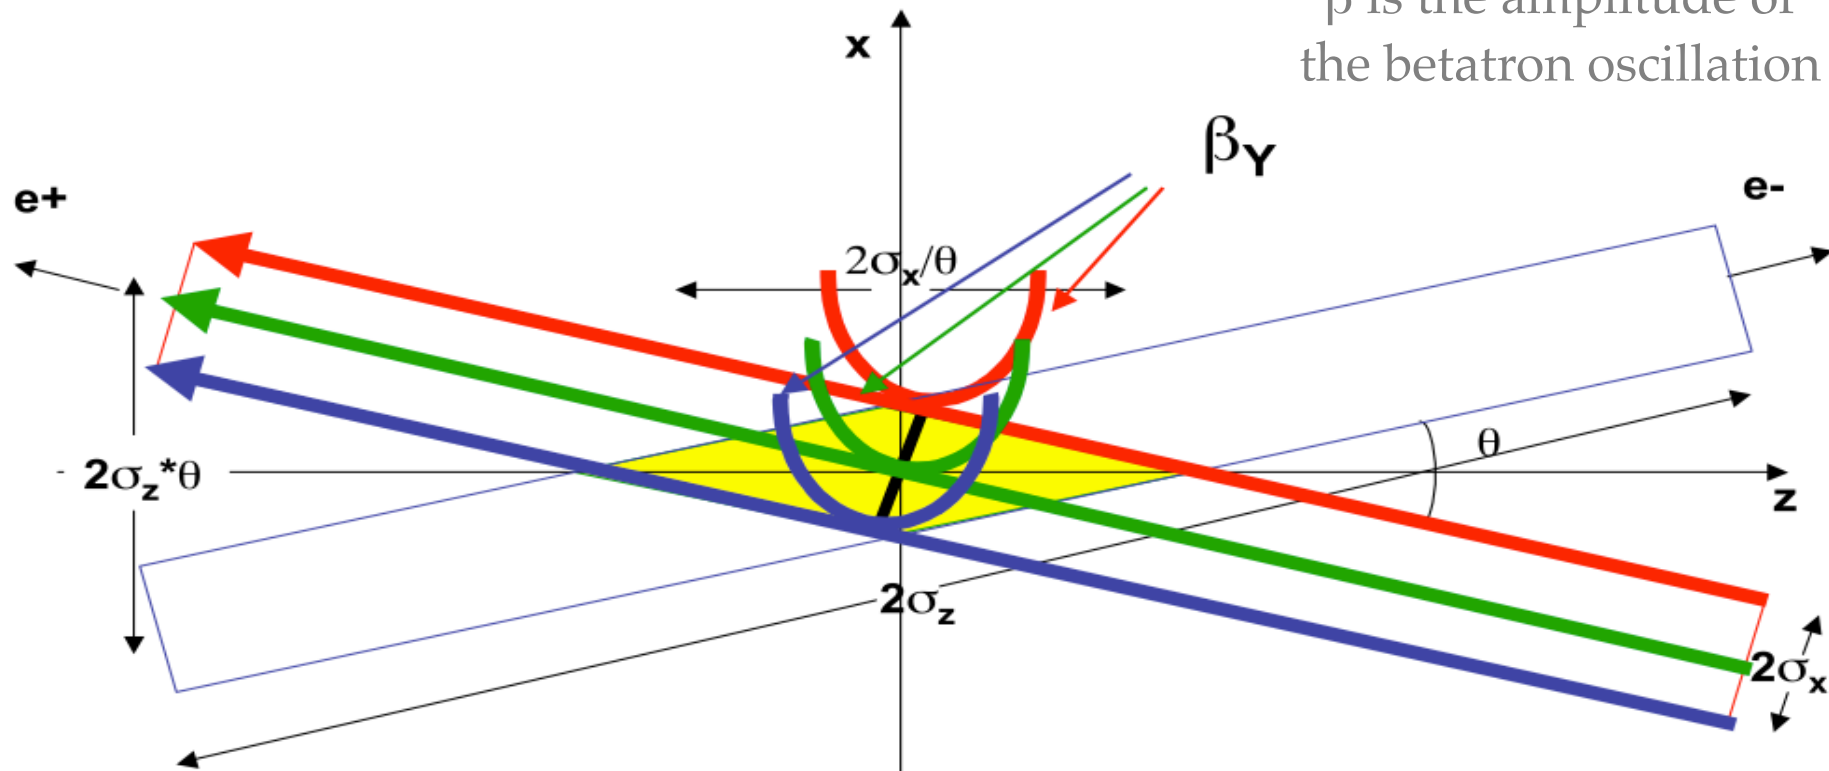

Collision length  $\sim 0.3$  mm  
 $2\sigma_x/\theta$

# Crab Waist Transform

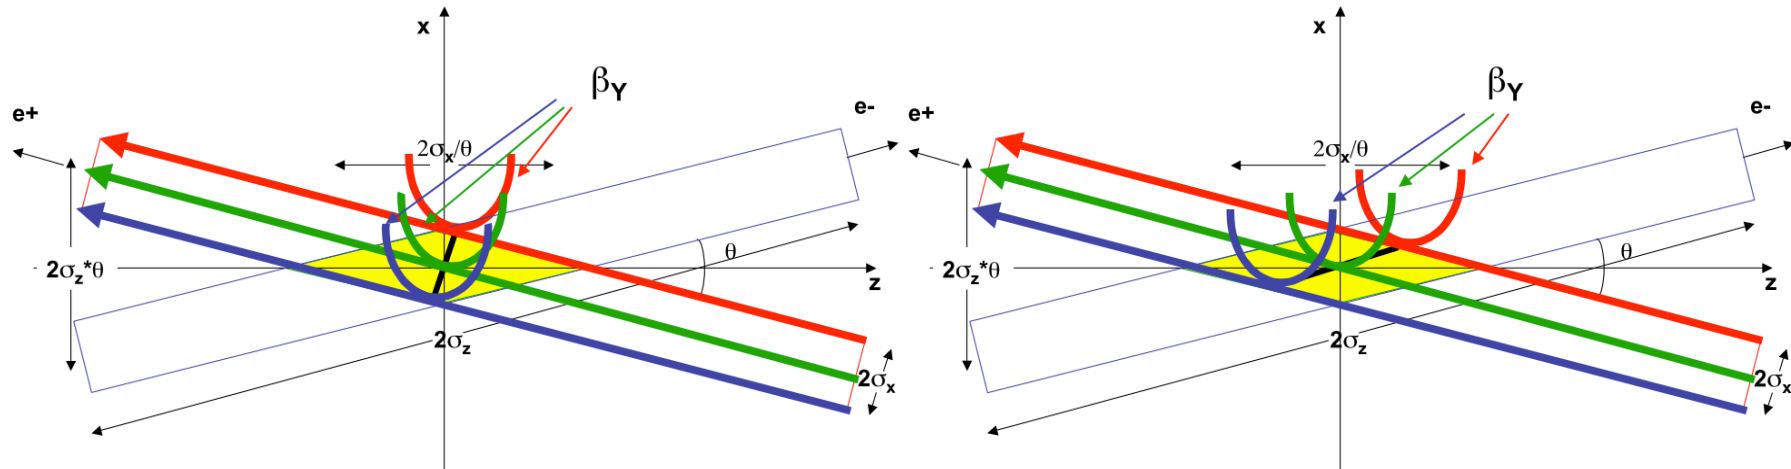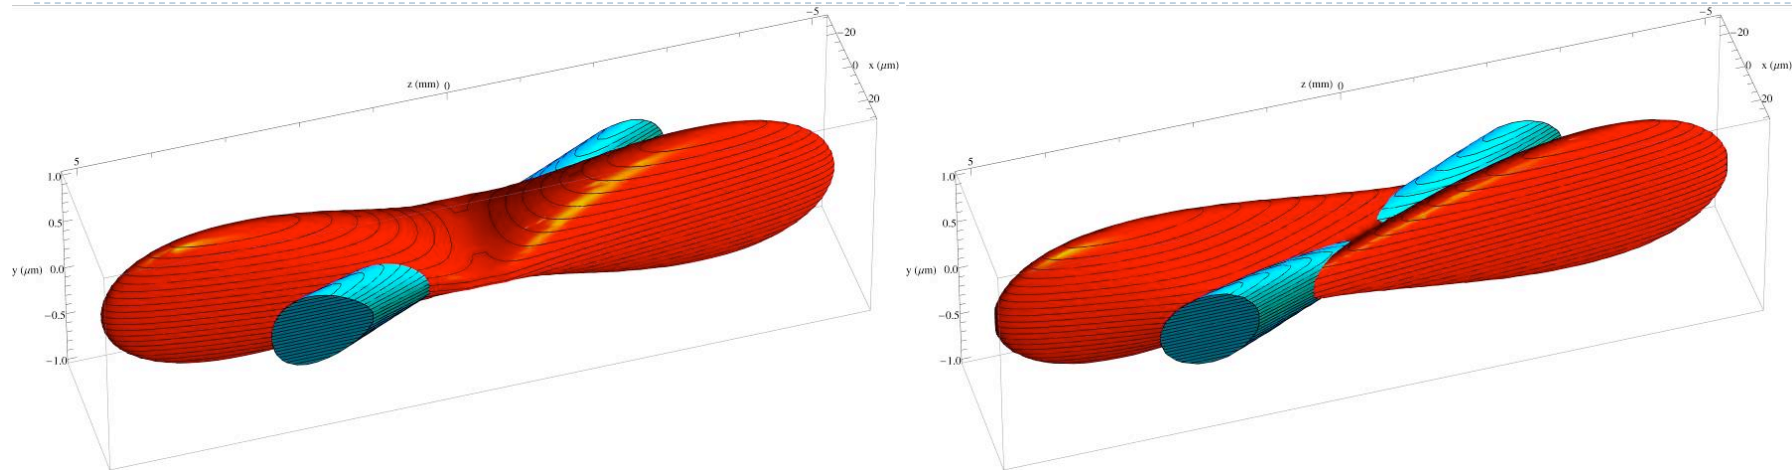


Crab Waist technique benefits:

- ▶ maximize geometrical overlap of beams;
- ▶ reduction of vertical tune shift;
- ▶ suppression of vertical synchrotron resonances.

# Machine parameters

	Units	HER	LER	HER	LER	HER	LER
Machine		Super B		PEP II		Super KEKB	
<b>Circumference</b>	<b>m</b>	<b>1258.4</b>		<b>2200</b>		<b>3016.3</b>	
Frequency turn	Hz	2.38E+05		1.36E+05		9.95E+04	
# bunch		978		1732		2500	
Frequency collision	MHz	233		236		249	
Full crossing angle	Rad	0.066		0.000		0.083	
Energy	GeV	6.7	4.18	9.0	3.1	7	4
Energy ratio		1.60		2.90		1.75	
$\beta_x$	cm	2.6	3.2	35	40	2.4	3.2
<b><math>\beta_y</math></b>	<b><math>\mu\text{m}</math></b>	<b>253</b>	<b>205</b>	<b>9000</b>	<b>10800</b>	<b>410</b>	<b>270</b>
coupling	%	0.25	0.25	0.24	0.45	0.35	0.40
Radial emittance $\epsilon_x$	nm	2.07	2.37	55	33	2.4	3.1
Vertical emittance $\epsilon_y$	pm	5.18	5.93	1300	1500	8.4	12.4
Bunch length	cm	0.5	0.5	1.15	1.25	0.5	0.6
Current	A	1.89	2.44	2.07	3.21	2.6	3.62
# particles/bunch	$10^{10}$	5.08	6.56	5.49	8.52	6.55	9.13
Hor. size @ IP $\sigma_x$	$\mu\text{m}$	7.34	8.71	43.87	36.33	7.75	10.62
<b>Ver. size @ IP <math>\sigma_y</math></b>	<b>nm</b>	<b>36.2</b>	<b>34.9</b>	<b>3421</b>	<b>4025</b>	<b>59.0</b>	<b>59.0</b>
Piwinisky angle		22.50	18.95	0.00	0.00	26.79	23.46
Horizontal tune shift	%	0.21	0.33	5		0.28	0.28
Vertical tune shift	%	9.89	9.55	5		8.75	9.00
<b>Luminosity</b>	<b><math>10^{36} \text{ Hz/cm}^2</math></b>	<b>1.02</b>		<b>0.012</b>		<b>0.80</b>	



# Machine layout

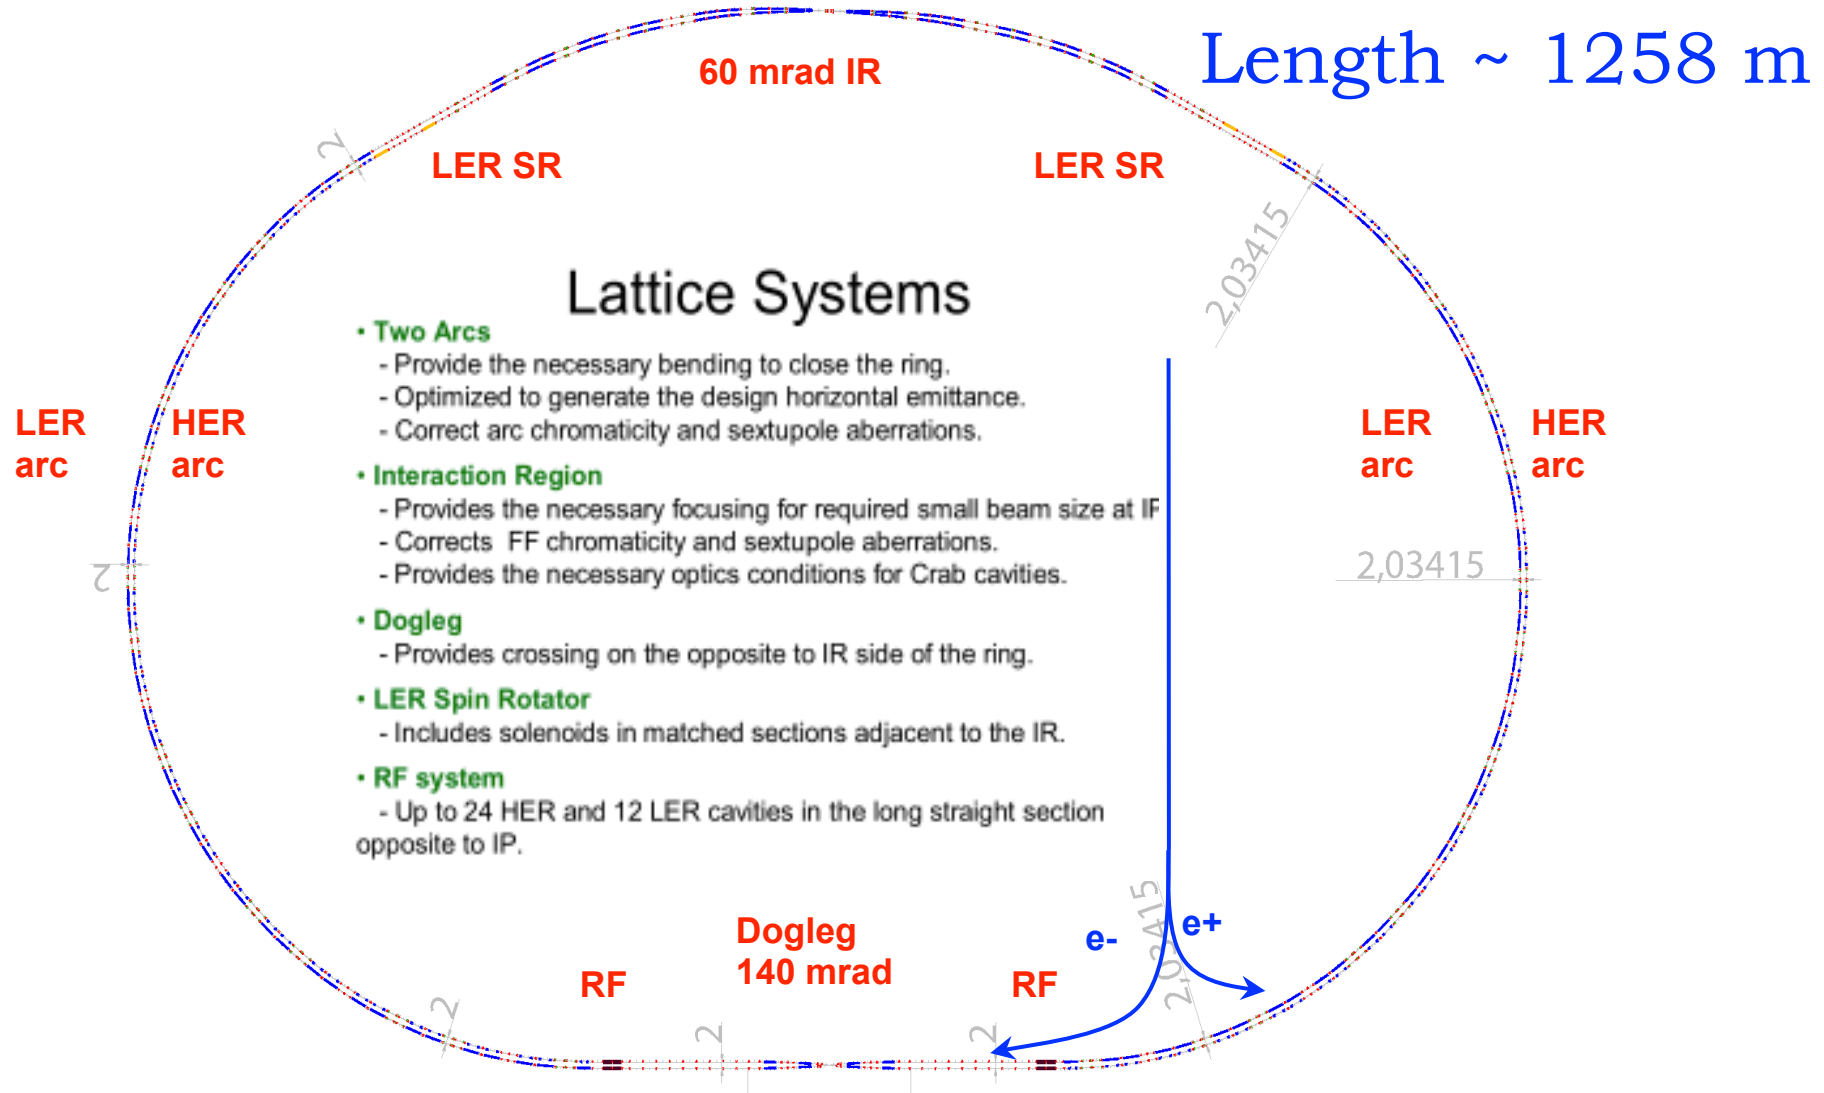



# Synchrotron light properties @ SuperB

- ▶ Comparison of brightness and flux from bending magnets and undulators for different energies dedicated SL sources & SuperB HER and LER
- ▶ Synchrotron light properties from dipoles are competitive
- ▶ Assumed undulators characteristics as NSLS-II
- ▶ Light properties from undulators still better than most LS, slightly worse than PEP-X (last generation project)

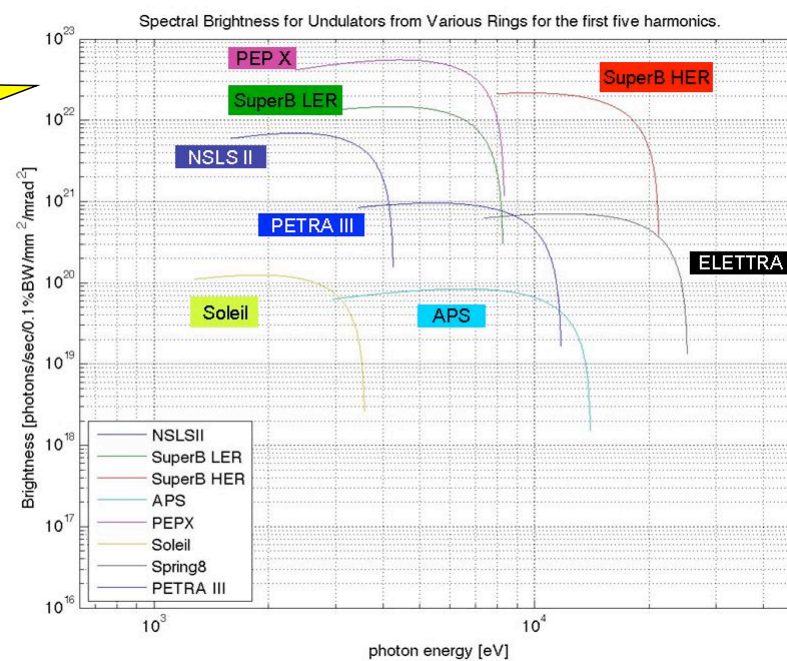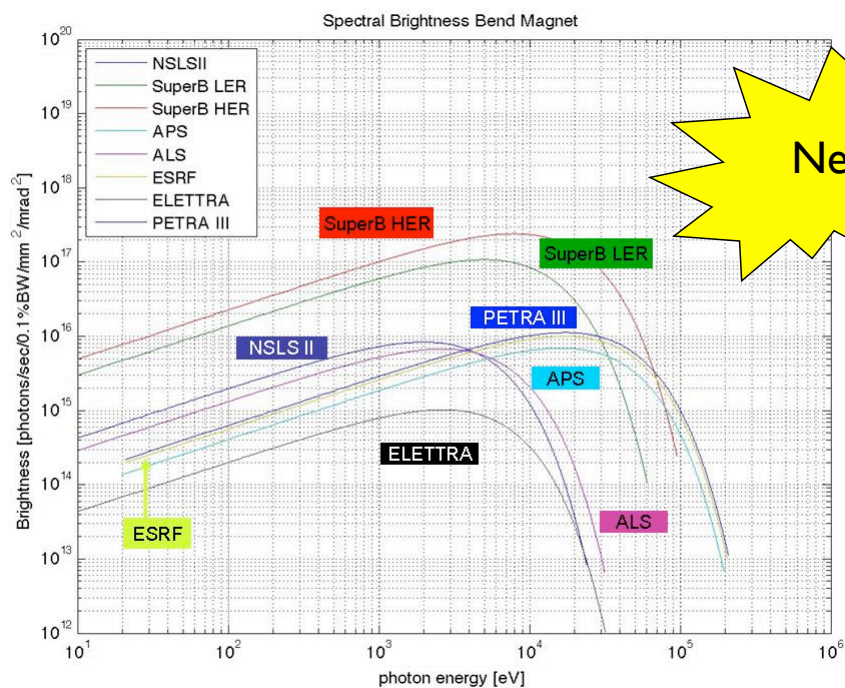


---

A vertical bar on the left side of the slide, divided into a blue upper section and an orange lower section.

# Detector

## [Detector Progress Report](#) [arXiv:1007.4241]



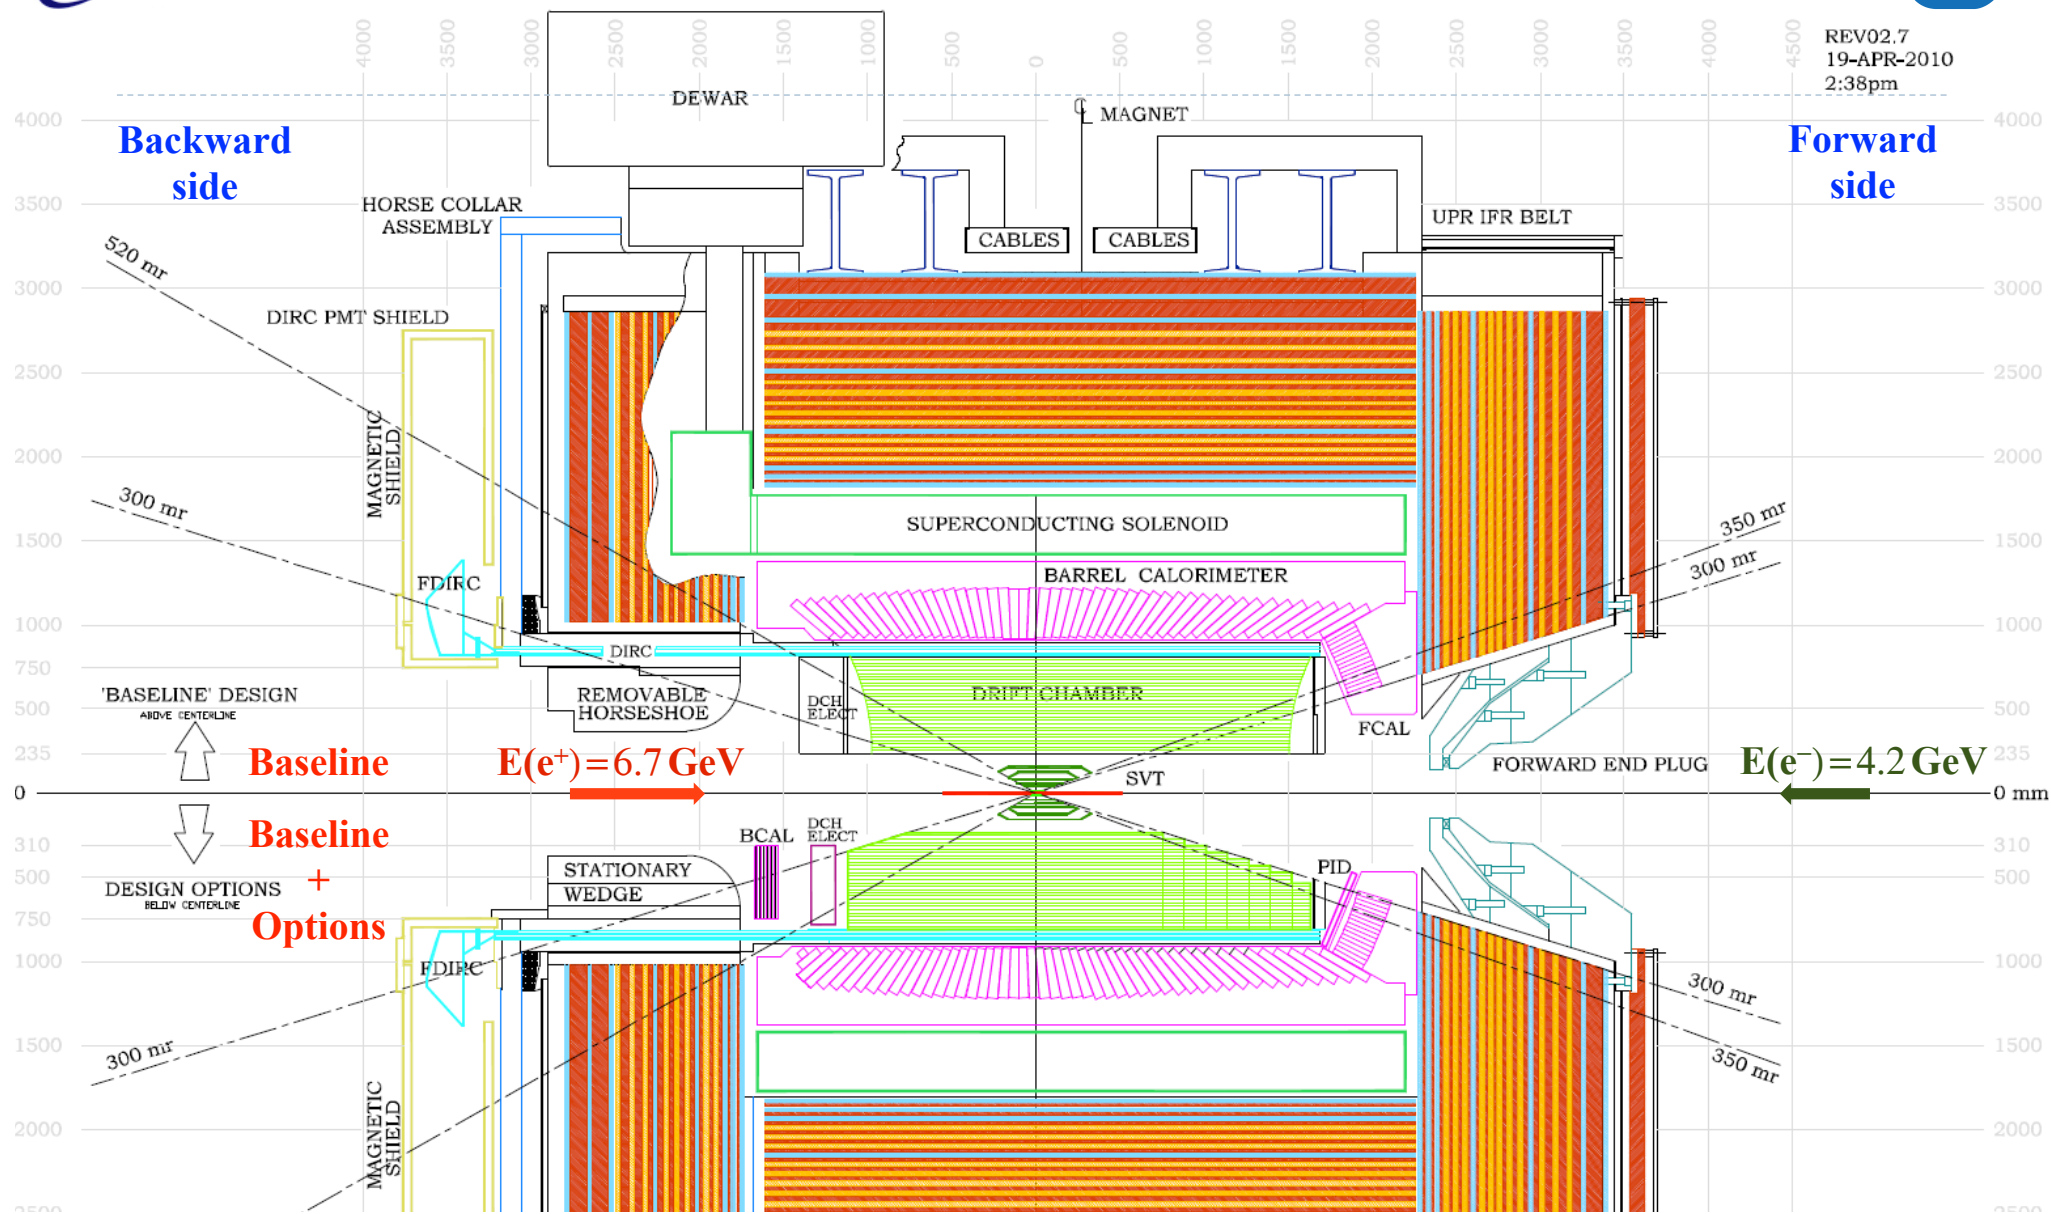

# R&D and Engineering Summary

Sys	R&D	Engineering
SVT	Layer 0 thin pixels Low mass mechanical support	Silicon strip layers Readout architecture
DCH	High speed waveform digitizing Cluster counting	CF mechanical structure Gas speed, cell size
Barrel PID	Photon detection for quartz bars	Standoff box replacement
Forw PID	Time of flight option Focusing RICH option	Mechanical integration Electronics
EMC	LYSO characterization Light detection, Other crystals Prototype Module Test	Readout electronics Forward EMC mechanical support
IFR	SiPM performance Prototype Module Test	Location of photo-detectors Absorber thickness definition
ETD	High speed data link Radiation hard devices	Trigger strategy Bhabha rejection

# Detector options

6 Layer SVT	LO Triplets @ ~1.5 cm if background is acceptable as default. MAPS Option. Retain 5 Layer outer detector.
SVT – DCH transition radius	~> than 20 cm determined by beam element cryostats to allow easy installation
Backward EMC	Inexpensive Veto device bringing 8-10% sensitivity improvements for $B \rightarrow \tau \nu$ . Low momentum PID via TOF? Technical Issues?
Forward PID	Physics gains about 5% in $B \rightarrow K^{(*)} \nu \nu$ . Somewhat larger gains for higher multiplicities Open technical options/interactions with EMC
Absorber in IFR	Optimized layout. Plan to reuse yoke. Still need to resolve engineering questions.

Geometry  
Selection  
Task Force

Decision 2011

---



A vertical bar on the left side of the slide, composed of a blue upper section and an orange lower section.

# SVT design and FEE specifications

# The SuperB Silicon Vertex Tracker (SVT)

▶ SVT provide precise tracking and vertex reconstruction, crucial for time dependent measurements, and perform stand-alone tracking for low  $p_t$  particles.



▶ Based on BaBar SVT: 5 layers silicon strip modules + Layer0 at small radius to improve vertex resolution and compensate the reduced SuperB boost w.r.t PEPII

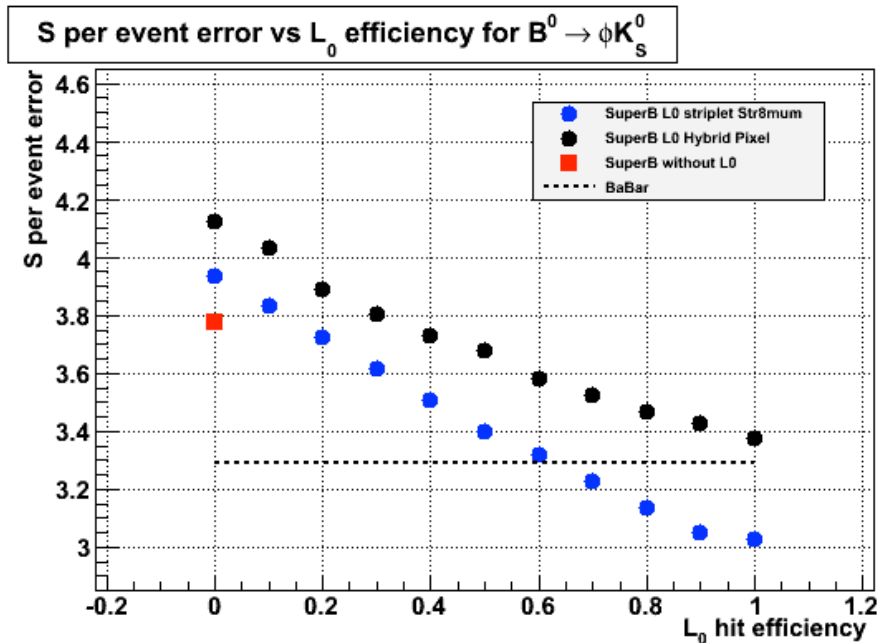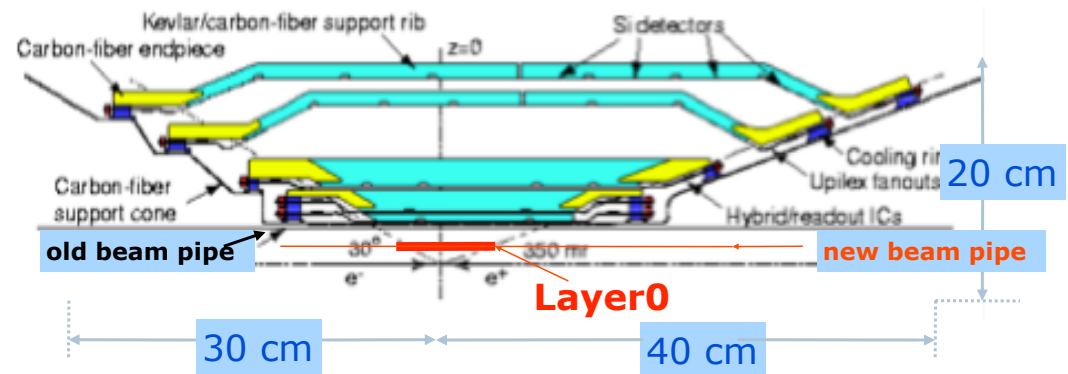


▶ Physics performance and back. levels set stringent requirements on Layer0:

- ▶  $R \sim 1.5$  cm, material budget  $< 1\% X_0$ ,
- ▶ hit resolution 10-15  $\mu\text{m}$  in both coordinates
- ▶ Track rate  $> 5\text{MHz}/\text{cm}^2$  (with large cluster too!), Total Integrated Dose  $> 3\text{MRad}/\text{yr}$



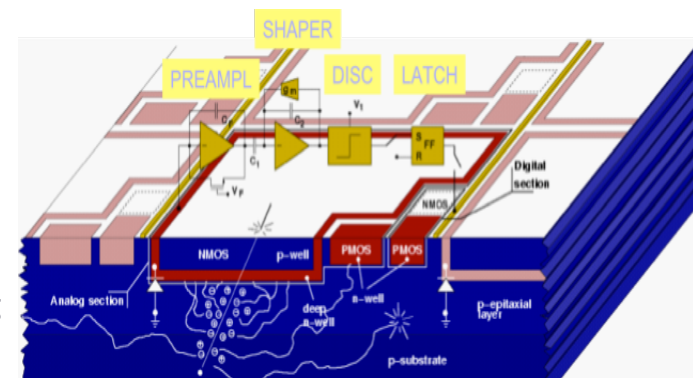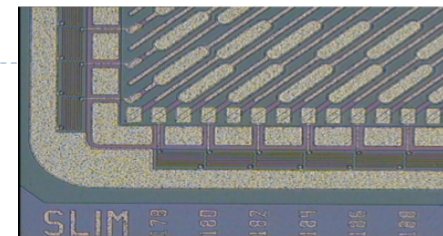

Wafer bonding & electrical interconn.

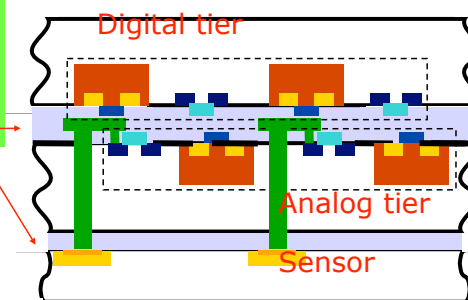

Complexity

- ▶ **Striplets option: mature technology, not so robust against background occupancy.**
  - ▶ Marginal with back. track rate higher than  $\sim 5 \text{ MHz/cm}^2$
  - ▶ **FE chip development** & engineering of module design needed
- ▶ **Hybrid Pixel option: viable, although marginal.**
  - ▶ Reduction of total material needed!
  - ▶ FE chip with  $50 \times 50 \mu\text{m}^2$  pitch & fast readout (hit rate  $100 \text{ MHz/cm}^2$ ) under development  $\rightarrow$  FE prototype chip (4k pixel, ST 130 nm) successfully tested with pixel sensor matrix connected.
- ▶ **CMOS MAPS option: new & challenging technology.**
  - ▶ Sensor & readout in  $50 \mu\text{m}$  thick chip!
  - ▶ Extensive R&D (SLIM5-Collaboration) on
    - ▶ Deep N-well devices  $50 \times 50 \mu\text{m}^2$  with in-pixel sparsification.
    - ▶ Fast readout architecture with target hit rate  $100 \text{ MHz/cm}^2$  & 100 ns timestamping developed..
  - ▶ CMOS MAPS (4k pixels) successfully tested with beams.
- ▶ **Thin pixels with Vertical Integration: reduction of material and improved performance.**
  - ▶ Two options are being pursued (VIPIX-Collaboration)
    - ▶ DNW MAPS with 2 tiers
    - ▶ Hybrid Pixel: FE chip with 2 tiers + high resistivity sensor

Complexity

▶ **Striplets option: mature technology, not so robust against background occupancy.**

- ▶ Marginal with back. track rate higher than  $\sim 5 \text{ MHz/cm}^2$
- ▶ **FE chip development** & engineering of module design needed

*Baseline solution*

▶ **Hybrid Pixel option: viable, although marginal.**

- ▶ Reduction of total material needed!
- ▶ FE chip with  $50 \times 50 \mu\text{m}^2$  pitch & fast readout (hit rate  $100 \text{ MHz/cm}^2$ ) under development  $\rightarrow$  FE prototype chip (4k pixel, ST 130 nm) successfully tested with pixel sensor matrix connected.

▶ **CMOS MAPS option: new & challenging technology.**


- ▶ Sensor & readout in  $50 \mu\text{m}$  thick chip!
- ▶ Extensive R&D (SLIM5-Collaboration) on
  - ▶ Deep N-well devices  $50 \times 50 \mu\text{m}^2$  with in-pixel sparsification.
  - ▶ Fast readout architecture with target hit rate  $100 \text{ MHz/cm}^2$  & 100 ns timestamping developed..
- ▶ CMOS MAPS (4k pixels) successfully tested with beams.

*R&D for upgrade  
See S. Zucca talk*

▶ **Thin pixels with Vertical Integration: reduction of material and improved performance.**

- ▶ Two options are being pursued (VIPIX-Collaboration)
  - ▶ DNW MAPS with 2 tiers
  - ▶ Hybrid Pixel: FE chip with 2 tiers + high resistivity sensor

# The SVT layout

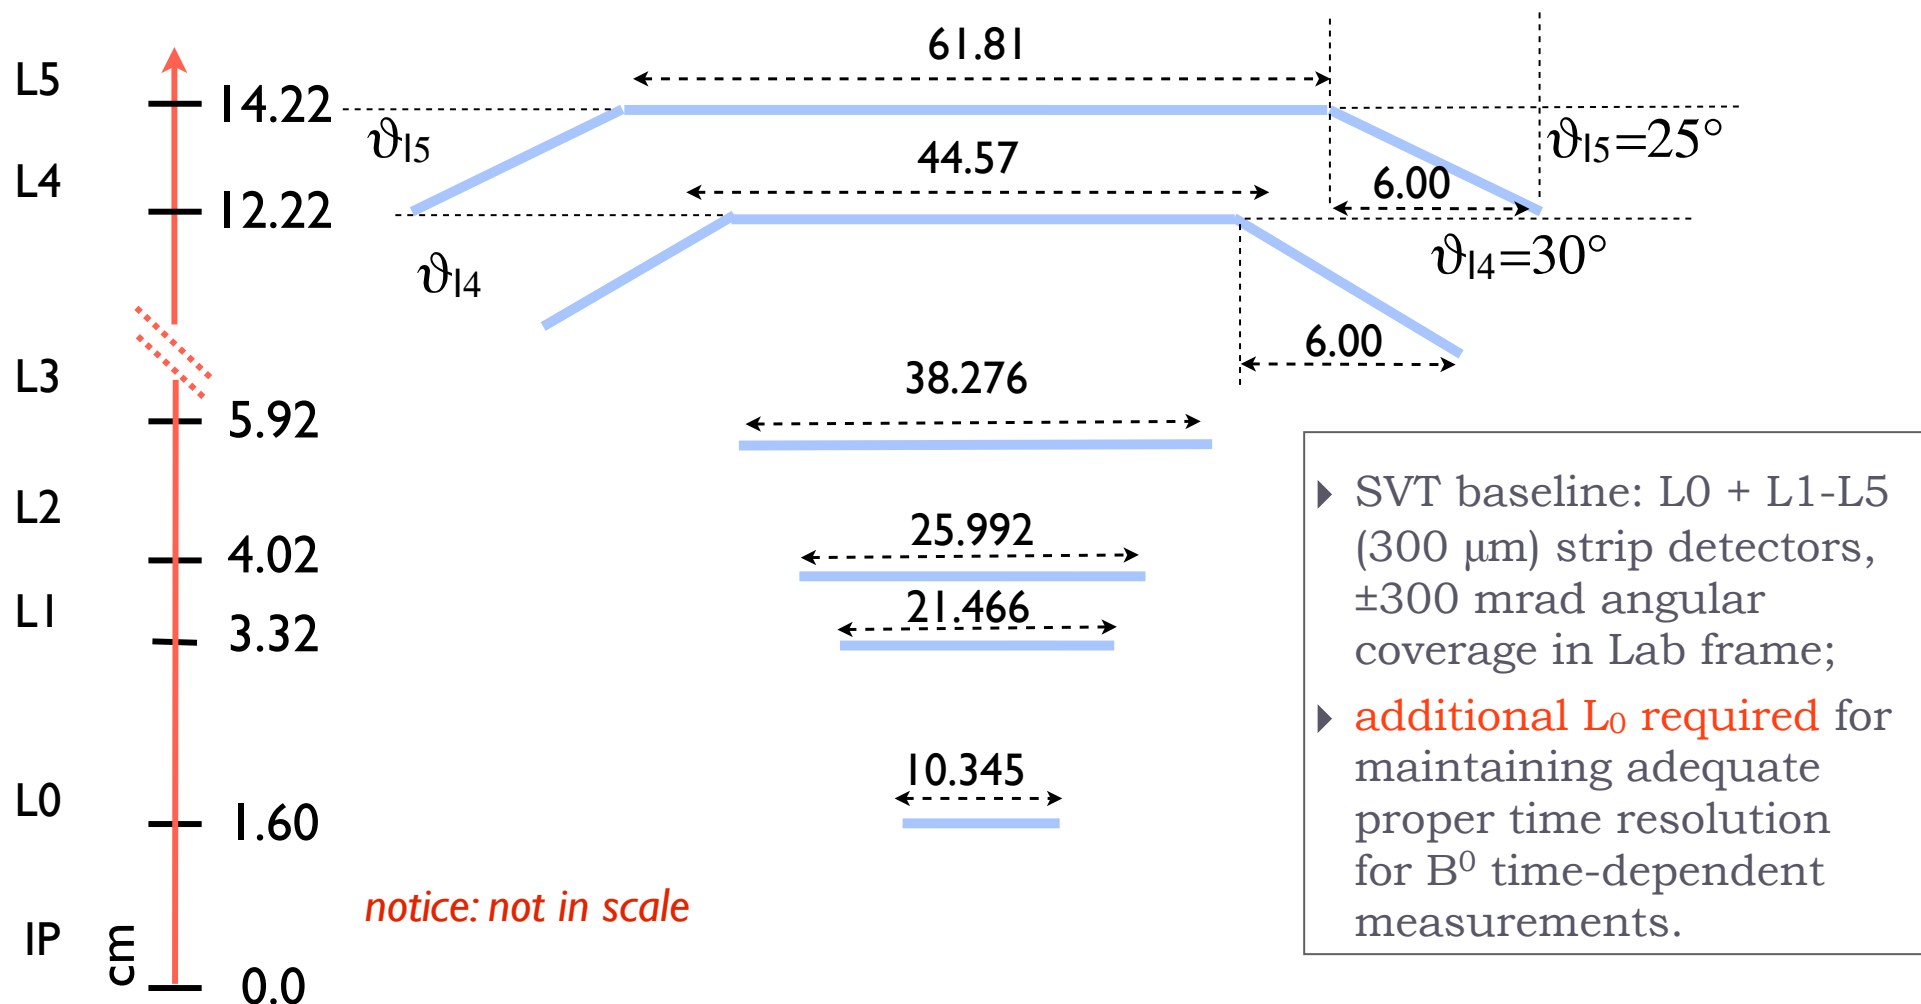

Symmetric coverage down to 300 mrad FW and BW



# Readout chip for strip modules

---

- ▶ Design of new readout chip(s) for triplets/strip detector is needed since **existent chips do not match all the requirements:**
  - ▶ Analog info is needed for:  $dE/dx$  (with high dynamic range required for low  $p_T$  tracks  $>10$  MIPs), position resolution, hit time resolution.
  - ▶ Very high rates in inner layers due to background:
    - ▶ L1-L3: 700-300 KHz/strip up to 2 MHz/striplet in Layer0 (safety factor x5 included)
    - ▶ Short shaping time needed to minimize inefficiency due to overlapping hits. L0: 25 ns, L1-L3: 50-100ns.
  - ▶ Long shaping time needed for long module in L4-L5 to reduce noise contribution: 0.5 – 1  $\mu$ s give reasonable S/N with acceptable inefficiency (rates 25-50 KHz/strip)
- ▶ **Probably need to develop 2 different chips: one for L0/L1-L2-L3 and one for L4-L5.**

# Readout chip general requirements

---

- ▶ Trigger
    - ▶ frequency: 150 kHz (1.5 Safety Factor) <-- several implication in readout chip design (number of output lines, fast output clock).
    - ▶ jitter: 100 ns (the goal is to go down to 30 ns)
    - ▶ latency: 10  $\mu$ s (1.7 Safety Factor; Level 1 design is 6  $\mu$ s)
  - ▶ DAQ window: 100-300 ns
  - ▶ Time stamping: 30 MHz (5-40 MHz)
  - ▶ Chip readout clock: 50 MHz
- 
- ▶ Within the SuperB – SVT group we started to evaluate if the readout architecture developed for Layer0 pixels could be adapted for strip readout, but **contribution in this area is very welcome!**

# Future Activities

---

- ▶ **A lot of activities: new groups are welcome!**
- ▶ Potential contributions in several areas:
  - ▶ Development of readout chips
  - ▶ Detector design, fabrication and tests
  - ▶ Simulation & reconstruction
- ▶ Groups now working for the SVT:
  - ▶ Italy: Bologna, Milano, Pavia, Pisa, RomaIII, Torino, Trento, Trieste
  - ▶ UK: QM, RAL
- ▶ Expression of interest from Strasbourg & other UK groups.
  
- ▶ **Contacts: Giuliana Rizzo (Pisa)**

---

A vertical bar on the left side of the slide, composed of a blue upper section and an orange lower section.

# Status of the Project

- ▶ SuperB inserted in April 2010 among the Italian National Research Program(PNR) Flagship Projects
  - ▶ Cooperation of INFN and IIT (Italian Institute of Technology): HEP experiment and light source
- ▶ In december 2010 first funding of 19M€ as first part of a pluriennial funding plan
  - ▶ Internal to Ministry of Research
- ▶ In april 2011 approval of the PNR, including 250M€ for SuperB.
  - ▶ Press release at: <http://www.istruzione.it/web/ministero/cs190411>
  - ▶ PNR at: <http://www.istruzione.it/web/ricerca/pnr>

# Funding and Management


---

- ▶ MoUs for TDR work in place with Canada, France, UK, Russia and SLAC.
- ▶ Negotiation with partner countries for construction MoUs started
- ▶ Expect that
  - ▶ Important in-kind contribute by the re-use of parts of PEP-II and Babar, for a value of about 135M€
  - ▶ For the accelerator and infrastructure most funding will be Italian
  - ▶ For the detector only half of the needed funding will come from Italy (about 25M€)
- ▶ The project will be managed through a European Research Infrastructure Consortium (ERIC)

# INFN SuperB Parameters



Parameter	Units	Base Line		Low Emittance		High Current		Tau-charm	
		HER (e+)	LER (e-)	HER (e+)	LER (e-)	HER (e+)	LER (e-)	HER (e+)	LER (e-)
LUMINOSITY	cm <sup>2</sup> s <sup>-1</sup>	1.00E+36		1.00E+36		1.00E+36		1.00E+35	
Energy	GeV	6.7	4.18	6.7	4.18	6.7	4.18	2.38	1.61
Circumference	m	1258.4		1258.4		1258.4		1258.4	
X-Angle (full)	mrاد	66		66		66		66	
$\beta_x$ @ IP	cm	2.6	3.2	2.6	3.2	5.06	6.22	6.76	8.32
$\beta_y$ @ IP	cm	0.0253	0.0205	0.0179	0.0145	0.0292	0.0237	0.0658	0.0533
Coupling (full current)	%	0.25	0.25	0.25	0.25	0.5	0.5	0.25	0.25
Emittance x (with IBS)	nm	2.00	2.46	1.00	1.23	2.00	2.46	5.20	6.4
Emittance y	pm	5	6.15	2.5	3.075	10	12.3	13	16
Bunch length (full current)	mm	5	5	5	5	4.4	4.4	5	5
Beam current	mA	1892	2447	1460	1888	3094	4000	1365	1766
Buckets distance	#	2		2		1		1	
Ion gap	%	2		2		2		2	
RF frequency	MHz	476		476		476		476	
Revolution frequency	MHz	0.238		0.238		0.238		0.238	
Harmonic number	#	1998		1998		1998		1998	
Number of bunches	#	978		978		1956		1956	
N. Particle/bunch (10 <sup>10</sup> )	#	5.08	6.56	3.92	5.06	4.15	5.36	1.83	2.37
$\sigma_x$ effective	$\mu\text{m}$	165.22	165.30	165.22	165.30	145.60	145.78	166.12	166.67
$\sigma_y$ @ IP	$\mu\text{m}$	0.036	0.036	0.021	0.021	0.054	0.0254	0.092	0.092
Piwiński angle	rad	22.88	18.60	32.36	26.30	14.43	11.74	8.80	7.15
$\Sigma_x$ effective	$\mu\text{m}$	233.35		233.35		205.34		233.35	
$\Sigma_y$	$\mu\text{m}$	0.050		0.030		0.076		0.131	
Hourglass reduction factor		0.950		0.950		0.950		0.950	
Tune shift x		0.0021	0.0033	0.0017	0.0025	0.0044	0.0067	0.0052	0.0080
Tune shift y		0.097	0.097	0.0891	0.0892	0.0684	0.0687	0.0909	0.0910
Longitudinal damping time	msec	13.4	20.3	13.4	20.3	13.4	20.3	26.8	40.6
Energy Loss/turn	MeV	2.11	0.865	2.11	0.865	2.11	0.865	0.4	0.17
Momentum compaction (10 <sup>-4</sup> )		4.36	4.05	4.36	4.05	4.36	4.05	4.36	4.05
Energy spread (10 <sup>-4</sup> ) (full current)	dE/E	6.43	7.34	6.43	7.34	6.43	7.34	6.43	7.34
CM energy spread (10 <sup>-4</sup> )	dE/E	5.0		5.0		5.0		5.0	
Total lifetime	min	4.23	4.48	3.05	3	7.08	7.73	11.4	6.8
Total RF Wall Plug Power	MW	16.38		12.37		28.83		2.81	

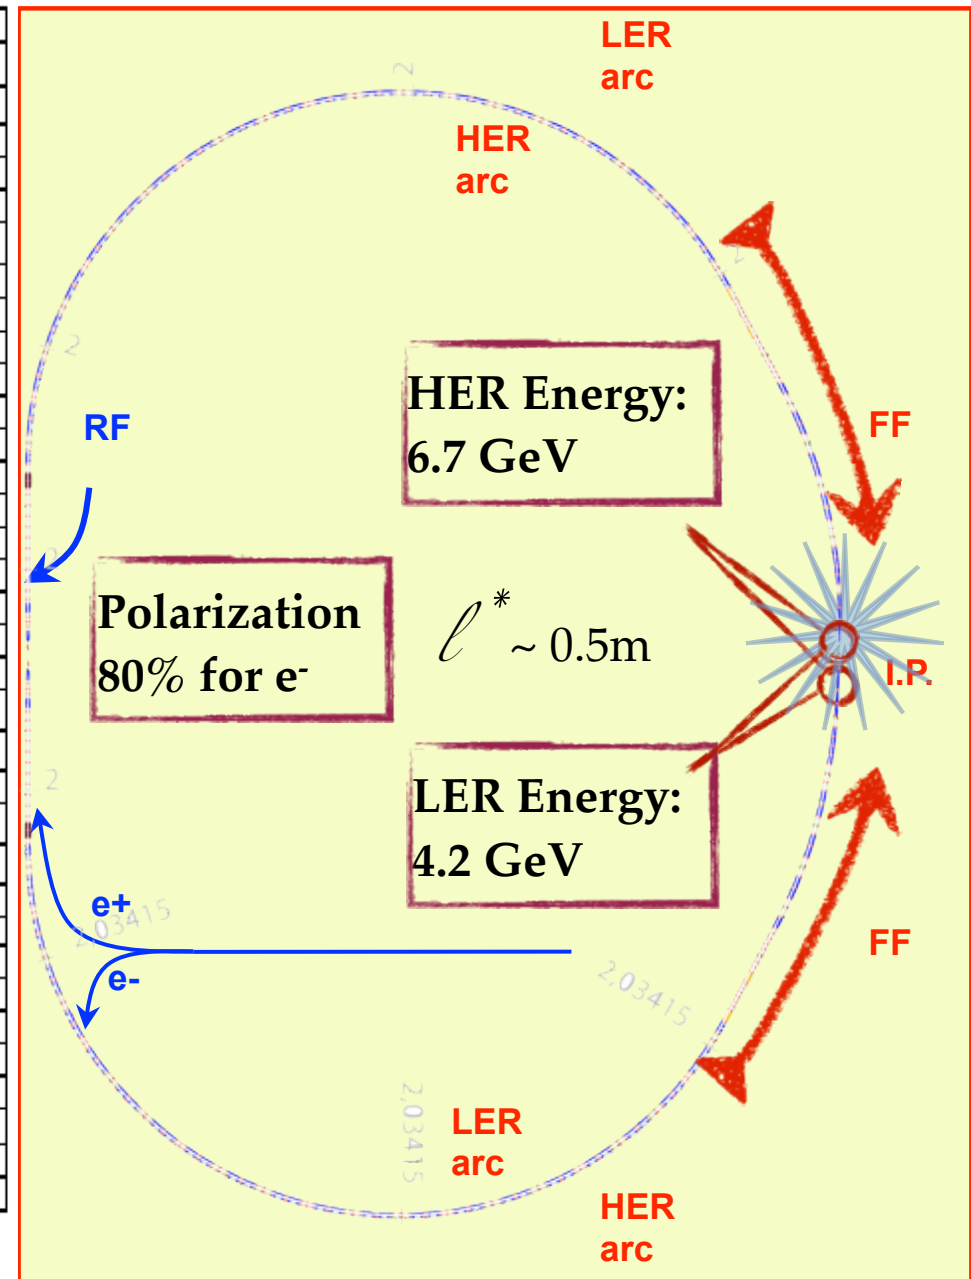

# Next steps and timeline

---

- ▶ Choose the site asap! Foreseen end of next week
  - ▶ The preferred site is Tor Vergata close to LNF
- ▶ Complete the Technical Design Report
  - ▶ End of 2011 / Mid 2012
- ▶ Prepare the transition from TDR Phase to Construction
  - ▶ Collaboration will start formally forming in Elba meeting, May 2011 (next week)
- ▶ Start recruitment for the construction: mainly Accelerator Physicists and Engineers
- ▶ Completion of construction foreseen end of 2015
  - ▶ First collisions mid 2016





---

A vertical bar on the left side of the slide, composed of a blue upper section and an orange lower section.

# Backup slides

# Golden Measurements: CKM

- ▶ Comparison of relative benefits of SuperB (75 ab<sup>-1</sup>) vs. existing measurements and LHCb (5 fb<sup>-1</sup>) and the LHCb upgrade (50 fb<sup>-1</sup>).

Observable/mode	Current (now)	LHCb (2017)	SuperB (2021)	LHCb upgrade (2030?)	Theory	
$\alpha$	Blue	Blue	Green	Blue	Yellow	LHCb can only use $\rho\pi$
$\beta$ from $b \rightarrow c\bar{c}s$	Blue	Blue	Green	Green	Green	
$B_d \rightarrow J/\psi\pi^0$	Yellow	Red	Green	Red	Green	$\beta$ theory error $B_d$
$B_s \rightarrow J/\psi K_S^0$	Red	Yellow	Red	Blue	Green	$\beta$ theory error $B_s$
$\gamma$	Yellow	Blue	Green	Green	Green	
$ V_{ub} $ inclusive	Blue	Yellow	Green	Blue	Blue	Need an $e^+e^-$ environment to do a precision measurement using semi-leptonic B decays.
$ V_{ub} $ exclusive	Blue	Yellow	Green	Blue	Blue	
$ V_{cb} $ inclusive	Blue	Yellow	Green	Blue	Blue	
$ V_{cb} $ exclusive	Blue	Yellow	Green	Blue	Blue	

Experiment: ■ No Result ■ Moderate Precision ■ Precise ■ Very Precise  
 Theory: ■ Moderately clean ■ Clean Need lattice ■ Clean

# SuperB is designed with 80% longitudinal polarization for $e^-$

---

## ▶ Polarization allows:

- ▶ Precision Measurement in ElectroWeak sector
- ▶ EDM and  $g-2$  in  $\tau$ .
- ▶ BKG reduction for LFV in  $\tau$ .
  
- ▶ Polarized beams provide measurements of  $\sin^2\theta_w(\text{eff})$  with comparable precision to SLD but at much lower energies.
- ▶ Polarization allows for **NC Z-bb coupling** measurement with better precision and different systematic w.r.t. LEP measurement of  $A_{\text{FB}}^b$ .

# Differential Cross sections in $e^+e^- \rightarrow f^+f^-$

Diagrams	$\sigma$ (nb)	$A_{\text{FB}}$	$A_{\text{LR}}$ (Pol = 100%)
$ Z+\gamma ^2$	1.01	0.0028	-0.00051
$ Z ^2+ \gamma ^2$ No interference	1.01	0.0088	-0.00002

## Asymmetries at Z-pole for measured $\sigma$

$$A_{\text{FB}} = \frac{\sigma_{\text{F}} - \sigma_{\text{B}}}{\sigma_{\text{F}} + \sigma_{\text{B}}}$$

$$A_{\text{LR}} = \frac{\sigma_{\text{L}} - \sigma_{\text{R}}}{\sigma_{\text{L}} + \sigma_{\text{R}}} \frac{1}{\langle |\mathcal{P}_e| \rangle}$$

$$A_{\text{LRFB}} = \frac{(\sigma_{\text{F}} - \sigma_{\text{B}})_{\text{L}} - (\sigma_{\text{F}} - \sigma_{\text{B}})_{\text{R}}}{(\sigma_{\text{F}} + \sigma_{\text{B}})_{\text{L}} + (\sigma_{\text{F}} + \sigma_{\text{B}})_{\text{R}}} \frac{1}{\langle |\mathcal{P}_e| \rangle}$$

Interference term is  $\sim g_A^e g_V^f$


at LEP: 15M hadronic Z decays, unpolarized  
 at SLC: 0.5M hadronic Z decays, polarized  $e^-$   
 at SuperB: Z-term  $\sim 30\text{M}$ , polarized  $e^-$

Expected stat. error:  $\sigma(A_{\text{LR}}) = 4.6 \times 10^{-6}$   
 relative stat. error 1.1% (80% polarization).  
**Systematics  $< 0.5\%$  on polarization needed**

$$A_{\text{LR}} \propto g_V^f \propto (T_3^f - 2Q_f \sin^2 \theta_{\text{eff}}^f)$$

$$\sigma(\sin^2 \theta_{\text{eff}}) = 1.8 \times 10^{-4}$$

cfr SLC  $\sigma(\sin^2 \theta_{\text{eff}}) = 2.6 \times 10^{-4}$

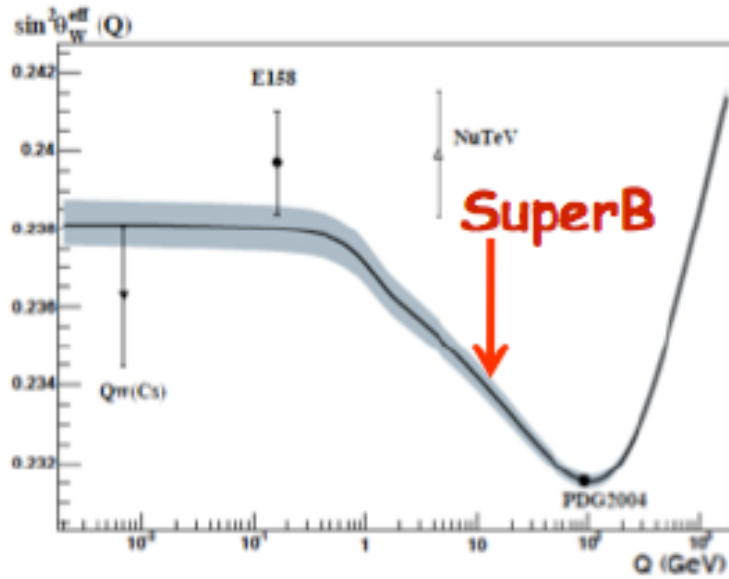


$$A_{LR} = \frac{\sigma(P) - \sigma(-P)}{\sigma(P) + \sigma(-P)} = \frac{16}{\sqrt{2}} \left( \frac{G_F q^2}{4\pi\alpha} \right) \left( \frac{g_A^e g_V^b}{Q_b} \right) P$$

- Measurable for all  $B^0 \bar{B}^0$  and  $B^+ B^-$  final states, both resonant and continuum.
- All QCD corrections included in the **single** form factor that **cancels** in the asymmetry.
- Very clean measurement, no **large** theoretical corrections (in progress...)

⇒ Excellent opportunity to measure  $g_V$  &  $\sin^2 \theta_W$  at SuperB with polarized beams!!

0.5% polarization syst.  
0.3% stat. error  
→ 0.0021

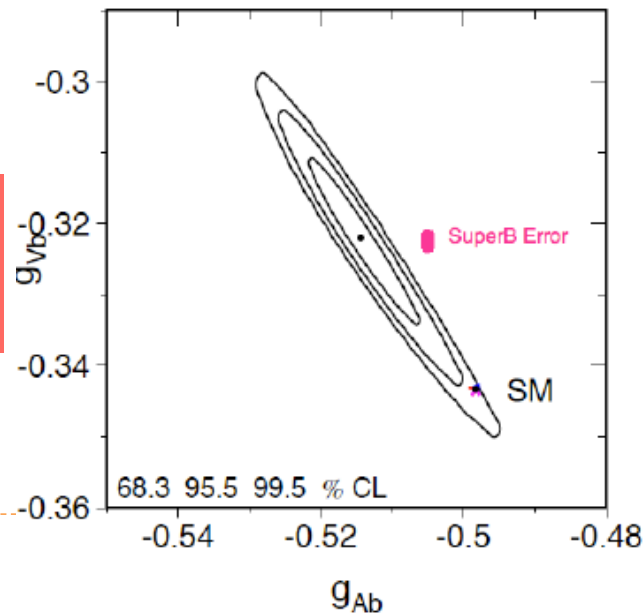

*The L-R luminosity asymmetry has to be very well controlled. Possibly done using monitoring using Bhabhas. Polarization should be measured better than .05%. luminosity dependent polarization affects systematic uncertainties*

Is this measurement also possible with Charm?

---

1. @Y(4S) . But hadronization correction.
2. Operate at a  $c\bar{c}$  vector resonance above open charm threshold  $\Psi(3770)$ , use the same analysis method as for b.

Polarization at low energies with high luminosity is needed

**That is included in the SuperB design**

# Luminosity

---

$$\mathcal{L} = f_c \int d^3\mathbf{x} dt \rho_1(\mathbf{x}, t) \cdot \rho_2(\mathbf{x}, t) v_{\text{rel.}} = 10^{36} \text{cm}^{-2} \text{s}^{-1} = 1 \text{kHz/nb}$$

- $f_c$  is the bunch collision frequency
- $\rho_i(\mathbf{x}, t)$  is the particle spatial density at time  $t$  and point  $\mathbf{x}$  of the beam  $i$
- $v_{\text{rel.}}$  is the relative speed of the two bunches

Under the assumption of gaussian rigid bunches each one having  $N_i$  particles:

$$\rho_i(\mathbf{x}, t) = \rho_i(\mathbf{x} \mp \beta \hat{\mathbf{z}} t) = N_i \mathcal{G}(\mathbf{x}; \mu = \pm \beta \hat{\mathbf{z}} t; \sigma_i)$$

The density superposition integral can be evaluated algebraically. For head on collisions:


$$\mathcal{L} = f_c \frac{N_1 N_2}{2\pi \Sigma_x \Sigma_y}$$

$$\Sigma_{x,y} = \sigma_{1x,y} \oplus \sigma_{2x,y}$$



N.B.: in this assumption  $\sigma$  is constant (which is not the case in real life)

# Recent results on pixel R&D for Layer0

- ▶ **CMOS DNW MAPS** with data push sparsified readout + timestamp tested with beams:
  - ▶ resolution of 14  $\mu\text{m}$  (digital output)
  - ▶ hit efficiency up to 92 %
  
- ▶ **HYBRID PIXEL:** front-end chip with 50x50  $\mu\text{m}$  pitch & fast readout architecture tested with sensor matrix
  - ▶ Optimized for hit rate 100MHz/cm<sup>2</sup> on full chip size (~1.3 cm<sup>2</sup>)
  - ▶ VHDL simulation: Effi > 98% @ 60 MHz RDclock
  - ▶ Timestamp granularity 0.2-5.0  $\mu\text{s}$

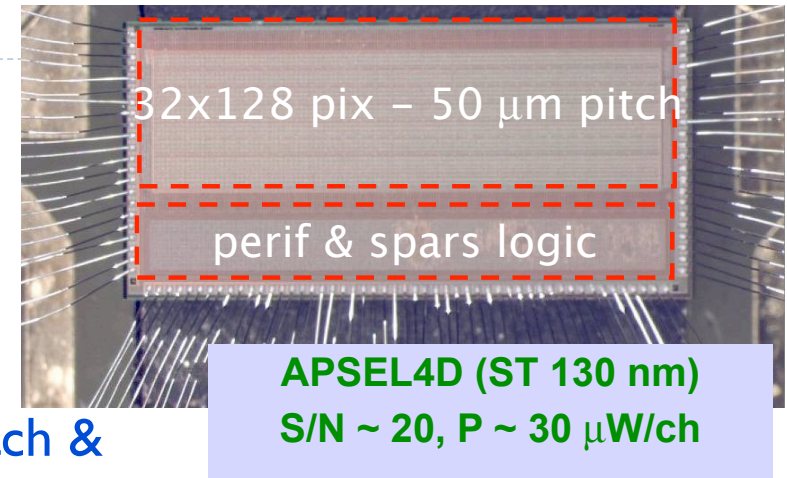

**FE chip (ST 130 nm, 32x128 pix)**  
**bump-bonded to sensor matrix**  
**S/N ~ 200, P ~ 2.5  $\mu\text{W}/\text{ch}$**

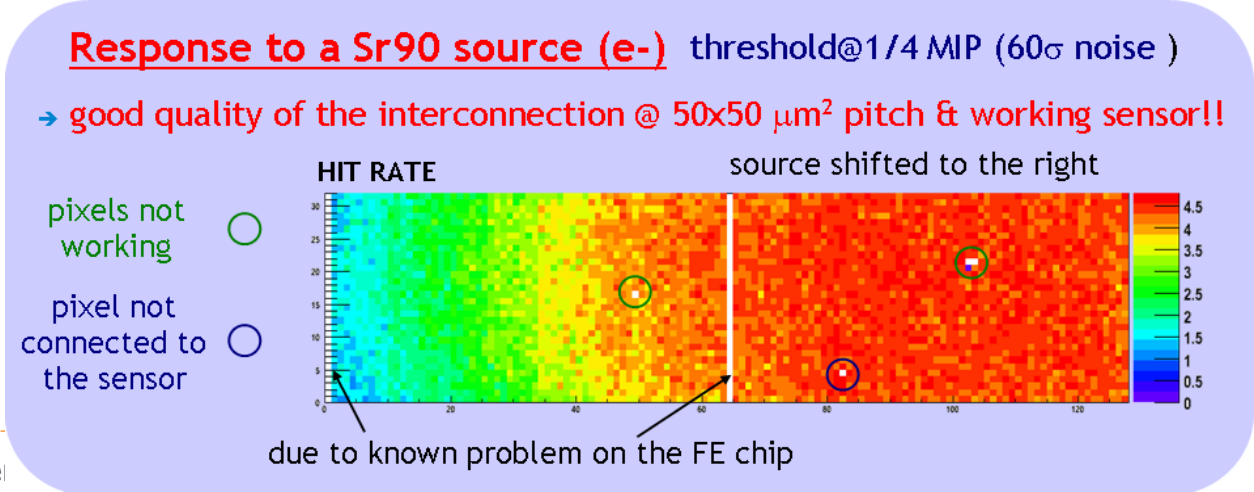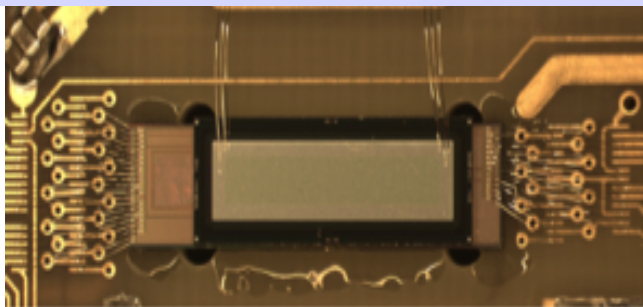





# Next R&D on pixel for Layer0

---

- ▶ Improvements in MAPS performance being pursued with:
  - ▶ **INMAPS CMOS process** with quadruple well + high resistivity substrate: higher charge collection efficiency & rad hardness → **design of first prototypes ongoing**
  - ▶ **3D MAPS** with 2 CMOS tiers interconnected: higher cce efficiency, more complex in-pixel logic, reduce cross-talk → **first chips under test, testbeam in Sep. 2011**
- ▶ Improved readout architecture developed for pixel with Vertical Integration
  - ▶ TimeStamp is latched in each pixel when fired & readout is time ordered.
    - ▶ Timestamp granularity 100 ns
  - ▶ Readout could work in data push mode & triggered mode
    - ▶ VHDL results for 100MHz/cm<sup>2</sup> hit rate: Effi\_triggered=98.2%, Effi\_data\_push=99.9%
  - ▶ **New submission of large 3D MAPS and FE chip for Hybrid pixel (2-tiers), with the improved readout architecture, in preparation for mid 2011**
- ▶ Vertical interconnection of FE chip (2-tiers) with high resistivity pixel matrix (best technology under investigation) will give the best performance: high S/N and radiation hardness, low power and material budget


# Light pixel module support & cooling

- ▶ Light support with integrated cooling needed for pixel module:  $P \sim 2 \text{ W/cm}^2$
- ▶ Carbon Fiber support with microchannel for coolant fluid developed in Pisa:
  - ▶ Total support/cooling material = 0.28 %  $X_0$  full module, 0.15%  $X_0$  net module
- ▶ Thermo-hydraulic measurements in TFD Lab: results within specs

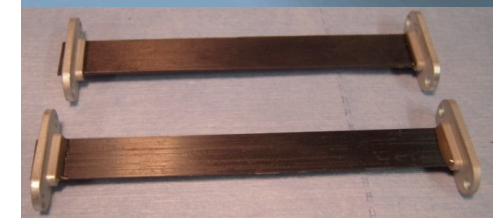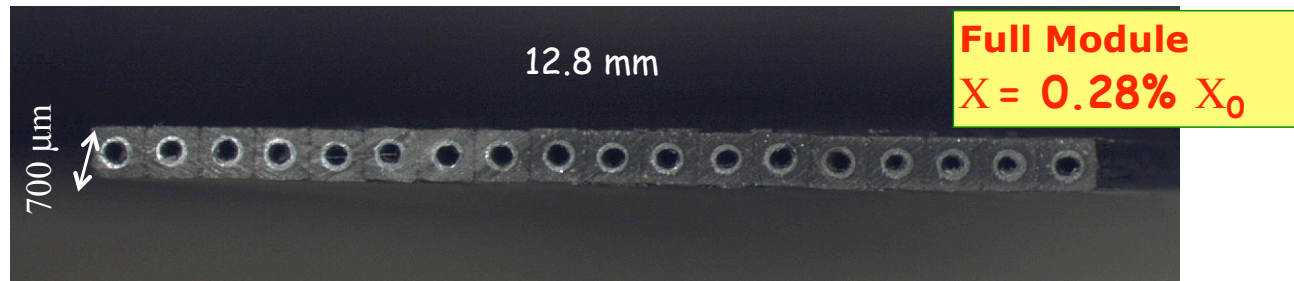

Full module supports with microchannels glued together

Net module, Sensor Temperature Power on Single Side

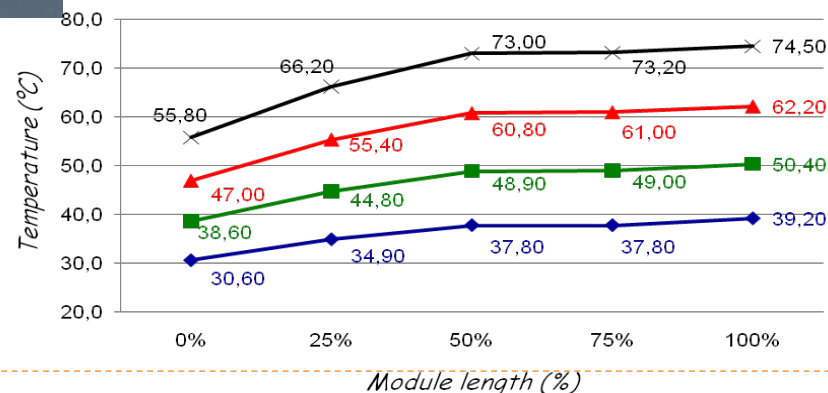

Net Module  
 $X = 0.15\% X_0$

