



## Beam Diagnostics Lecture 2

Measuring Complex Accelerator Parameters

Uli Raich


CERN AB-BI




## Contents of lecture 2



- Some examples of measurements done with the instruments explained during the last lecture
  - Spectroscopy
  - Trajectory and Orbit measurements
  - Tune measurements
    - Traditional method
    - BBQ method
  - Multi-turn extraction
  - Transverse and longitudinal emittance measurements
  - Longitudinal phase space tomography



## Faraday Cup application Testing the decelerating RFQ



**Antiproton decelerator**

- ◆ Accelerate protons to 24 GeV and eject them onto a target
- ◆ Produce antiprotons at 2 GeV
- ◆ Collect the antiprotons and cool them
- ◆ Decelerate them and cool them
- ◆ Output energy: 100 MeV

**In order to get even lower energies:**


- ◆ Pass them through a moderator
  - High losses
  - Large energy distribution

⇒ **Build a decelerating RFQ**


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

3




## Waiting for Godot



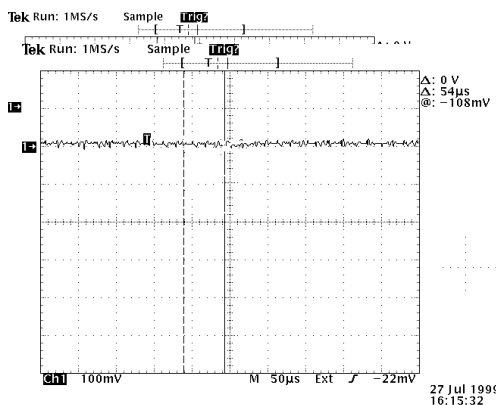

Proton beam

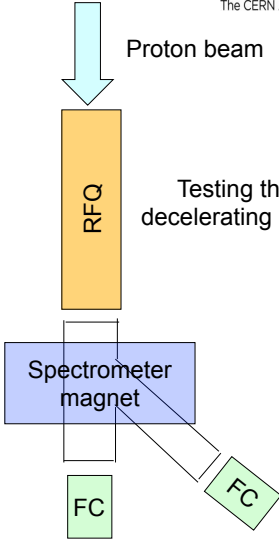


Testing the decelerating RFQ


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

4



### Setup for charge state measurement



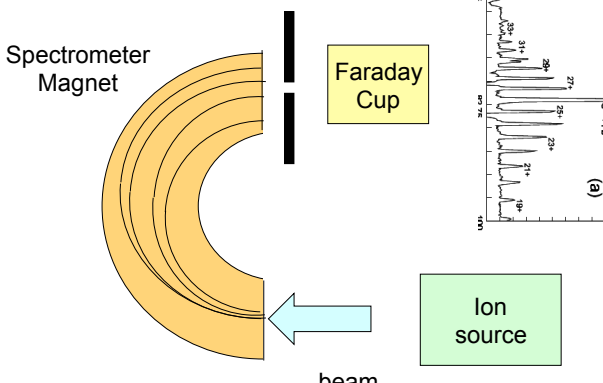


Spectrometer Magnet

Faraday Cup

Ion source

beam

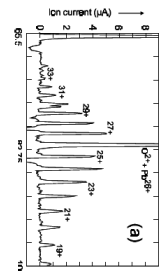

Ion current ( $\mu\text{A}$ )


(B)

- The spectrometer magnet is swept and the current passing the slit is measured


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

5



### Measuring charge state distribution



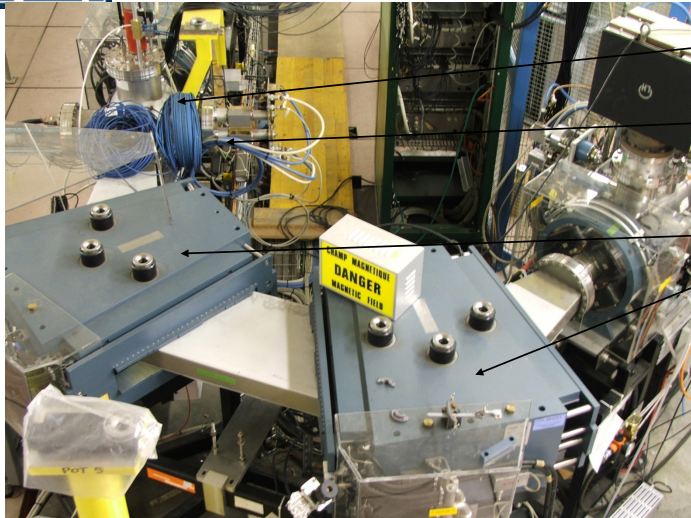

Faraday Cup


Slit



Spectrometer magnets

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

6

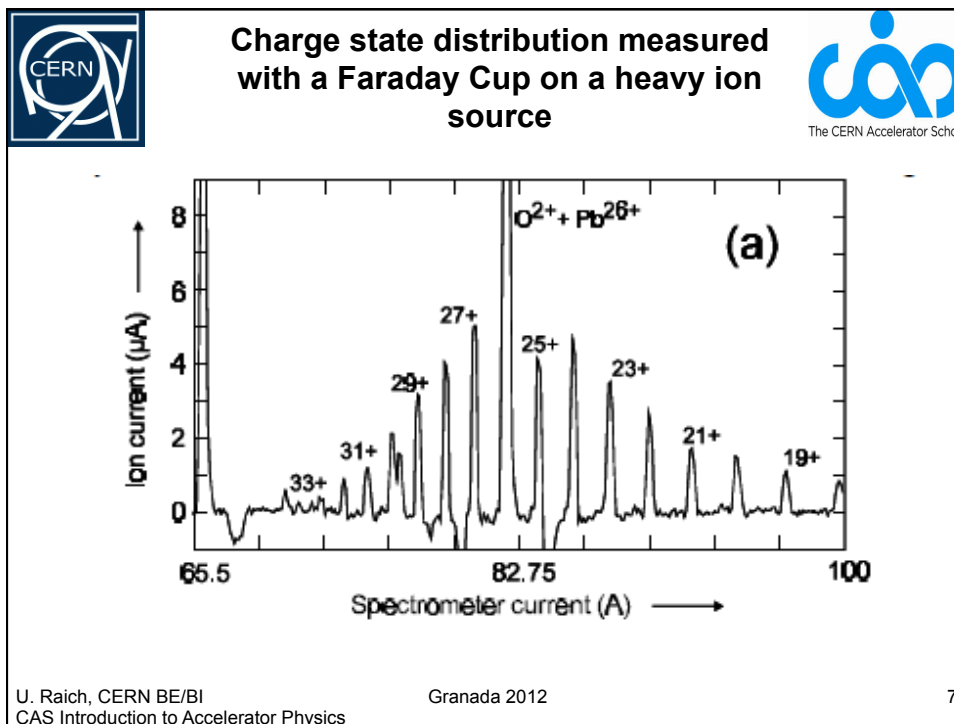

 **Trajectory and Orbit measurements**   
The CERN Accelerator School

Definitions:

Trajectory: The mean positions of the beam during 1 turn

Orbit: The mean positions over many turns for each of the BPMs


The trajectories must be controlled at injection, ejection, transition

Closed orbits may change during acceleration or RF “gymnastics”


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

8



## Trajectory Measurement at LHC



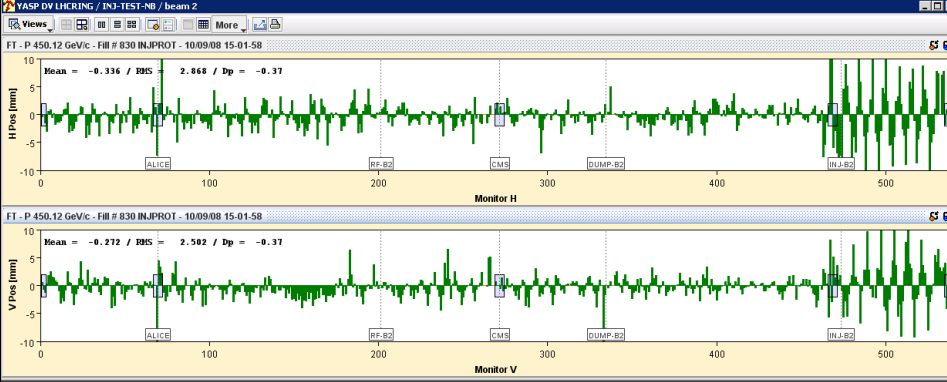


Knowing the optics one can deduce the orbit correction from the measurement


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

9



## The PUs



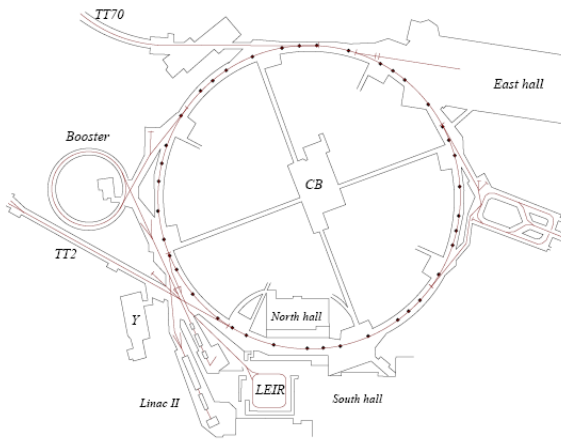



U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

10



## The PS, a universal machine



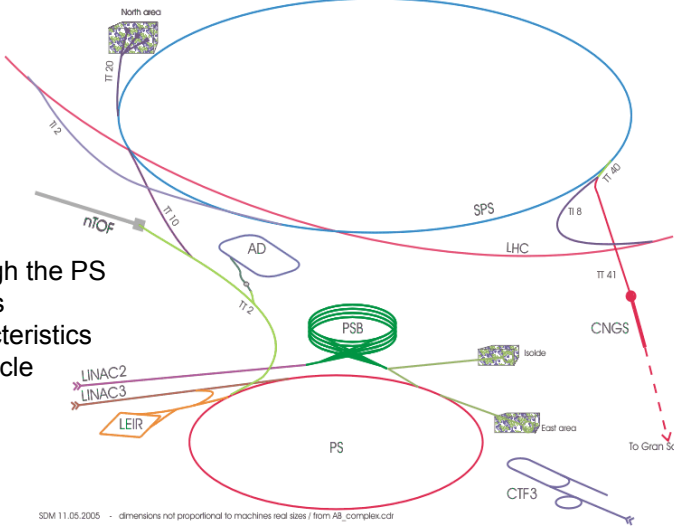


All beams pass through the PS  
 Different particle types  
 Different beam characteristics  
 Concept of a super cycle


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

11



## The super cycle



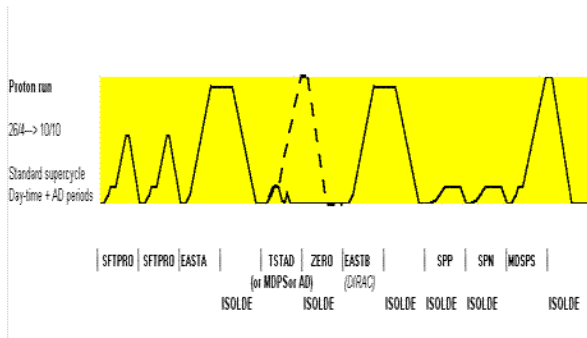

Proton run  
26h → 10h10


Standard supercycle  
Day-time + AD periods

SFTPRO	SFTPRO	EASTA	TSTAD	ZERO	EASTB	SPP	SPN	MDSFS
			(or MDPS or AD)	(ZIRAC)				
			ISOLDE	ISOLDE	ISOLDE	ISOLDE	ISOLDE	ISOLDE


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

12




## Position Measurements



Red: The sum signal  
Green: The difference signal


Procedure:  
Produce integration gates and Baseline signals  
Baseline correct both signals  
Integrate sum and difference signals and store results in memory  
Take external timing events into account e.g. harmonic number change,  $\gamma$ -transition etc.

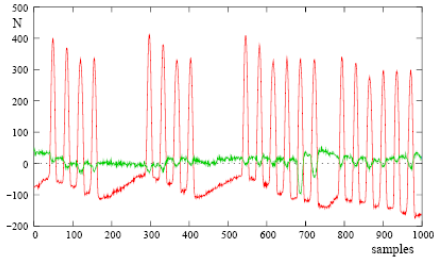


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

13



## Trajectory readout electronics



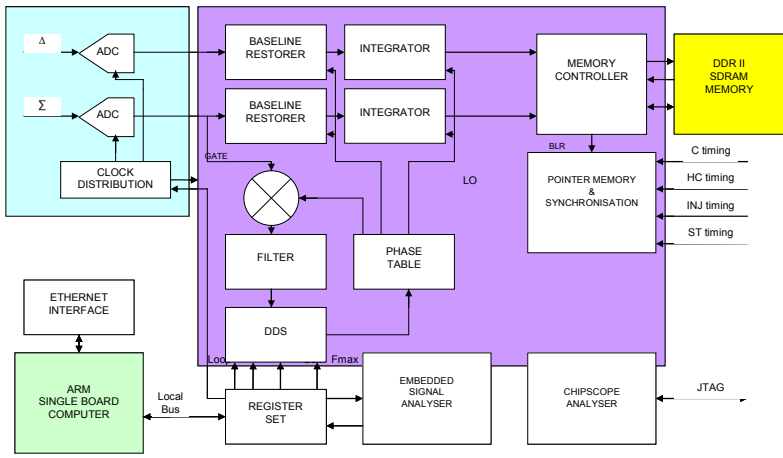



U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics



Granada 2012

14



## Baseline restoration



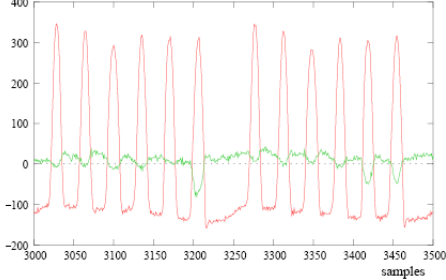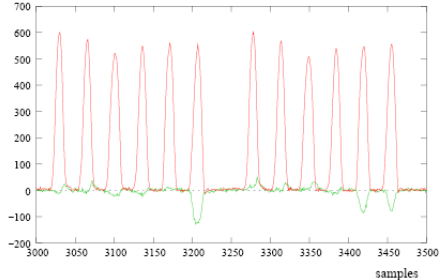



Low pass filter the signal to get an estimate of the base line  
 Add this to the original signal


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics






Granada 2012

15



## Beams in the PS



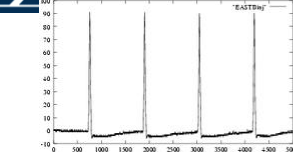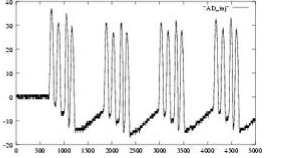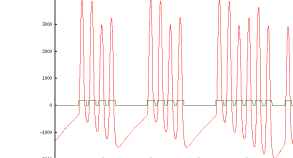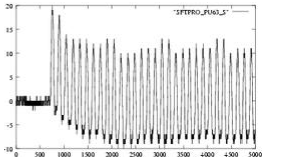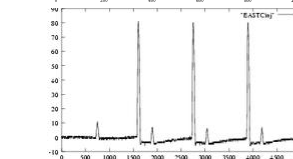






U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012


16






## RF Gymnastics




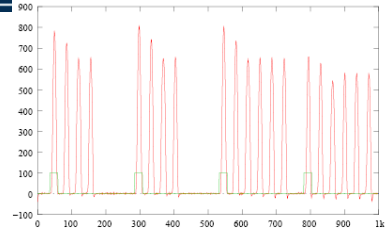

Example of generated gate around 2<sup>nd</sup> injection

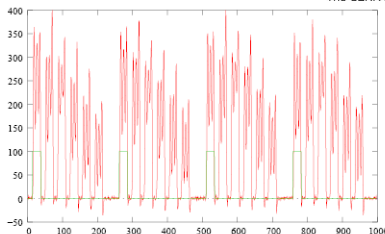


Idem, during bunch splitting

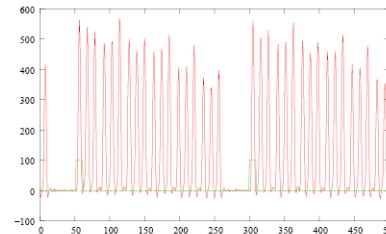


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


17



## Trajectory measurements in circular machines



Needs integration gate  
Can be rather tricky  
Distance between bunches changes with acceleration  
Number of bunches may change

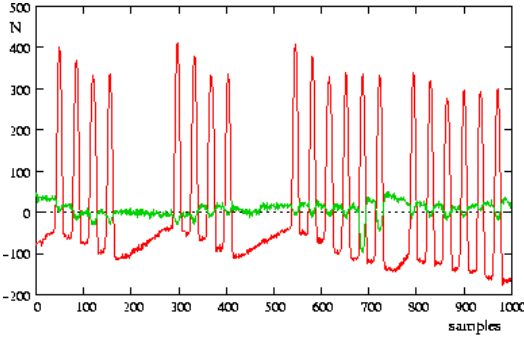

Raw data from pick-ups  
double batch injection

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

18




## Changing bunch frequency



- Bunch splitting or recombination
- One RF frequency is gradually decreased while the other one is increased
- Batch compression

For all these cases the gate generator must be synchronized

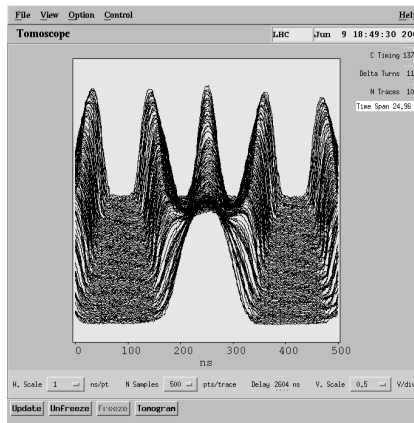


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

19



## Batch compression

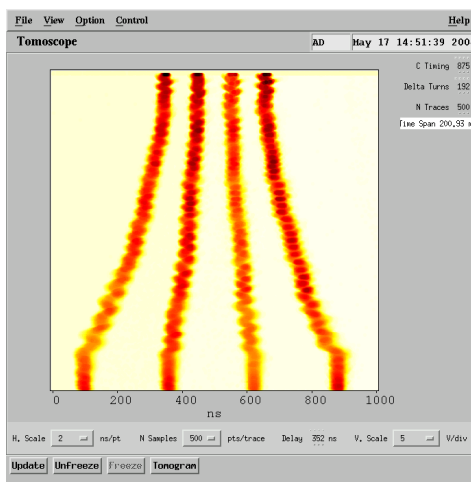

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


20



## Tune measurements



- When the beam is displaced (e.g. at injection or with a deliberate kick, it starts to oscillate around its nominal orbit (betatron oscillations)
- Measure the trajectory
- Fit a sine curve to it
- Follow it during one revolution





U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012



21



## The Sensors





The kicker

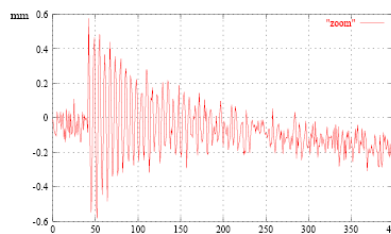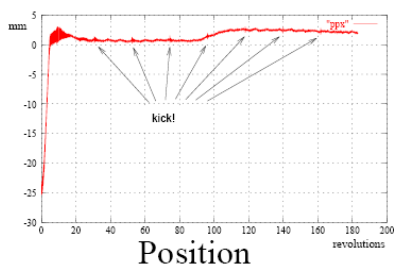


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012


22

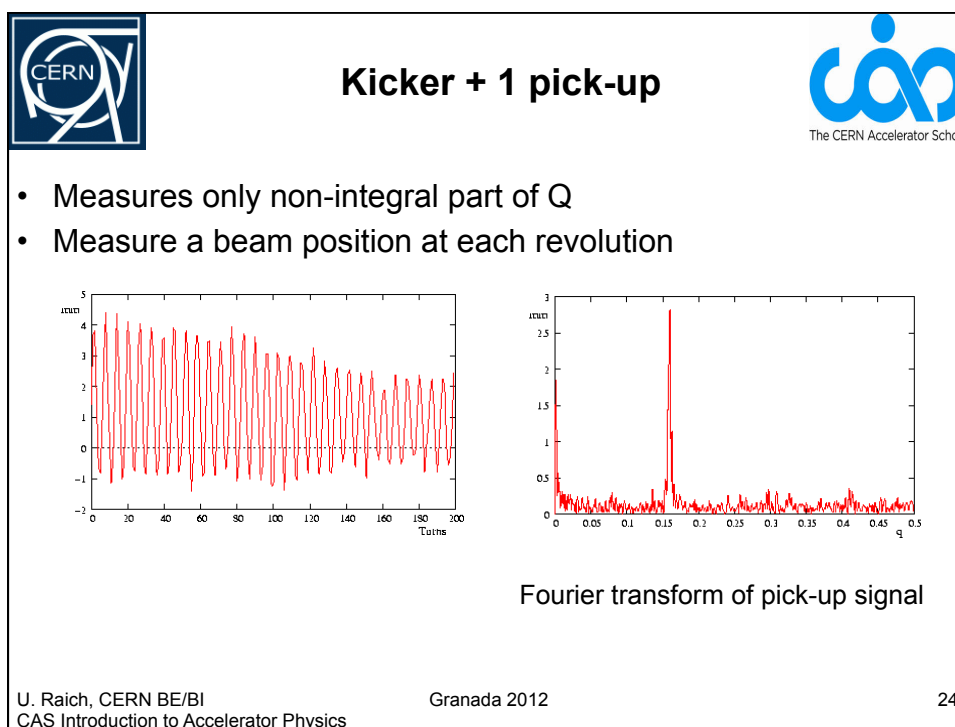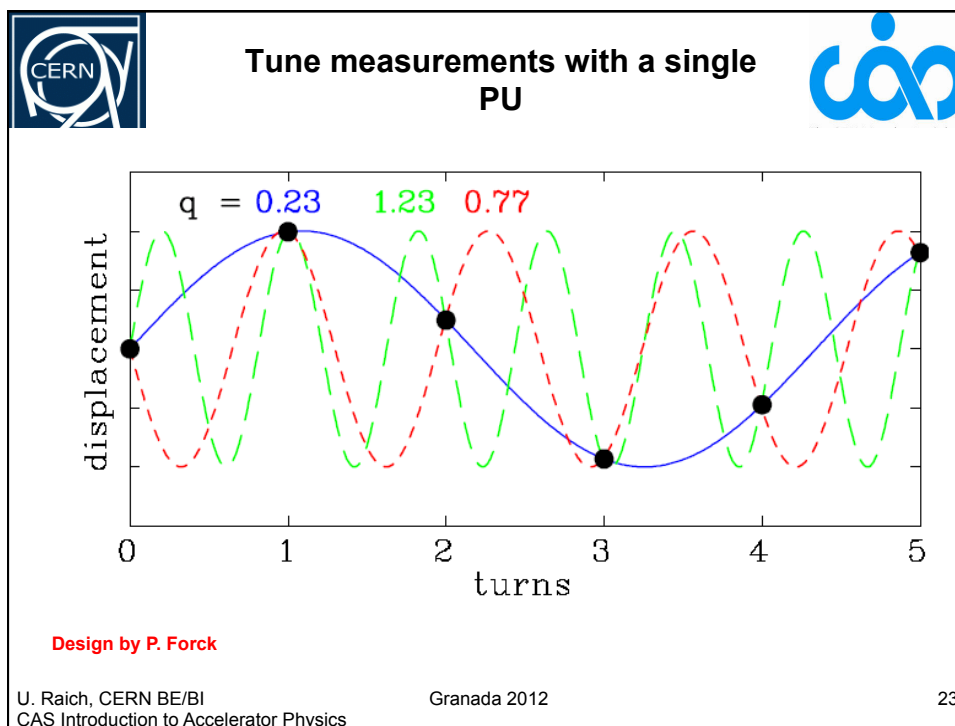



## Periodic extension of the signal and Windowing



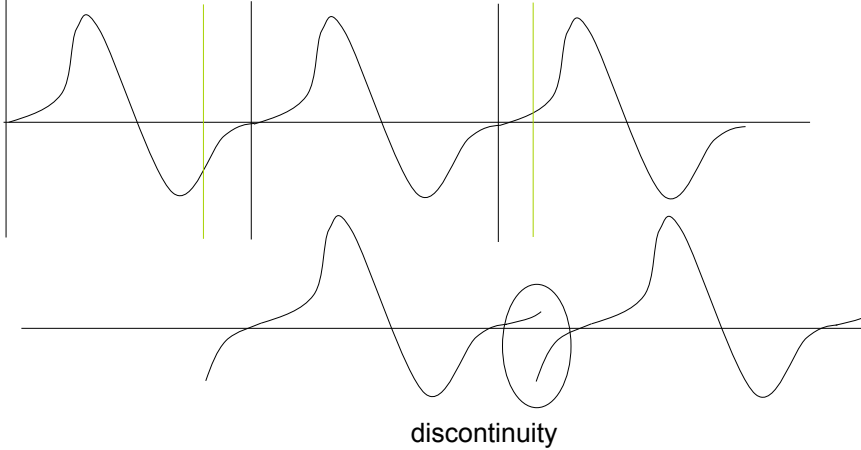


discontinuity


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

25



## Windowing




The Discrete Fourier assumes one cycle of a repetitive signal.

Blackman-Harris Window is used

Each sample is multiplied with a coefficient

Coefficients are pre-calculated and stored in a table

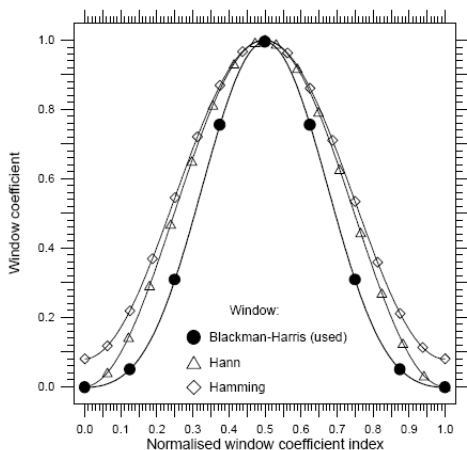

Window:

- Blackman-Harris (used)
- △ Hann
- ◇ Hamming

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


26



## Peak search algorithm



- Power value is bigger than its predecessor
- Power value is bigger than its successor
- Power value is biggest in the whole spectrum
- The power value is at least 3 times bigger than the arithmetic mean of all power bins.

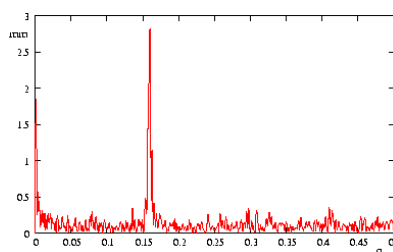

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

27



## Q interpolation




Betatron signal is not a pure Harmonic but includes rev. freq Harmonics, noise ...  
The windowing process is not Perfect  
Coherent betatron signal is Damped in the time domain

$$V(n_{\beta}-1) = a(n_{\beta}-1)^2 + b(n_{\beta}-1) + c$$

$$V(n_{\beta}) = an_{\beta}^2 + bn_{\beta} + c$$


$$V(n_{\beta}+1) = a(n_{\beta}+1)^2 + b(n_{\beta}+1) + c$$

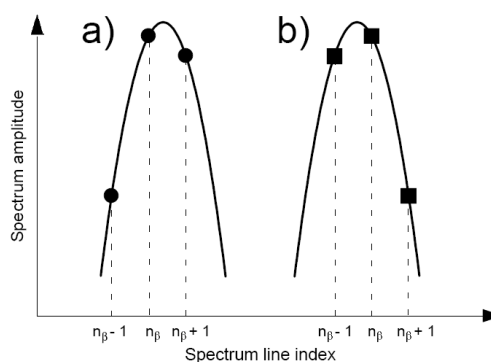


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

28



## Q-Measurement Results



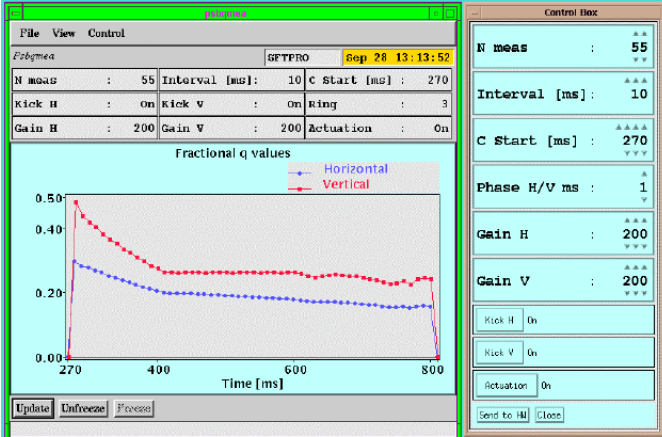



U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

29



## Direct Diode Detection Base Band Q measurement



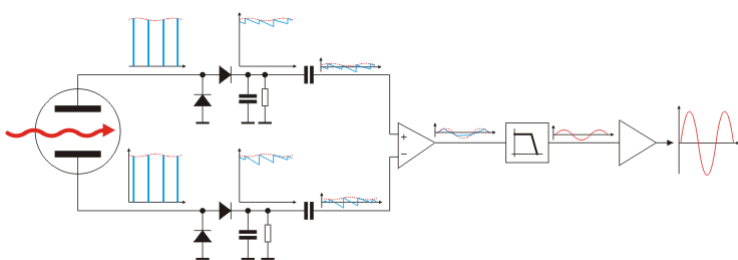

Diode Detectors convert spikes to saw-tooth waveform

Signal is connected to differential amplifier to cut out DC level



Filter eliminates most of the revolution frequency content

Output amplifier brings the signal level to amplitudes suitable for long distance transmission


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


30

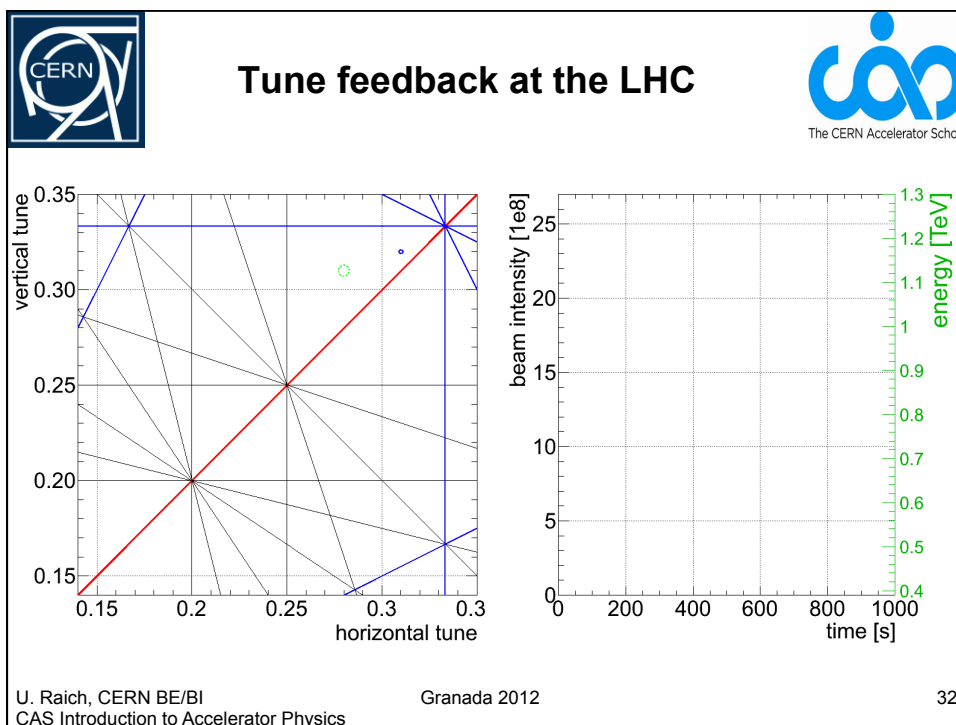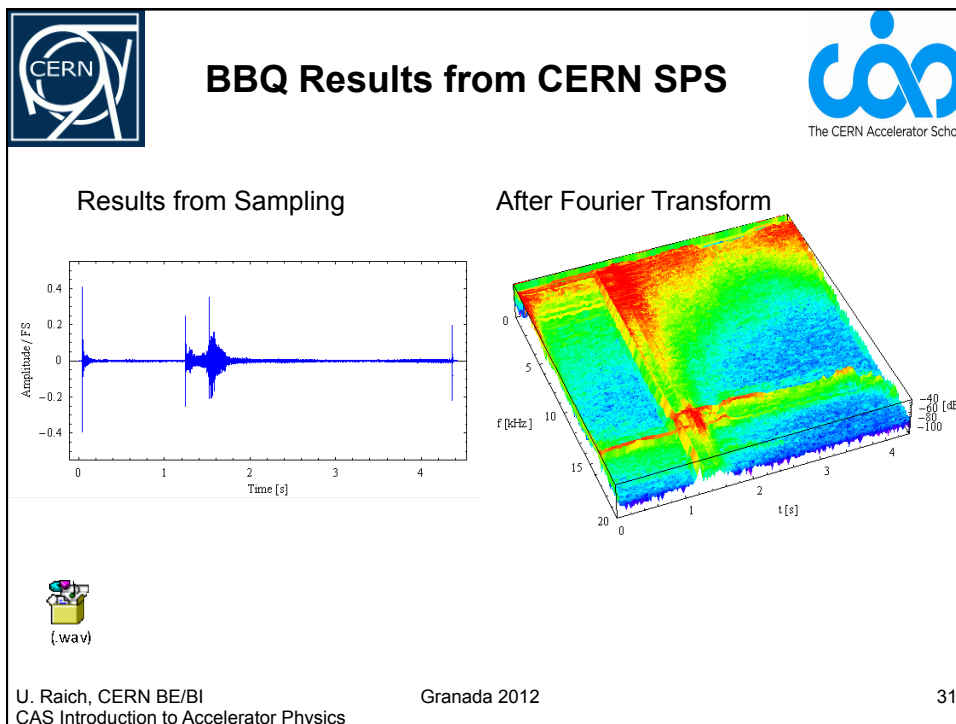






## Multi-Turn Extraction



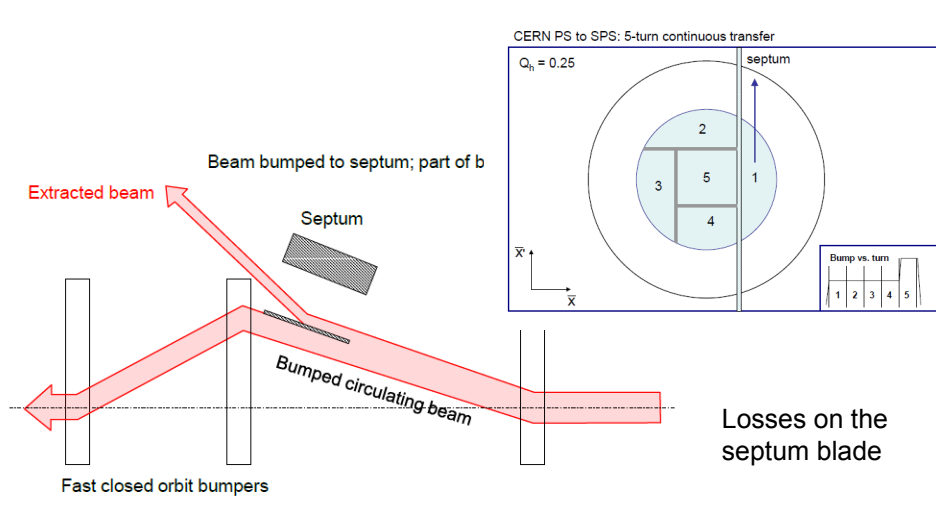

Fast closed orbit bumpers

Beam bumped to septum; part of b

Septum

Extracted beam


Bumped circulating beam

Losses on the septum blade


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


33



## Islands in transverse phase space



*phase space portrait kfa71ma\_000834\_6.256000.dat*

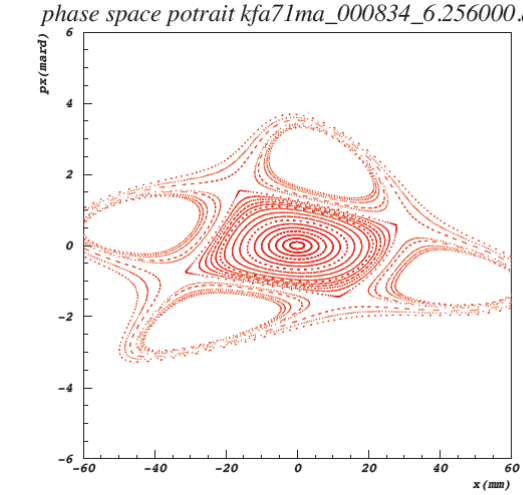

$px$  (mrad)

$x$  (mm)

Create stable island in phase space through excitation with hexapoles and octopoles and capture the beam in them



Can this be measured?


Poor man's phase space meter using 2 BPMs at  $90^\circ$  phase advance

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012


34

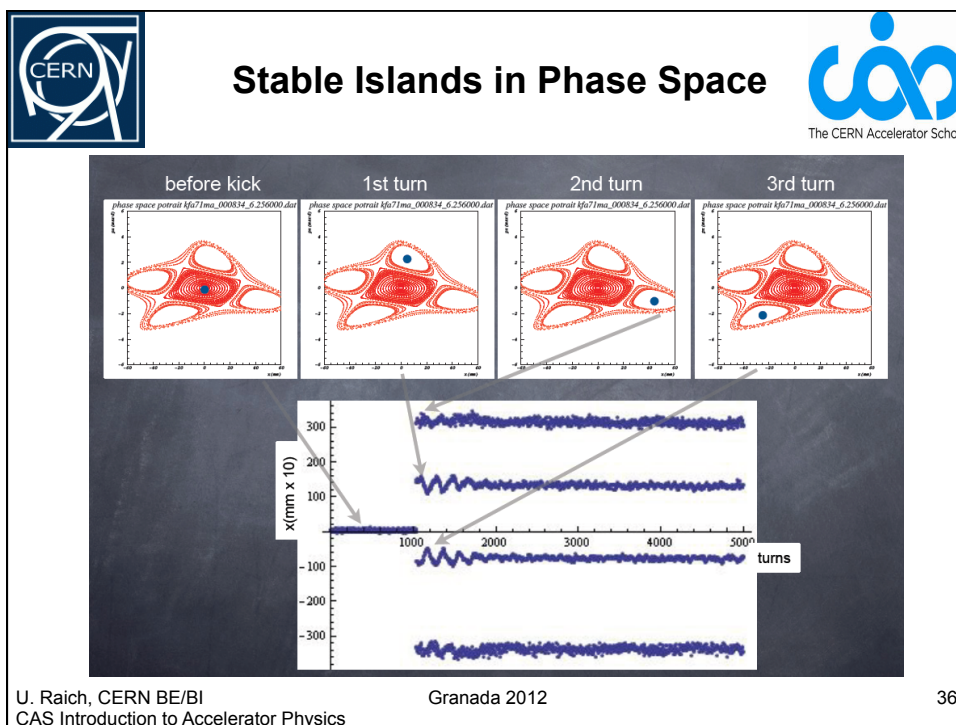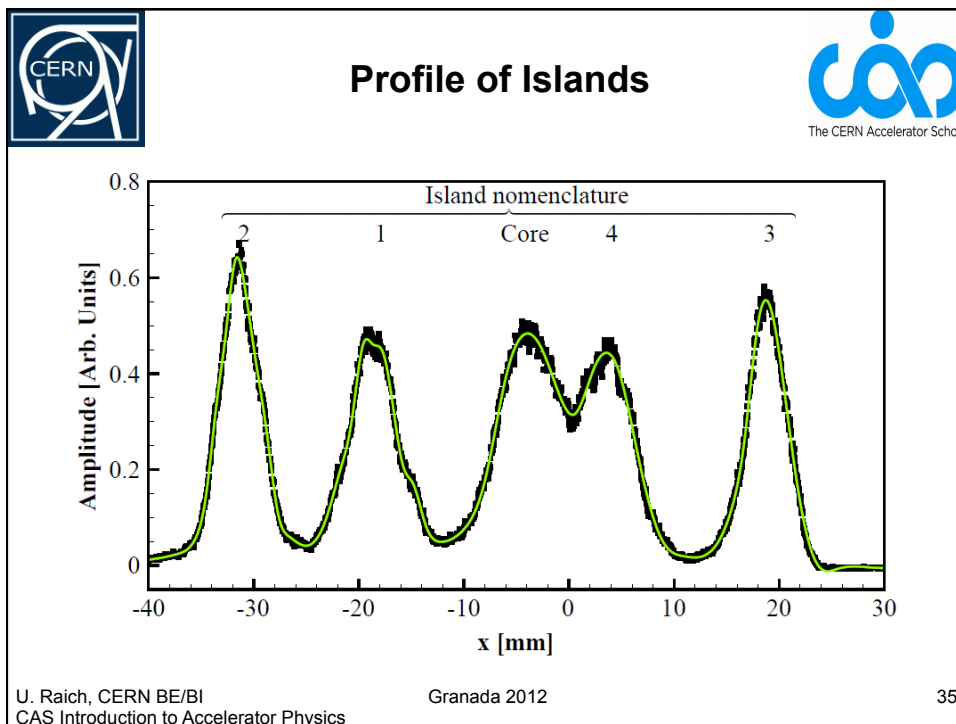




## Projection in Phase Space



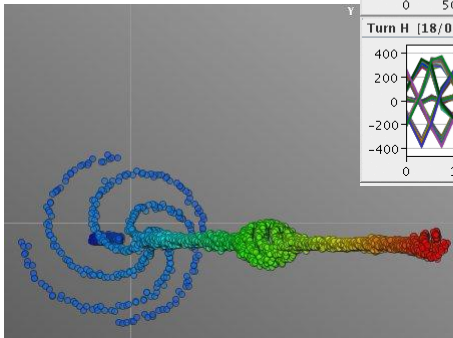

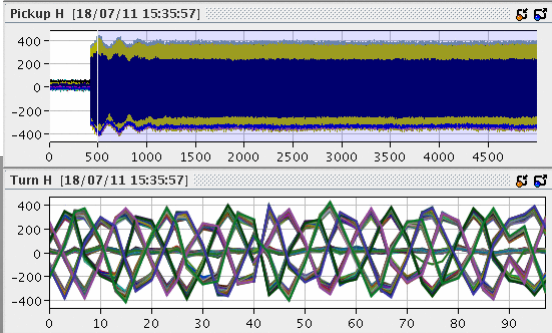



U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

37



## Emittance measurements



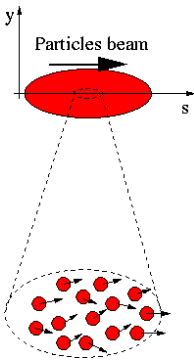

A beam is made of many many particles, each one of these particles is moving with a given velocity. Most of the velocity vector of a single particle is parallel to the direction of the beam as a whole (s). There is however a smaller component of the particles velocity which is perpendicular to it (x or y).


$$\vec{v}_{particle} = v_s \hat{u}_s + v_x \hat{u}_x + v_y \hat{u}_y$$

Design by E. Bravin


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


38



## Emittance measurements




- If for each beam particle we plot its position and its transverse angle we get a particle distribution whose boundary is an usually ellipse.
- The projection onto the  $x$  axis is the beam size

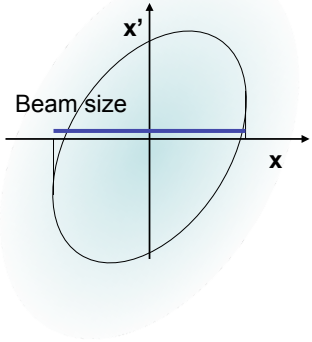


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


39



## The slit method




- If we place a slit into the beam we cut out a small vertical slice of phase space
- Converting the angles into position through a drift space allows to reconstruct the angular distribution at the position defined by the slit

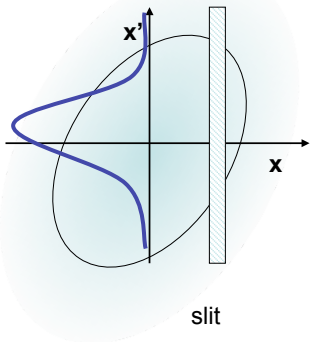


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


40



## Transforming angular distribution to profile




- When moving through a **drift space** the angles don't change (**horizontal move** in phase space)
- When moving through a **quadrupole** the position does not change but the angle does (**vertical move** in phase space)




slit

Influence of a drift space

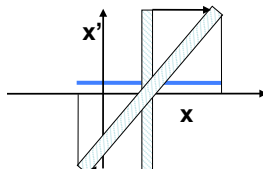


slit



slit

Influence of a quadrupole

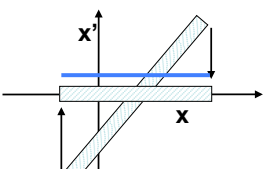


slit


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012


41




## The Slit Method



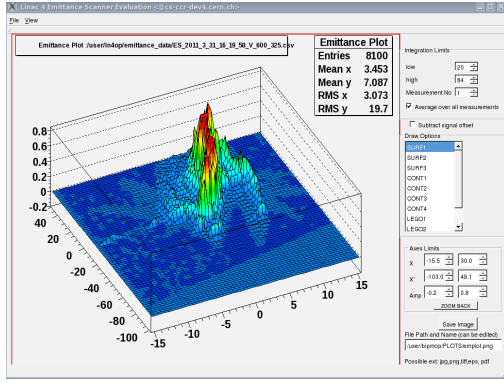

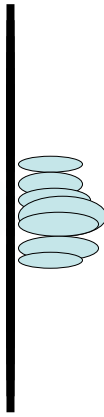

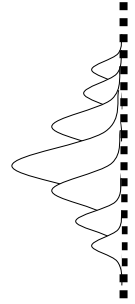



U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012



42



## Phase Space Scanner




The CERN Accelerator School

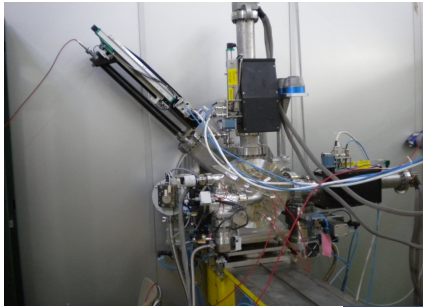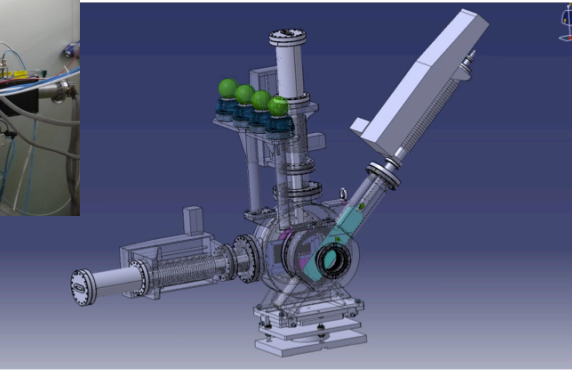
U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


43





## Emittance plot Solenoid




The CERN Accelerator School

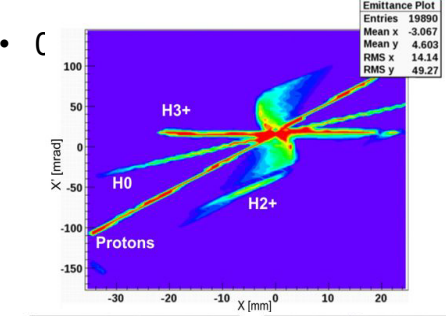

Emittance Plot	
Entries	19890
Mean x	-3.067
Mean y	4.603
RMS x	14.14
RMS y	49.27



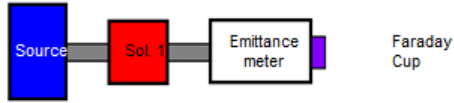The solenoid splits the trajectories according to particle type. The source produces

- protons
- H<sup>0</sup>
- H<sub>2</sub><sup>+</sup>
- H<sub>3</sub><sup>+</sup>

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator

Granada 2012

44






### Moving slit emittance measurement




- Position resolution given by slit size and displacement
- Angle resolution depends on resolution of profile measurement device and drift distance
- High position resolution → many slit positions → slow
- Shot to shot differences result in measurement errors




### Transformation in Phase Space

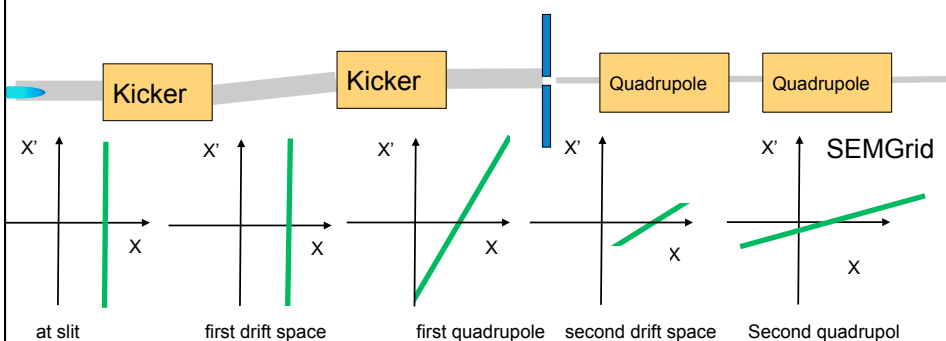



## Result of single pulse emittance measurement




File	Control	View	Options
LBE_SPEM gain	-	LT_BHZ20DUMP 152.8 Amp.	LBEEX_MCHZ10 -0.8 μs
LBE_SPEM gain	1.0	LTB_BHZ40 9.3 Amp.	LBEEX_FKHZ10 -1.0 μs
LBE_SPEM gain	1.0	LBE_QFW10 6.0 Amp.	LBEEX_SMEASHZ10 -0.1 μs
LBE_SPEM gain	1.0	LBE_QFW20 10.0 Amp.	LBEEX_SKVT10 -0.1 μs
LBE_SPEM gain	1.0	LBE_KHZ10 35.5 V	LBEEX_FKVT10 -1.0 μs
LBE_SPEM gain	1.0	LBE_KVT10 350.5 V	LBEEX_SMEASKVT10 -0.1 μs
LBE_SPEM gain	1.0	LBE_BHZ10 9.3 Amp.	LX_TCL-CPS -1.0 μs
LBE_SPEM gain	1.0	LBE_DVT10 9.3 Amp.	LX_TCL-PSB -0.1 μs
LBE_SPEM gain	1.0	LBE_SBE10A 8520.0 nV	LX_TCL-LIBD -0.1 μs
LBE_SPEM gain	1.0	LBE_KVT10A 188.8 nV	LX_TCL-EXTCON -0.1 μs
			LX_TCL-MEAS -0.8 μs
			LX_WBHZ10 -1.0 μs
			LX_SBNZ40SL-SURV -3.0 μs
			LX_SBNZ40SL-SURV -0.1 μs
			LX_SBNZ40SB-SRV -0.1 μs

Plane: **H0E**


Unit X: **2.40**

Unit Y: **0.50**


Delay: **-1964.1**



Emittance Surface



Mismatch Linac/Booster  
Reference Ellipse



Measured Ellipse centered

E(%I)	11.5 mm.mrad
Xmean	0.9 mm
Ymean	0.6 mmrad
Xmax	8.6 mm
Ymax	1.5 mmrad
α	-0.5
β	6.4
γ	0.2
Σ	96.8
Misma	51.1%


FREEZE    CANCEL BEAM

Waiting for new acquisition...


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012


47




## Transverse Emittance measurement



- Spectrometer produces image of slit on second slit
- second slit selects energy slice
- first kicker sweep phase space over all energies
- buncher rotates energy slice in phase space
- at second spectrometer the phase distribution is transformed into an energy distribution analyzed by the second spectrometer
- second kicker corrects for first kicke

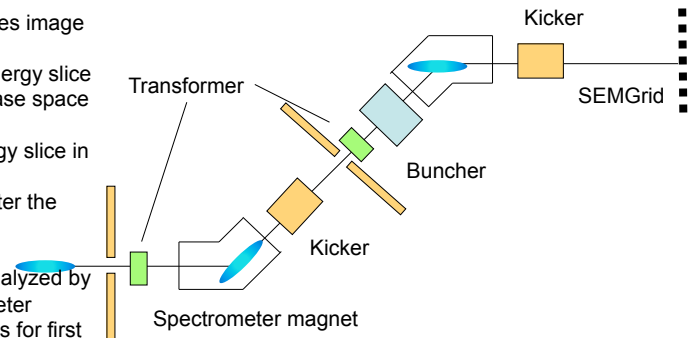

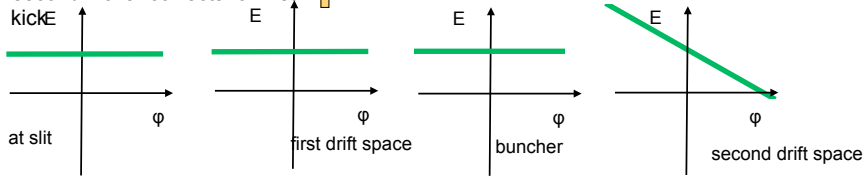


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

48






## Single Shot Emittance Measurement




- ◆ Advantage:
  - ◆ Full scan takes 20  $\mu$ s
  - ◆ Shot by shot comparison possible
- ◆ Disadvantage:
  - ◆ Very costly
  - ◆ Needs dedicated measurement line
  - ◆ Needs a fast sampling ADC + memory for each wire
- ◆ Cheaper alternative:
  - ◆ Multi-slit or pepperpot measurement


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics
Granada 2012
49



## Multi-slit measurement



- ◆ Needs high resolution profile detector
- ◆ Must make sure that profiles don't overlap

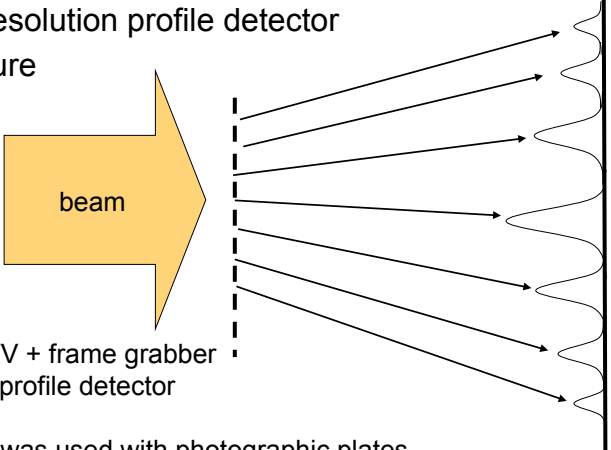

Scintillator + TV + frame grabber  
often used as profile detector

Very old idea, was used with photographic plates

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics
Granada 2012
50



## Pepperpot



Uses small holes instead of slits  
Measures horizontal and vertical emittance in a single shot


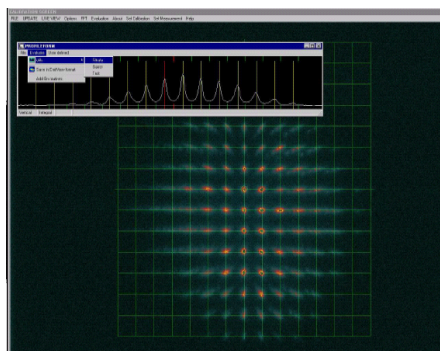


Photo P. Forck



U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

51



## Computed Tomography (CT)



Principle of Tomography:


- Take many 2-dimensional Images at different angles
- Reconstruct a 3-dimensional picture using mathematical techniques (Algebraic Reconstruction Technique, ART)




U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012

52




## The reconstruction







Produce many projections of the object to be reconstructed



Back project and overlay the "projection rays"



Project the back-projected object and calculate the difference




Iteratively back-project the differences to reconstruct the original object


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics


Granada 2012


53



## Some CT results



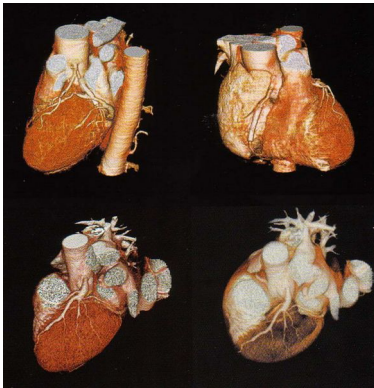

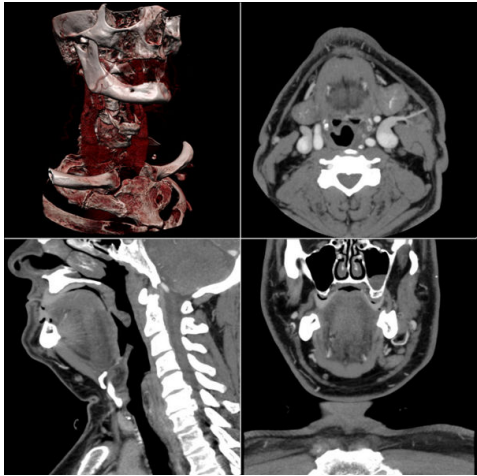



U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

54



## Computed Tomography and Accelerators




RF voltage

Restoring force for non-synchronous particle

Longitudinal phase space


Projection onto  $\Phi$  axis corresponds to bunch profile

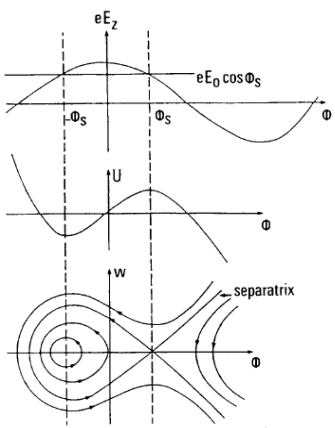


U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics



Granada 2012

55



## Reconstructed Longitudinal Phase Space



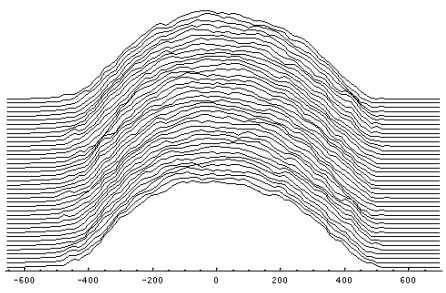
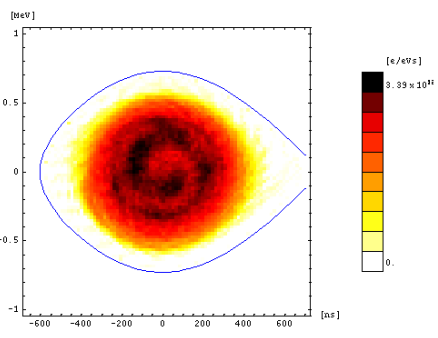
U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

56



# Bunch Splitting

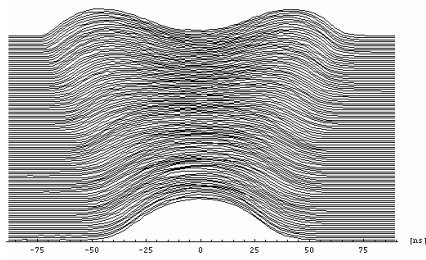

U. Raich, CERN BE/BI  
CAS Introduction to Accelerator Physics

Granada 2012

57