



# Beam Diagnostics Lecture 2

Measuring Complex Accelerator Parameters

Uli Raich

CERN BE-BI

Dakar, Senegal 2014





## Contents of lecture 2




- Some examples of measurements done with the instruments explained during the last lecture
  - Spectroscopy
  - Trajectory and Orbit measurements
  - Tune measurements
    - Traditional method
    - BBQ method
  - Multi-turn extraction
  - Transverse and longitudinal emittance measurements
  - Longitudinal phase space tomography

# Setup for charge state measurement

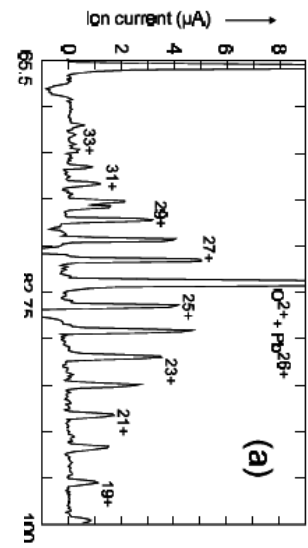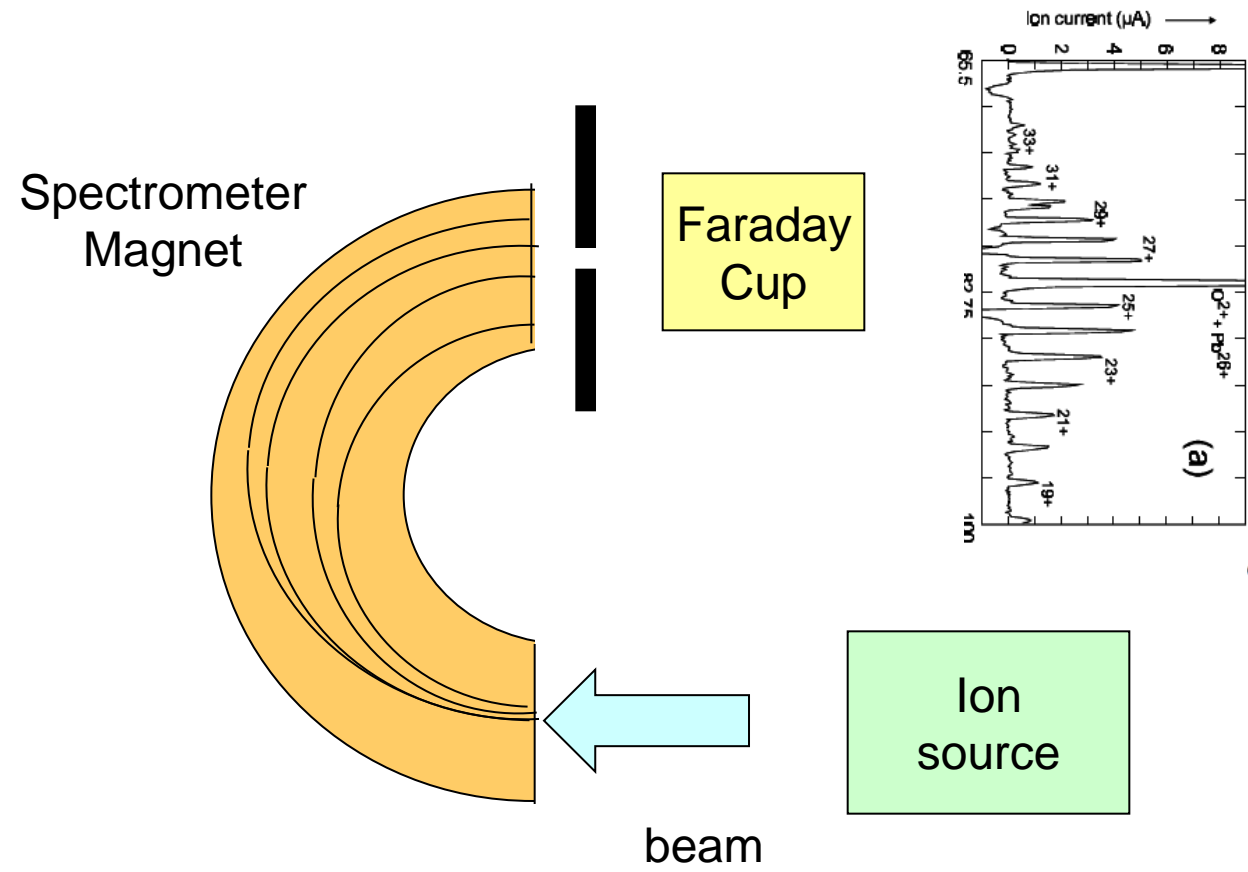

- The spectrometer magnet is swept and the current passing the slit is measured

# Measuring charge state distribution

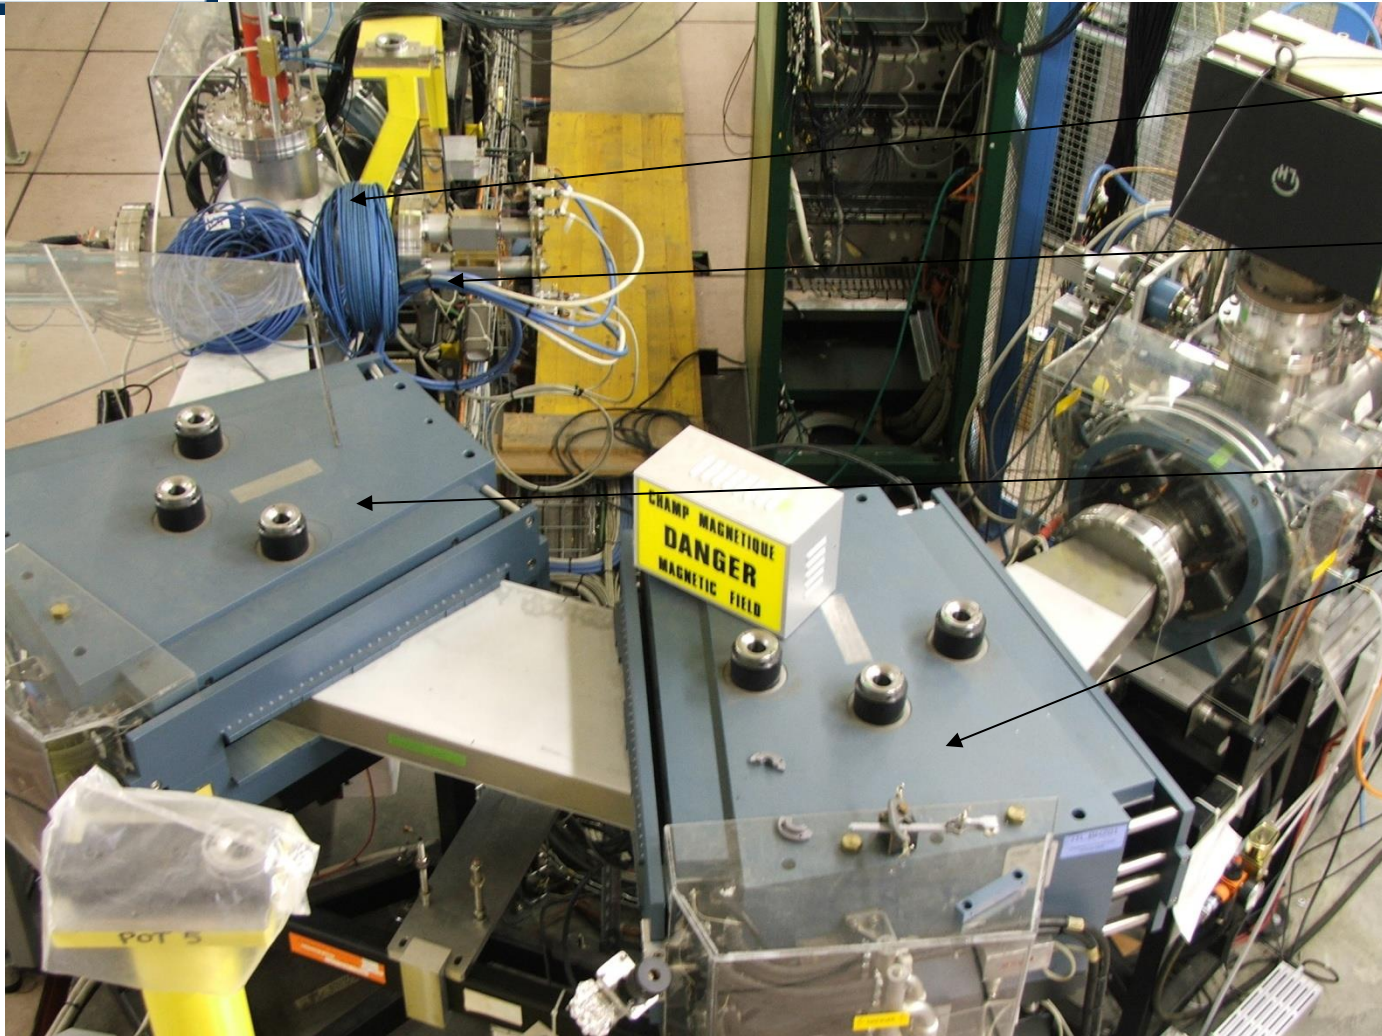

Faraday Cup


Slit

Spectrometer magnets

CHAMP MAGNETIQUE  
DANGER  
MAGNETIC FIELD



# Charge state distribution measured with a Faraday Cup on a heavy ion source

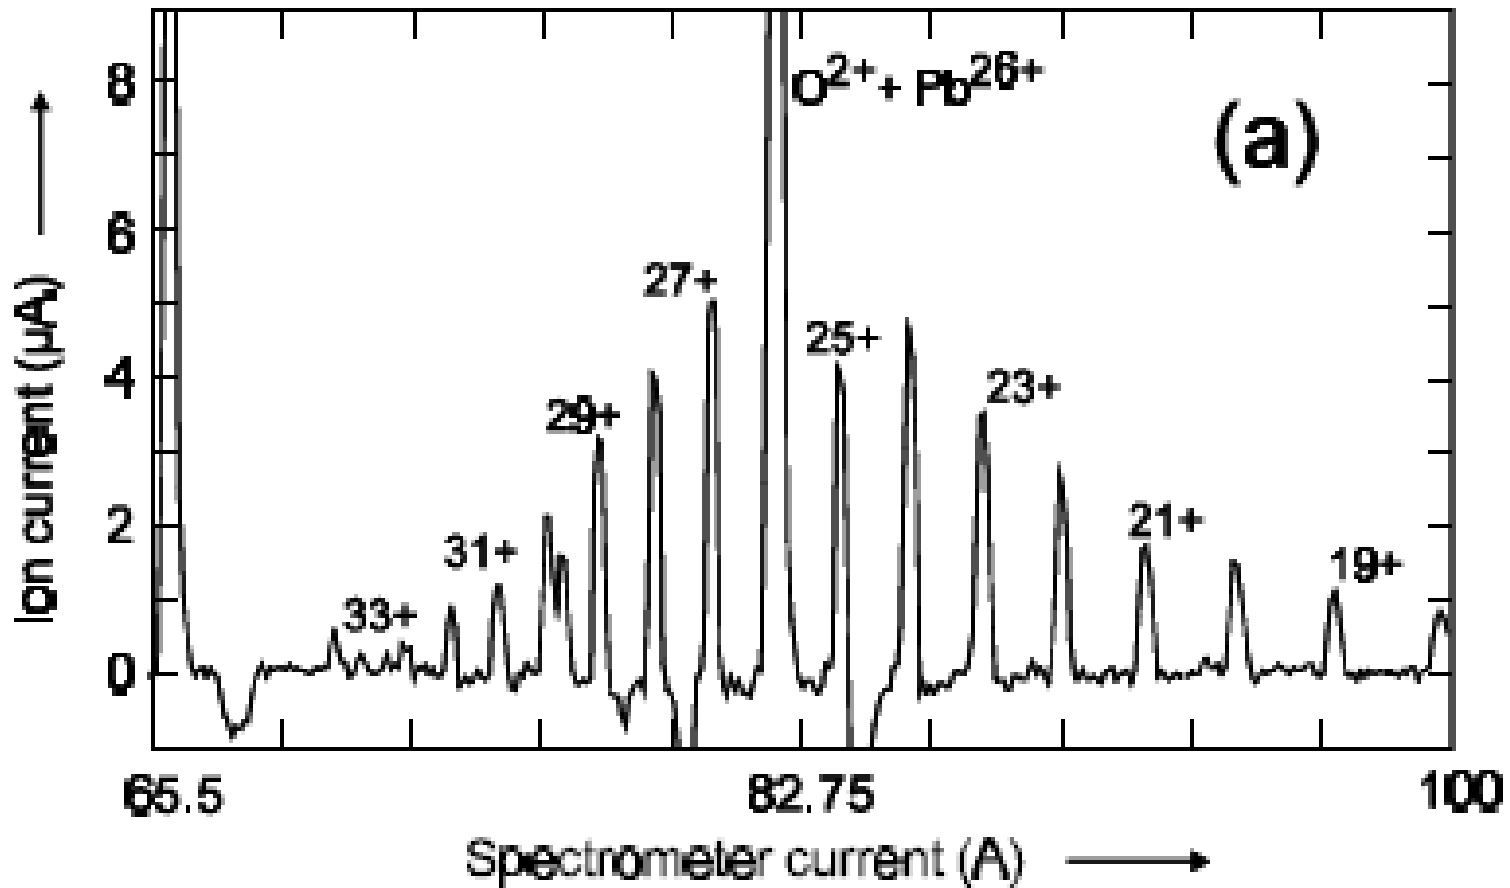



# Trajectory Measurement at LHC



Knowing the optics one can deduce the orbit correction from the measurement






# The PUs





# The PS, a universal machine

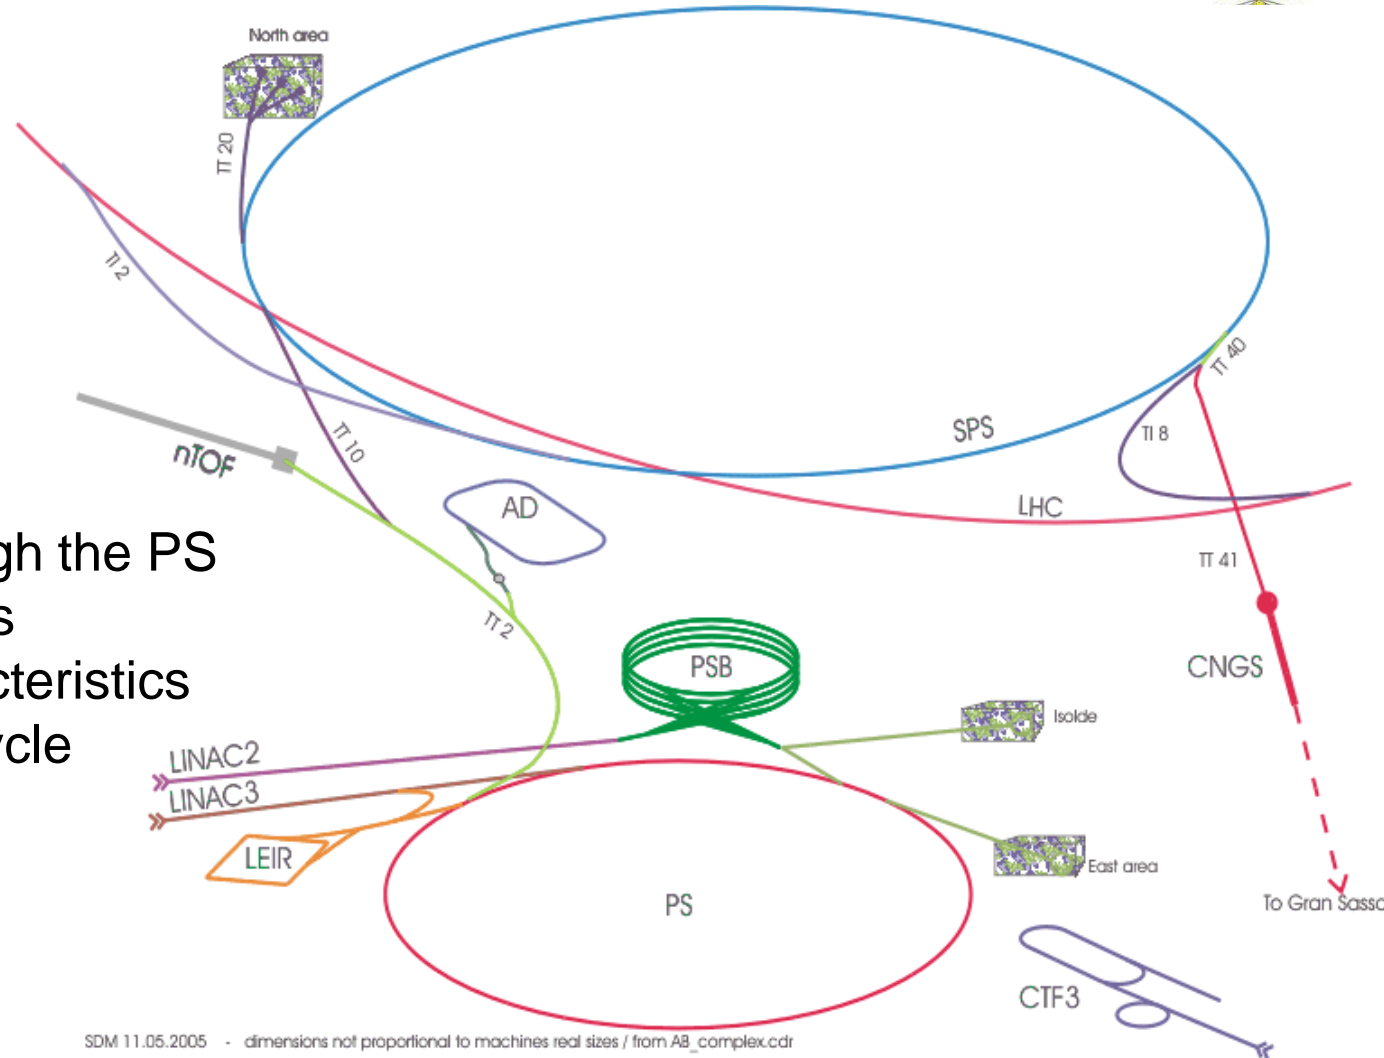


SDM 11.05.2005 - dimensions not proportional to machines real sizes / from AB\_complex.cdr

- All beams pass through the PS
- Different particle types
- Different beam characteristics
- Concept of a super cycle





# The super cycle

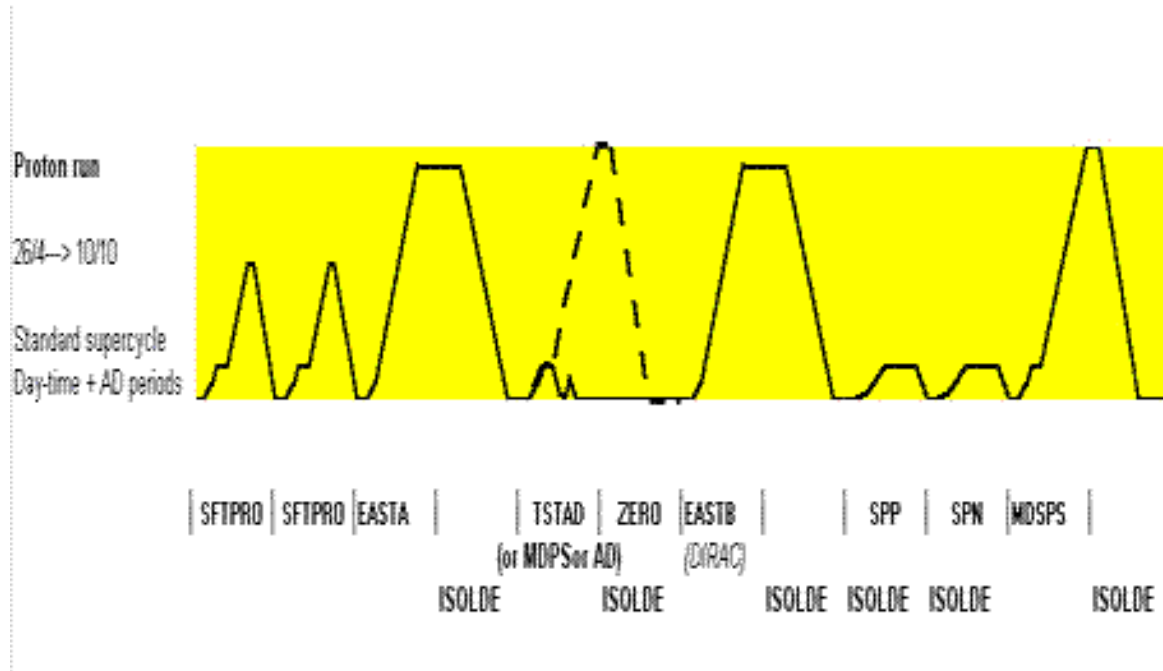



# Position Measurements



Red: The sum signal

Green: The difference signal

Procedure:

Produce integration gates and

Baseline signals

Baseline correct both signals


Integrate sum and difference signals

and store results in memory

Take external timing events into


account e.g. harmonic number

change,  $\gamma$ -transition etc.

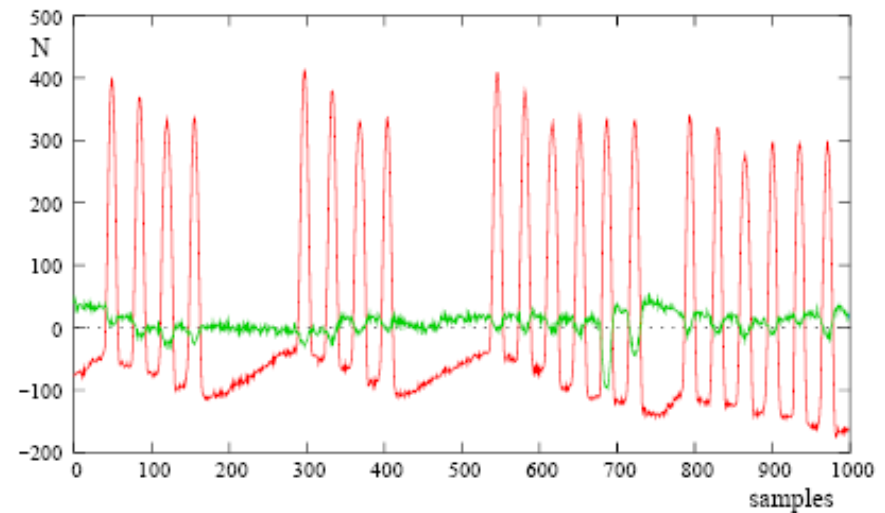



# Trajectory readout electronics

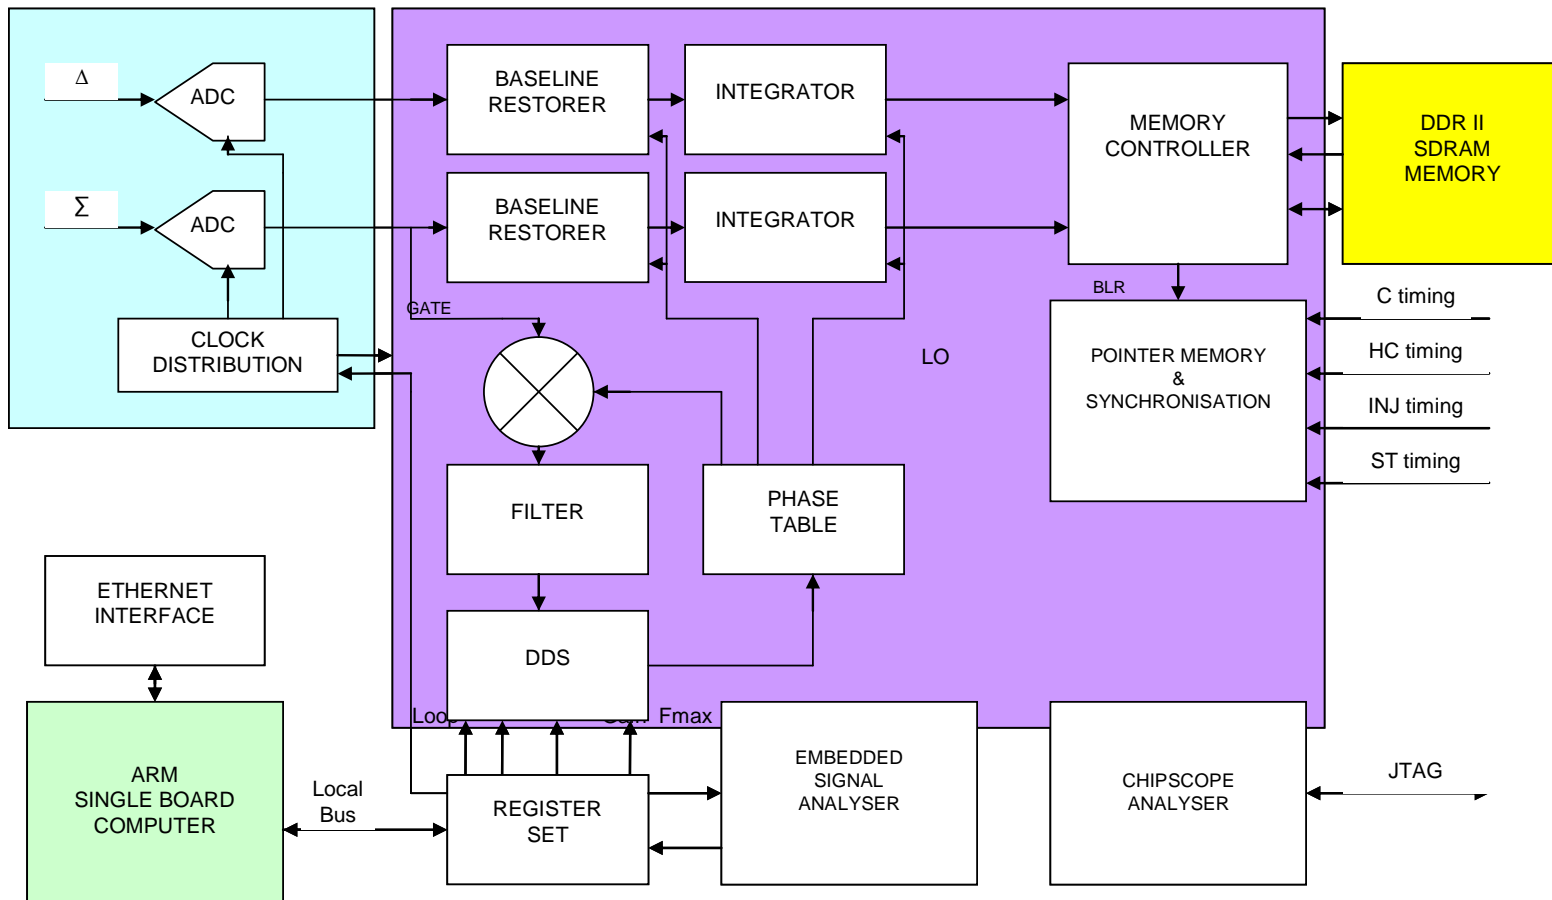





# Trajectory measurements in circular machines








Needs integration gate  
Can be rather tricky  
Distance between bunches  
changes with acceleration  
Number of bunches  
may change

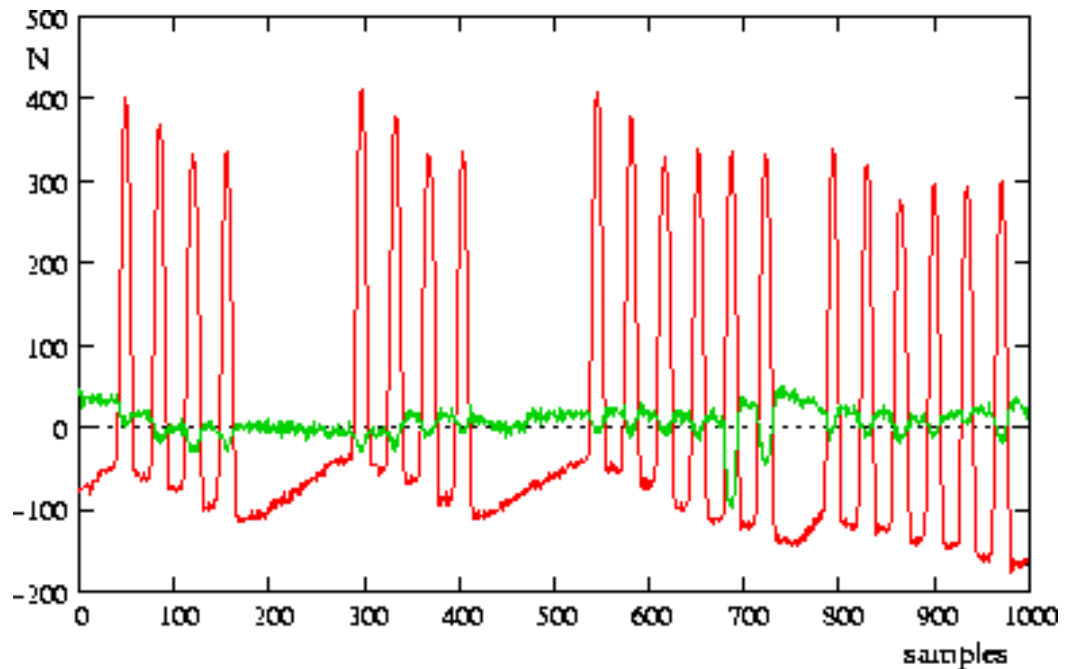

Raw data from pick-ups  
double batch injection





# Beams in the PS

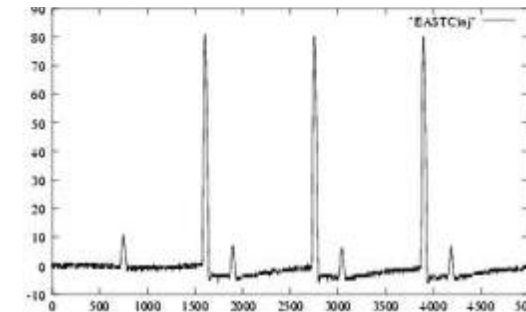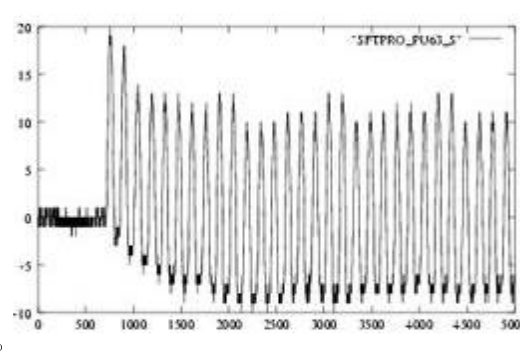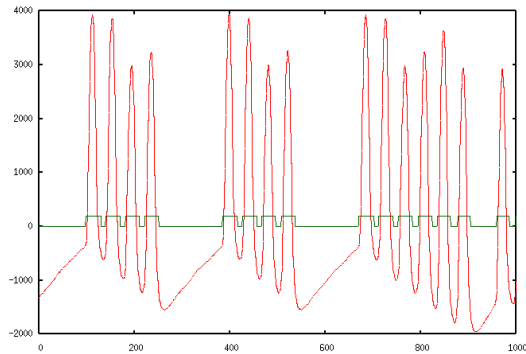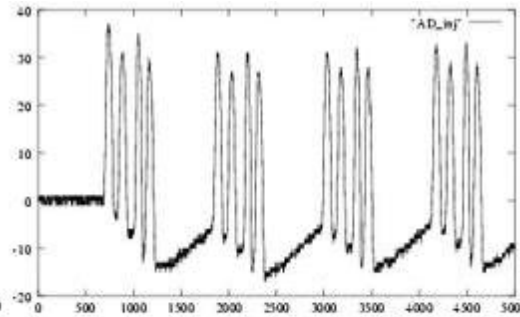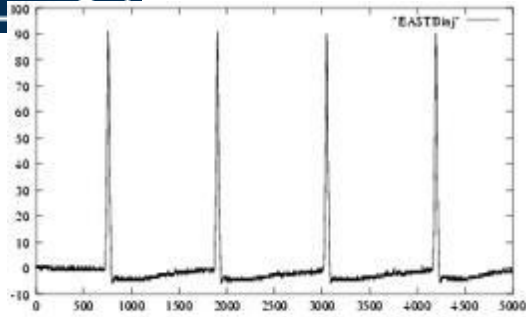



# Baseline restoration

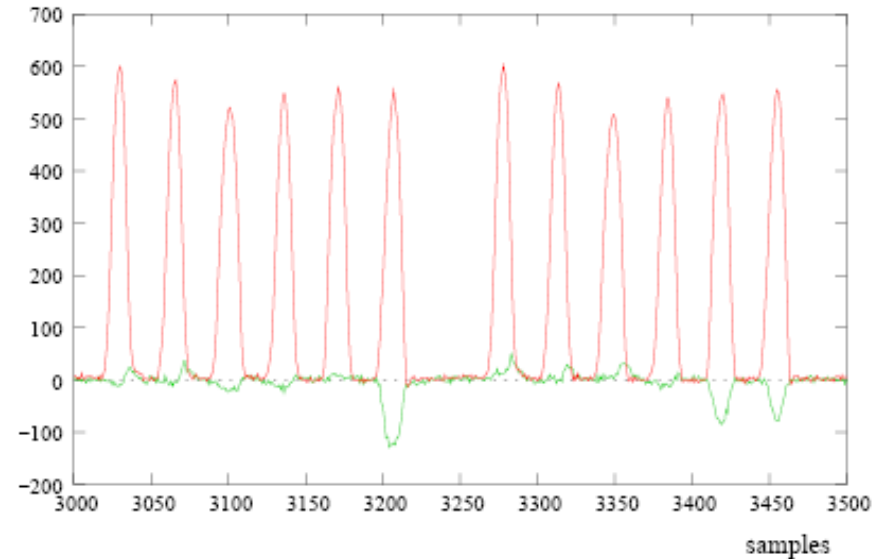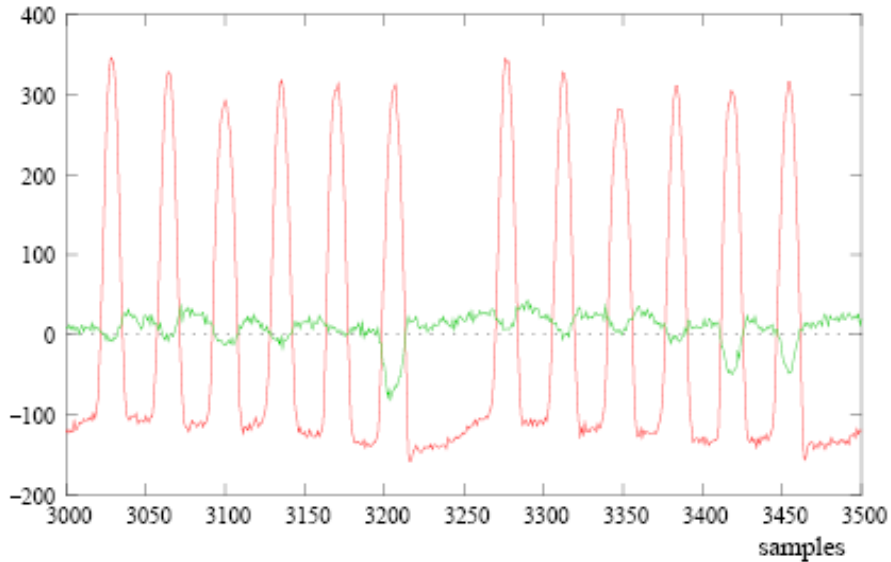


Low pass filter the signal to get an estimate of the base line  
Add this to the original signal







# RF Gymnastics

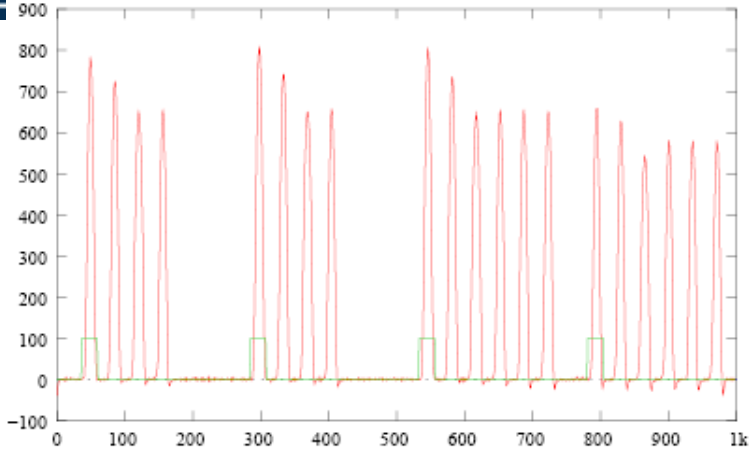

Example of generated gate around 2<sup>nd</sup> injection

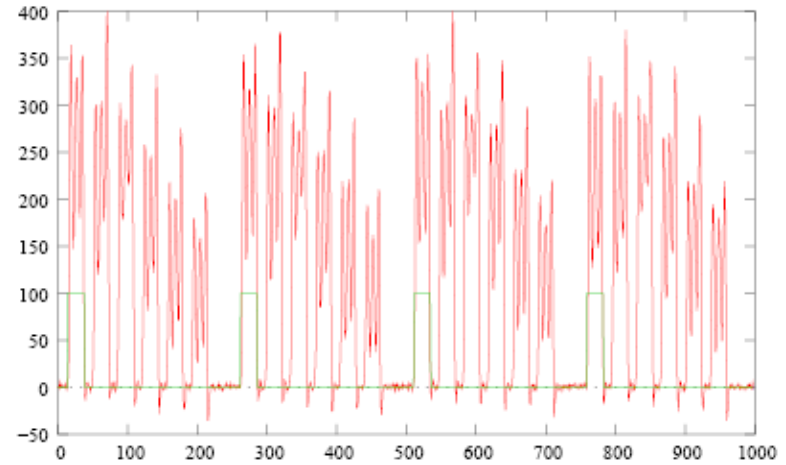

Idem, during bunch splitting

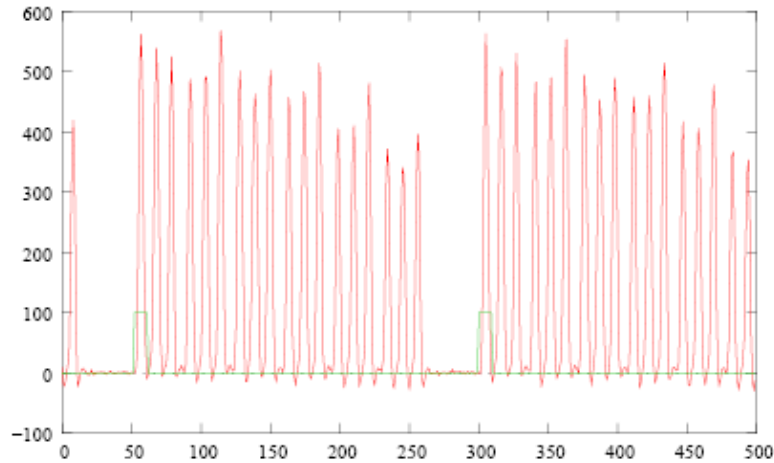




# Changing bunch frequency



- Bunch splitting or recombination
- One RF frequency is gradually decreased while the other one is increased
- Batch compression

For all these cases the gate generator must be synchronized

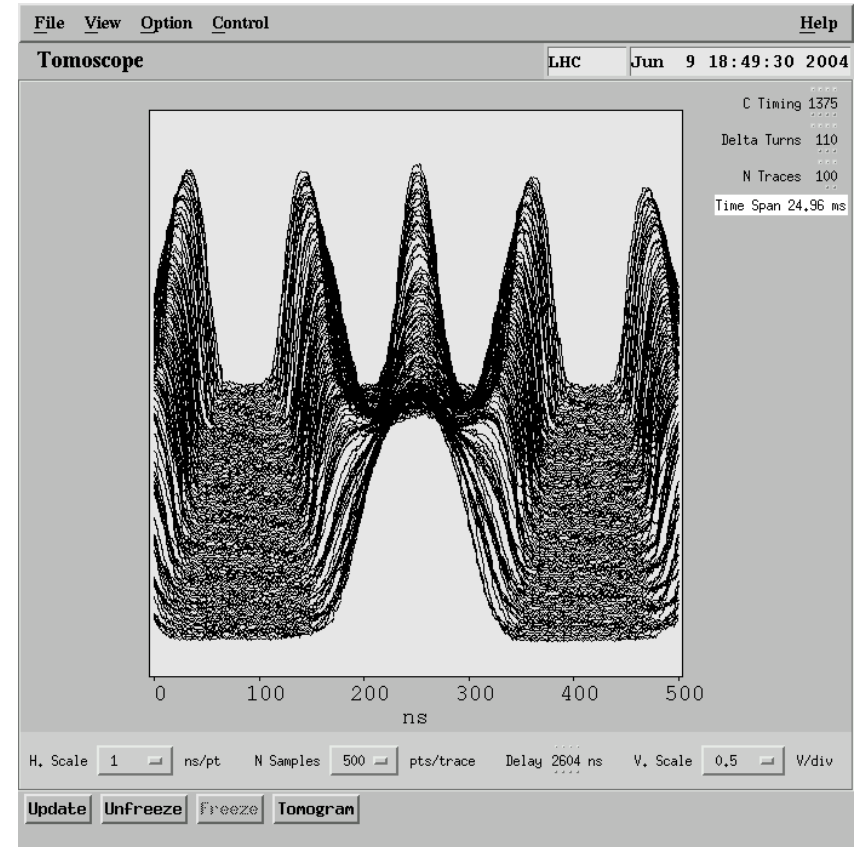




# Tune measurements



- When the beam is displaced (e.g. at injection or with a deliberate kick, it starts to oscillate around its nominal orbit (betatron oscillations)
- Measure the trajectory
- Fit a sine curve to it
- Follow it during one revolution

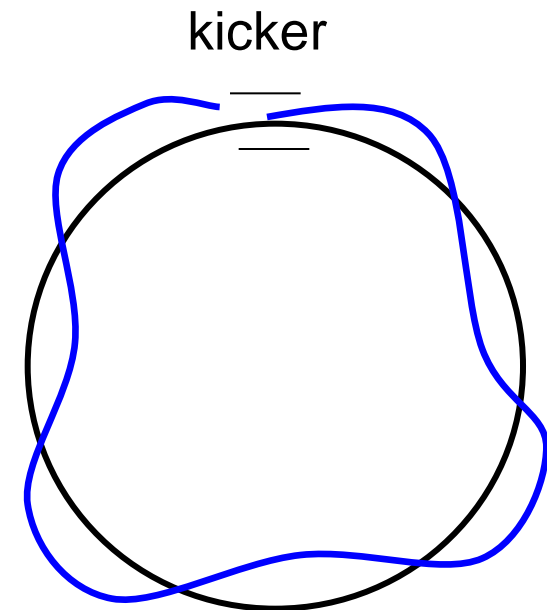






# The Sensors



Shoobox pick-up  
with linear cut

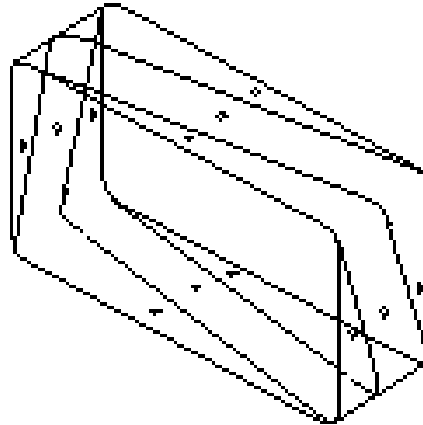


### The kicker

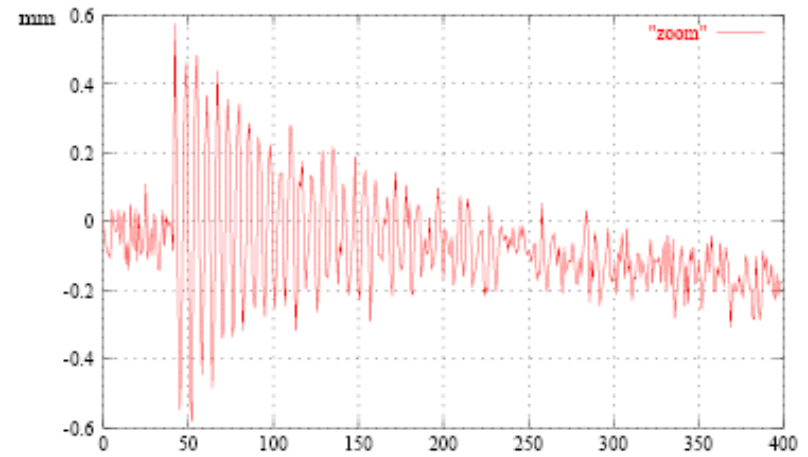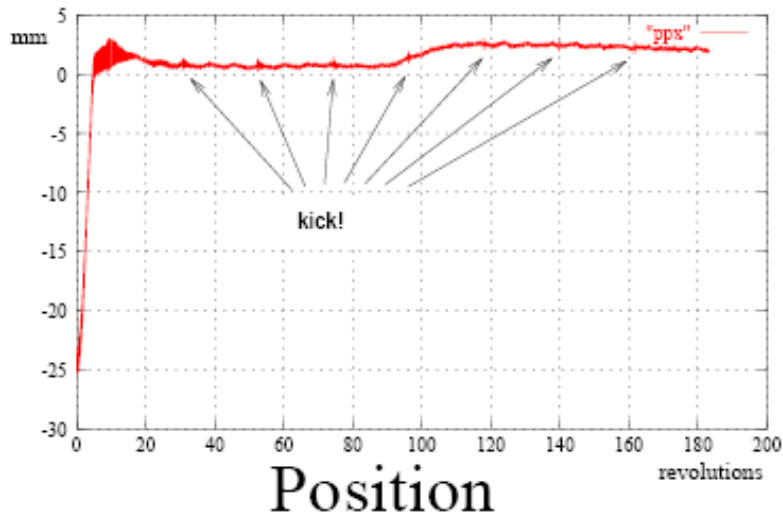



# Tune measurements with a single PU

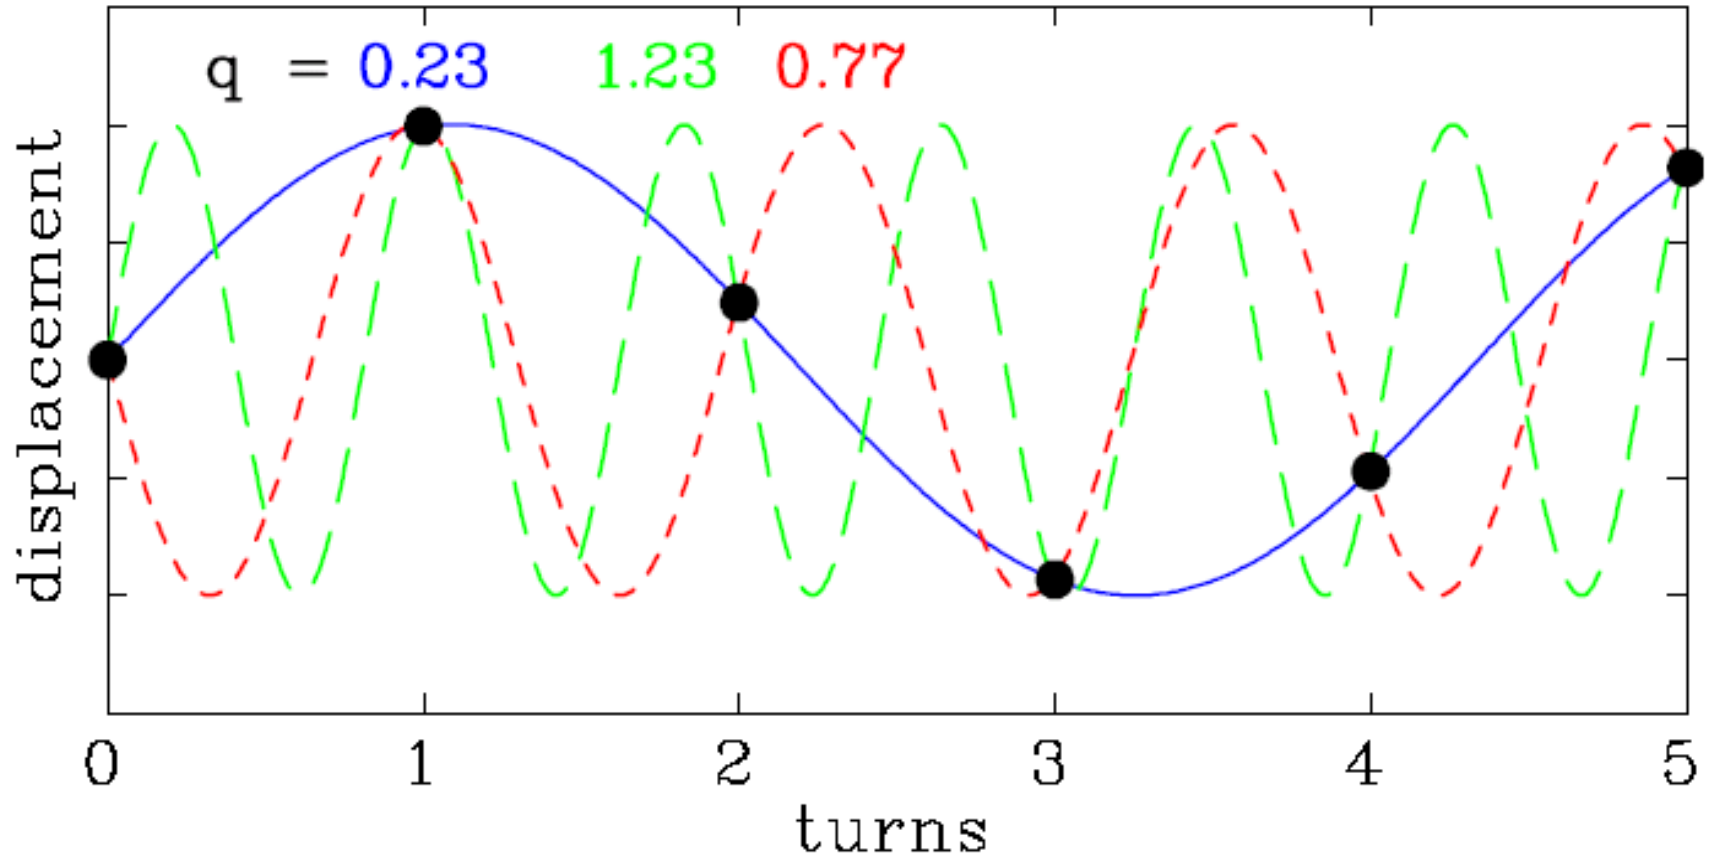



Design by P. Forck



# Kicker + 1 pick-up



- Measures only non-integral part of  $Q$
- Measure a beam position at each revolution

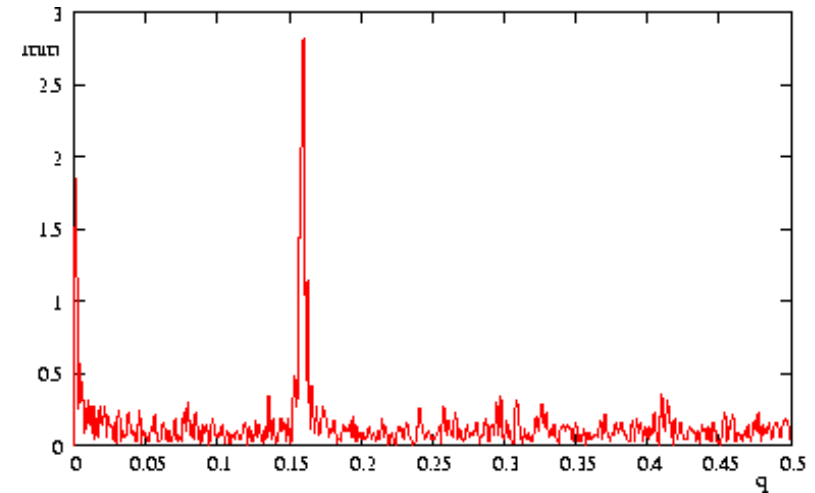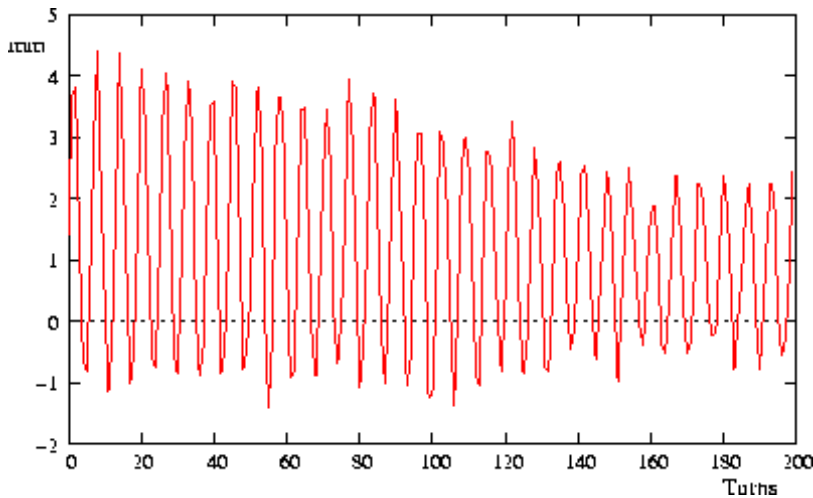

Fourier transform of pick-up signal






# Windowing

The Discrete Fourier assumes one cycle of a repetitive signal.

Blackman-Harris Window is used


Each sample is multiplied with a coefficient

Coefficients are pre-calculated and stored in a table

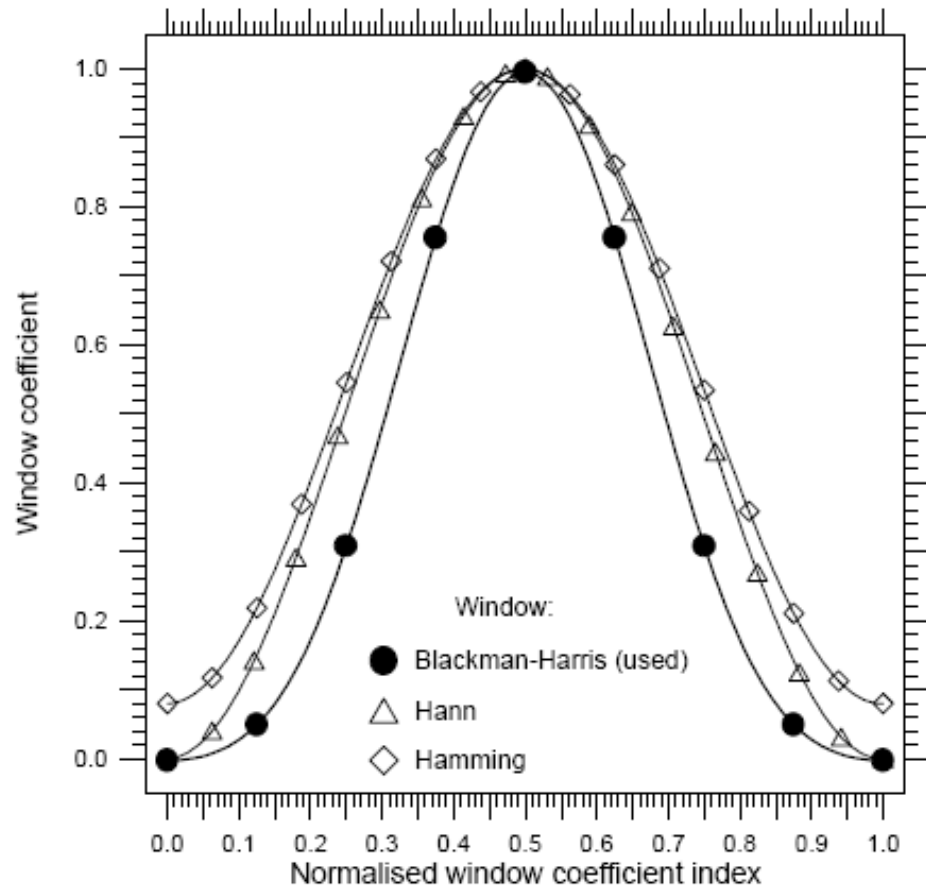




# Periodic extension of the signal and Windowing

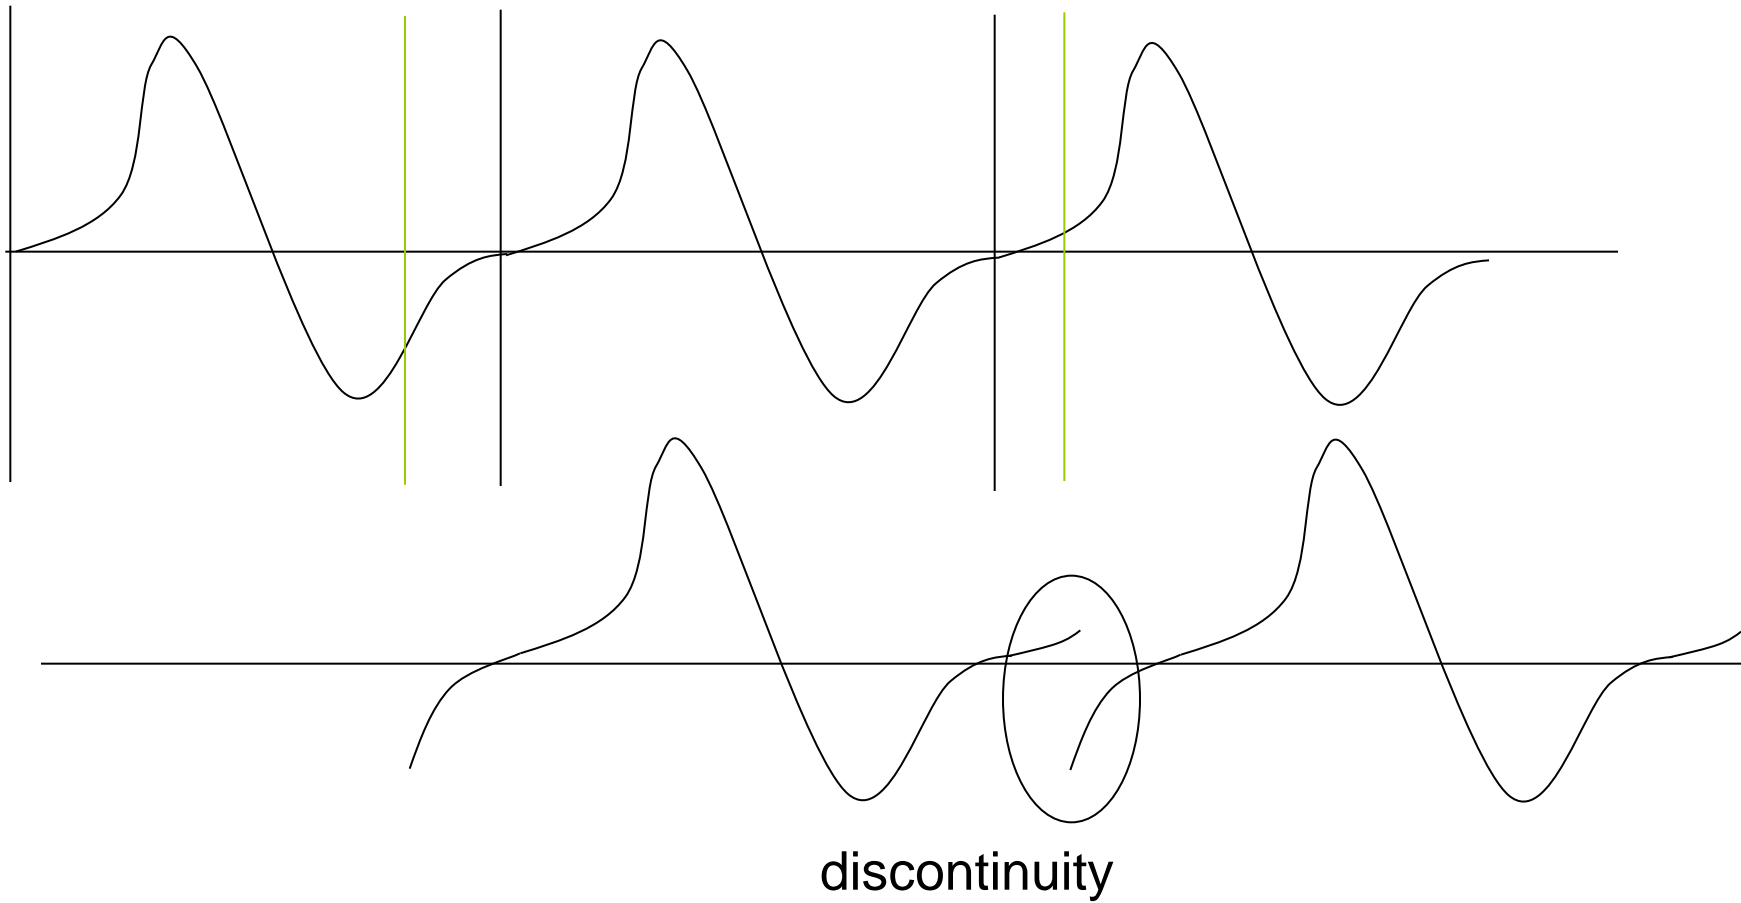



# Peak search algorithm

- Power value is bigger than its predecessor
- Power value is bigger than its successor
- Power value is biggest in the whole spectrum
- The power value is at least 3 times bigger than the arithmetic mean of all power bins.

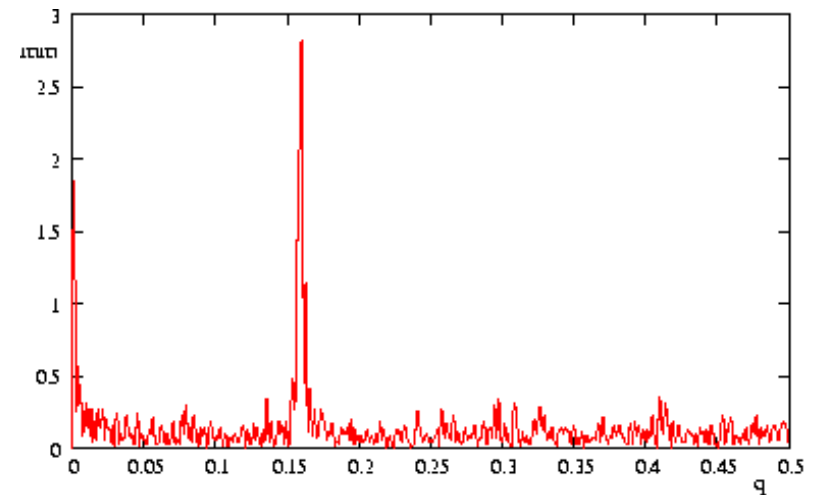



# Q interpolation



Betatron signal is not a pure Harmonic but includes rev. freq Harmonics, noise ...


The windowing process is not Perfect

Coherent betatron signal is Damped in the time domain

$$V(n_\beta - 1) = a(n_\beta - 1)^2 + b(n_\beta - 1) + c$$


$$V(n_\beta) = an_\beta^2 + bn_\beta + c$$

$$V(n_\beta + 1) = a(n_\beta + 1)^2 + b(n_\beta + 1) + c$$

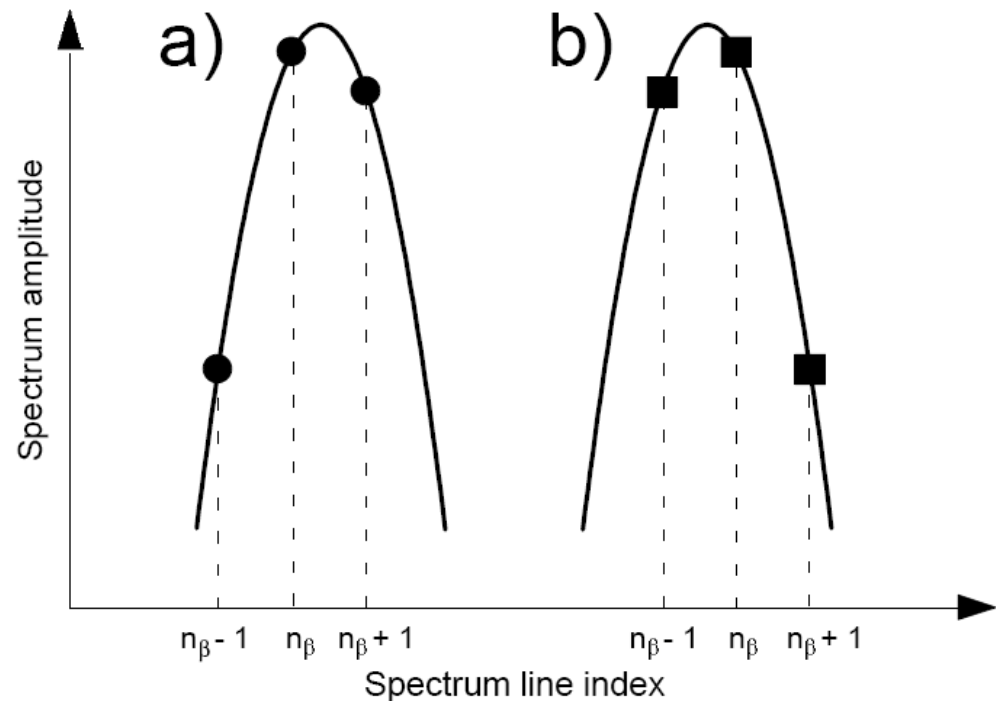




# Q-Measurement Results

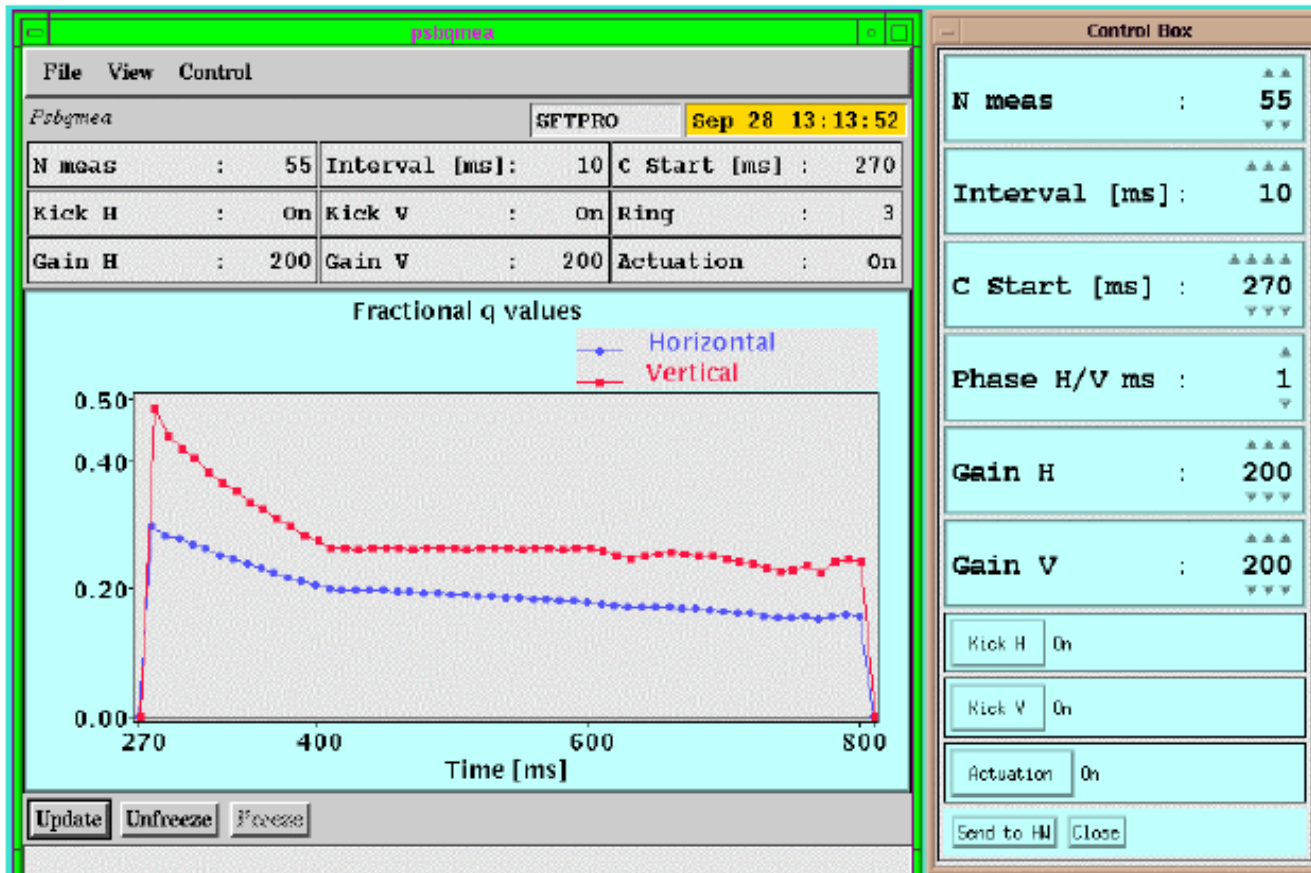



# Direct Diode Detection Base Band Q measurement

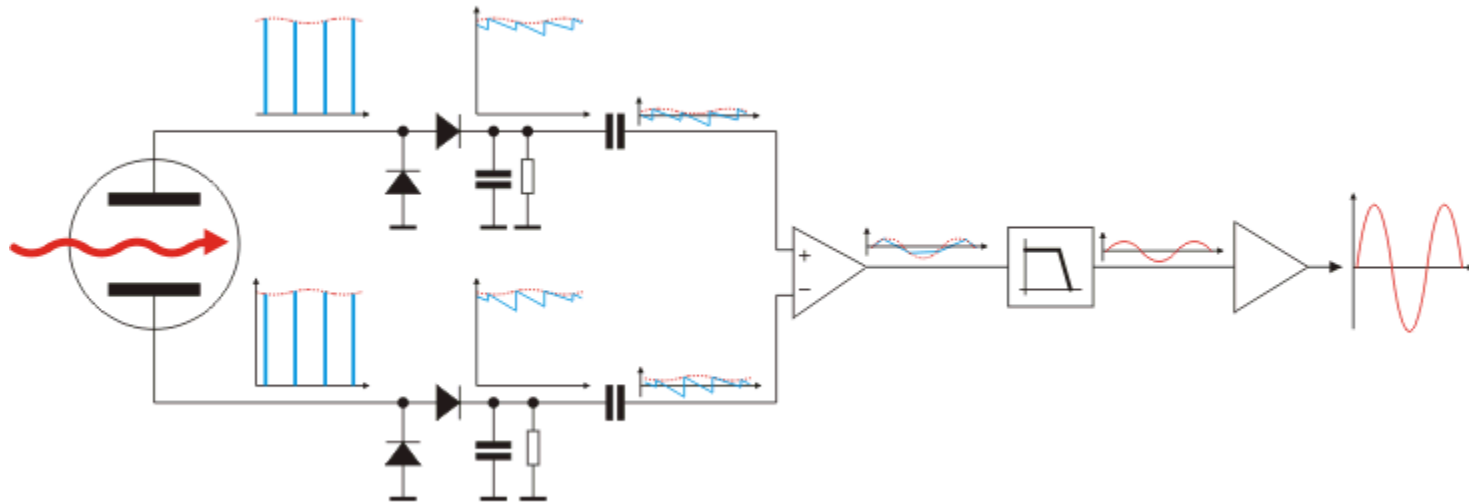

Diode Detectors convert spikes to saw-tooth waveform

Signal is connected to differential amplifier to cut out DC level

Filter eliminates most of the revolution frequency content

Output amplifier brings the signal level to amplitudes suitable for long distance transmission

Curtesy M. Gasior







# BBQ Results from CERN SPS



## Results from Sampling


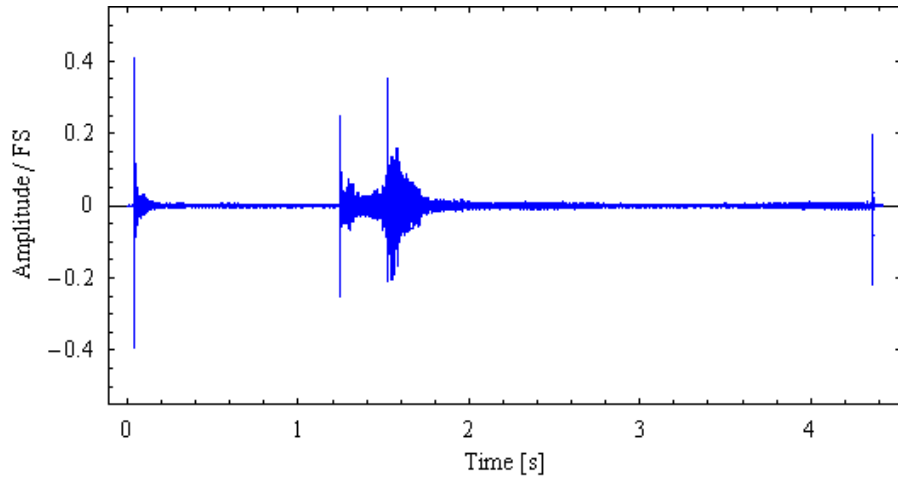


## After Fourier Transform

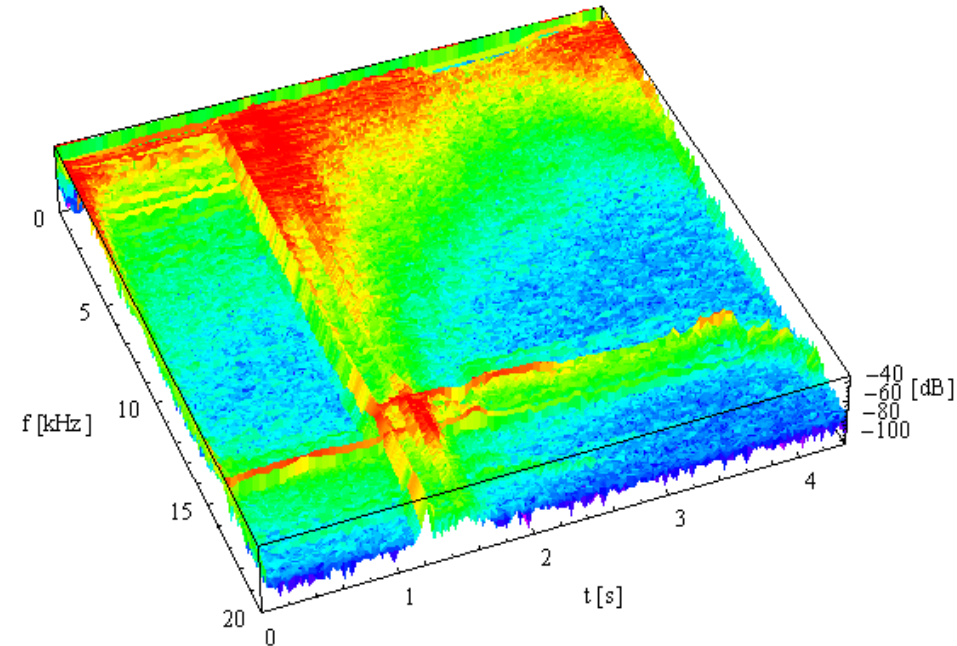




# Tune feedback at the LHC

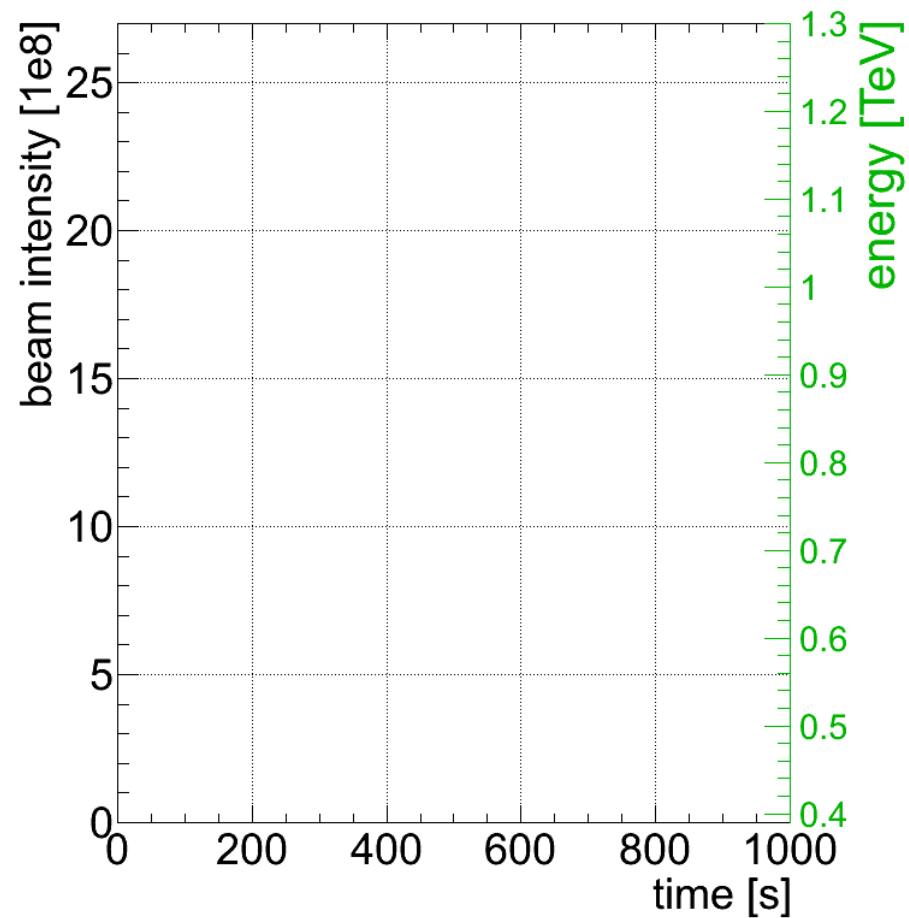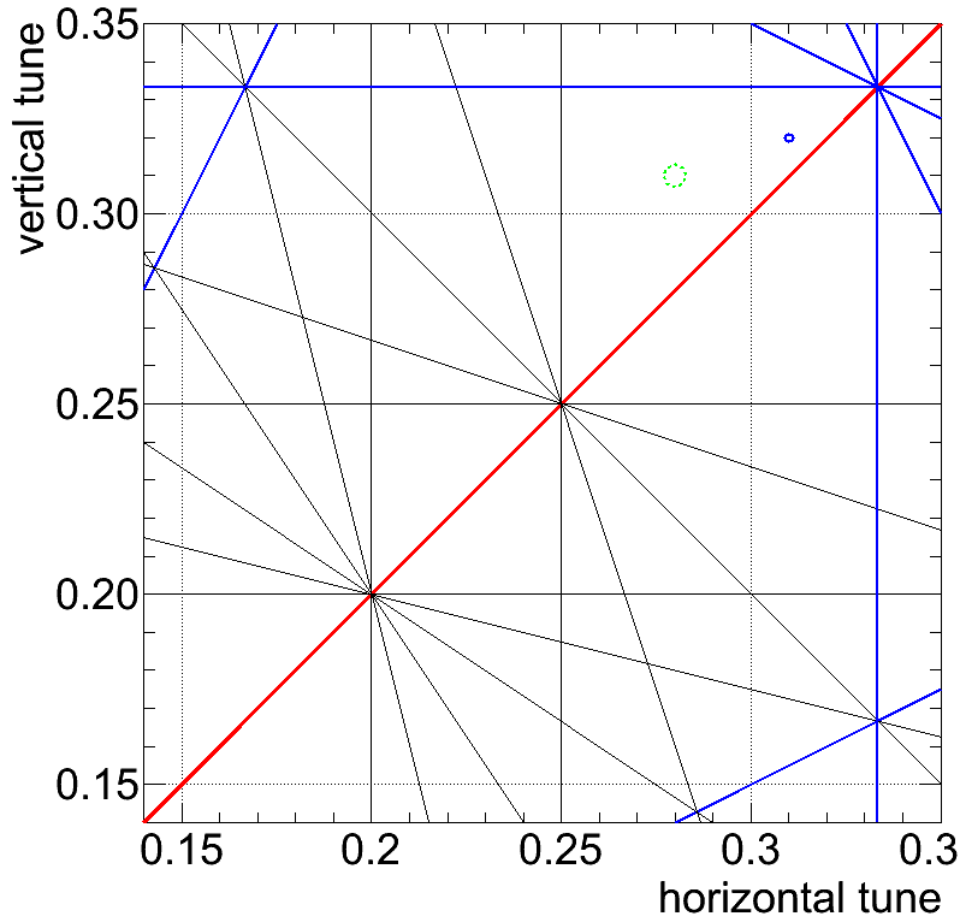



# Emittance measurements

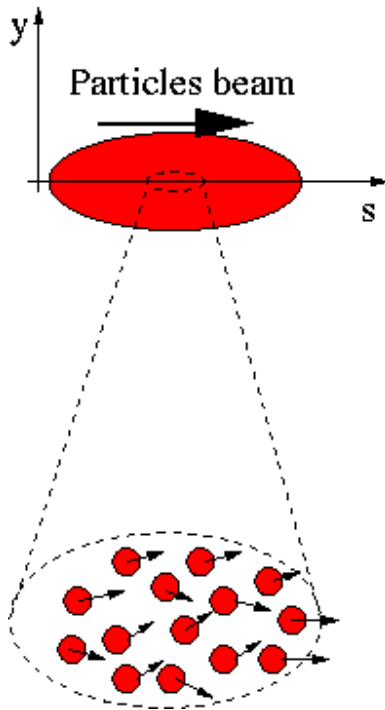

A beam is made of many many particles, each one of these particles is moving with a given velocity. Most of the velocity vector of a single particle is parallel to the direction of the beam as a whole ( $s$ ). There is however a smaller component of the particles velocity which is perpendicular to it ( $x$  or  $y$ ).

$$\vec{v}_{particle} = v_s \hat{u}_s + v_x \hat{u}_x + v_y \hat{u}_y$$


Design by E. Bravin



# Emittance measurements



- If for each beam particle we plot its position and its transverse angle we get a particle distribution whose boundary is an usually ellipse.
- The projection onto the  $x$  axis is the beam size

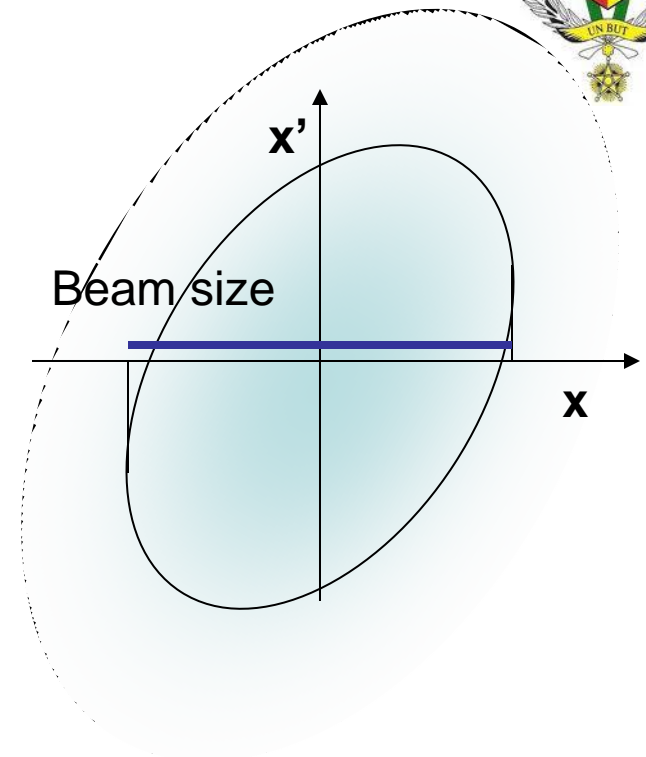




# The slit method



- If we place a slit into the beam we cut out a small vertical slice of phase space
- Converting the angles into position through a drift space allows to reconstruct the angular distribution at the position defined by the slit

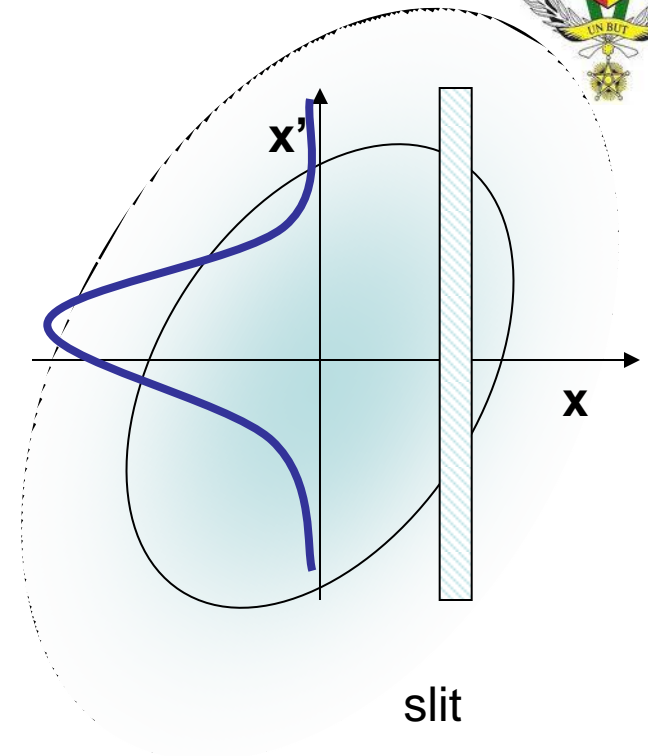




# Transforming angular distribution to profile




- When moving through a **drift space** the angles don't change (**horizontal move** in phase space)
- When moving through a **quadrupole** the position does not change but the angle does (**vertical move** in phase space)

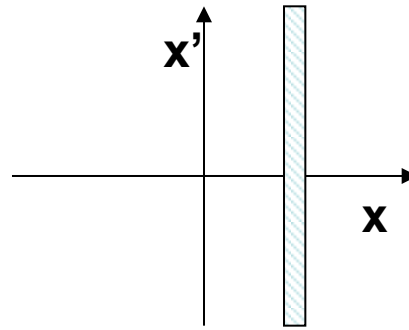


slit

Influence of a drift space

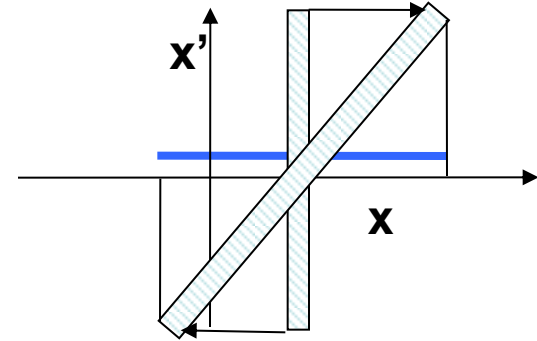

slit

Influence of a quadrupole



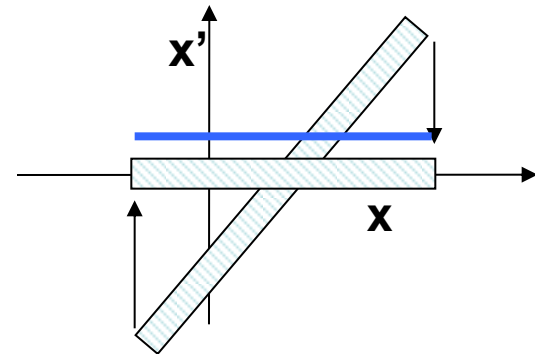


slit






# The Slit Method

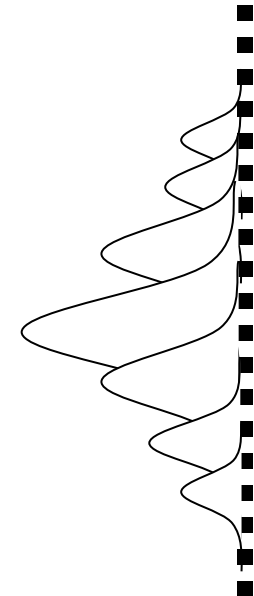
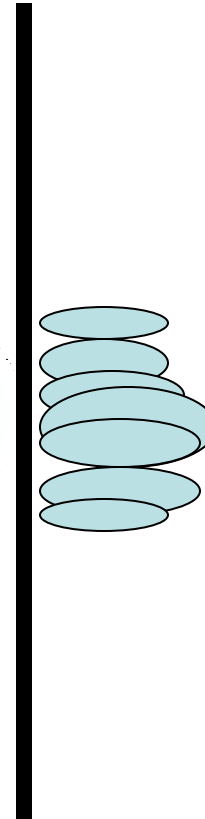
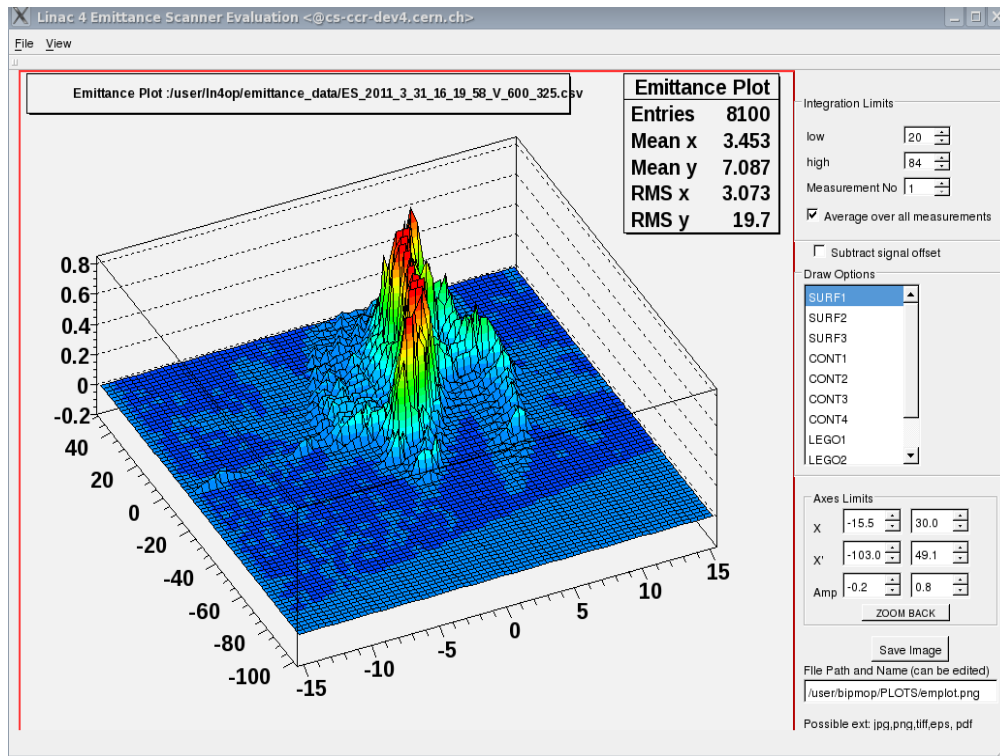




# Phase Space Scanner

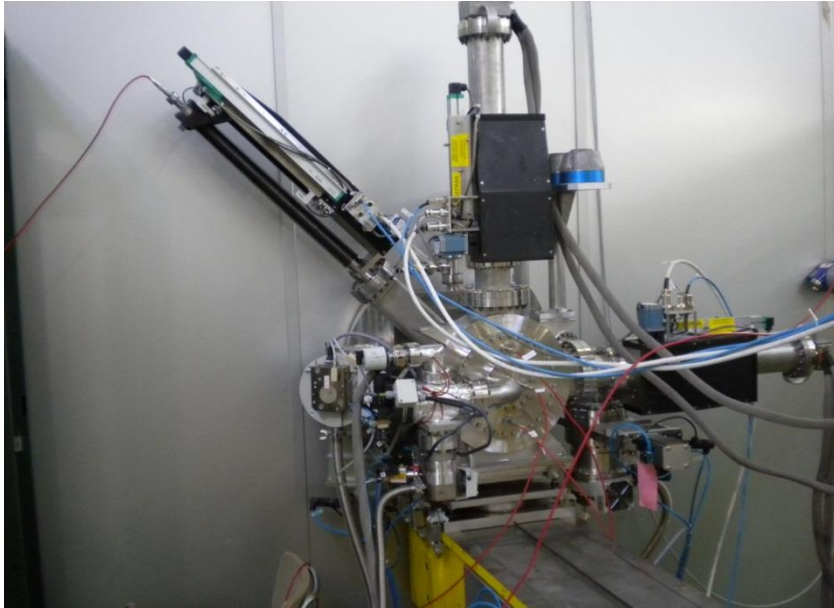

# Emittance plot Solenoid

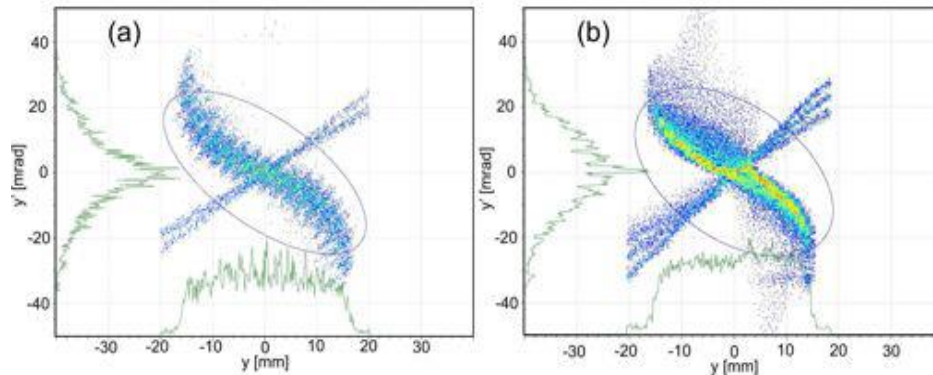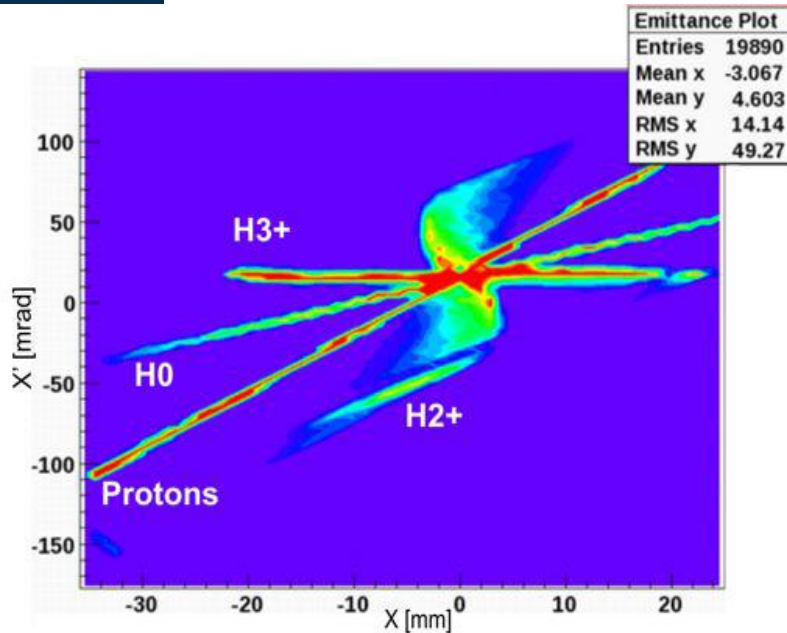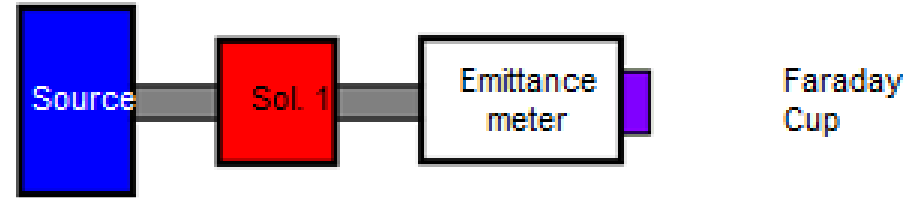

The solenoid splits the trajectories according to particle type.

The source produces

- protons
- $H^0$
- $H_2^+$
- $H_3^+$







# Moving slit emittance measurement



- Position resolution given by slit size and displacement
- Angle resolution depends on resolution of profile measurement device and drift distance
- High position resolution  $\rightarrow$  many slit positions  $\rightarrow$  slow
- Shot to shot differences result in measurement errors



# Transformation in Phase Space

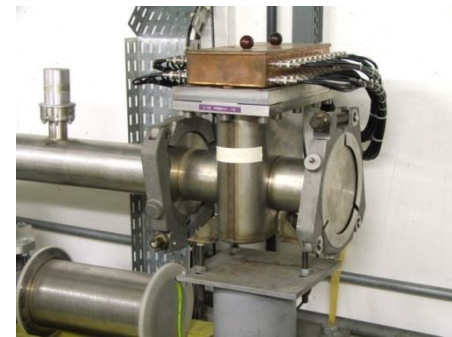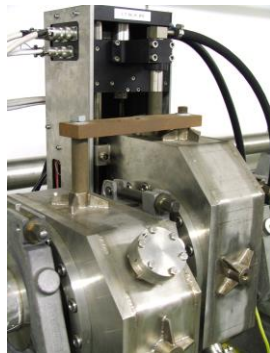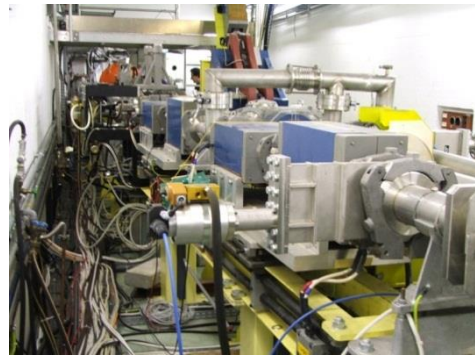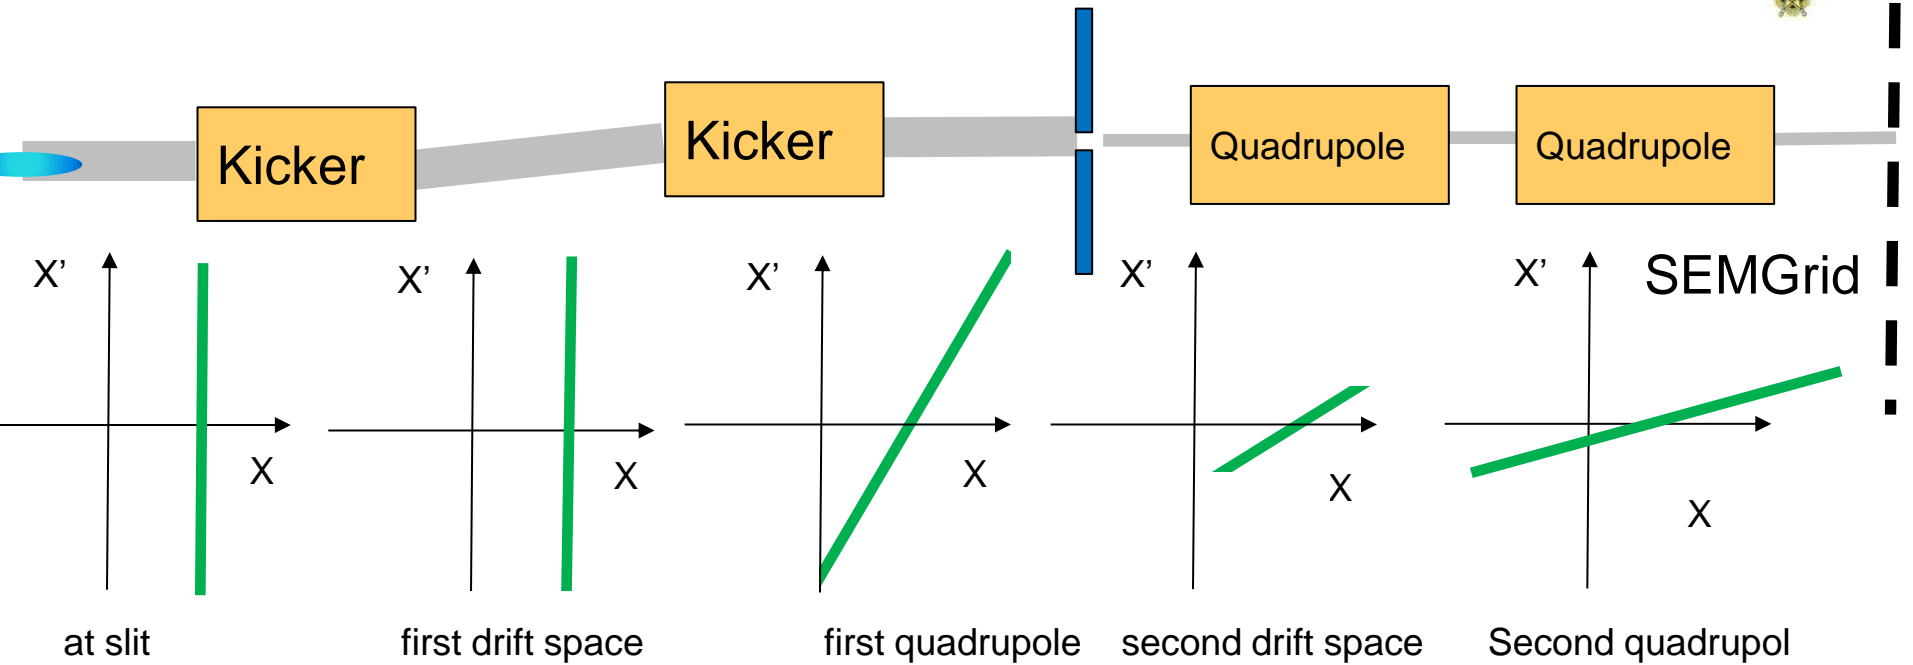





# Result of single pulse emittance measurement



File	Control	View	Options
LBE. SPEM Gain	-	LT. BHZ20DUMP	192.8 Amp.
1.0		LTB. BHZ40	0.1 Amp.
LTB. TRAG0	162.4 mA	LBE. QFVV10	-6.0 Amp.
LBE. TRAG5	2.6 mA	LBE. QDWV20	10.2 Amp.
		LBE. KHZ10	395.5 V
		LBE. KVT10	380.9 V
		LBE. DHZ10	9.1 Amp.
		LBE. DVT10	5.1 Amp.
		LBE. KHZ10A	-6320.0 mV
		LBE. KVT10A	-188.3 mV
		LBEX. MKHZ10	-0.1 μs
		LBEX. FKHZ10	-1.0 ms
		LBEX. SMEASKHZ10	-0.1 μs
		LBEX. MKVT10	-0.1 μs
		LBEX. FKVT10	-1.0 ms
		LBEX. SMEASKVT10	-0.1 μs
		LX. TCL-CPS	-1.0 ms
		LX. TCL-PSB	-0.1 μs
		LX. TCL-LIND	-0.1 μs
		LX. TCL-EXTCON	-0.1 μs
		LX. TCL-MEAS	0.1 μs
		LX. WBHZ10	-1.0 ms
		LX. SBHZ40EL-SURV	0.1 μs
		LX. SBHZ40SL-SURV	0.1 μs
		LX. SBHZ40PSB-SRV	0.1 μs
		LBE. SLN10AP	2.2 mm
		LBE. SLV10AP	2.0 mm

Aug 15 11:24:35 2003

MDPSB  
PROTON  
LBE

Plane	HOR
Unit X	2.40
Unit Y	0.50
Delay	-1964.1

Emittance Surface

HORIZONTAL Position mm

Mismatch Linac/Booster

Reference Ellipse

Measured Ellipse centered

HORIZONTAL Position mm

E(%I)	11.5 mm.mrad
Xmean	0.9 mm
Ymean	0.6 mrad
Xmax	8.6 mm
Ymax	1.5 mrad
α	-0.5
β	6.4
γ	0.2
Σ♥	96.8 ♥
Misma	51.1 %

FREEZE CANCEL BEAM

Waiting for new acquisition...



# Single Shot Emittance Measurement



- Advantage:
  - Full scan takes 20  $\mu\text{s}$
  - Shot by shot comparison possible
- Disadvantage:
  - Very costly
  - Needs dedicated measurement line
  - Needs a fast sampling ADC + memory for each wire
- Cheaper alternative:
  - Multi-slit or pepperpot measurement







# Multi-slit measurement



- Needs high resolution profile detector
- Must make sure that profiles don't overlap

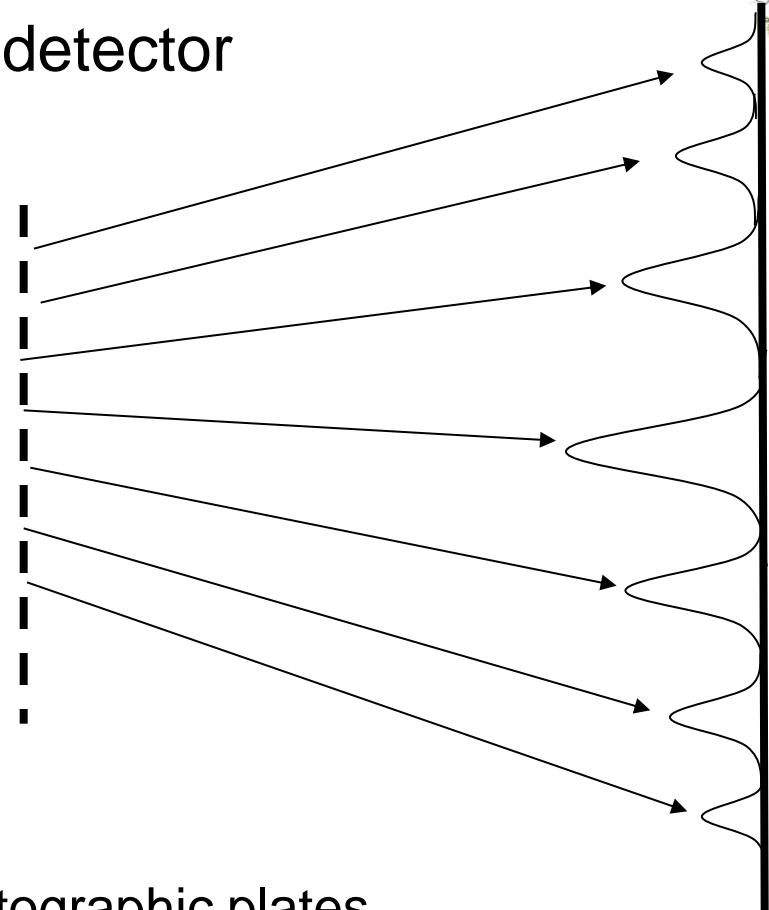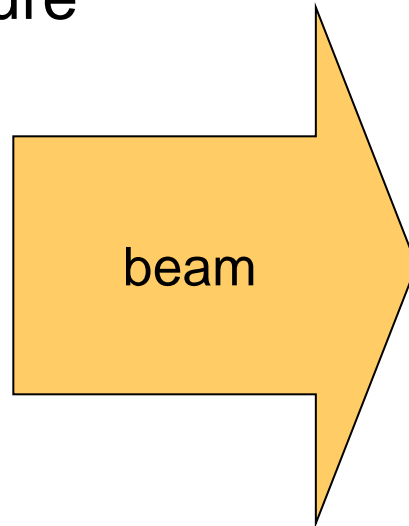

Scintillator + TV + frame grabber often used as profile detector

Very old idea, was used with photographic plates



# Pepperpot



Uses small holes instead of slits

Measures horizontal and vertical emittance in a single shot


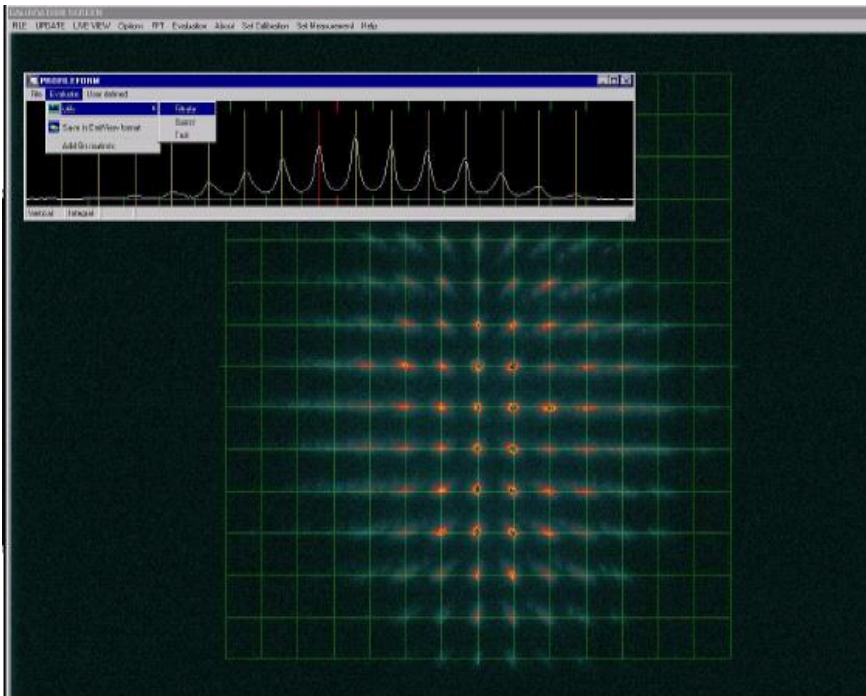


Photo P. Forck





# Computed Tomography (CT)

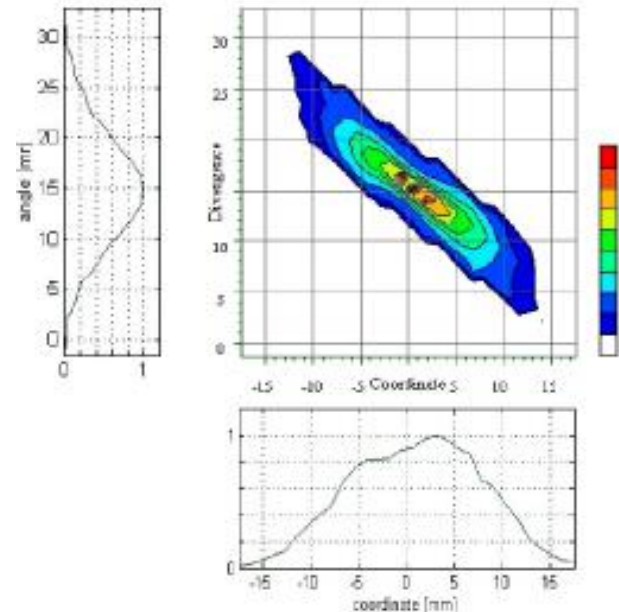


Principle of Tomography:

- Take many 2-dimensional Images at different angles
- Reconstruct a 3-dimensional picture using mathematical techniques (Algebraic Reconstruction Technique, ART)







# The reconstruction

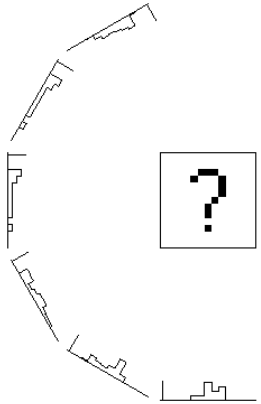


Produce many projections of the object to be reconstructed

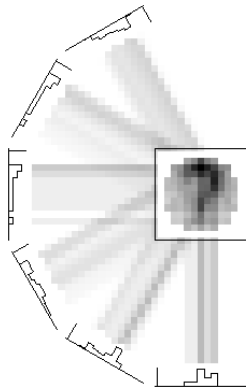

Back project and overlay the "projection rays"

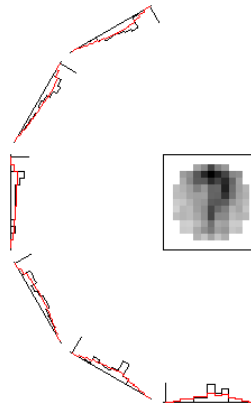



Project the back-projected object and calculate the difference

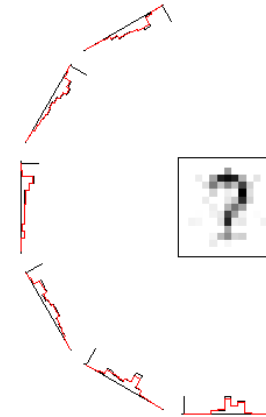

Iteratively back-project the differences to reconstruct the original object



# Some CT results

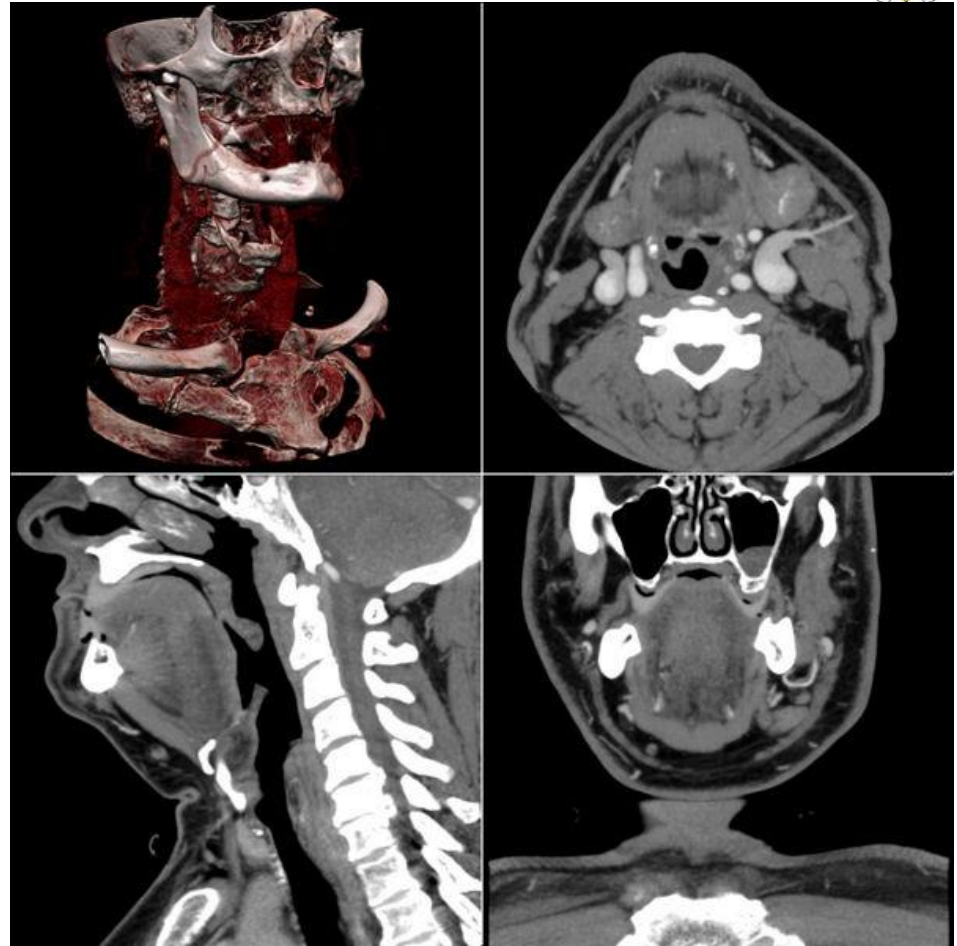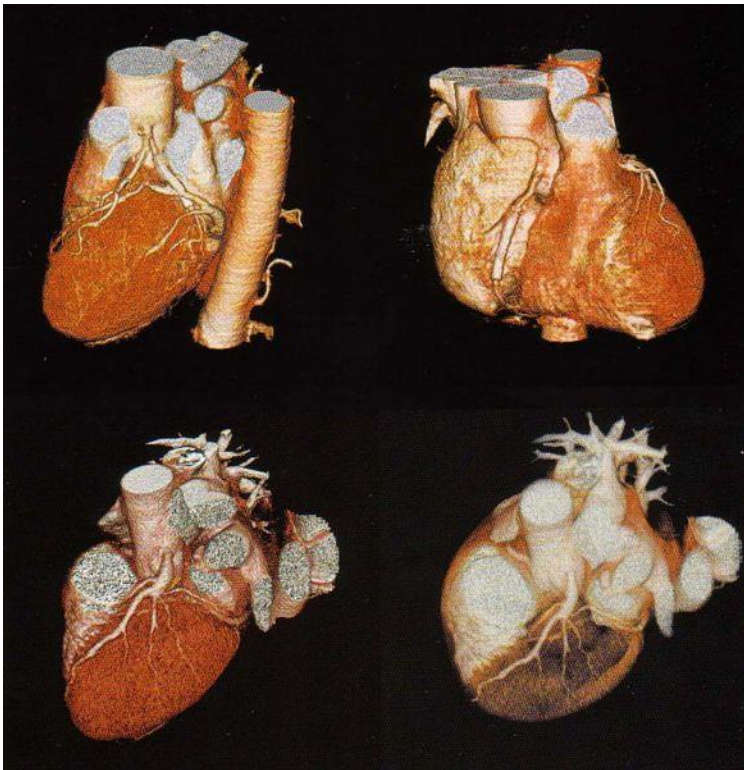





# Computed Tomography and Accelerators




RF voltage

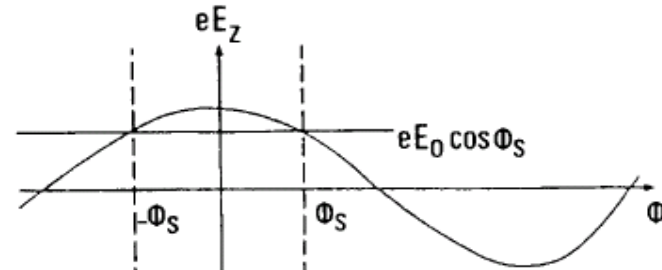

Restoring force for non-synchronous particle

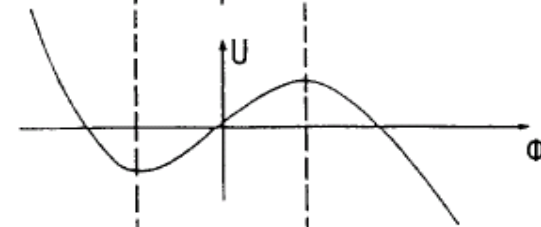


Longitudinal phase space

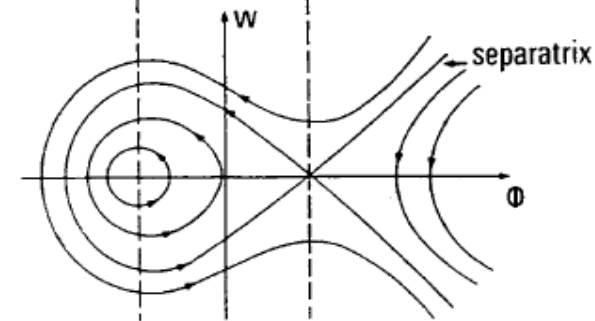

Projection onto  $\Phi$  axis corresponds to bunch profile



# Reconstructed Longitudinal Phase Space

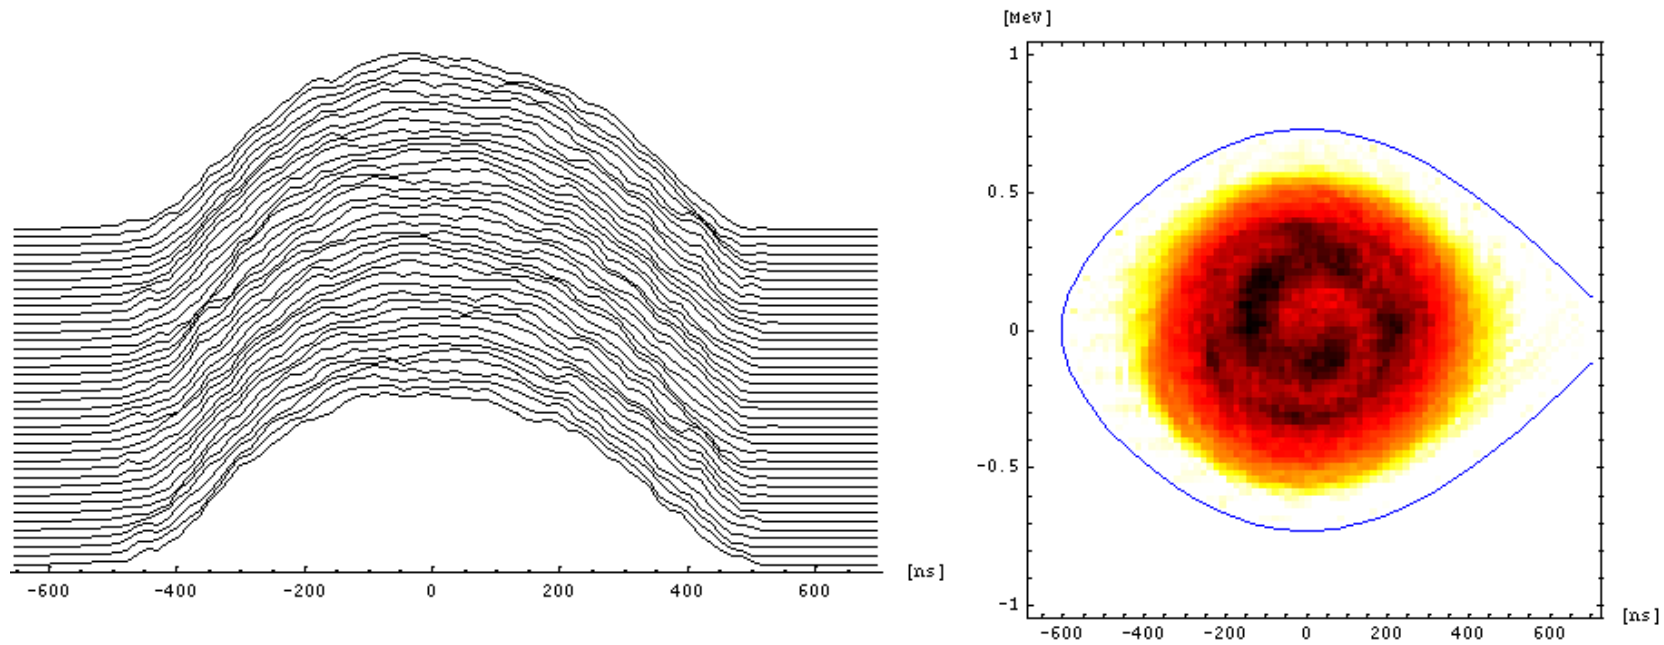





# Bunch Splitting

