

Introduction to Transverse Beam Dynamics

Lecture 5: Insertions / Tracking / Beam stability

Andrea Latina (CERN)

JUAS 2014

20th January 2014

Recap: Dispersion function and orbit

$$\begin{cases} x(s) = x_{\beta}(s) + x_D(s) \\ x(s) = C(s)x_0 + S(s)x'_0 + D(s)\frac{\Delta p}{p} \end{cases}$$

In matrix form

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} \begin{pmatrix} x \\ x' \end{pmatrix}_0 + \frac{\Delta p}{p} \begin{pmatrix} D \\ D' \end{pmatrix}_0$$



We can rewrite the solution in matrix form:

$$\begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_s = \begin{pmatrix} C & S & D \\ C' & S' & D' \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_0$$


Dispersion in a FODO cell with length L , bending angle θ , and phase advance μ :

$$\eta^{\pm} = \frac{L\theta \left(1 \pm \frac{1}{2} \sin \frac{\mu}{2}\right)}{4 \sin^2 \frac{\mu}{2}}$$

Recap: FODO cell and its optical functions

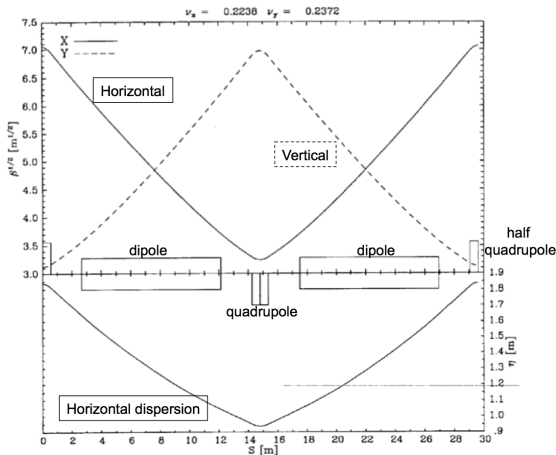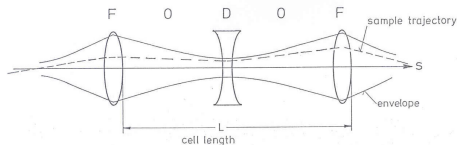


Insertions

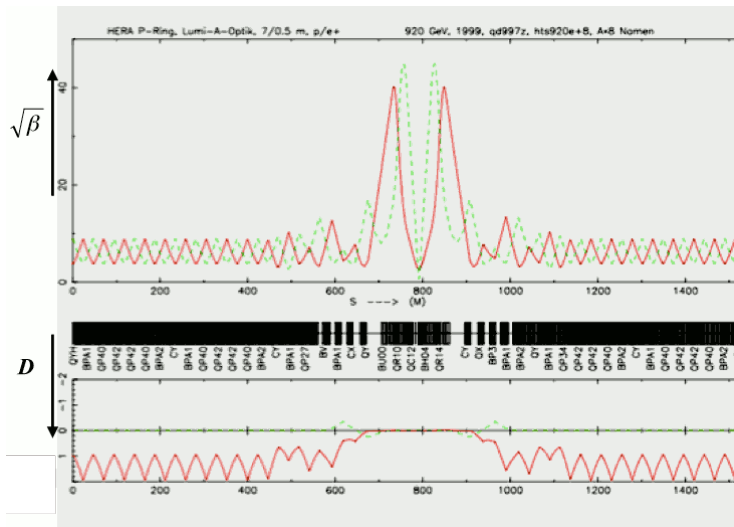

Dispersion suppressor

In an arc, the FODO dispersion is non-zero everywhere. However, in straight sections, we often want to have $\eta = \eta' = 0$. \Rightarrow for instance to keep small the beam size at the interaction point.

We can “match” between these two conditions with a “dispersion suppressor”: a non-periodic set of magnets that transforms FODO η, η' to zero

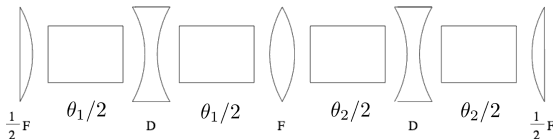

Consider two FODO cells with length L and different total bend angles: θ_1, θ_2 : we want to have

$$\begin{pmatrix} \eta \\ \eta' \end{pmatrix}_{\text{entrance}} = \begin{pmatrix} \eta_0 \\ 0 \end{pmatrix} \quad \text{to} \quad \begin{pmatrix} \eta \\ \eta' \end{pmatrix}_{\text{exit}} = \begin{pmatrix} 0 \\ 0 \end{pmatrix}$$

Note:

- ▶ the two cells have the same quadrupole strengths, so that they have also the same β , and μ (phase advance per cell)
- ▶ remember that $\alpha = 0$ at both ends, and that, if the incoming beam comes from a FODO cell with the same length L , phase advance μ , and with a total bending angle θ , then the initial dispersion is

$$\eta_0 = \eta_{\text{FODO}}^+$$

$$\eta_{\text{FODO}}^+ \approx \frac{4f^2}{L} \left(1 + \frac{L}{8f}\right) \theta, \text{ in thin-lens approximation}$$

Dispersion suppressor (cont.)

Transport for the dispersion:

$$\begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix} = \begin{pmatrix} C & S & D \\ C' & S' & D' \\ 0 & 0 & 1 \end{pmatrix} \underset{\text{suppressor}}{\quad} \begin{pmatrix} \eta_0 \\ 0 \\ 1 \end{pmatrix}$$

In 2×2 form reads

$$\begin{pmatrix} 0 \\ 0 \end{pmatrix} = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} \begin{pmatrix} \eta_0 \\ 0 \end{pmatrix} + \begin{pmatrix} D \\ D' \end{pmatrix}$$

which has solution

$$\begin{pmatrix} D \\ D' \end{pmatrix} = - \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} \begin{pmatrix} \eta_0 \\ 0 \end{pmatrix}$$

The transfer matrix for the suppressor is

$$M_{\text{suppressor}} = M_{\text{FODO } 2} \cdot M_{\text{FODO } 1}$$

For each FODO cell, $M_{\text{FODO}} = M_{1/2F} \cdot M_{\text{dipole}} \cdot M_D \cdot M_{\text{dipole}} \cdot M_{1/2F}$, in thin-lens approximation:

$$M_{\text{FODO } j} = \begin{pmatrix} 1 - \frac{L^2}{8f^2} & L \left(1 + \frac{L}{4f}\right) & \frac{L}{2} \left(1 + \frac{L}{8f}\right) \theta_j \\ -\frac{L}{4f^2} \left(1 - \frac{L}{4f}\right) & 1 - \frac{L^2}{8f^2} & \left(1 - \frac{L}{8f} - \frac{L^2}{32f^2}\right) \theta_j \\ 0 & 0 & 1 \end{pmatrix}$$

where $j = 1, 2$ (1=first cell, 2=second cell)

Dispersion suppressor (cont.)

If we do the math, we find

$$\begin{cases} D(s) = \frac{L}{2} \left(1 + \frac{L}{8f}\right) \left[\left(3 - \frac{L^2}{4f^2}\right) \theta_1 + \theta_2\right] \\ D'(s) = \left(1 - \frac{L}{8f} - \frac{L^2}{32f^2}\right) \left[\left(1 - \frac{L^2}{4f^2}\right) \theta_1 + \theta_2\right] \end{cases}$$

From lecture 3, we remember that the phase advance μ for a FODO cell, in terms of the length L and the focal length f , is


$$\left| \sin \frac{\mu}{2} \right| = \frac{L}{4f}$$

Thus, one can write the solution as a function of the phase advance μ , and of $\theta = \theta_1 + \theta_2$:

$$\begin{cases} \theta_1 = \left(1 - \frac{1}{4 \sin^2 \frac{\mu}{2}}\right) \theta \\ \theta_2 = \frac{1}{4 \sin^2 \frac{\mu}{2}} \theta \end{cases}$$

Dispersion suppressor (summary)

Dispersion suppressor, a non-periodic set of magnets that transforms FODO η, η' to zero:

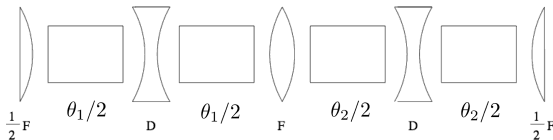


One possibility: two FODO cells with length L , phase advance μ , and different total bend angles: θ_1, θ_2 :

$$\begin{cases} \theta_1 = \left(1 - \frac{1}{4 \sin^2 \frac{\mu}{2}}\right) \theta \\ \theta_2 = \frac{1}{4 \sin^2 \frac{\mu}{2}} \theta \end{cases}$$

An interesting solution is for $\mu = 60^\circ$: in this case

- ▶ then $\theta_1 = 0$, and $\theta_2 = \theta \Rightarrow$ we just leave out two dipole magnets in the first FODO cell insertion
- ▶ this is called the “missing-magnet” scheme


Optics functions in the dispersion suppressor, with $\mu = 60^\circ$

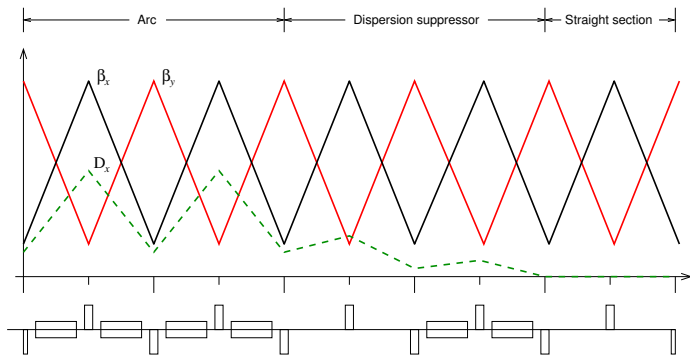

This is the "missing-magnet" scheme.

Intermezzo

Often the insertions are larger than few meters...

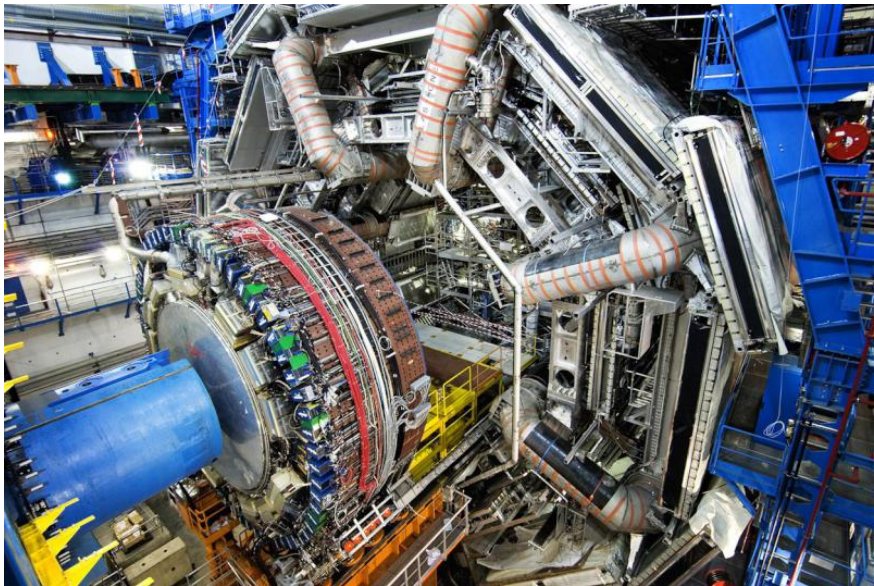

The drift space

The most problematic insertion: the drift space !

Let's see what happens to the Twiss parameters α , β , and γ if we stop focusing for a while


$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_s = \begin{pmatrix} C^2 & -2SC & S^2 \\ -CC' & SC' + S'C & -SS' \\ C'^2 & -2S'C' & S'^2 \end{pmatrix} \begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_0$$

for a drift:

$$M_{\text{drift}} = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} = \begin{pmatrix} 1 & s \\ 0 & 1 \end{pmatrix} \Rightarrow \begin{cases} \beta(s) = \beta_0 - 2\alpha_0 s + \gamma_0 s^2 \\ \alpha(s) = \alpha_0 - \gamma_0 s \\ \gamma(s) = \gamma_0 \end{cases}$$

Let's study the location of the waist: $\alpha = 0$

- ▶ the location of the point of smallest beam size, β^*

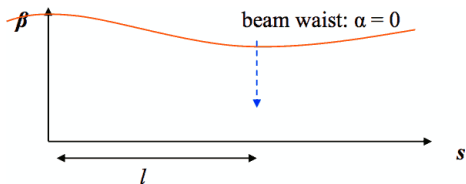

Beam waist:

$$\alpha(s) = \alpha_0 - \gamma_0 s = 0 \quad \rightarrow \quad s = \frac{\alpha_0}{\gamma_0} = l_{\text{waist}}$$

Beam size at that point

$$\left. \begin{array}{l} \gamma(l) = \gamma_0 \\ \alpha(l) = 0 \end{array} \right\} \rightarrow \gamma(l) = \frac{1 + \alpha^2(l)}{\beta(l)} = \frac{1}{\beta(l)} \rightarrow \beta_{\min} = \frac{1}{\gamma_0}$$

This beta, at $l = l_{\text{waist}}$, is also called "beta star":

$$\Rightarrow \beta^* = \beta_{\min}$$


It's here that the interaction point (IP) is located.

Drift space with $L = l_{\text{waist}}$: The low β -insertion

We can assume we have a symmetry point at a distance l_{waist} :

$$\beta(s) = \beta_0 - 2\alpha_0 s + \gamma_0 s^2, \text{ at } \alpha(s) = 0 \rightarrow \beta^* = \frac{1}{\gamma_0}$$

On each side of the symmetry point




we have

$$\beta(s) = \beta^* + \frac{s^2}{\beta^*}$$

$\Rightarrow \beta$ grows quadratically with s .

A drift space at the interaction point, with length $L = l_{\text{waist}}$, is called “low- β insertion”:



Phase advance in a low- β insertion

We have:

$$\beta(s) = \beta^* + \frac{s^2}{\beta^*}$$

The phase advance across the straight section is:

$$\Delta\mu = \int_{-L_{\text{waist}}}^{L_{\text{waist}}} \frac{ds}{\beta^* + \frac{s^2}{\beta^*}} = 2 \arctan \frac{L_{\text{waist}}}{\beta^*}$$

which is close to $\Delta\mu = \pi$ for $L_{\text{waist}} \gg \beta^*$.

In other words: the tune will increase by half an integer!


Achromatic insertions

There exist insertions (arcs) that don't introduce dispersion: they are called *achromatic arcs*

- ▶ In principle, dispersion can be suppressed by one focusing quadrupole and one bending magnet
- ▶ With one focusing quad in between two dipoles, one can get achromat condition: In between two bends, we call it arc section. Outside the arc section, we can match dispersion to zero. This is called “Double Bend Achromat” (DBA) structure
- ▶ We need quads outside the arc section to match the betatron functions, tunes, etc.
- ▶ Similarly, one can design “Triple Bend Achromat” (TBA), “Quadruple Bend Achromat” (QBA), and “Multi Bend Achromat” (MBA or nBA) structure
- ▶ For FODO cells structure, dispersion suppression section at both ends of the standard cells (see previous slides)

The Double Bend Achromat lattice (DBA)

Consider a simple DBA cell with a single quadrupole in the middle (plus external quadrupoles for matching).

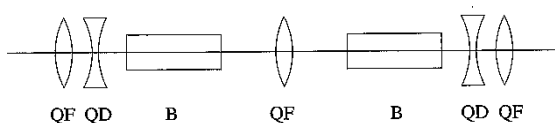

$$M_{\text{DBA}} = M_B \cdot M_{\text{drift}} \cdot \underbrace{M_{1/2F} \cdot M_{1/2F}}_{M_F} \cdot M_{\text{drift}} \cdot M_B$$




In thin-lens approximation, the dispersion matching condition:

$$\begin{pmatrix} D_{\text{center}} \\ 0 \\ 1 \end{pmatrix} = \begin{pmatrix} 1 & 0 & 0 \\ -\frac{1}{2f} & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & L_1 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & L & L\theta/2 \\ 0 & 1 & \theta \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 0 \\ 0 \\ 1 \end{pmatrix}$$


where f is the focal length of the quad, θ and L are the bend angle and the length of the dipole, and L_1 is the distance between the dipole and the centre of the quad.

$$f = \frac{1}{2} \left(L_1 + \frac{1}{2} L \right); \quad D_{\text{center}} = \left(L_1 + \frac{1}{2} L \right) \theta$$


DBA optical functions

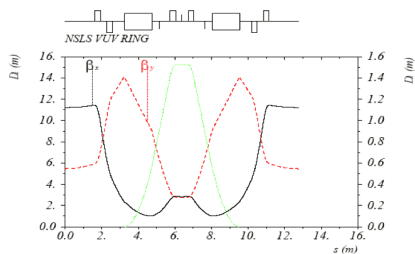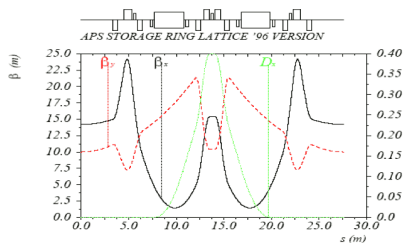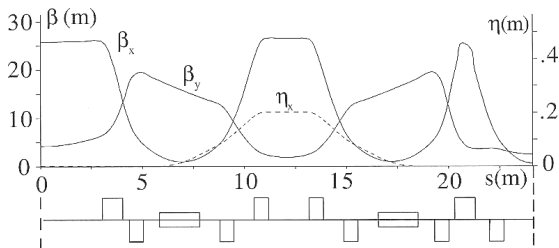


Triple Bend Achromat (TBA)

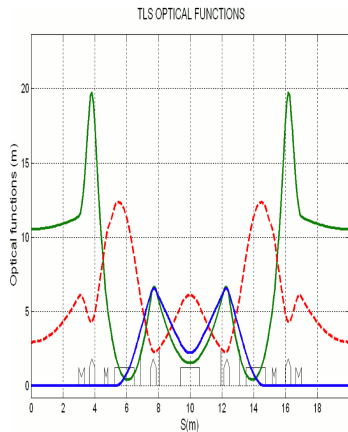

Combined function dipoles

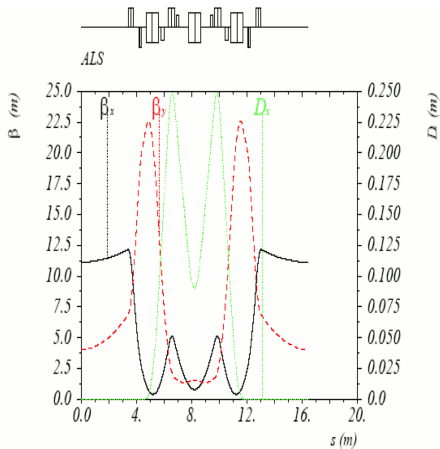

QBA, OBA, and nBA

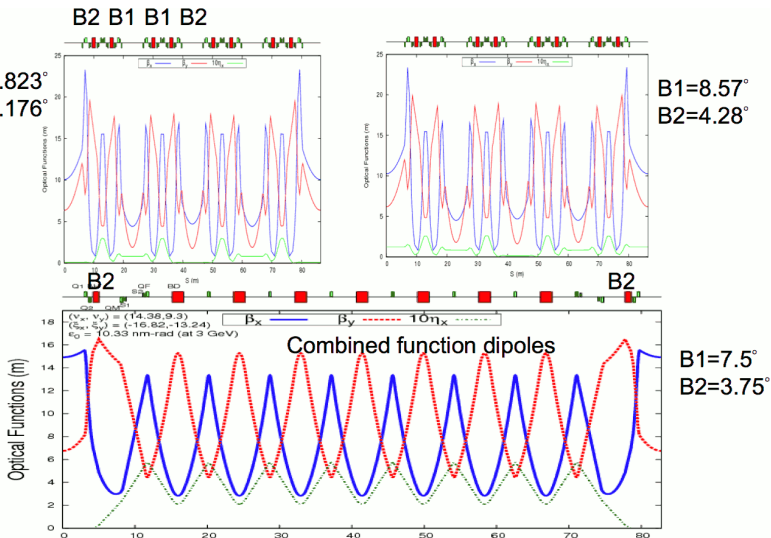

Last steps: 6-D phase space

In the real life the state vector is six-dimensional:

$$\begin{pmatrix} x & x' & y & y' & z & \Delta p/p \end{pmatrix}^T$$

and the transfer matrix is typically


$$\begin{pmatrix} x \\ x' \\ y \\ y' \\ z \\ \frac{\Delta p}{p} \end{pmatrix}_s = \begin{pmatrix} R_{11} & R_{12} & \mathbf{0} & \mathbf{0} & 0 & R_{16} \\ R_{21} & R_{22} & \mathbf{0} & \mathbf{0} & 0 & R_{26} \\ \mathbf{0} & \mathbf{0} & R_{33} & R_{34} & 0 & 0 \\ \mathbf{0} & \mathbf{0} & R_{43} & R_{44} & 0 & 0 \\ R_{51} & R_{52} & 0 & 0 & 1 & R_{56} \\ 0 & 0 & 0 & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} x \\ x' \\ y \\ y' \\ z \\ \frac{\Delta p}{p} \end{pmatrix}_0$$

in bold the elements that would couple the $x - y$ motion.

Nota bene: this matrix can still represent **only** linear elements.

- ▶ if we want to consider high-order elements: e.g. sextupoles, octupoles, etc. \Rightarrow we need computer simulations ! “particle tracking” or “maps” (MAD-X, for instance)
- ▶ because such elements introduce non-linear motion, which is too difficult to treat analytically

Non-linear dynamics

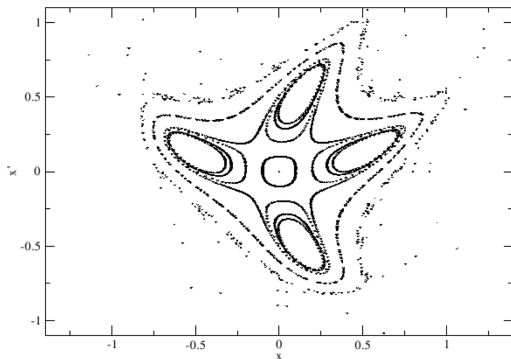

- $Q=0.2516$
- linear motion near center (circles)
- More and more square
- Non-linear tunes shift
- Islands
- Limit of stability
- Dynamic Aperture
- Crucial if strong quads and chromaticity correction in s.r. light sources
- many non-linearities in LHC due to s.c. magnet and finite manufacturing tolerances

$$\begin{pmatrix} x_{n+1} \\ x'_{n+1} \end{pmatrix} = \begin{pmatrix} \cos(2\pi Q) & \sin(2\pi Q) \\ -\sin(2\pi Q) & \cos(2\pi Q) \end{pmatrix} \begin{pmatrix} x_n \\ x'_n + x_n^2 \end{pmatrix}$$

Particle tracking with dynamic aperture

Dynamic aperture: *is a method used to calculate the amplitude threshold of stable motion of particles. Numerical simulations of particle tracking aims at determining the “dynamic aperture”.*


Dynamic aperture for hadrons

- ▶ in the case of protons or heavy ion accelerators, (or synchrotrons, or storage rings), there is minimal radiation, and hence the dynamics is symplectic
- ▶ for long term stability, a tiny dynamical diffusion can lead an initially stable orbit slowly into an unstable region
- ▶ this makes the dynamic aperture problem particularly challenging: One may need to consider the stability over billions of turns


For the case of electrons

- ▶ in bending magnetic fields, the electrons radiate which causes a damping effect.
- ▶ this means that one typically only cares about stability over few (\sim thousands) of turns

Dynamic Aperture and tracking simulations

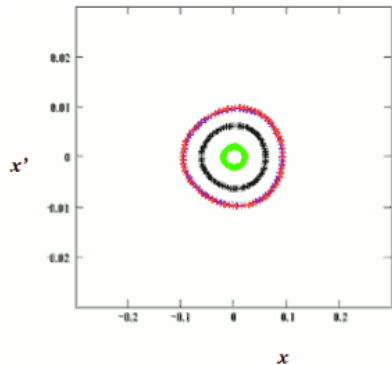

a beam of four particles in a storage ring composed by only linear elements

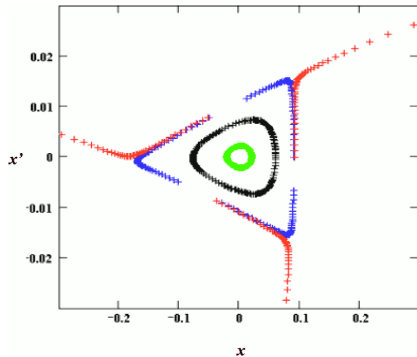

a beam of four particles in a storage ring where there is a strong sextupole: it's a catastrophe!!!

The end!

I'd like to thank:

Javier Resta-Lopez, Reyes Alemany,
Guido Sterbini, and Dario Pellegrini

for their help.

Best of luck to you students with your
career in accelerator physics!