


Detectors for non-accelerator particle physics

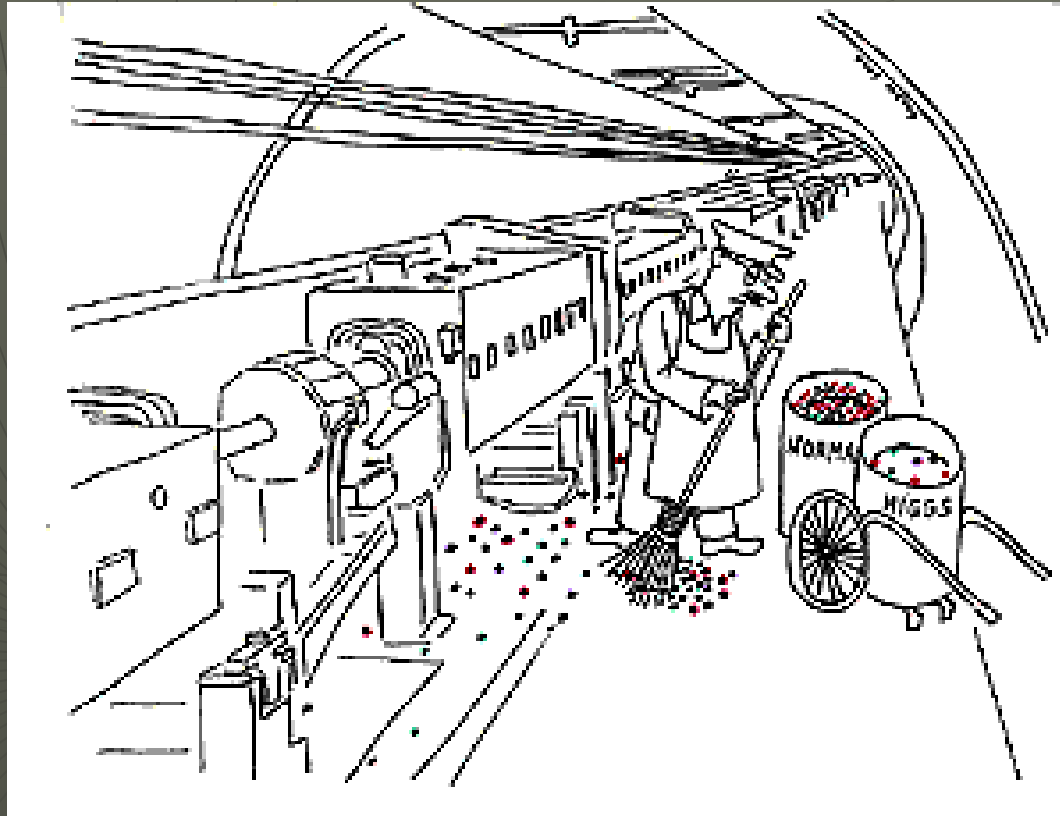

B. Satyanarayana





Department of High Energy Physics

Tata Institute of Fundamental Research, Mumbai

T: 09987537702 - E: bsn@tifr.res.in - W: <http://www.tifr.res.in/~bsn> - F: bheesette

Detectors aided major discoveries

- ❖ **Crookes Tubes:** Sir William Crookes (1869-75)
- ❖ **Cloud chamber:** Charles Thomas Rees Wilson (1894), Nobel Prize (1927)
- ❖ **Electron:** J.J.Thomson (1897) using Crookes Tubes
- ❖ **“Gold foil apparatus”:** Hans Geiger & Ernest Marsden (1909)
- ❖ **Proton:** E.Rutherford (1911) using “Gold foil apparatus”
- ❖ **Photon:** A.Compton (1923)
- ❖ **Neutron:** J.Chadwick (1932)
- ❖ **Positron:** C.Anderson (1932)
- ❖ **Muon:** C.Anderson & S.Neddermeyer (1937)
- ❖ **Neutral Kaon:** G.Rochester & C.Butler (1947) CC and GM
- ❖ **Charged Pion:** C.Powell (1947) photographic emulsions flown by balloons
- ❖ **Lambda:** (1947)
- ❖ **Neutral Pion:** R.Bjorkland (1949)
- ❖ **Bubble chamber :** D.Glaser (1952), Nobel Prize (1960)
- ❖ **Synchrotron:** (1952)
- ❖ **Xi minus:** R.Armenteros (1952)
- ❖ **Sigma plus:** G.Tomasini (1953) using emulsion technique
- ❖ **Sigma minus:** W.Fowler (1953)
- ❖ **Antiproton:** W.Segrè (1955)
- ❖ **Antineutron:** B.Cork (1956)
- ❖ **MOS transistors:** Kahng & Atalla (1960), electronic counters
- ❖ **Multi-Wire Proportional Counter:** G.Charpak (1968), Nobel Prize (1992)
- ❖ **Time Projection Chamber:** D.R.Nygren (1974)
- ❖ **Charm quark:** SLAC & BNL collaborations (1974)
- ❖ **Super Proton Synchrotron:** John Adams *et al* (1976)
- ❖ **Stochastic cooling:** Van der Meer, Nobel Prize (1984)
- ❖ **Large area (20”) PMT:** Hamamatsu (1980)
- ❖ **Resistive Plate Chamber:** R.Santonico (1981)
- ❖ **W & Z bosons:** UA1 and UA2 collaborations (1983)
- ❖ **Micro Strip Gas Chamber:** A.Oed (1988)
- ❖ **Top quark:** D0 & CDF collaborations (1995)
- ❖ **Gas Electron Multiplier:** F.B.Sauli (1996)
- ❖ **Neutrino oscillation:** Super-Kamiokande Collaboration (1998)

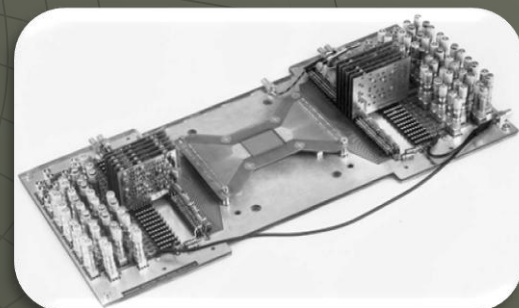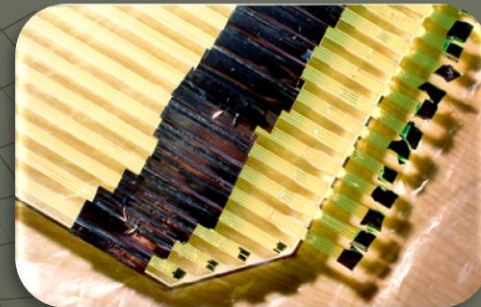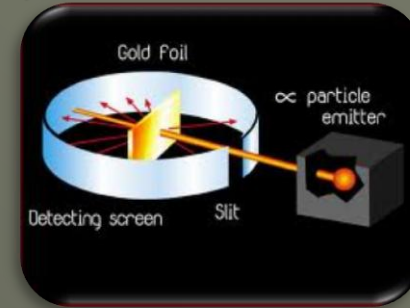

Tasks of HEP detectors

- ◆ **Tracking detector:** Direction, sign and momenta of the particles. Often aided by magnetic field.
- ◆ **Electromagnetic calorimeter:** Energy carried by electrons and photons. Signals proportional to the energy of the incident particles.
- ◆ **Hadronic calorimeter:** Energy carried by hadrons (protons, pions and neutrons).
- ◆ **Muon system:** Muons are charged particles that penetrate large amounts of matter, losing little of their energy. Essentially made of tracking detectors.
- ◆ **Particle identification:** Identification of charged and neutral particles. Charged particles are identified by combining momentum information with Time-of-Flight, energy loss dE/dx , Čerenkov or transition radiation.
- ◆ **Displaced vertex:** B-, D- or τ -tagging achieved with high spatial resolution detectors.
- ◆ **RICH detector:** Determines the velocity of a charged particle
- ◆ **Transition radiation detector:** Uses the γ -dependent threshold of transition radiation in a stratified material
- ◆ **Time of flight detector:** Discriminates between a lighter and a heavier particle of the same momentum using their time of flight between two detector planes.
- ◆ **Neutrinos:** Detected through inferred momentum conservation.
- ◆ **Dark matter:** Principle of nuclear recoil by candidate particles (mainly WIMPs)

Classification of HEP detectors

- ◆ **Non-electronic detectors**
 - Emulsions, cloud chamber, bubble chamber
- ◆ **Gaseous detectors**
 - GM, SWPC, MWPC, PMD, drift chamber, TPC, MSGC, GEMs, streamer tube, spark chamber, PPAC, RPC, CSC (Types: wired, micro-pattern, wire-less)
- ◆ **Scintillation detectors**
 - Organic (crystals, liquids, plastics, *extruded*), inorganic crystals, gas, glass
- ◆ **Silicon detectors**
 - Strip, pixel, *readout integrated*
- ◆ **Photo detectors**
 - PMT, PD, APD, VLPC, SiPM
- ◆ **Liquid ionisation detectors**
 - Scintillator, Argon, Xenon
- ◆ **Hybrid detectors**
 - HPD, LArTPC

On-detector, high-speed, ultra low-noise front-end ASICs

Novel data acquisition system architectures, pipelines and data links

Aided by rapid, concurrent developments in detector readout technologies


High performance flash ADCs, multi-hit TDCs, DSPs, FPGAs

Field programmable, complex, multi-level, trigger schemes


Wilson's Cloud Chamber (1894)

World's largest multi-plate cloud chamber was operated in Ooty in mid 50's as part of an air shower array and significant results on the high energy nuclear interactions and cores of extensive air showers were obtained.


Contributed to the discoveries of e^+ , μ and K .

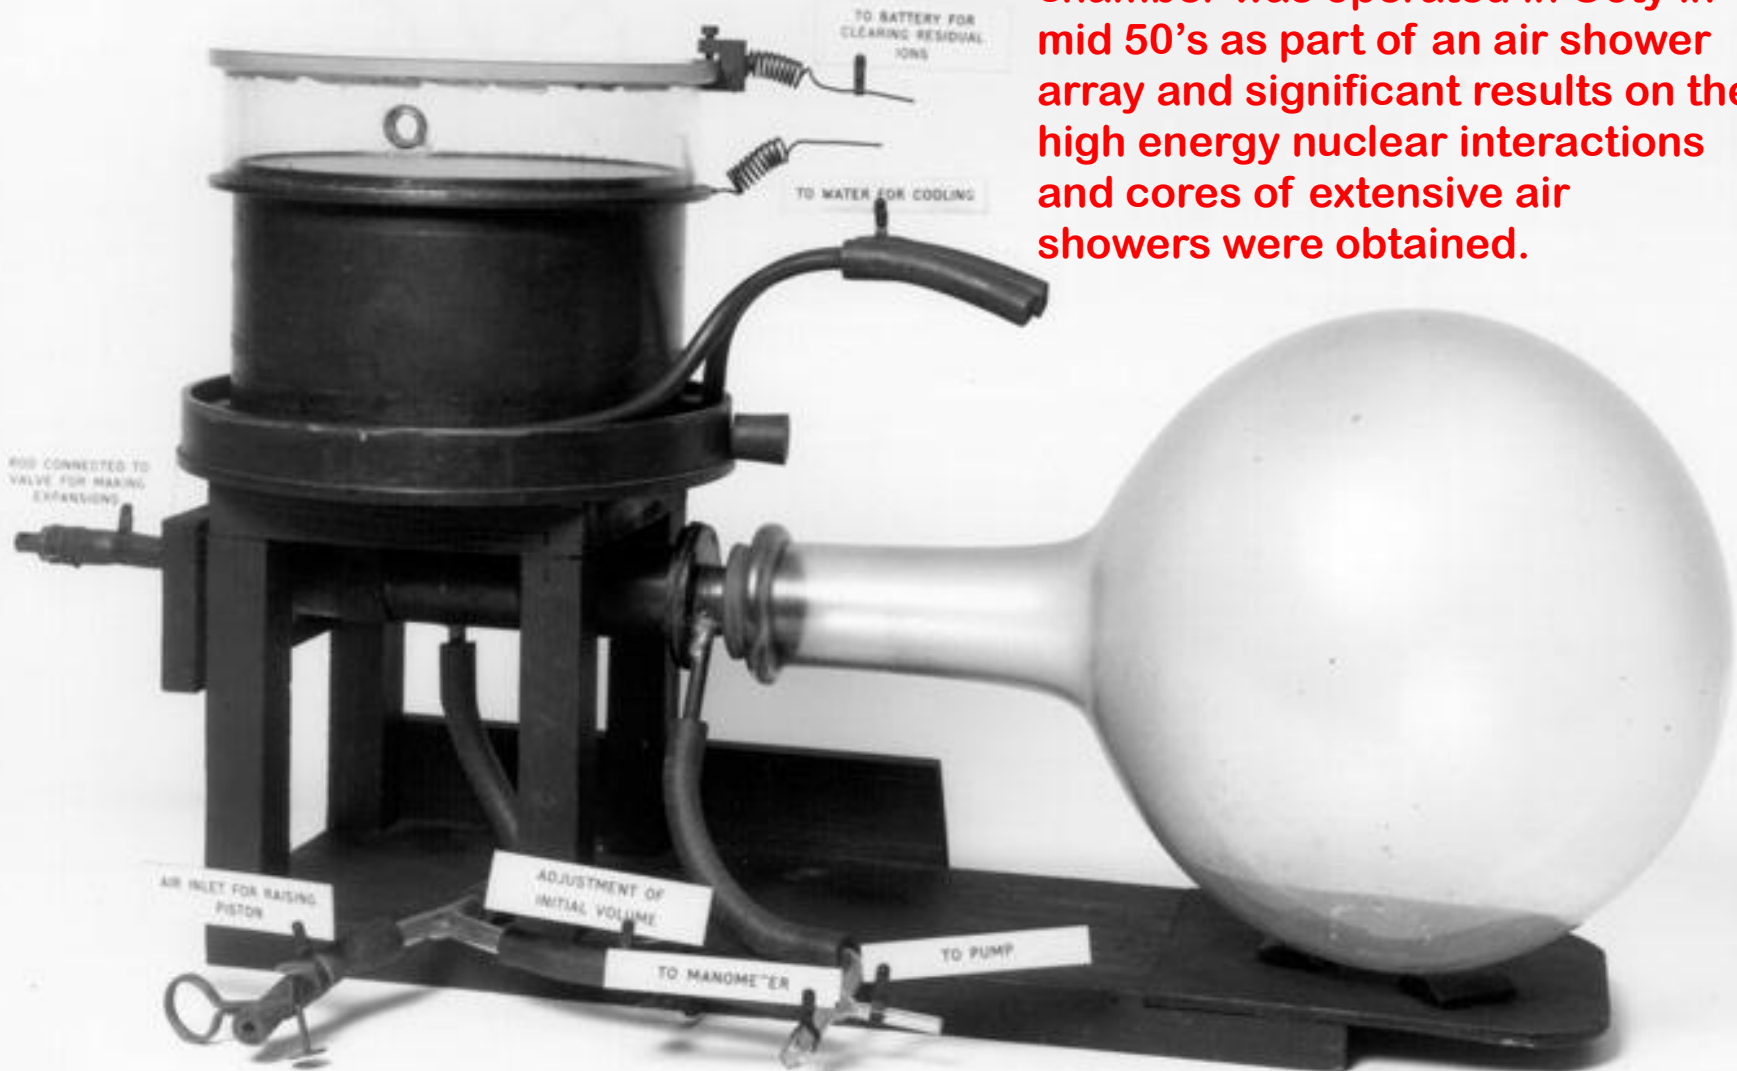


Geiger-Müller Tube (1928)

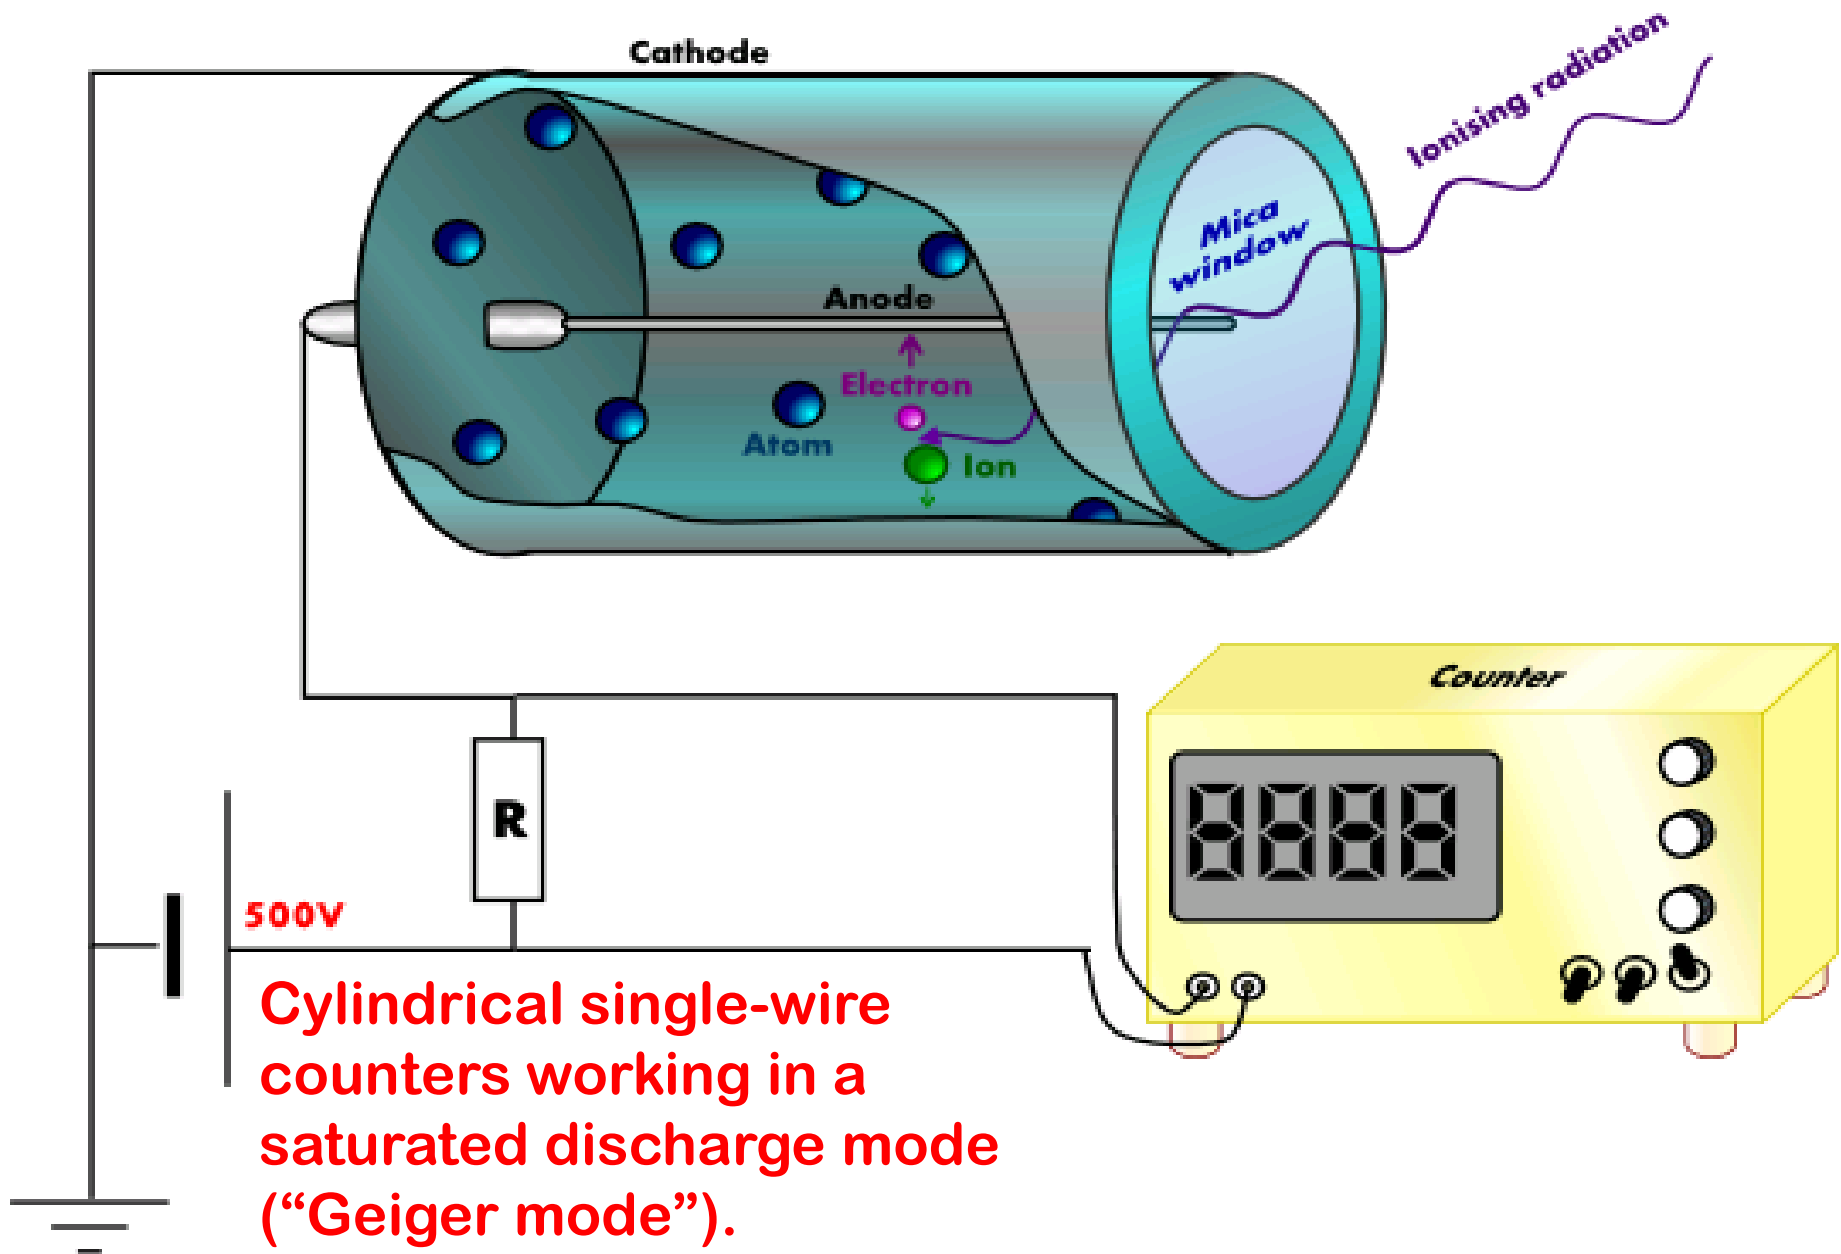




Keuffel's Parallel Plate Counters (1949)

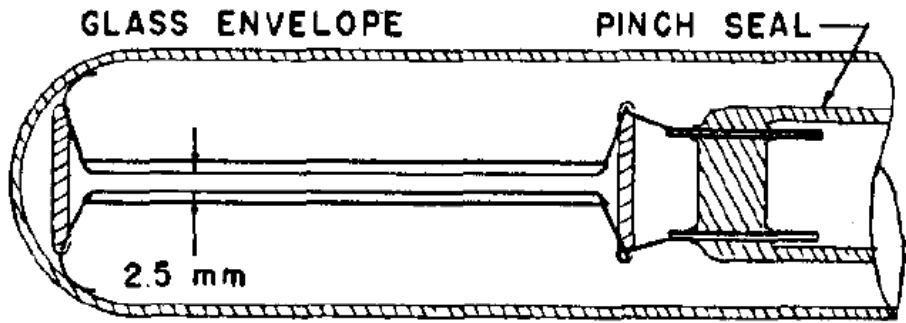



Argon-Xylene mixture TO GROUND JOINT →

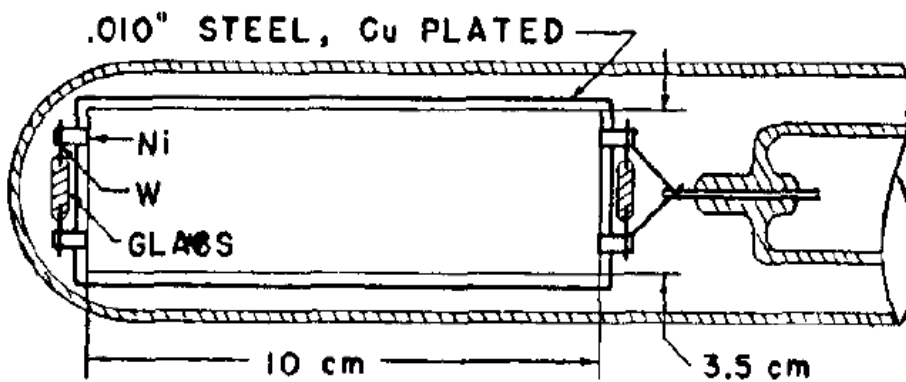


ALL METAL JOINTS SPOT-WELDED

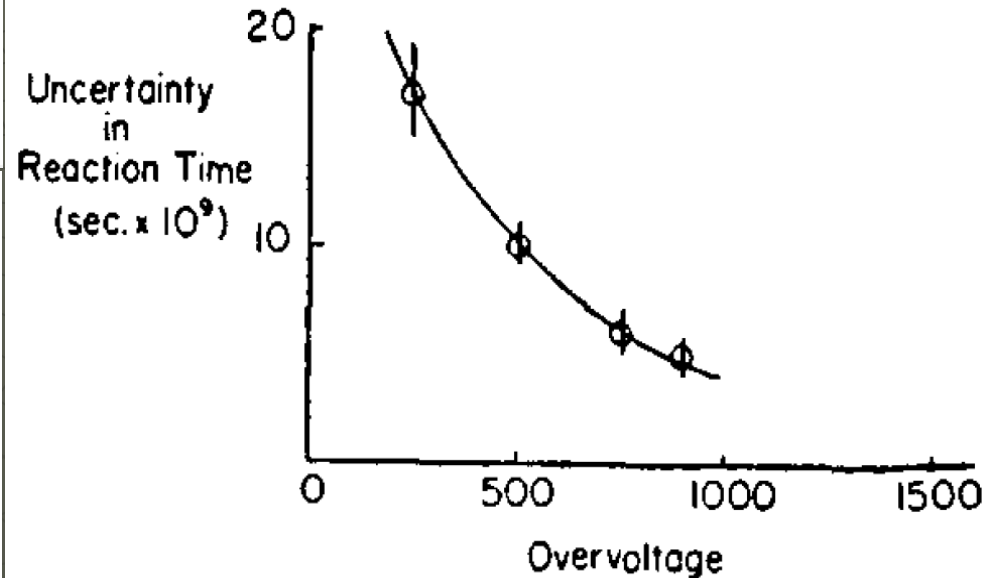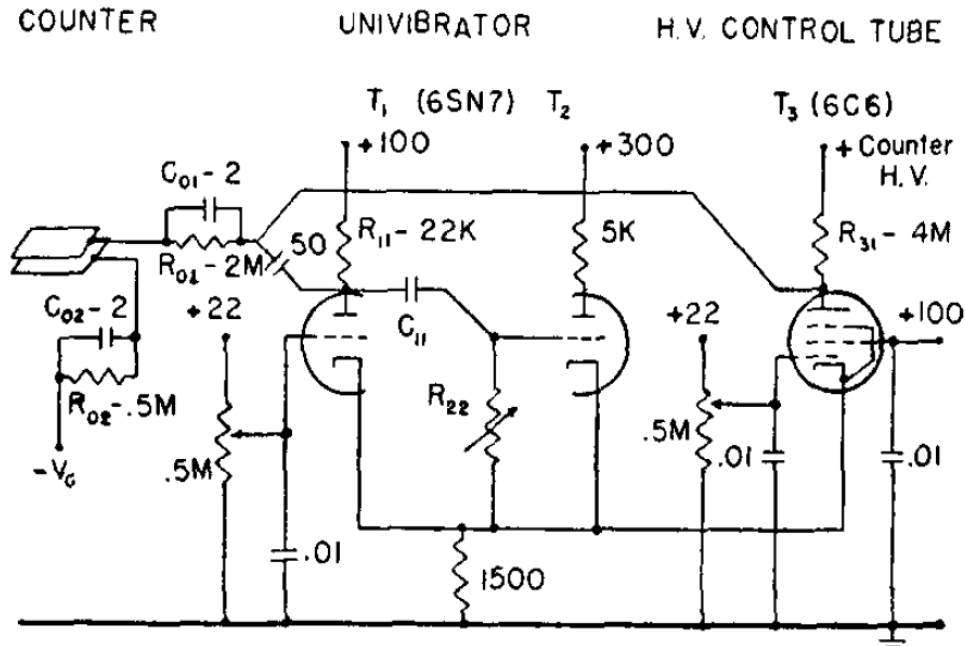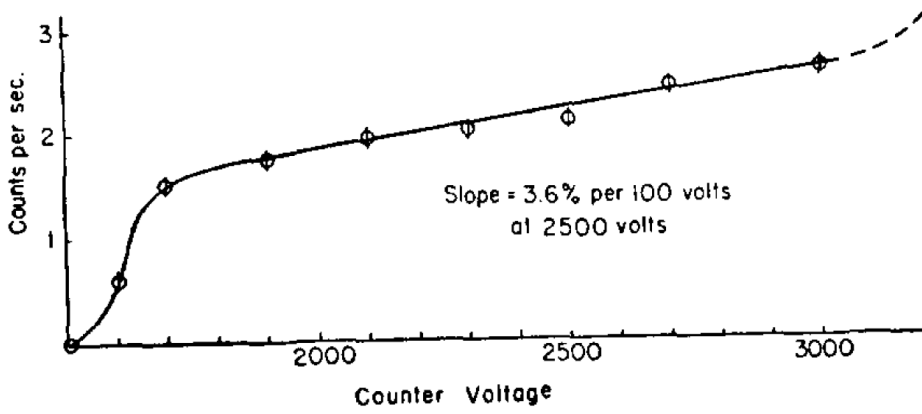

Glaser's Bubble Chamber (1952)

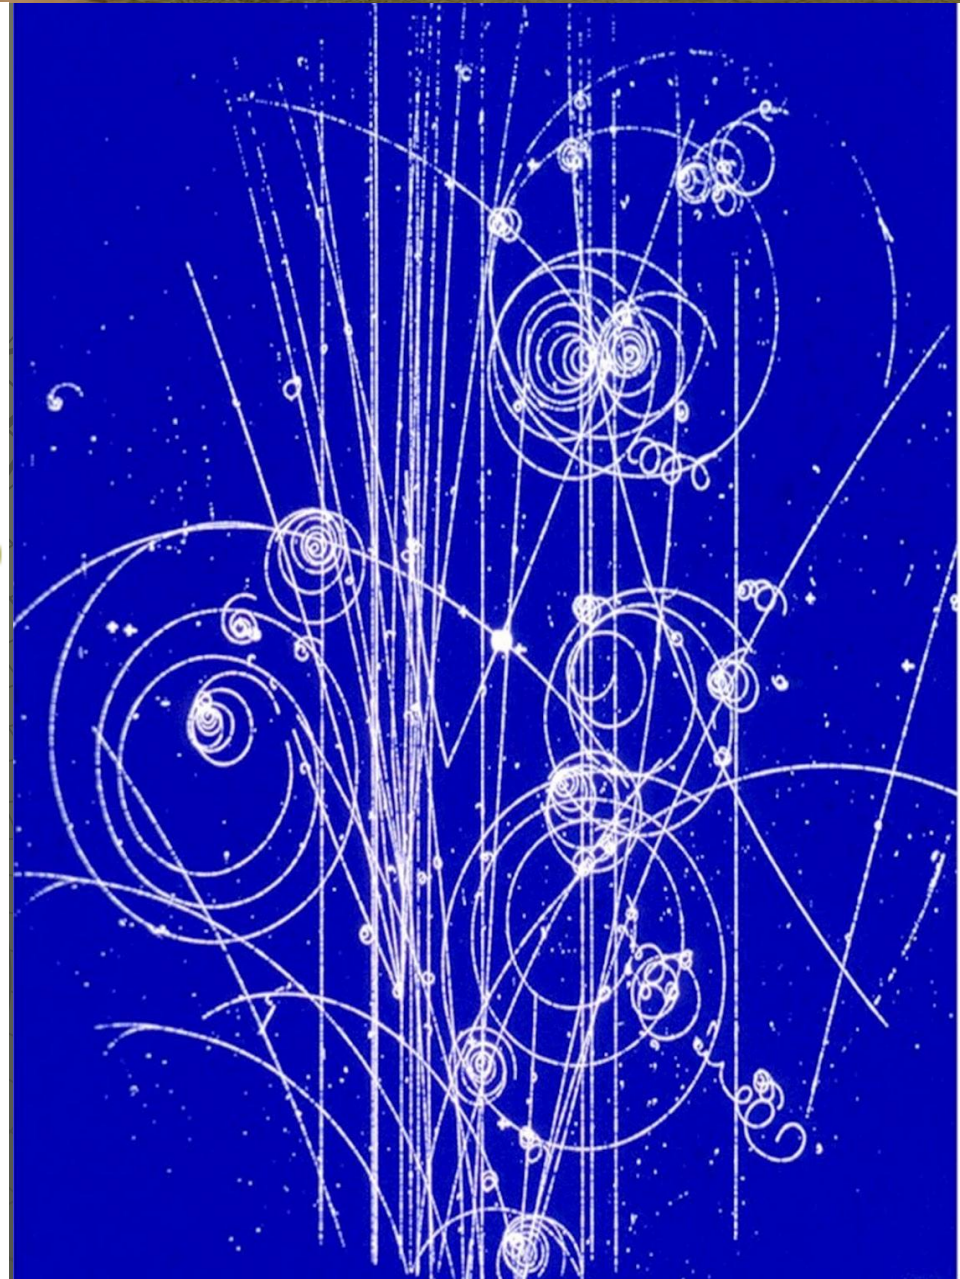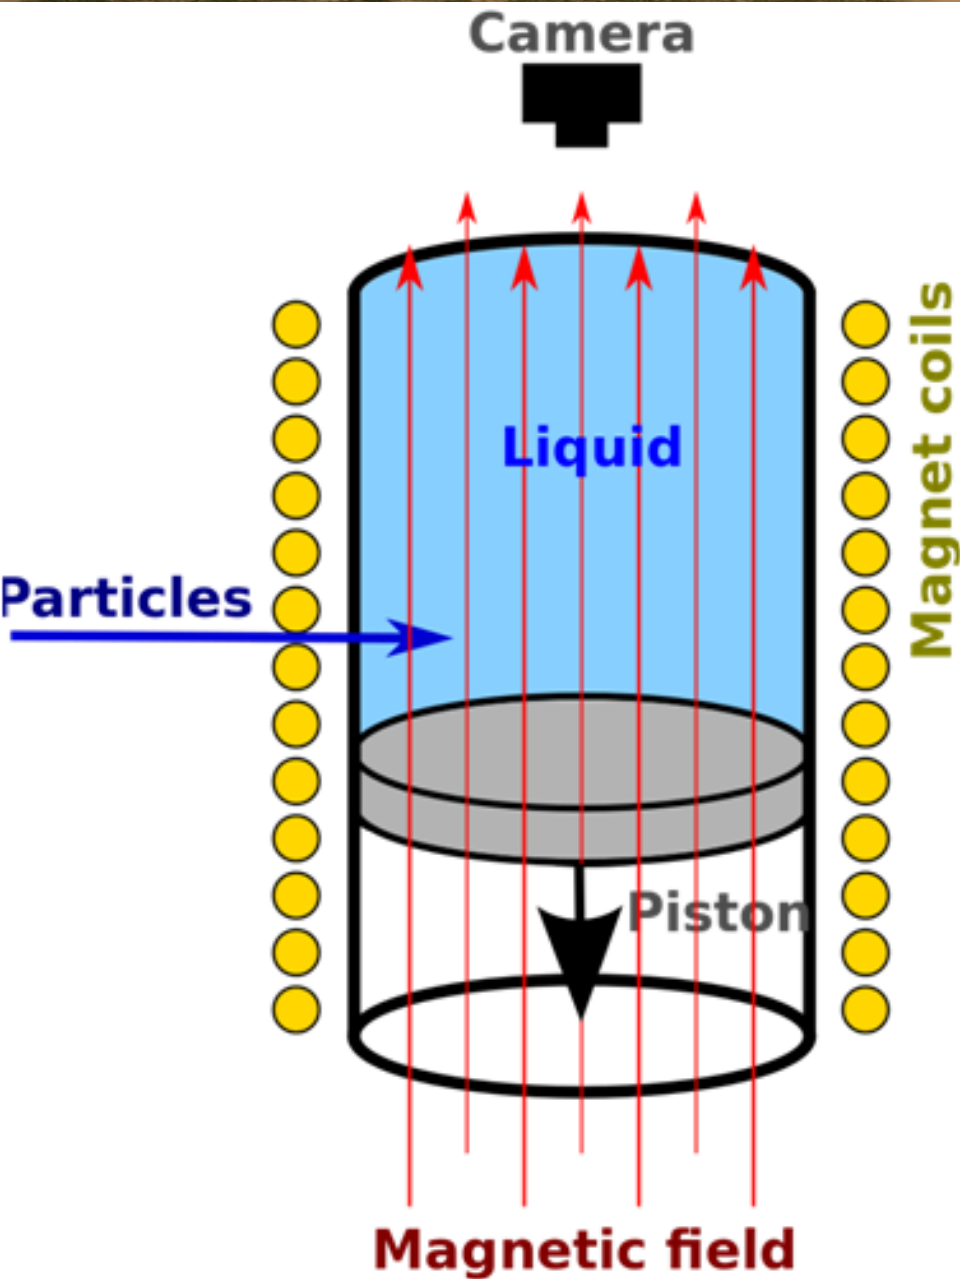

Discovery detector of atmospheric ν

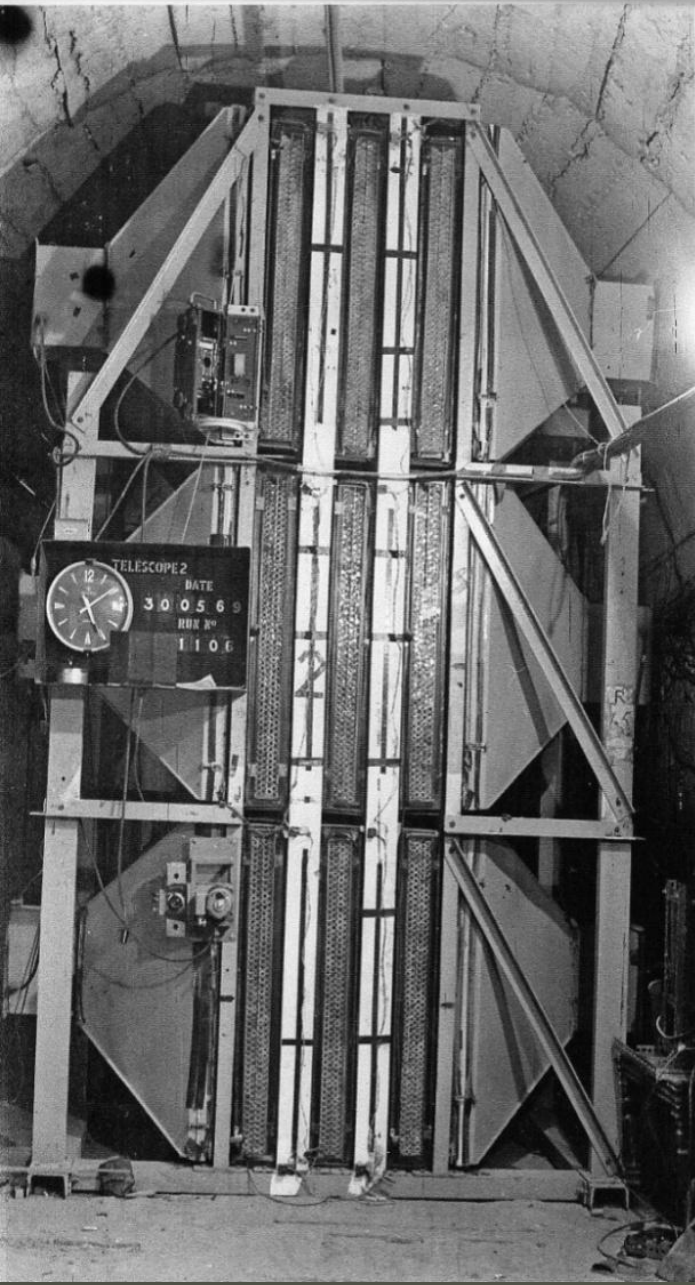


DETECTION OF MUONS PRODUCED BY COSMIC RAY NEUTRINO DEEP UNDERGROUND

C. V. ACHAR, M. G. K. MENON, V. S. NARASIMHAM, P. V. RAMANA MURTHY
and B. V. SREEKANTAN,
Tata Institute of Fundamental Research, Colaba, Bombay


K. HINOTANI and S. MIYAKE,
Osaka City University, Osaka, Japan

D. R. CREED, J. L. OSBORNE, J. B. M. PATTISON and A. W. WOLFENDALE
University of Durham, Durham, U.K.

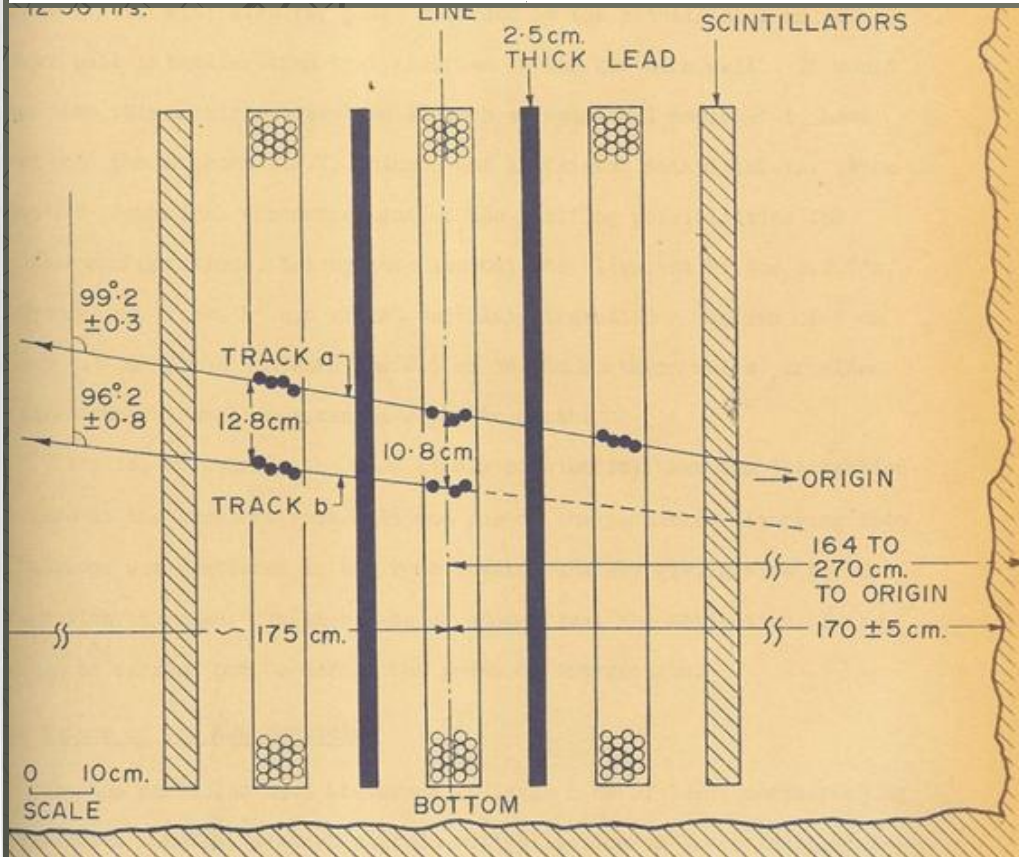

Physics Letters 18 (1965) 196, 15 Aug 1965

KGF proton decay experiments (1984)



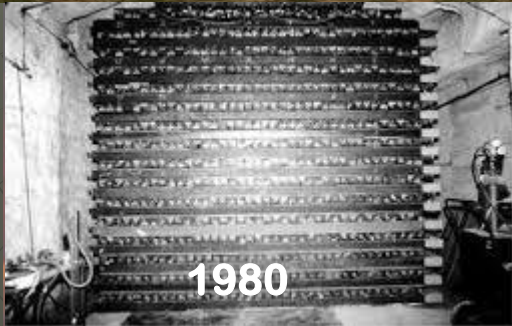


Georges Charpak's MWPC (1968)



The first modern electronically-readout gaseous detector. Contributed to the discoveries of W, Z, c and t.

Gas proportional counters

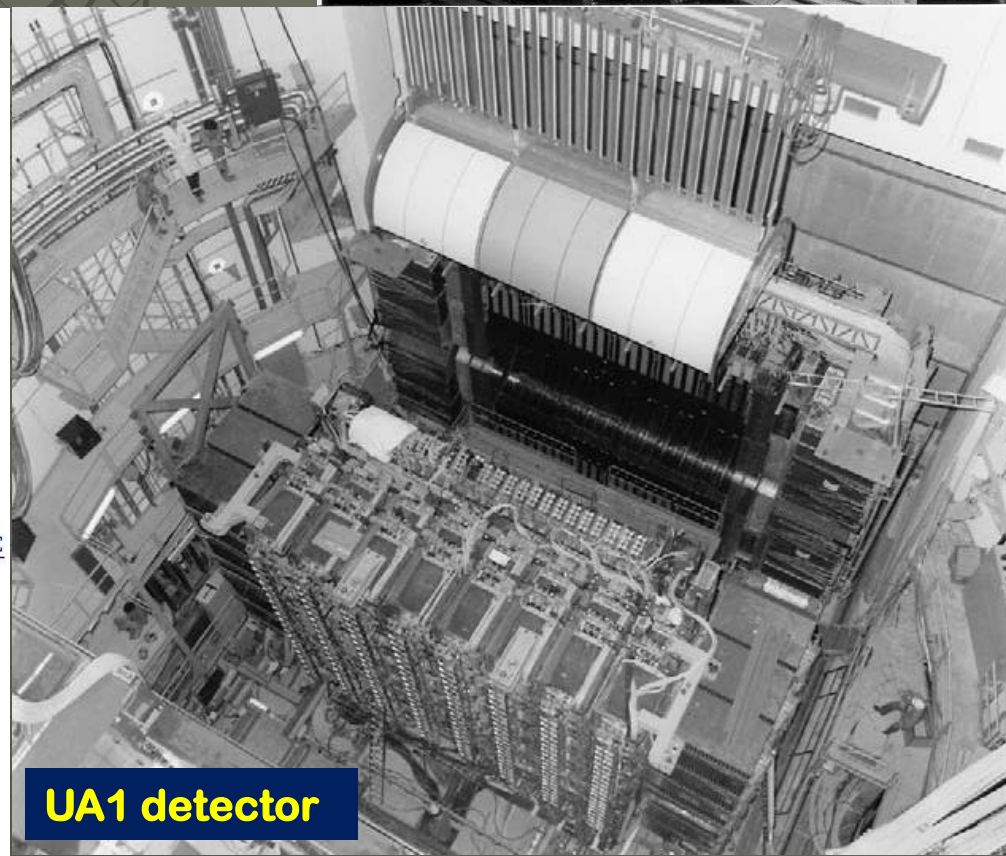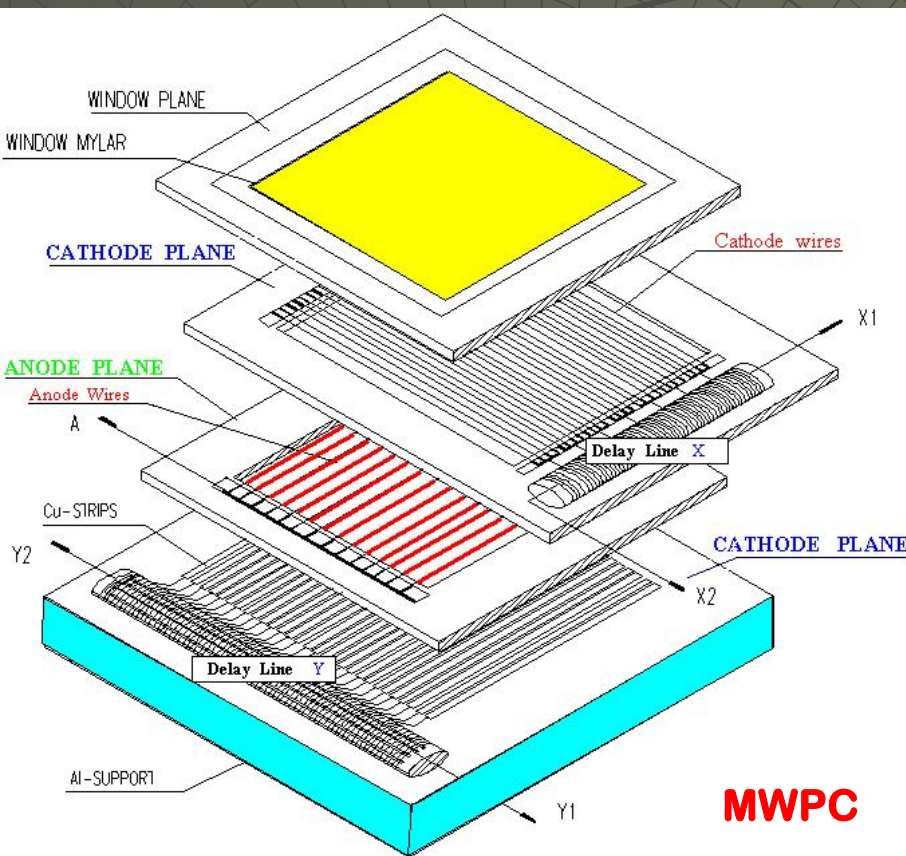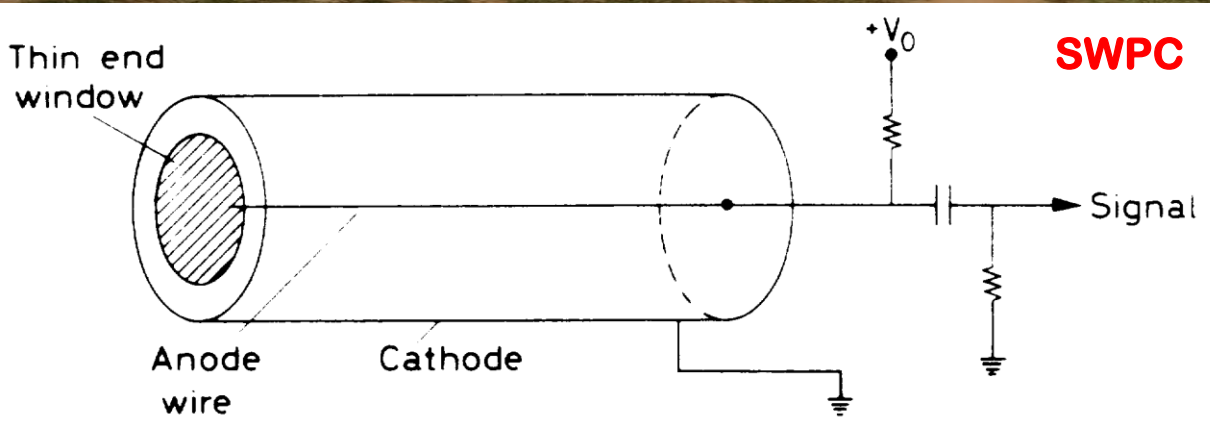


Resistive Plate Chamber (1981)

GOOD TIME RESOLUTION ---> THIN GAP
GOOD EFFICIENCY---> THICK GAS LAYER



THIN GAP (100 μm) AND HIGH PRESSURES (~10 bar)
HIGH RESISTIVITY ELECTRODE
(PESTOV GLASS, $10^9 \Omega \text{ cm}$)

Yu.N. Pestov & G.V. Fedotovich (1978)

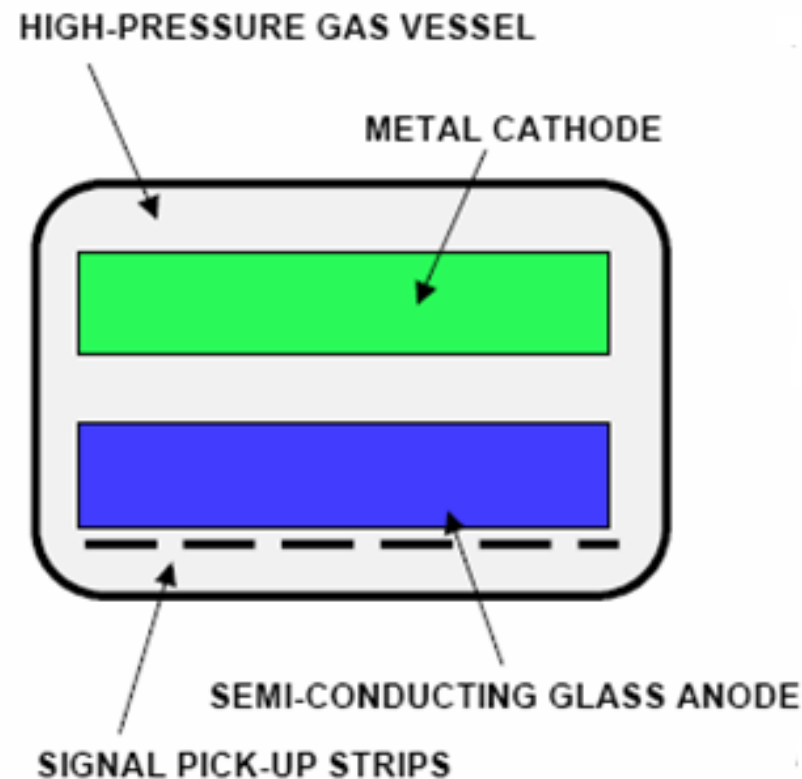

DEVELOPMENT OF RESISTIVE PLATE COUNTERS

R. SANTONICO and R. CARDARELLI

Istituto di Fisica dell'Università di Roma, Roma, Italy; Istituto Nazionale di Fisica Nucleare, Sezione di Roma, Italy

Received 12 January 1981

Contributed to the discovery of H.

A dc operated particle detector has been developed and tested, whose constituent elements are two parallel electrode bakelite plates between which, in a 1.5 mm gap, a gas mixture of argon and butane at ordinary pressure is circulated. The counter has 97% efficiency and ~1 ns time resolution at an operating voltage of about 10 kV. The output pulse needs no amplification, being typically 300 mV over 25 Ω .

The detector presented in this paper, which will be called "Resistive Plate Counter" (RPC) is essentially the same principle as that recently developed by Pestov and Fedotovich [1]. Nevertheless the drastic simplifications introduced in its realization, such as the absence of high pressure gas, the low requirements of mechanical precision, and the use of plastic materials instead of glass, makes it of potential interest in a different and possibly wider range of applications. In particular it could replace with great economic advantages plastic scintillators, whenever large detecting areas are needed under not exceedingly high fluxes of particles.


When the cathode is a metal plate, the photons produced by the discharge are not allowed to propagate in the gas, thus avoiding the possibility to originate secondary discharges in other points of the detector.

RPCs exhibit much better time resolution than

... $22 \times 0.2 \text{ cm}^2$ on which a copper foil 50 μm thick is glued on the side not facing the gas*. The high voltage electrode is a

* The cement used here and in the following is epoxy resin which has been proven to guarantee a sufficient electrical contact between copper and bakelite. Its conductivity can be increased, if needed, by adding a small amount of graphite.

Schematic of a basic RPC


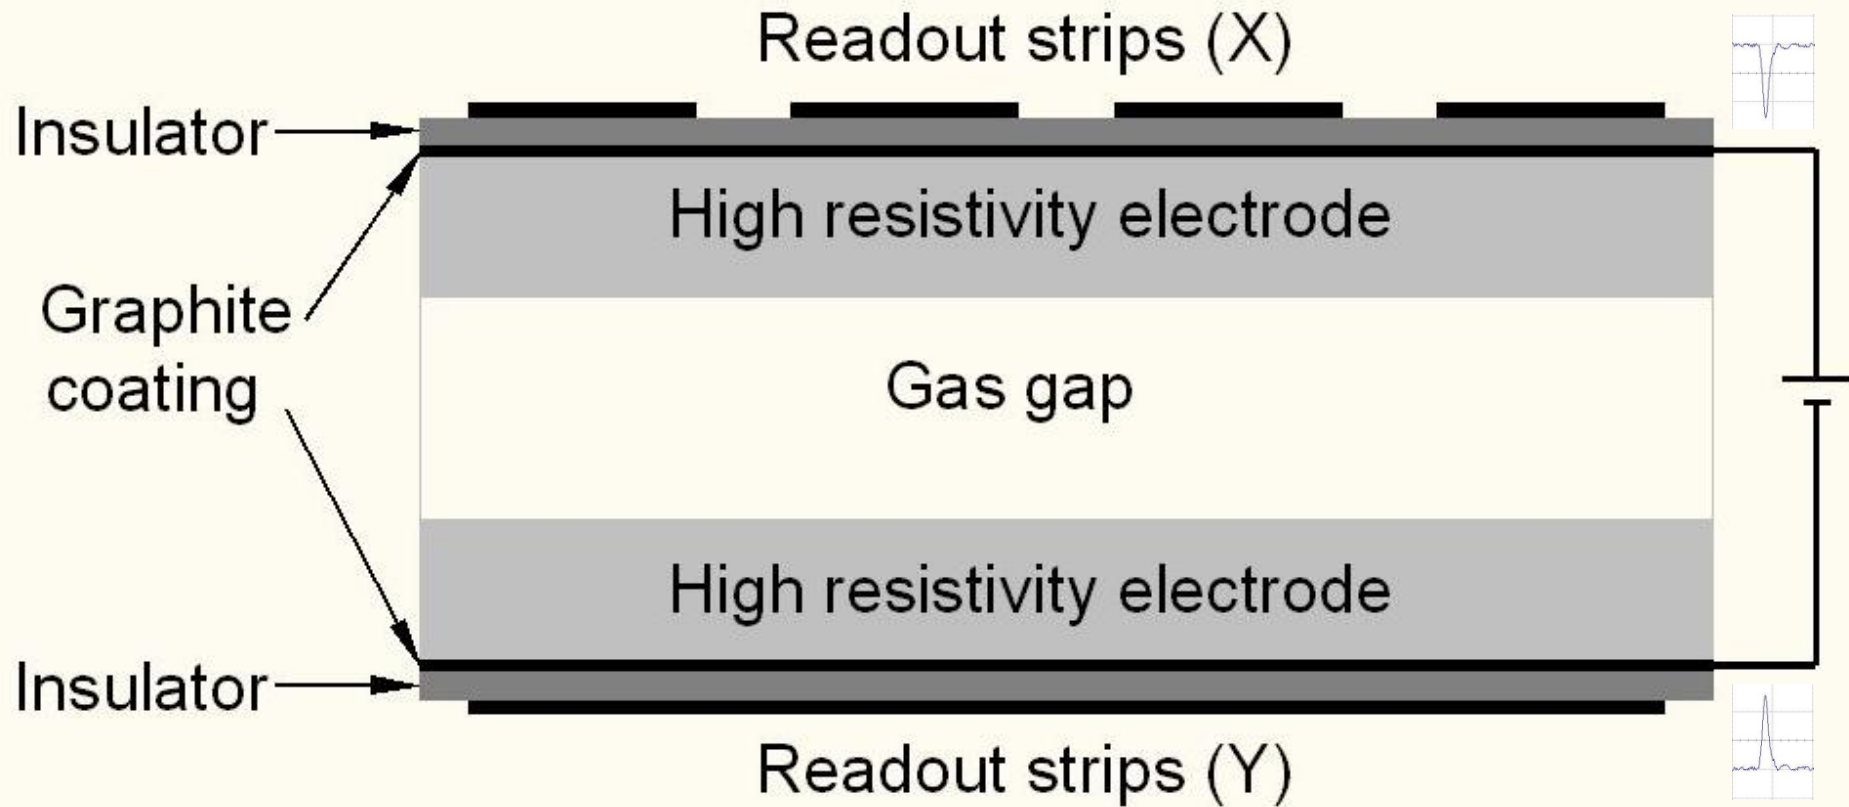


- ❖ Resistive materials like glass or bakelite are used as electrodes
- ❖ Special paint mixtures or films applied on the outer surfaces of the electrodes for applying high voltage (producing uniform field)
- ❖ Plastic honey-comb laminations or G10 panels used as signal readout panel
- ❖ Special plastic films for insulating the readout panels from high voltages
- ❖ Two modes of operation: Avalanche ($\text{R134a:Isobutane:SF}_6 :: 95.5:4.2:0.3$) and Streamer ($\text{R134a:Isobutane:Ar} :: 56:7:37$)

Two modes of RPC operation

Avalanche mode

Streamer mode

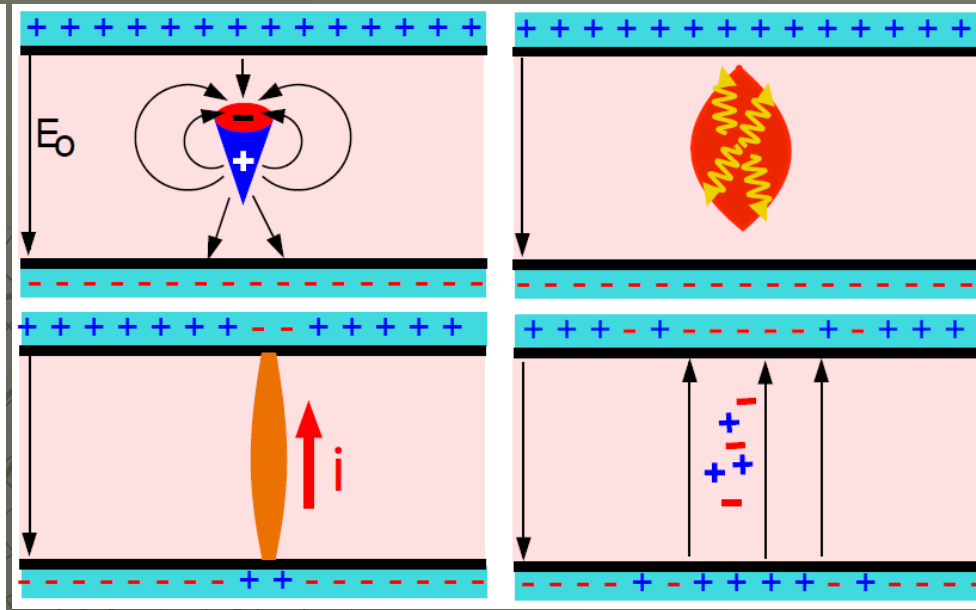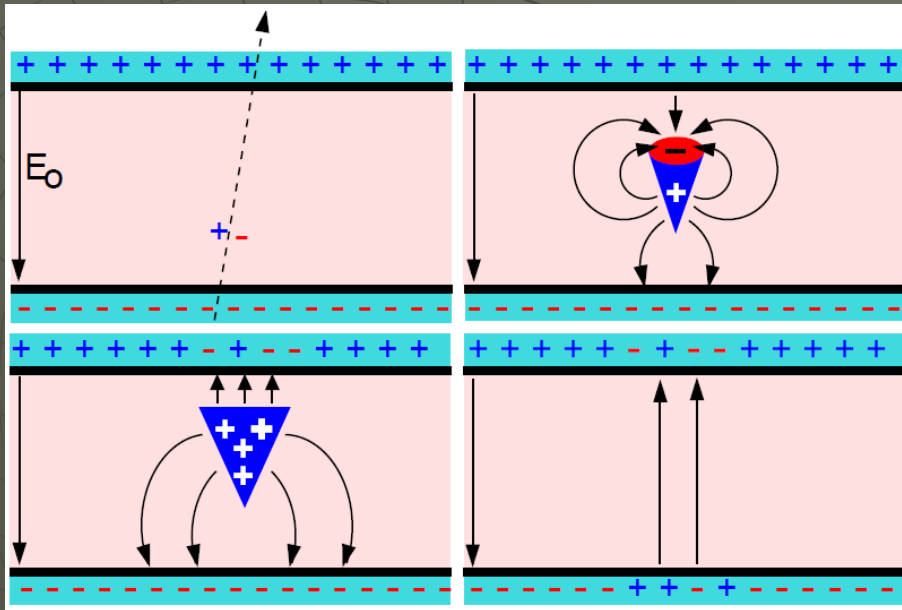

- Gain of the detector $\ll 10^8$
- Charge developed $\sim 1\text{pC}$
- Needs a preamplifier
- Longer detector life
- Typical gas mixture
R134a:iB:SF₆::94.5:4:0.5
- Moderate purity of gases is fine!
- Higher counting rate capability

- Gain of the detector $> 10^8$
- Charge developed $\sim 100\text{pC}$
- No need for a preamplifier
- Relatively shorter detector life
- Typical gas mixture
R134a:iB:Ar::62.8:30
- High purity of gases expected
- Low counting rate capability

Typical expected parameters

- ◆ No. of clusters in a distance g follows Poisson distribution with an average of $\bar{n} = g/\lambda$
- ◆ Probability to have n clusters $p(n) = \frac{1}{n!} \left(\frac{g}{\lambda}\right)^n e^{-\frac{g}{\lambda}}$
- ◆ Number of electrons reaching the anode $n = n_0 e^{(\alpha-\beta)x}$
- ◆ Intrinsic efficiency $\epsilon_{\max} = 1 - e^{-\bar{n}}$
- ◆ So ϵ_{\max} depends only on gas and gap
- ◆ Intrinsic time resolution $\sigma_t = 1.28/(\alpha - \beta)v_D$
- ◆ So σ_t doesn't depend on the threshold
- ◆ Area of signal pickup spot $S = Qd \div \epsilon V$ (→ counting rate capability)
 - ❖ Gas: 96.7/3/0.3 (R134a/iB/SF₆)
 - ❖ Electrode thickness: 2mm
 - ❖ Gas gap: 2mm
 - ❖ HV: 10.0KV (E = 50KV/cm)
 - ❖ Relative permittivity (ϵ): 10
 - ❖ Mean free path (λ): 0.104mm
 - ❖ Avg. no. of electrons/cluster: 2.8
 - ❖ Drift velocity (V_D) = 130mm/ns
 - ❖ Townsend coefficient (α): 13.3/mm
 - ❖ Attachment coefficient (β): 3.5/mm
 - ❖ Total charge (q_{tot}): 200pC
 - ❖ Induced charge (q_{ind}): 6pC
 - ❖ Charge threshold: 0.1pC
 - ❖ Efficiency (ϵ_{\max}): 90%
 - ❖ Time resolution (σ_t): 950pS
 - ❖ Signal pickup spot (S) = 0.1mm²



RPC characteristics and merits

- ◆ Large detector area coverage, thin ($\sim 10\text{mm}$), small mass thickness
- ◆ Flexible detector and readout geometry designs
- ◆ Solution for tracking, calorimeter, muon detectors
- ◆ Trigger, timing and special purpose design versions
- ◆ Built from simple/common materials; low fabrication cost
- ◆ Ease of construction and operation
- ◆ Highly suitable for industrial production
- ◆ Detector bias and signal pickup isolation
- ◆ Simple signal pickup and front-end electronics; digital information acquisition
- ◆ High single particle efficiency ($>95\%$) and time resolution ($\sim 1\text{nSec}$)
- ◆ Particle tracking capability; 2-dimensional readout from the same chamber
- ◆ Scalable rate capability (Low to very high); Cosmic ray to collider detectors
- ◆ Good reliability, long term stability
- ◆ Under laying Physics mostly understood!


Deployment scenario of RPCs

Experiment	Area (m ²)	Electrodes	Gap(mm)	Gaps	Mode	Type
PHENIX	?	Bakelite	2	2	Avalanche	Trigger
NeuLAND	4	Glass	0.6	8	Avalanche	Timing
FOPI	6	Glass	0.3	4	Avalanche	Timing
HADES	8	Glass	0.3	4	Avalanche	Timing
HARP	10	Glass	0.3	4	Avalanche	Timing
COVER-PLASTEX	16	Bakelite	2	1	Streamer	Timing
EAS-TOP	40	Bakelite	2	1	Streamer	Trigger
STAR	50	Glass	0.22	6	Avalanche	Timing
CBM TOF	120	Glass	0.25	10	Avalanche	Timing
ALICE Muon	140	Bakelite	2	1	Streamer	Trigger
ALICE TOF	150	Glass	0.25	10	Avalanche	Timing
L3	300	Bakelite	2	2	Streamer	Trigger
BESIII	1200	Bakelite	2	1	Streamer	Trigger
BaBar	2000	Bakelite	2	1	Streamer	Trigger
Belle	2200	Glass	2	2	Streamer	Trigger
CMS	2953	Bakelite	2	2	Avalanche	Trigger
OPERA	3200	Bakelite	2	1	Streamer	Trigger
YBJ-ARGO	5630	Bakelite	2	1	Streamer	Trigger
ATLAS	6550	Bakelite	2	1	Avalanche	Trigger
ICAL	97,505	Both	2	1	Avalanche	Trigger

Industrial production of ICAL RPCs

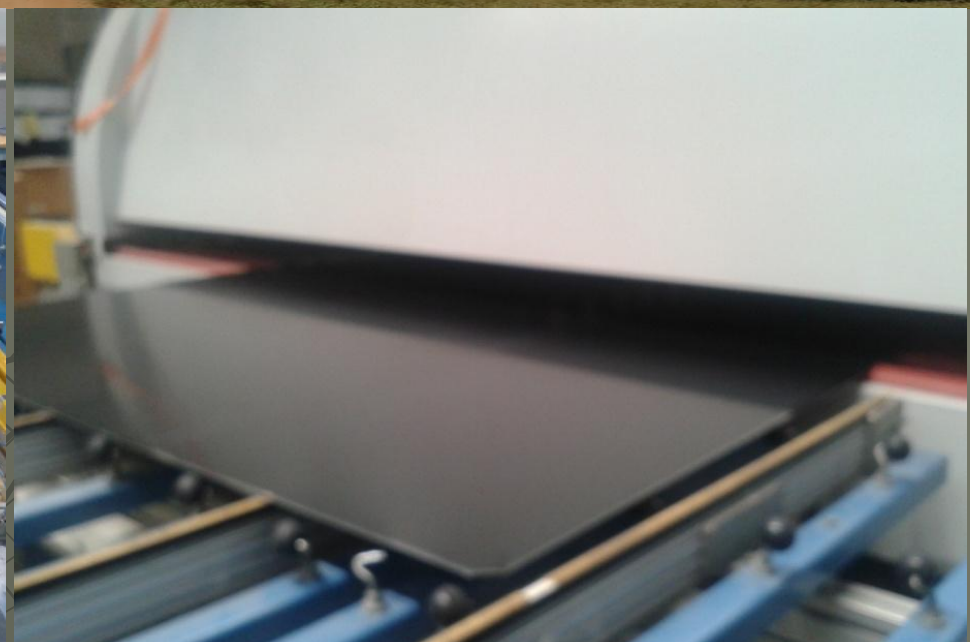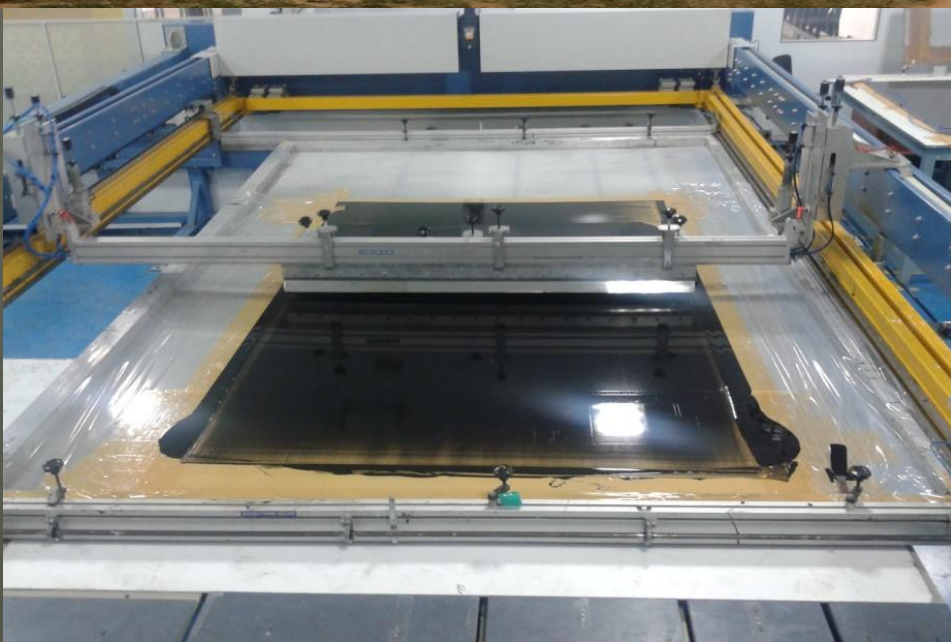

Argo-YBJ RPC carpet array

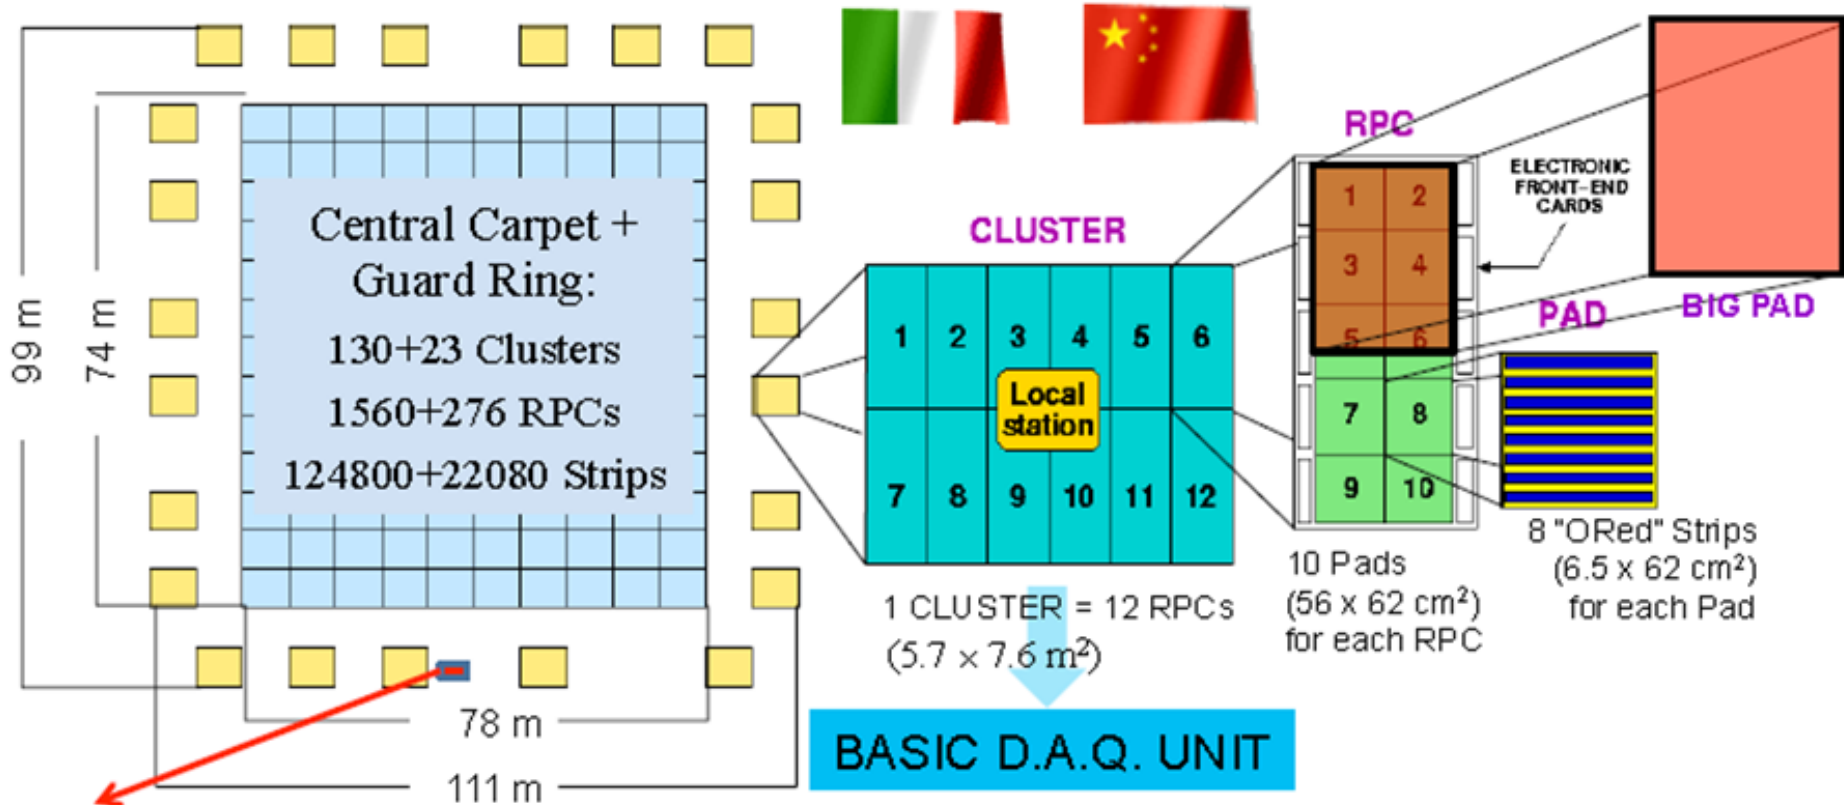


Test telescope


large area:
 5600+1100=6700 m²
 92% active surface



Primary energy

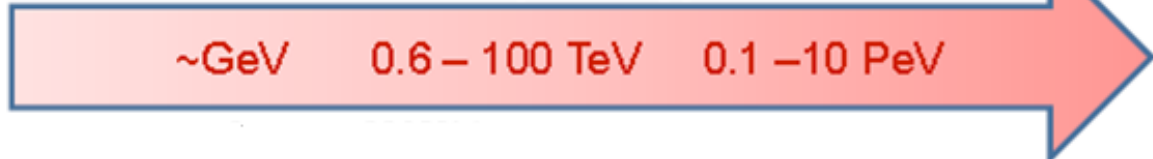




Large scale deployment of scintillators

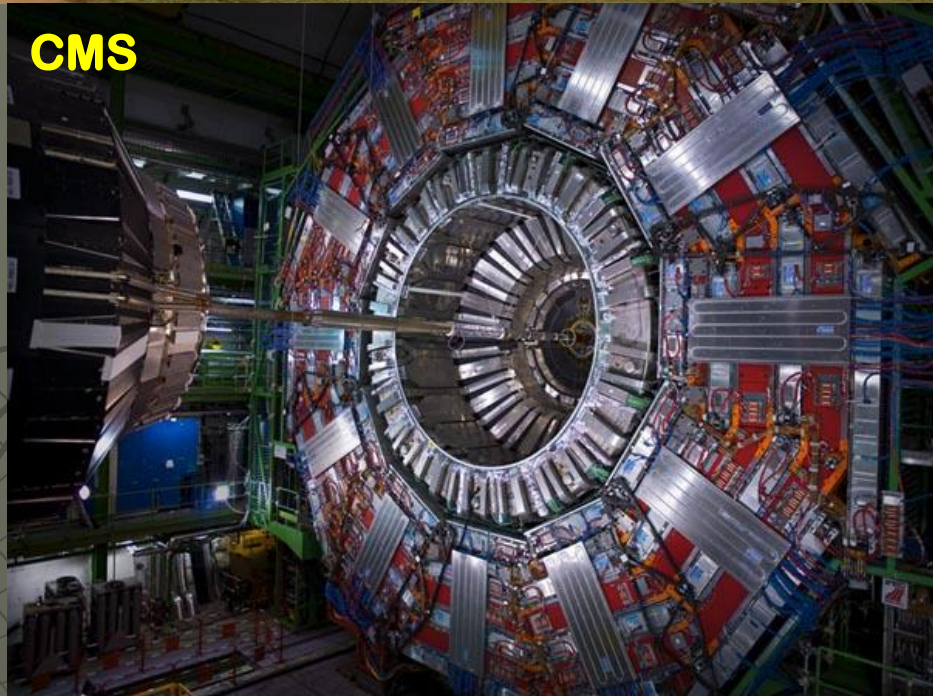

FNAL-NICADD extrusion Line

- ❖ Fermilab and Northern Illinois Center for Accelerator and Detector Development.
- ❖ For ALICE upgrade, the ILC calorimetry program, MINOS and MINERvA experiments.
- ❖ Simple, inexpensive and robust extrusion procedure.
- ❖ Co-extruded hole and TiO_2 coating or Tyvek.
- ❖ In some cases no alternative to the extrusion because of geometry requirements.
- ❖ Polystyrene pellets are used as the base material, along with % PPO (2,5-Diphenyloxazole) and 0.03% POPOP (1,4-bis(5-phenyloxazol-2-yl) benzene) dopants.
- ❖ This is a blue-emitting scintillator, absorption cut-off at 400nm and emission at 420nm.
- ❖ Light attenuation lengths of long and short components are 42cm & 30cm.
- ❖ Fiber hole diameter and number of fibres are some of the considerations.
- ❖ Readout by Solid State Photomultipliers (SSPM).
- ❖ New development: Co-extrude fibres with the scintillator profile.

Extrusion scintillator technology

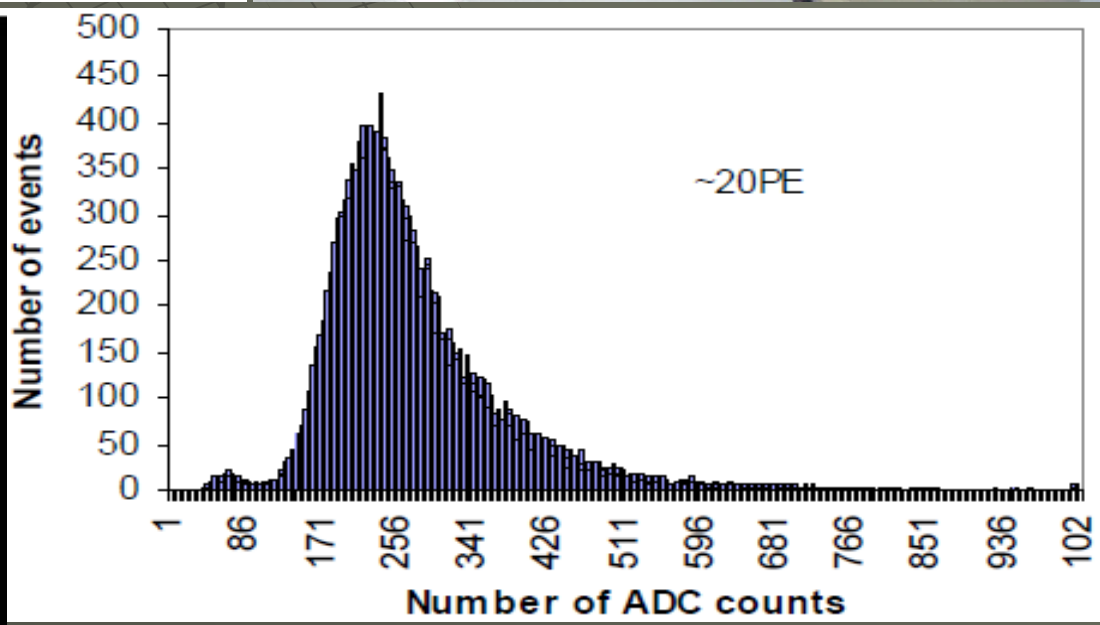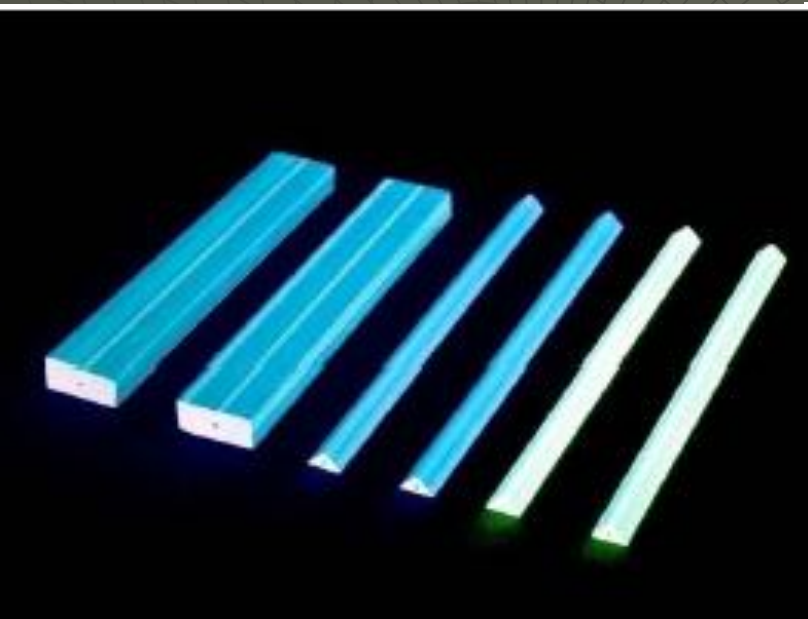
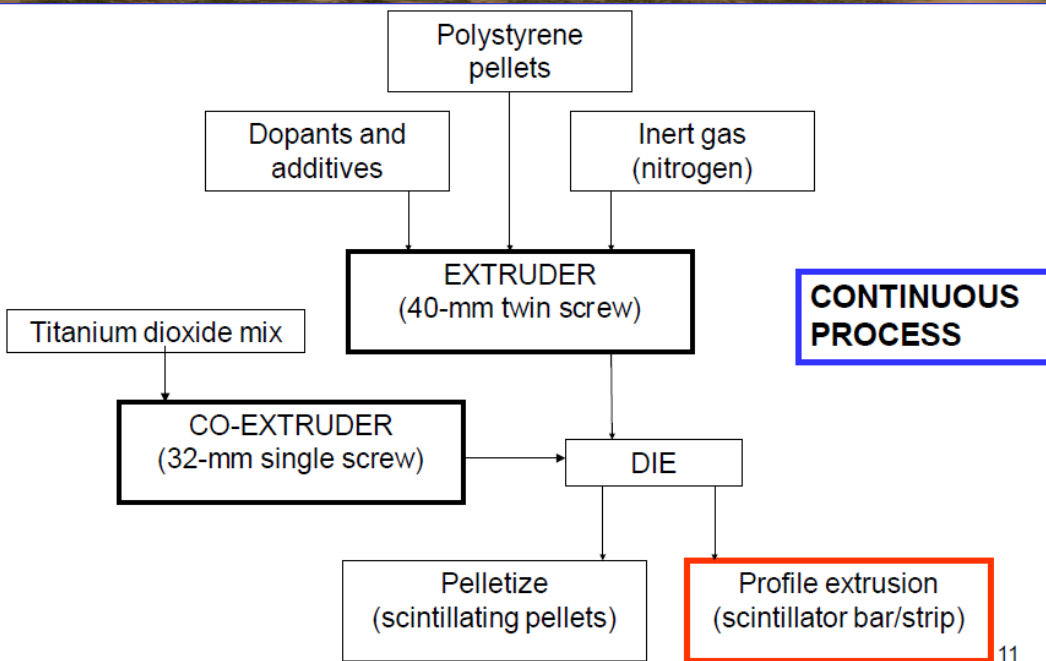


New hybrid scintillators



- ◆ New generation experiments require large volume, cheap scintillation materials with high light yields and short scintillation decay times.
- ◆ Extruded scintillators suffer from poorer optical quality, particulate matter and additives in polystyrene pellets.
- ◆ New single-component and multi-component polymer mixtures.
- ◆ Hybrid scintillators using luminescent salts as scintillation dyes.
- ◆ Introduction of fusible inorganic fillers found to alter optical transmission spectra and rapid shortening of the scintillation decay times of the hybrid scintillators.
- ◆ Polymer based hybrid glasses in which the components do not chemically react with each other during the manufacturing process.
- ◆ Conventional hybrid materials in which all or a part of the inorganic components participate in chemical reactions with organic components. **For example**, a reaction between the AlCl_3 inorganic filler and the polystyrene matrix during the injection moulding process.

R1449 PMTs & neutrino astronomy

- ❖ In 1979, Masatoshi Koshiba came up with a challenging proposal to Hamamatsu's President Hiruma "Hey, could you make me a 25" PMT?"
- ❖ A number of previously acquired highly sophisticated technologies were collectively used to develop the 20" PMT.
- ❖ 50Kt water Čerenkov detector uses 11.2K PMTs.

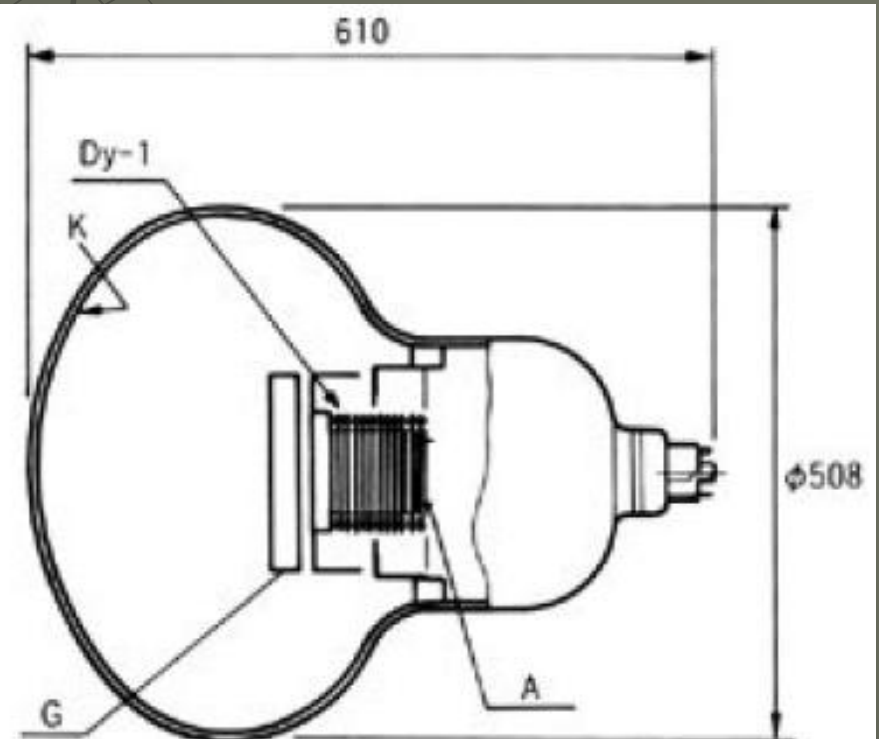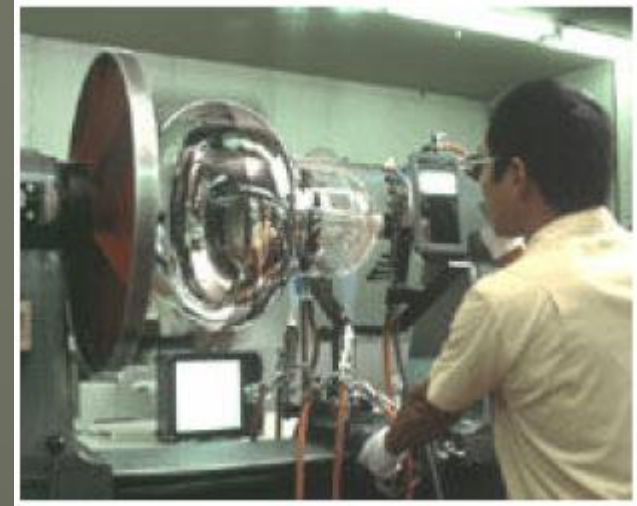

Super Kamiokande experiment

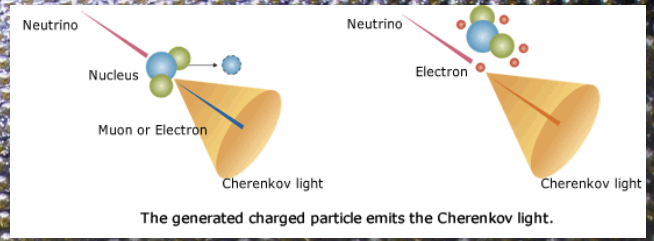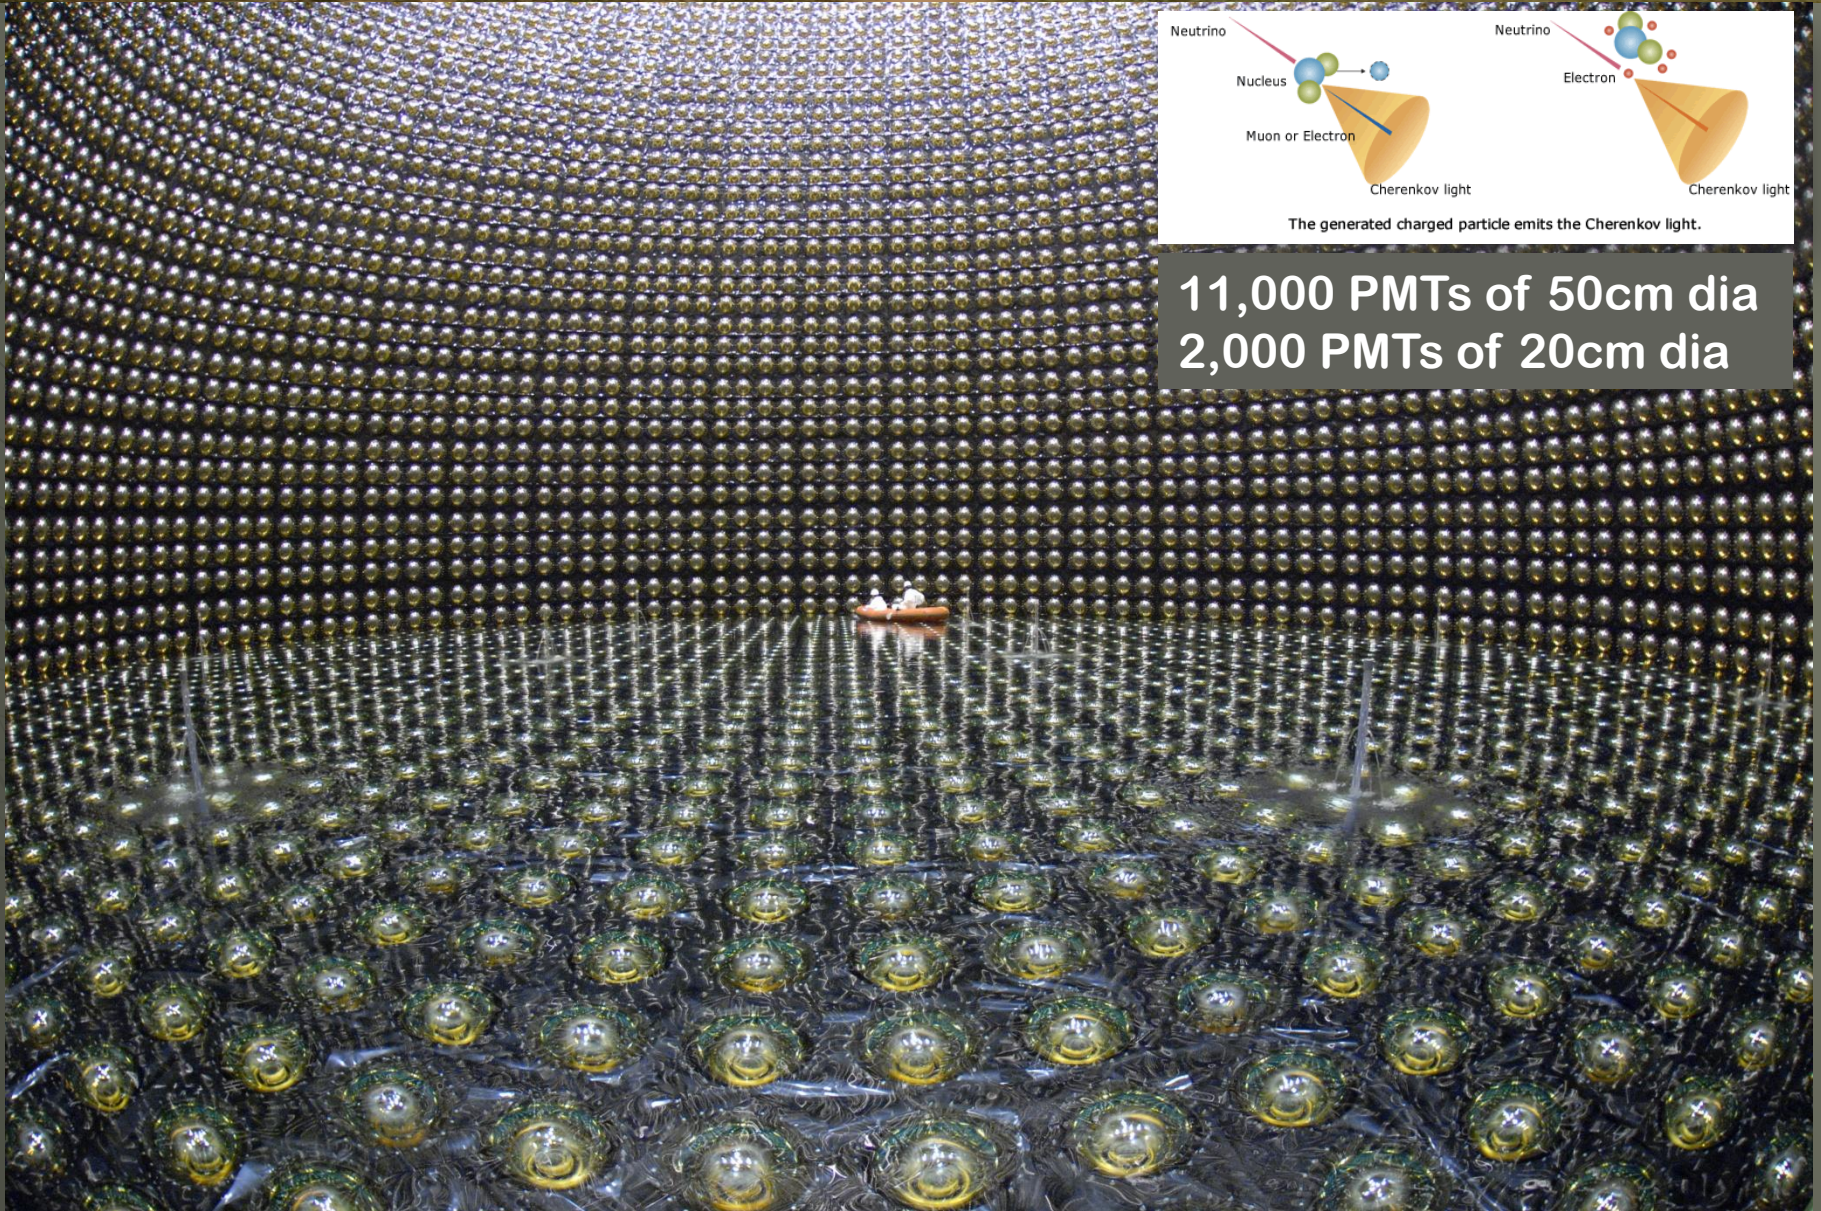




11,000 PMTs of 50cm dia
2,000 PMTs of 20cm dia

GM APDs and SiPMs

- ◆ Very small (few mm)
- ◆ Pixelated active surface structure
- ◆ Insensitive to magnetic fields
- ◆ Works at low bias voltage ($\sim 100\text{V}$)
- ◆ *Relatively* inexpensive
- ◆ Single photon counting capability
- ◆ Very fast time resolution ($\sim 200\text{ps}$)
- ◆ Good linear response

SiPM:

- matrix of n pixels (~ 1000) in parallel
- each pixel: GM-APD + $R_{\text{quenching}}$

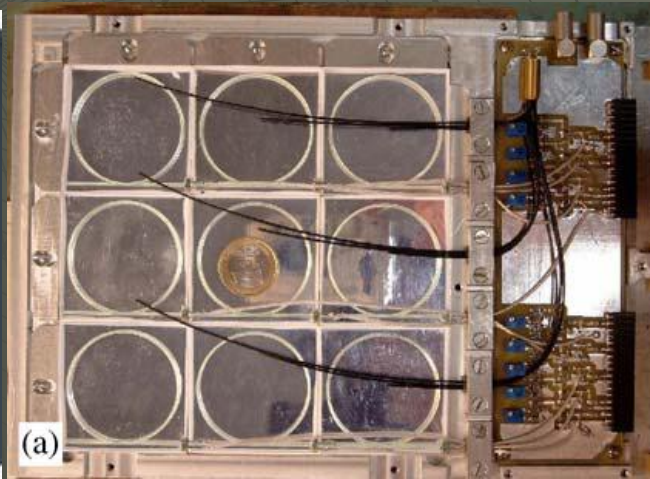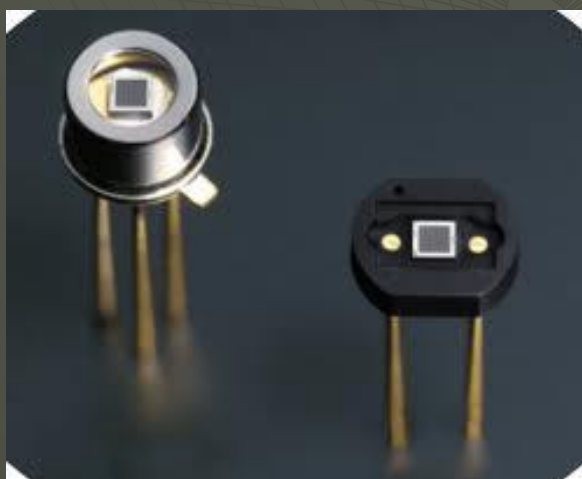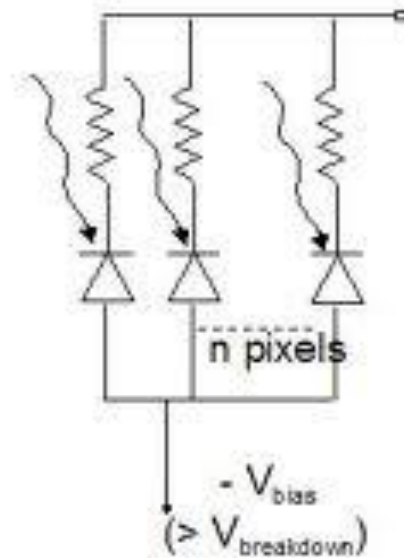

A 1-minute tutorial on SiPM





- ❖ SiPM is a pixelated avalanche photodiode operated in the limited Geiger mode.
- ❖ For example, a detector surface of $1 \times 1 \text{ mm}^2$ is divided into 1024 pixels.
- ❖ Operated with a reverse bias which is slightly above the breakdown voltage.
- ❖ Current flow in a pixel limited by an individual poly-silicon resistor ($R_{\text{pixel}} = 400 \text{ k}\Omega$).
- ❖ Signal from a pixel is determined by the charge accumulated in the pixel capacitance, C_{pixel} . That is,

$$Q_{\text{pixel}} = C_{\text{pixel}} \times \Delta V = C_{\text{pixel}} \times (V_{\text{bias}} - V_{\text{breakdown}})$$

where, ΔV is \approx a few volts, C_{pixel} is $\sim 50 \text{ fF}$, yielding $Q_{\text{pixel}} \approx 150 \text{ fC}$ or 10^6 electrons.

- ❖ SiPM pixel signal doesn't depend on the number of primary carriers (Geiger mode).
- ❖ Each pixel detects the carriers created by a photon, ionization of a charged particle, or thermal noise with the same response signal of 10^6 electrons.
- ❖ Analog information obtained by adding response of all fired pixels.
- ❖ The dynamic range is determined by the finite number of pixels, presently 10^3 :
- ❖ The SiPM photon-detection efficiency is comparable to the QE of PMTs for blue light and larger for green light, which is important for the usage of WLS fibres.
- ❖ For stable operations, the sensitivity of the SiPM gain and efficiency to temperature and bias voltage are important issues.
- ❖ The total temperature and bias voltage dependence of the SiPM gain at room temperature is measured to be $4.5\%/\text{°C}$ and $7\%/0.1\text{V}$.



Some of the basic characteristics

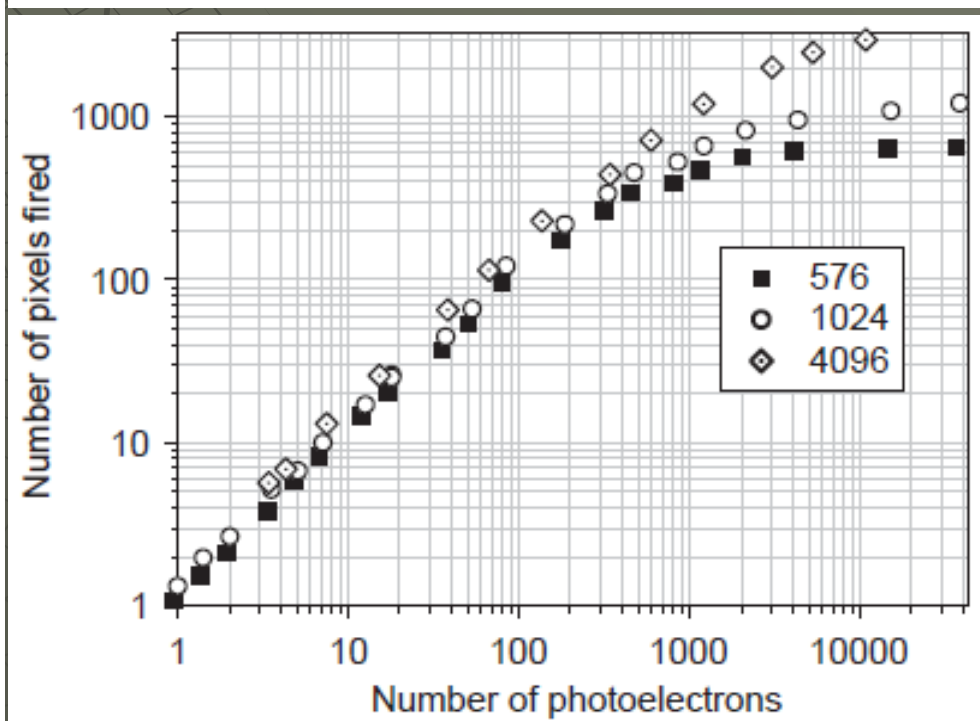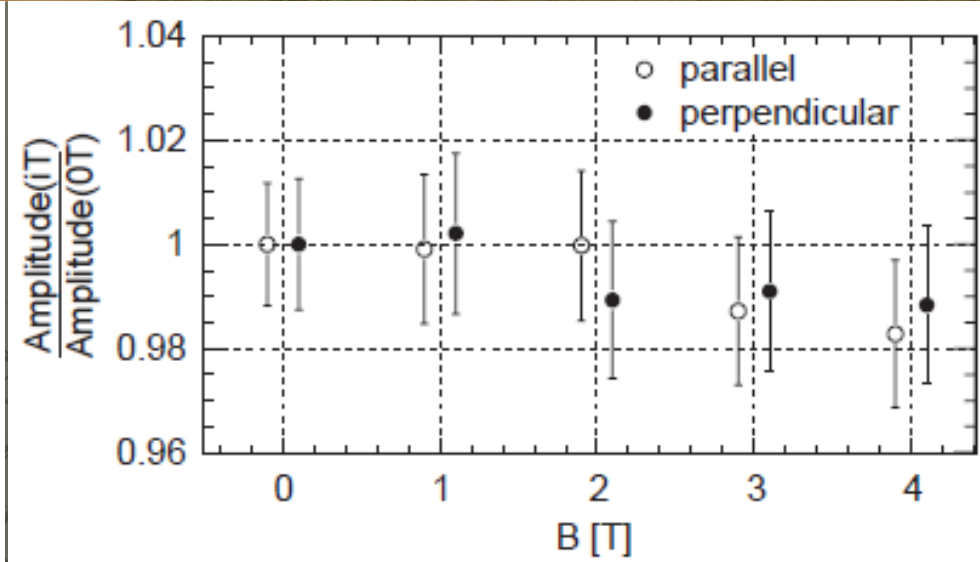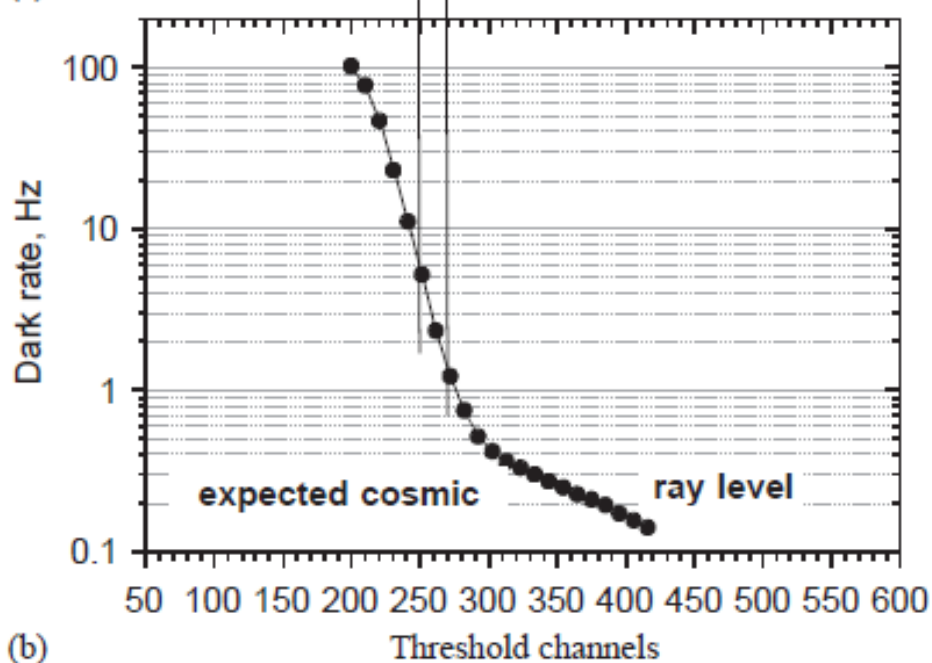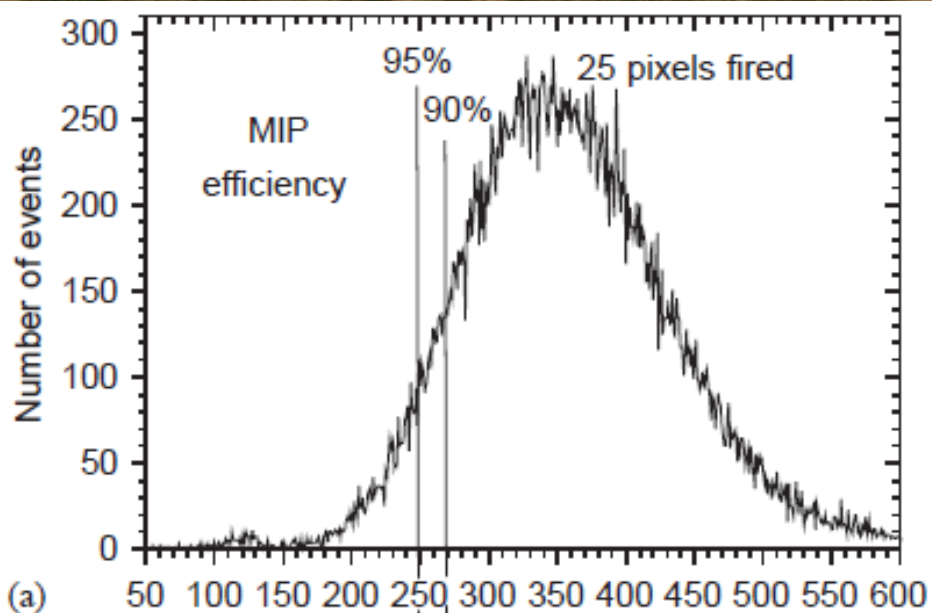

The IceCube detector




"Bert"

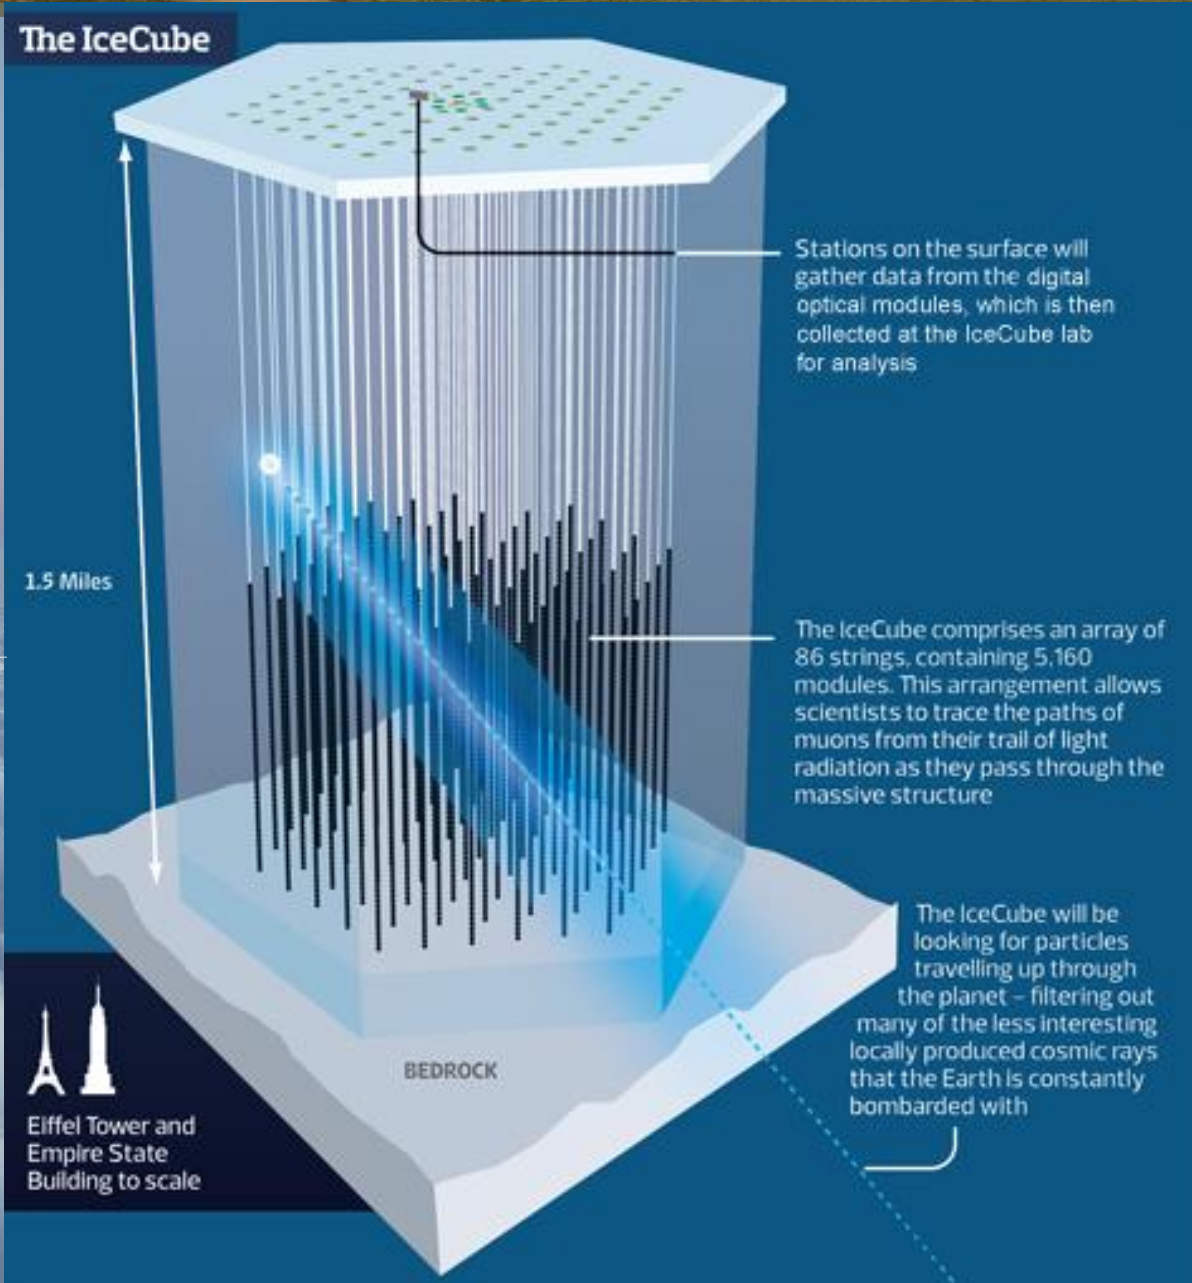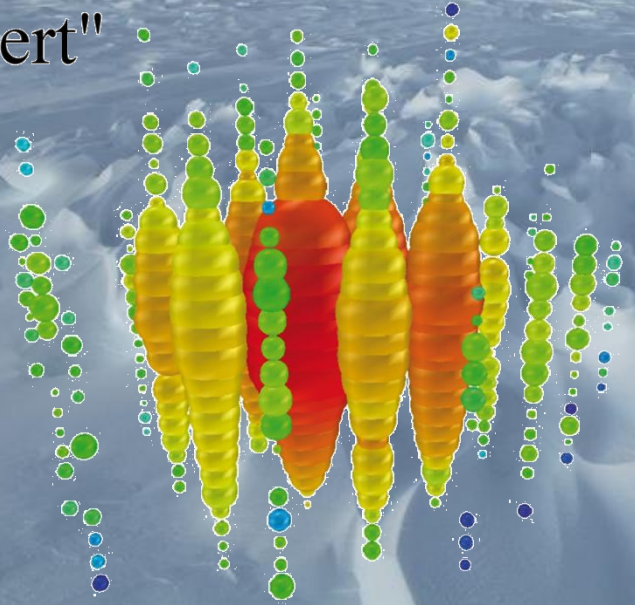


Digital Optical Module (DOM)

- ◆ Self-triggers on PMT pulse
- ◆ Captures waveforms with:
 - ◆ 250MHz first 500ns
 - ◆ 40MHz over 5000ns
- ◆ Dynamic range:
 - ◆ 200 PE over 15ns
 - ◆ 2000 PE over 5000ns
- ◆ Time-stamps each pulse:
 - ◆ rms < 5ns
- ◆ Dead time < 1%
- ◆ Noise rate < 1000Hz
- ◆ Calibration devices:
 - ◆ UV & blue LEDs
 - ◆ Electrical pulsers

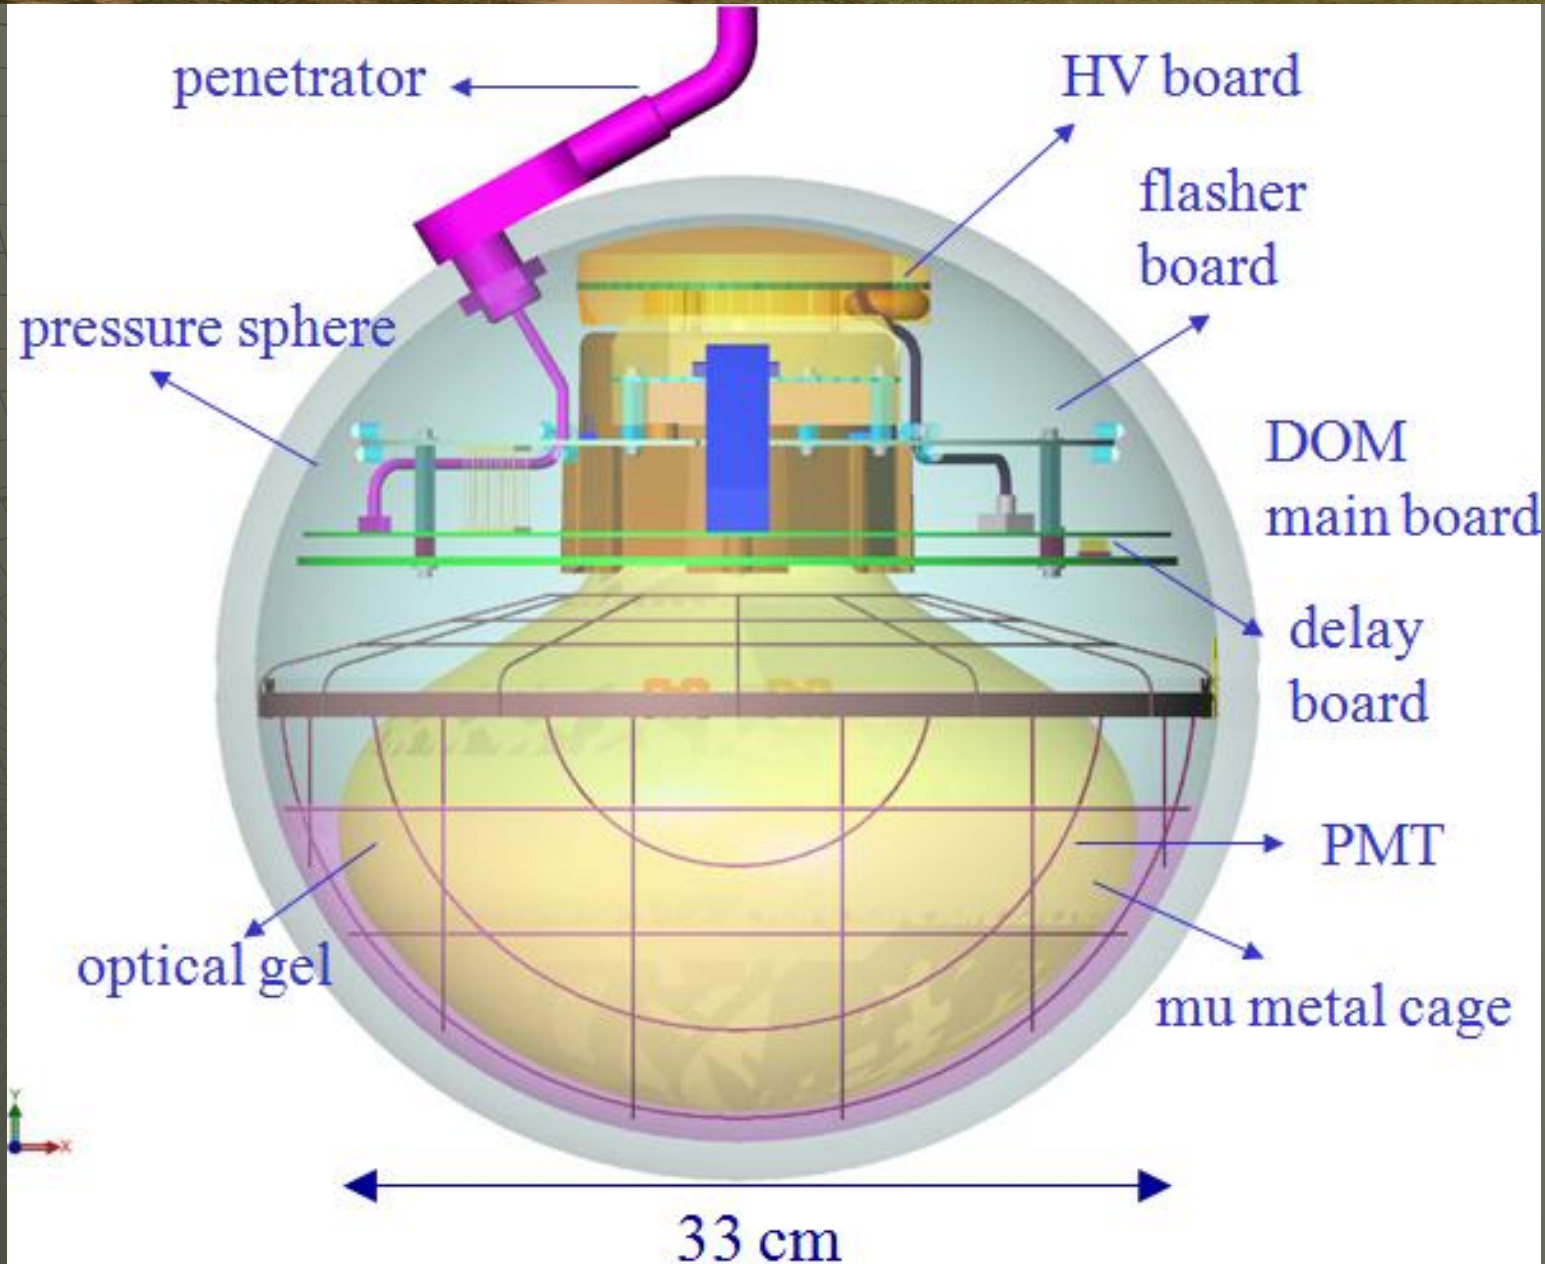

DOM Main board



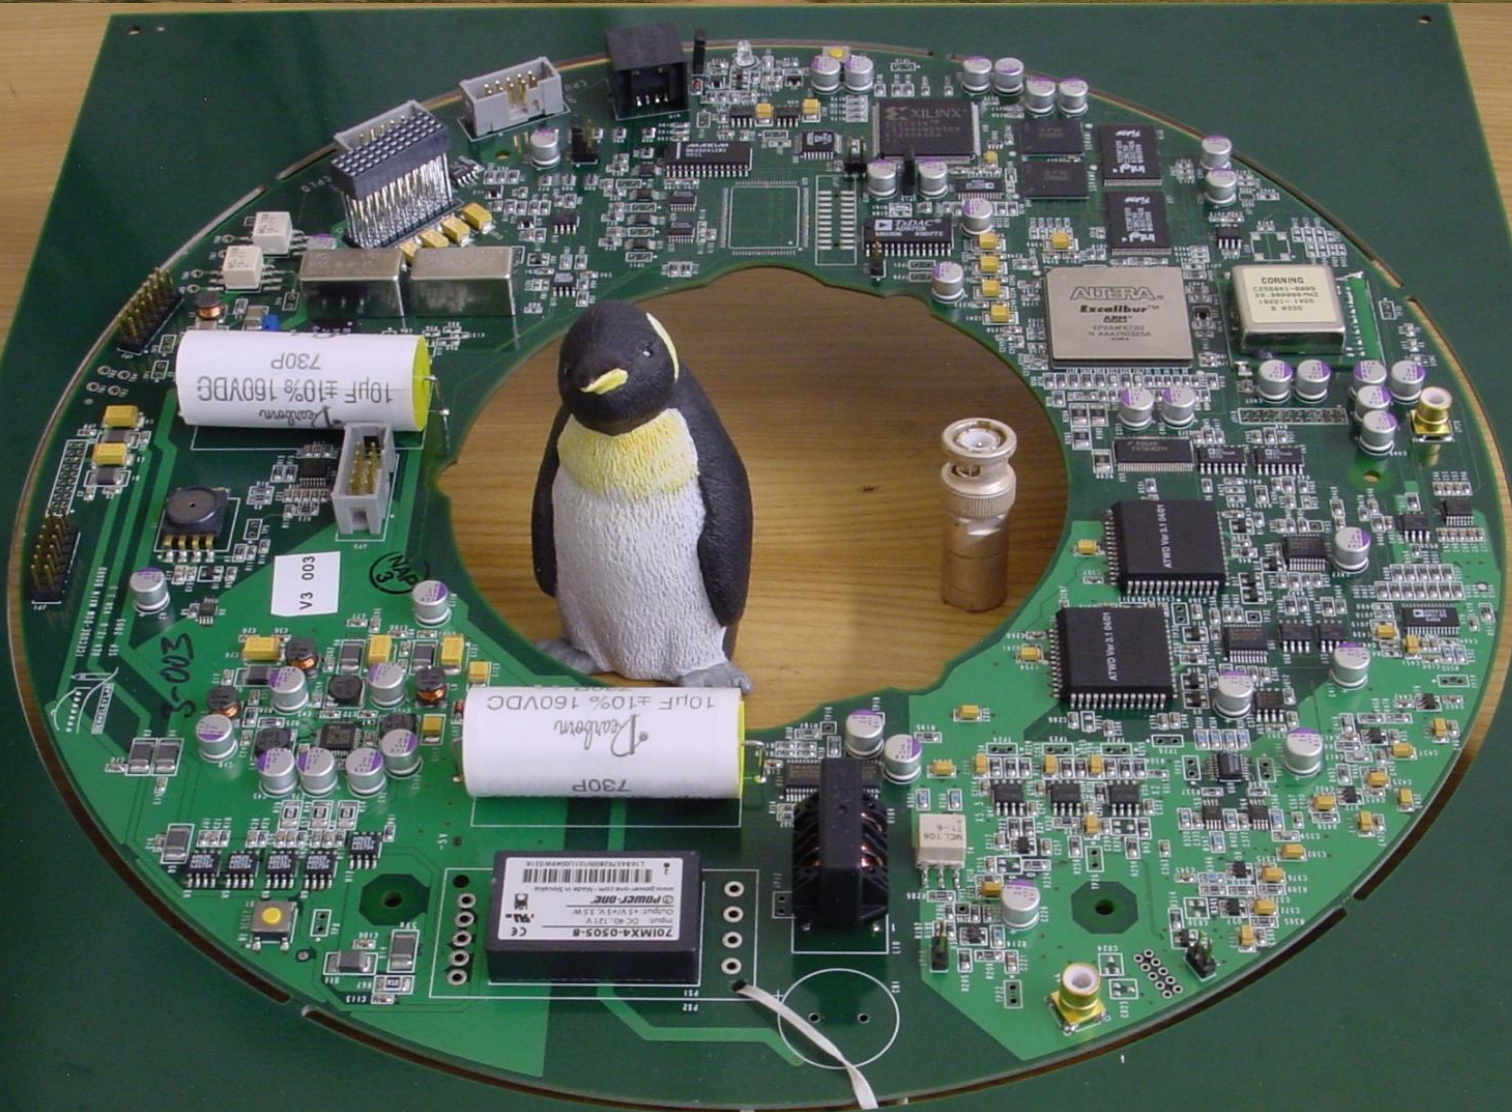


26612





The DOM assembly




DZERO LAr calorimeter

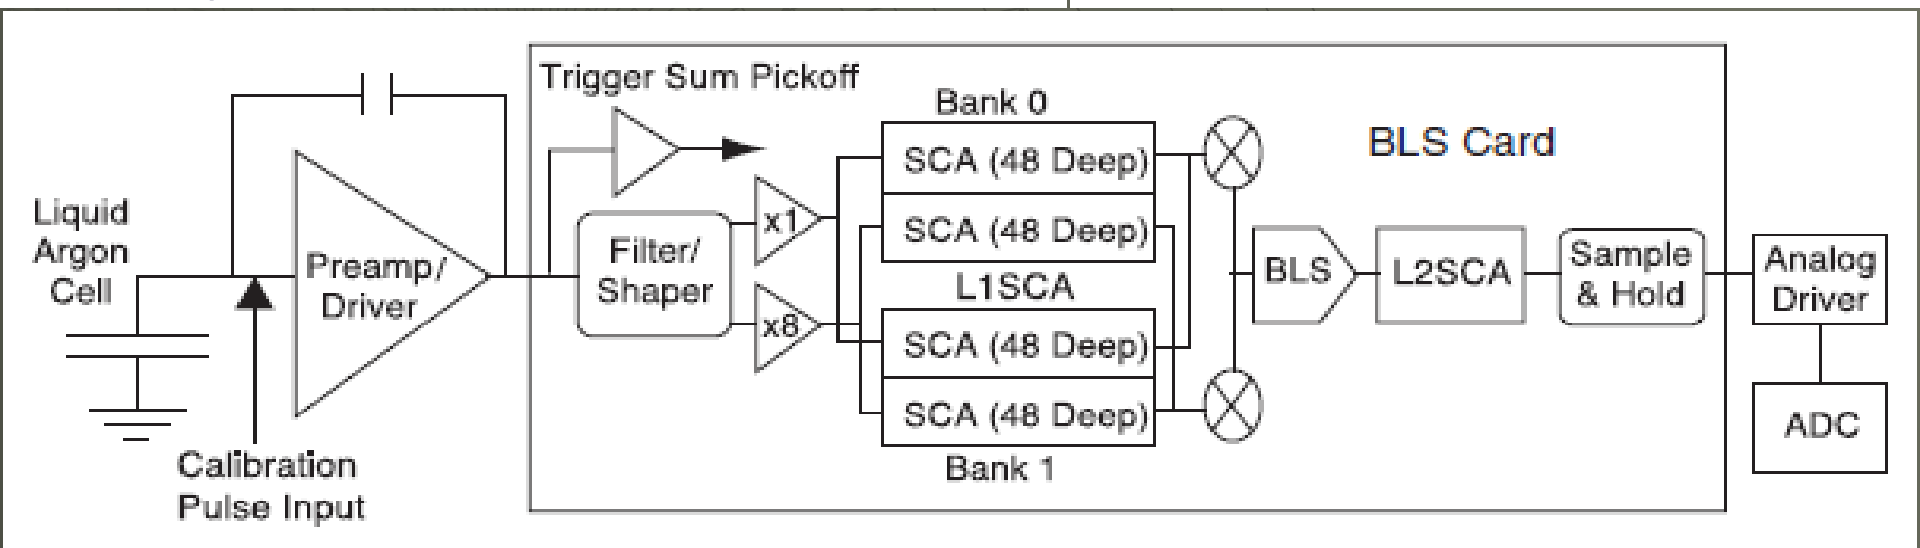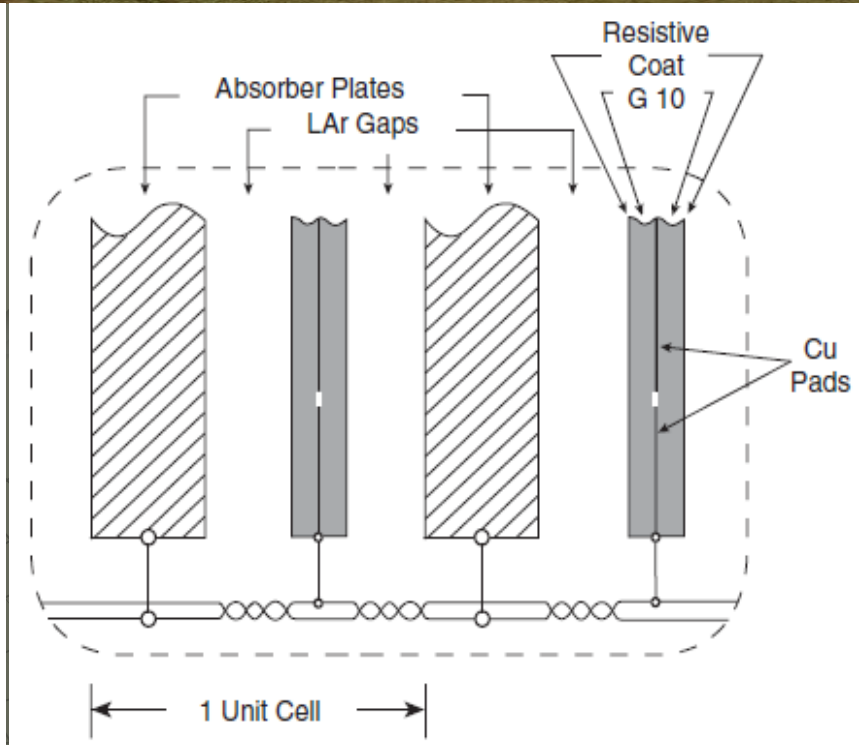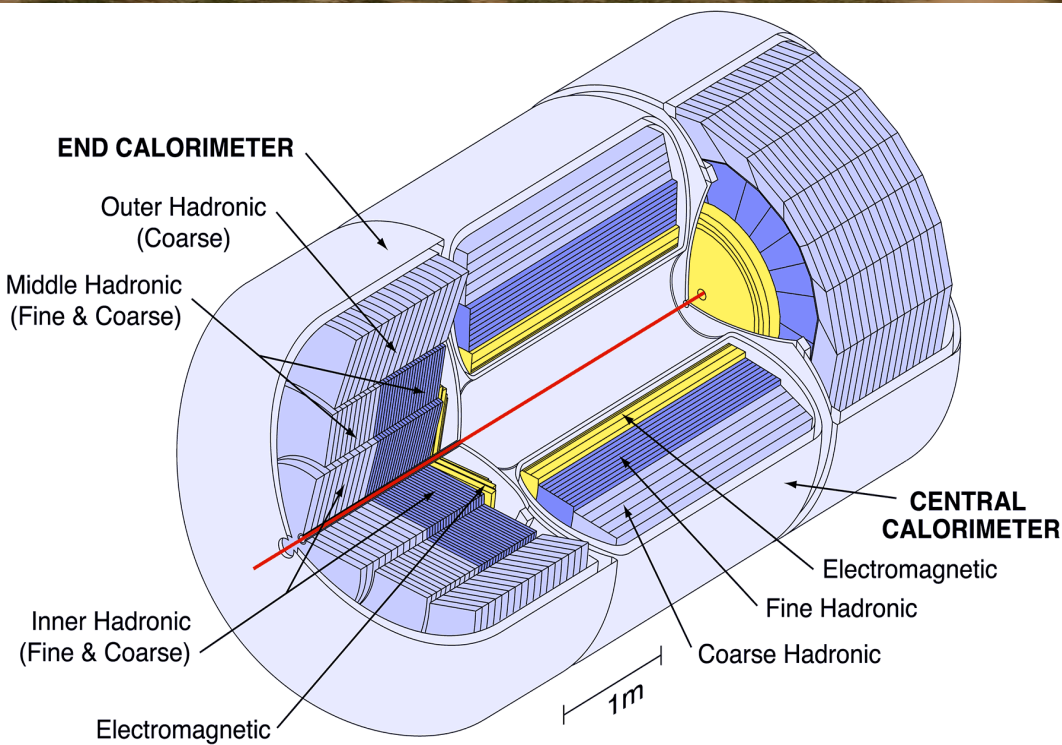

Readout of ATLAS LAr calorimeter

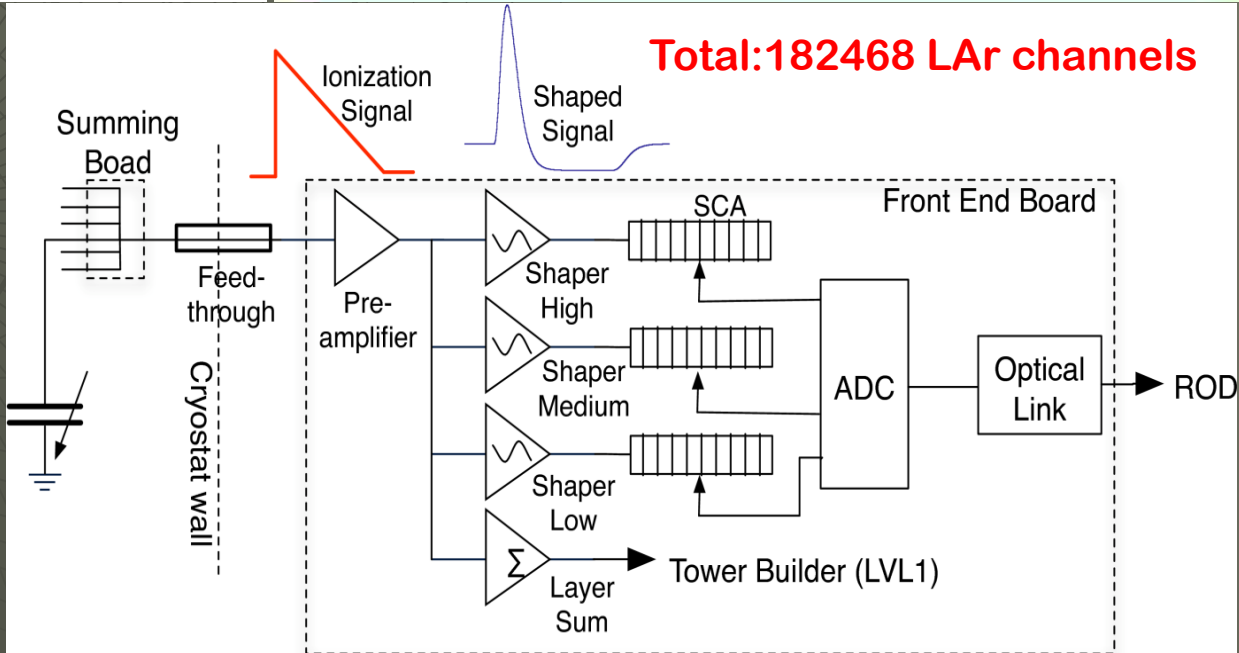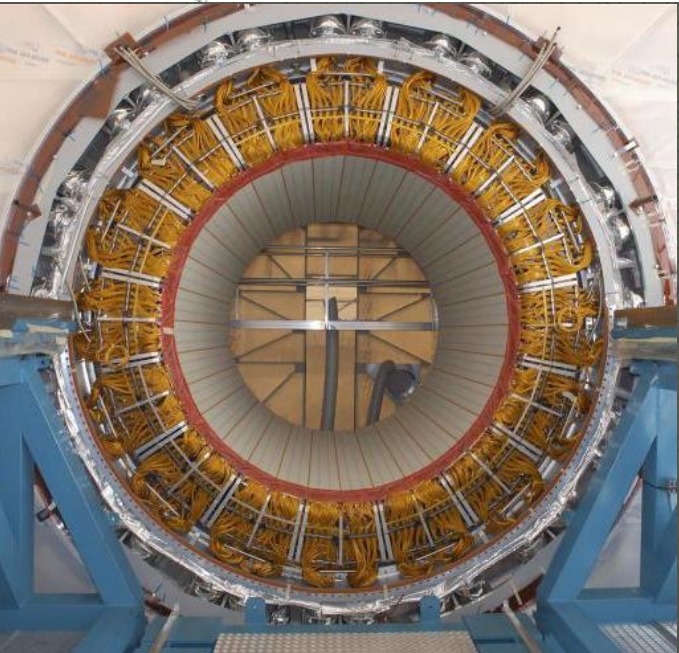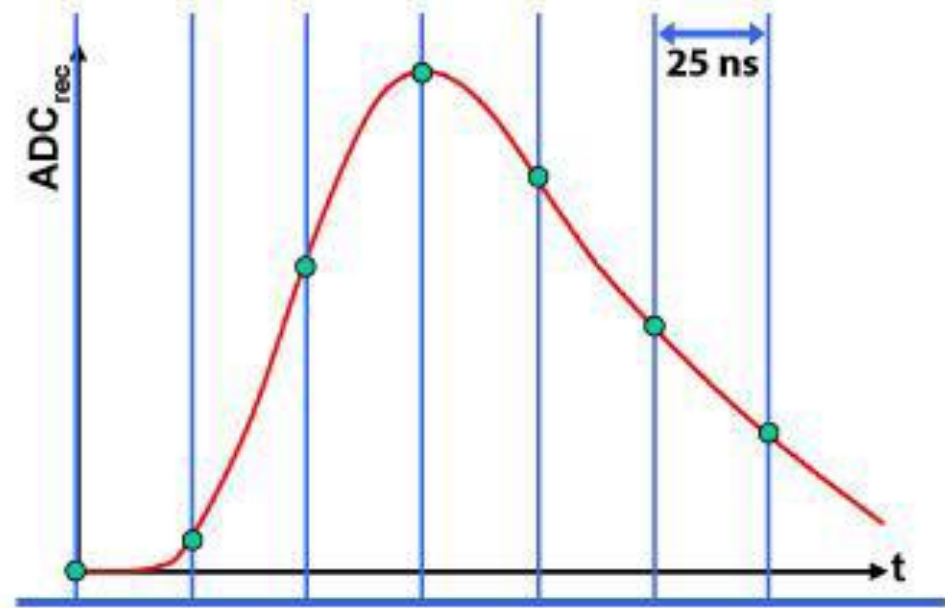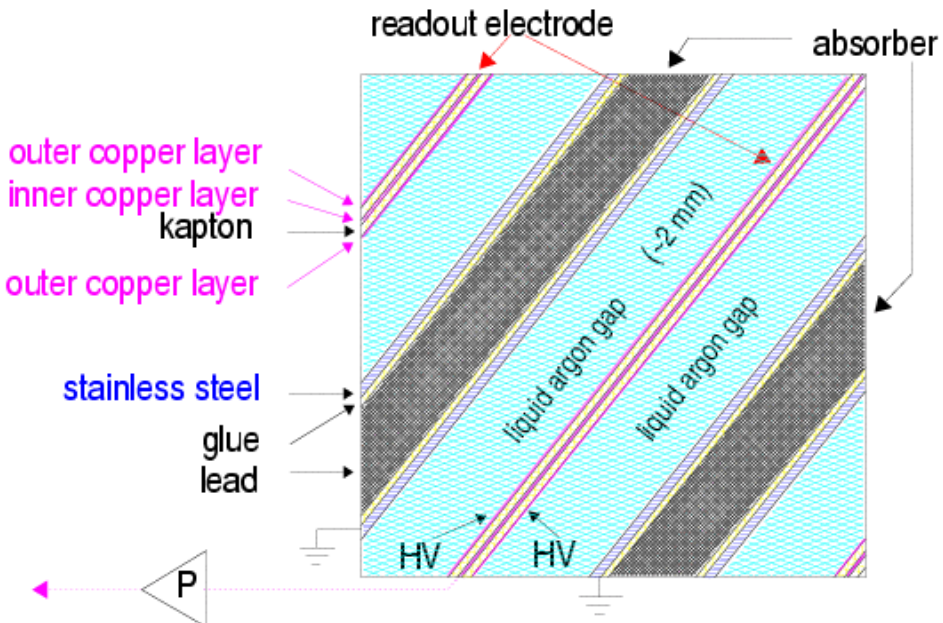


Principle of LAr TPC

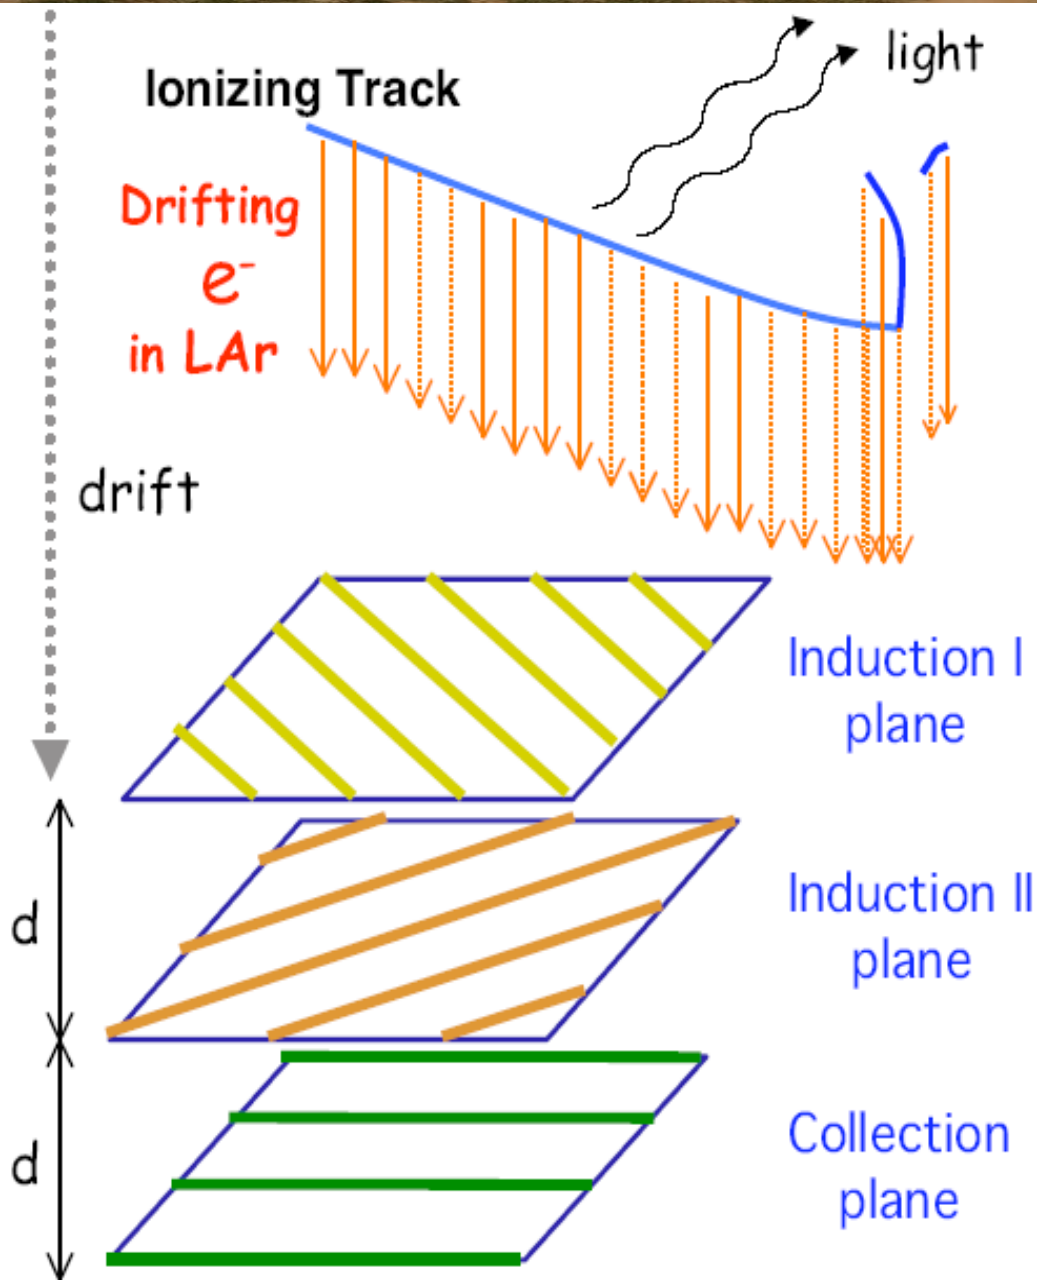

Density 1.4 g/cm^3
Radiation length 14 cm
Interaction length 80 cm
 $dE/dx(\text{mip}) = 2.1 \text{ MeV/cm}$
 $T=88\text{K @ } 1 \text{ bar}$

- ✓ About 12000 electron-ion pairs per mm of mip track are produced. About 40% recombine in our nominal drift field. When the left-over charges drift, they induce a signal on the wires.
- ✓ Since the mobility of electrons is much higher than that of ions, only electrons contribute to the observed signal.
- ✓ Electrons can drift over macroscopic distances if argon very pure (e.g. \approx meter drift requires purity of <1 in 10^{10} atoms)
- ✓ Multiple non-destructing readout wire plans can be assembled for multi-views.

600t LAr TPC for ICARUS

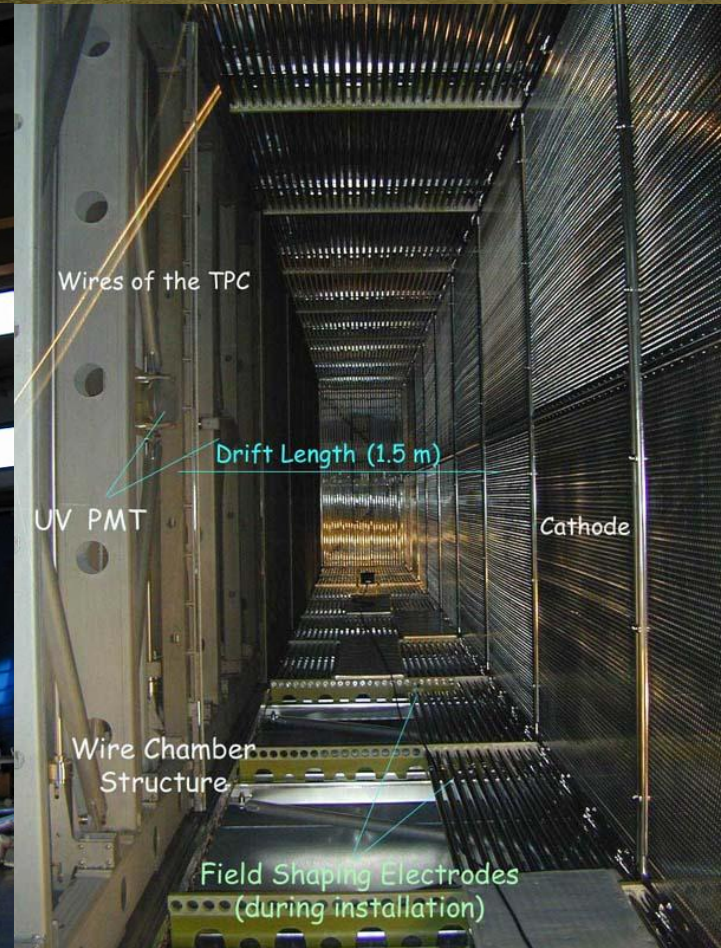

- ❖ Number of independent containers = 2
- ❖ Single container internal dimensions: $L=19.6\text{m}$, $W=3.9\text{m}$, $H=4.2\text{m}$
- ❖ Total (cold) internal volume = 534 m^3
- ❖ Sensitive LAr mass = 600 ton

Methods of TPC readout


- ◆ Single-phase devices do not show any internal gain and therefore rely on small signal-to-noise ratios and extremely sensitive front-end electronics.
- ◆ Double-phase readout, benefits from internal gain due to readout in the gas-phase where avalanches in argon can increase the primary signal substantially. The price for this advantage is the restriction to one-sided gas readout which enforces either unprecedented long drift lengths or very large surface area (shallow tank). In addition, this technique battles with space-charge effects at the gas-liquid interface and necessary tight control of the liquid level, temperature, etc.
- ◆ Third alternative is liquid argon readout technology. It combines the separate advantages of both, single-phase operation for the wire readout and an amplified signal in a double-phase readout. The idea is to stick to the robust and mature single-phase TPC concept and implement an optical readout of light produced by electroluminescence in liquid argon.

Current work on LAr TPC detectors


- ◆ Liquid Argon Time Projection Chambers (LArTPC) technology is now proven for up to 600t mass. A detector capable of delivering the neutrino physics program of the future will however need to be on a more grander scale with a fiducial volume of perhaps up to 100 kt.
- ◆ MODULAR essentially stacks together many ICARUS modules to achieve the final volume.
- ◆ GLACIER drifts charge up to 20m through a single huge liquid Argon volume to be amplified and readout in the gas directly above the liquid volume.
- ◆ FLARE and LANND are also based on a single volume of liquid Argon but which are internally segmented to limit the maximum charge drift distance and read signals using wire planes, similar to ICARUS.
- ◆ The latest project funded on the basis of a LArTPC detector using wire-plane readout is the ArgoNeuT project, currently taking data in the FNAL neutrino beam.
- ◆ Targeted experiments of this detector technology:
 - LAGUNA proton decay and neutrino physics project
 - RD51 initiative
 - Upgrades to the T2K experiment
 - Proposed neutrino factory project
 - ArDM dark matter experiment

Gas Electron Multipliers (GEMs)


- ❖ Manufactured using standard printed circuit wet etching techniques.
- ❖ Comprise a thin ($\sim 50\mu\text{m}$) Kapton foil, double-sided clad with copper and holes are perforated through.
- ❖ Two surfaces are maintained at a potential gradient; providing field for electron amplification and an avalanche of electrons.
- ❖ When coupled with a drift electrode above and a readout electrode below, it acts as a micro-pattern detector.
- ❖ Amplification and detection are decoupled, i.e. readout is at zero potential. This permits transfer to a second amplification device and can be coupled to another GEM.



COPPER-CLAD
KAPTON

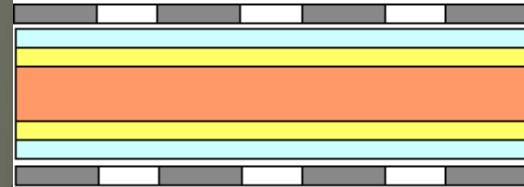




PATTERNING WITH
MASKING & UV EXPOSURE



ETCHING OF THE
HOLE PATTERN



OPENING THE CHANNELS
WITH A KAPTON SOLVENT

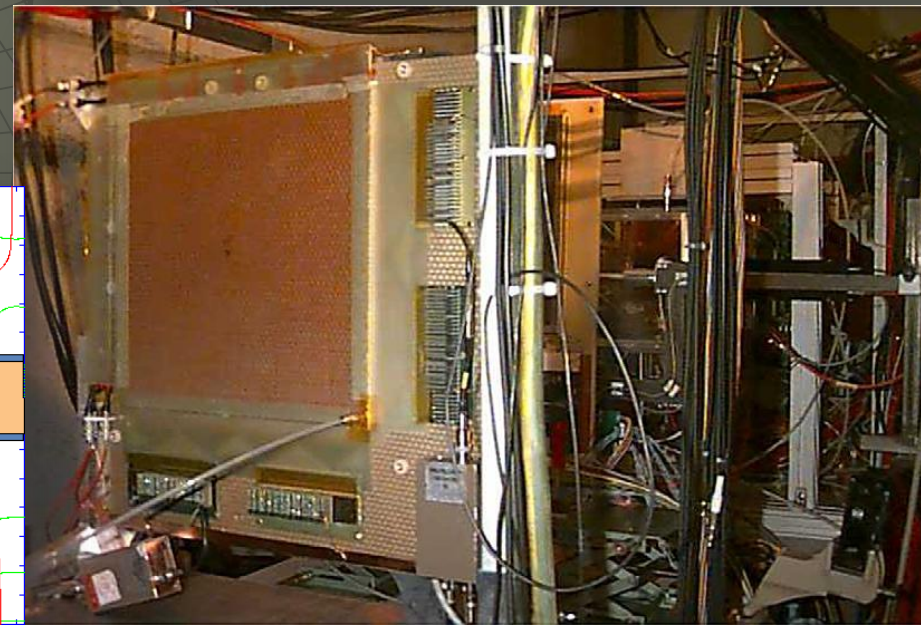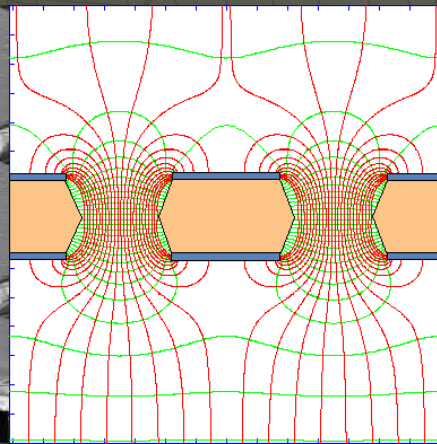
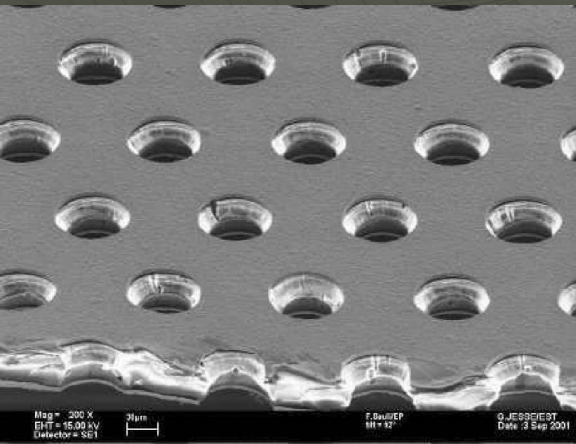


THGEM readout for TPC

- ◆ The new concept of operating a Thick Gas Electron Multiplier (THGEM) directly in the liquid opens the exciting possibility of fine grained tracking (spatial resolution of order mm) with high signal to noise ratio using only low-cost, robust components.
- ◆ Utilising electroluminescence, i.e. light emitted in the THGEM holes, for optical readout, for instance with silicon photomultipliers (SiPM), directly in the liquid volume would be the key new effect in this technology.
- ◆ The THGEM provides an excellent imaging plane for electroluminescence.
- ◆ Electrons initially released by ionisation drift towards the holes, mechanically drilled through the printed-circuit board, where the presence of strong electric fields inside the holes results in a grid of well-localised light sources.



Optical readout for LAr detectors

- ❖ ICARUS has shown that Liquid Argon is a suitable medium for TPCs for:
 - Calorimetry
 - Fine Grain tracking
- ❖ Design of readout planes must keep electronics cost reasonable.
- ❖ Optical readout is feasible alternative to the wire based readout for Liquid Argon TPC of the future.
- ❖ Liquid Argon TPC with Thick Gas Electron Multiplier (THGEM) and optical readout using Silicon Photomultipliers (SiPM).

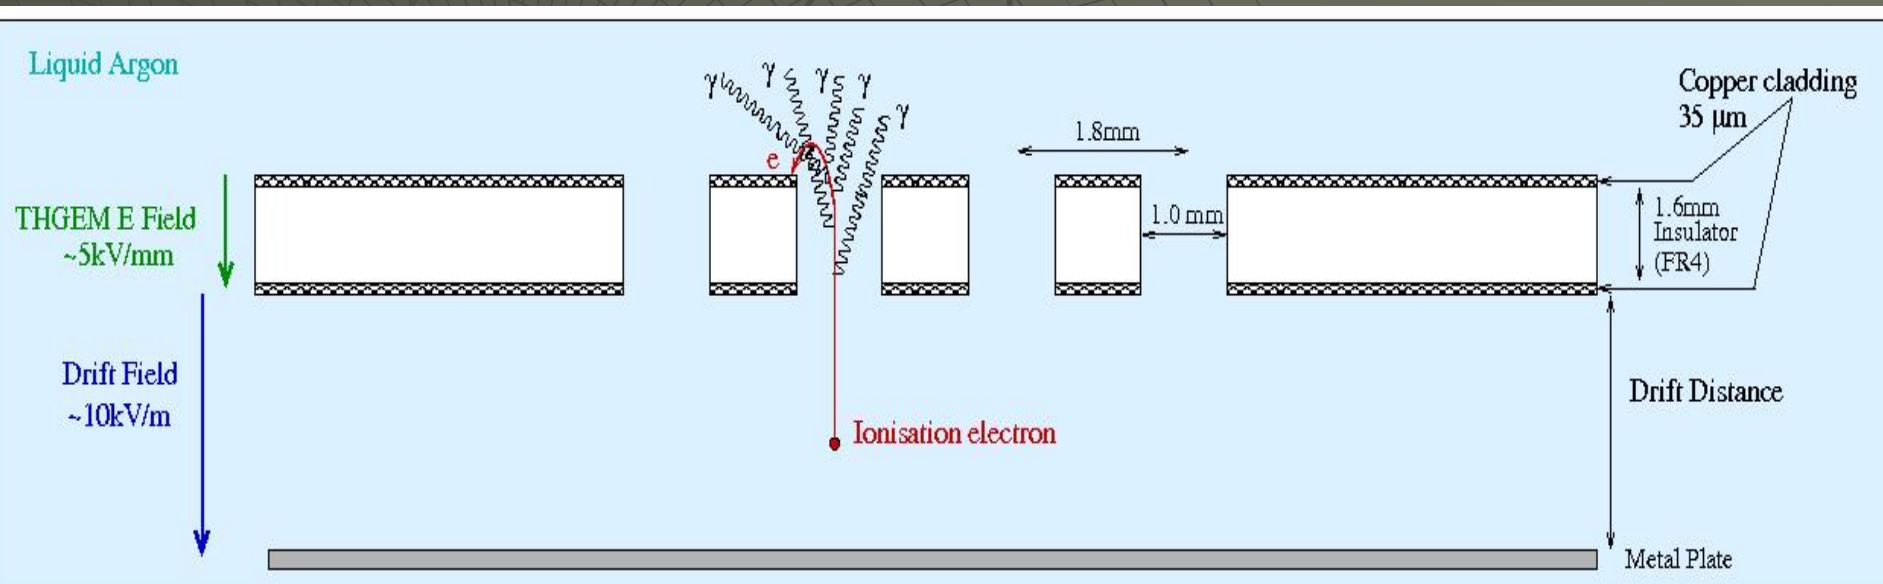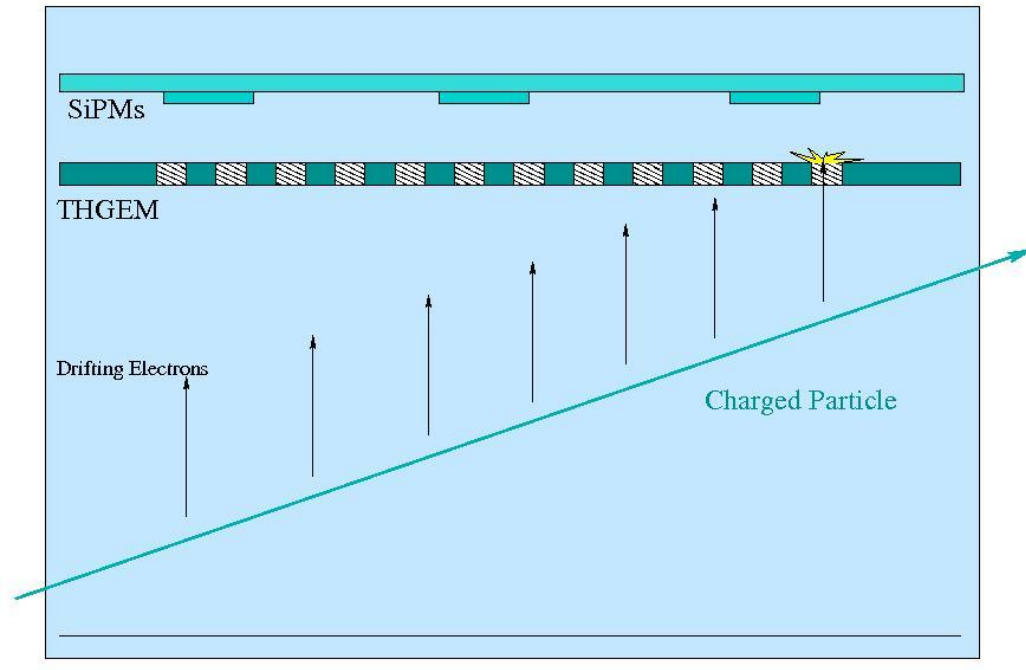



Light readout concept for tracking

- ❖ The electroluminescence from the THGEM holes can be imaged by an optical readout device.
- ❖ Silicon Photomultipliers (SiPMs) from SENSL were used in this study.
- ❖ Strong signal output, gain 10^6 .
- ❖ Arranging sensors in a sparse array above the THGEM allows fewer readout channels than holes, with no reduction in resolution.
- ❖ Row and column readout gives $2N$ readout channels rather than N^2 .

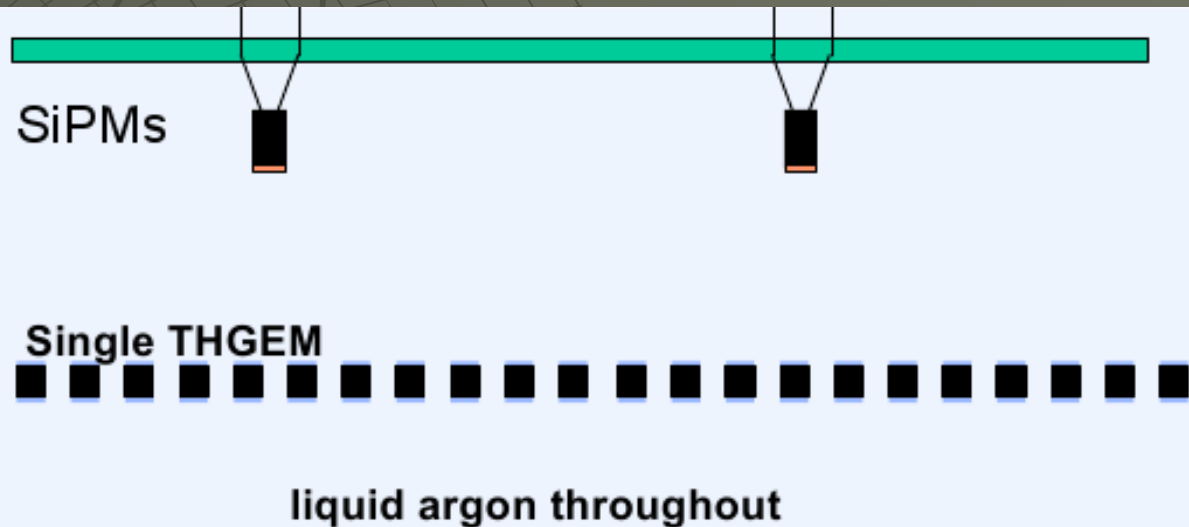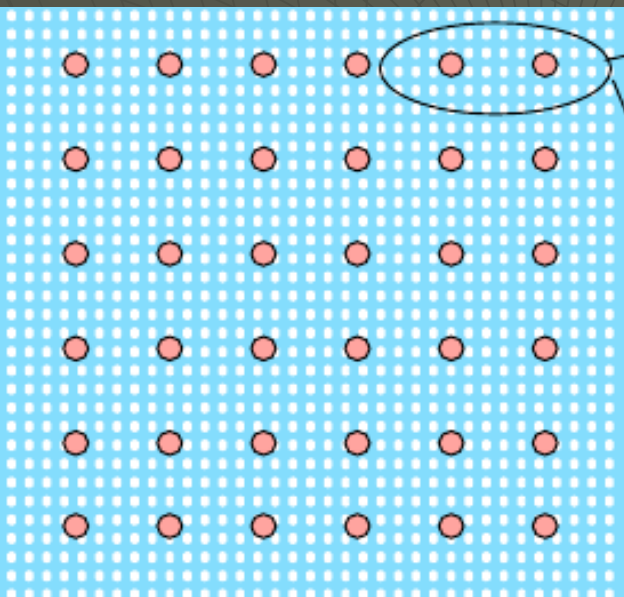


Photon Multiplicity Detector (PMD)



- ❖ PMD a pre-shower detector measuring spatial distribution of photons in the forward rapidity region.
- ❖ Complements the study of photons in the forward region where calorimeter can't be used due to high particle density.
- ❖ Honeycomb (rectangular) proportional counter, the cells of which are 5 mm deep with a surface of about 1cm^2 (0.22cm^2) in START(ALICE) design.
- ❖ Confines charged particle hits to single cell.
- ❖ Copper walls separate the cells in order to prevent signals from blowing up by confining low-energy electrons to a single cell.
- ❖ In the assembled version, the PCBs form part of a gas-tight chamber having a high voltage connection and inlet/outlet for the gas.
- ❖ Readout by GASSIPLEX (Manas) chips in STAR (ALICE) design.

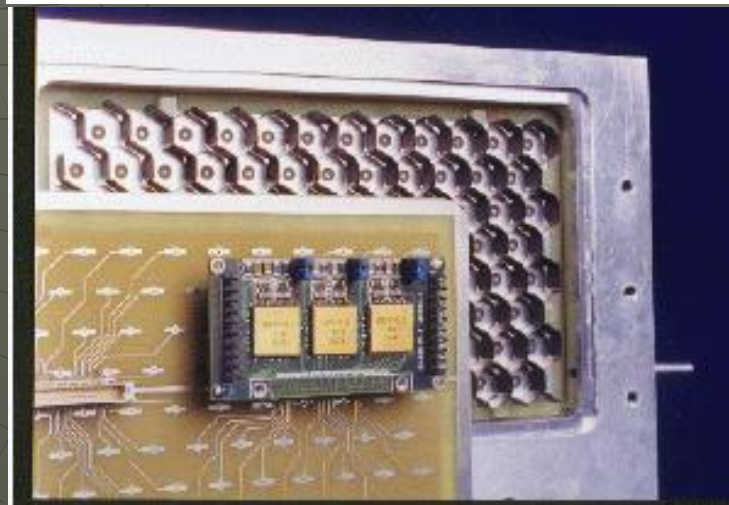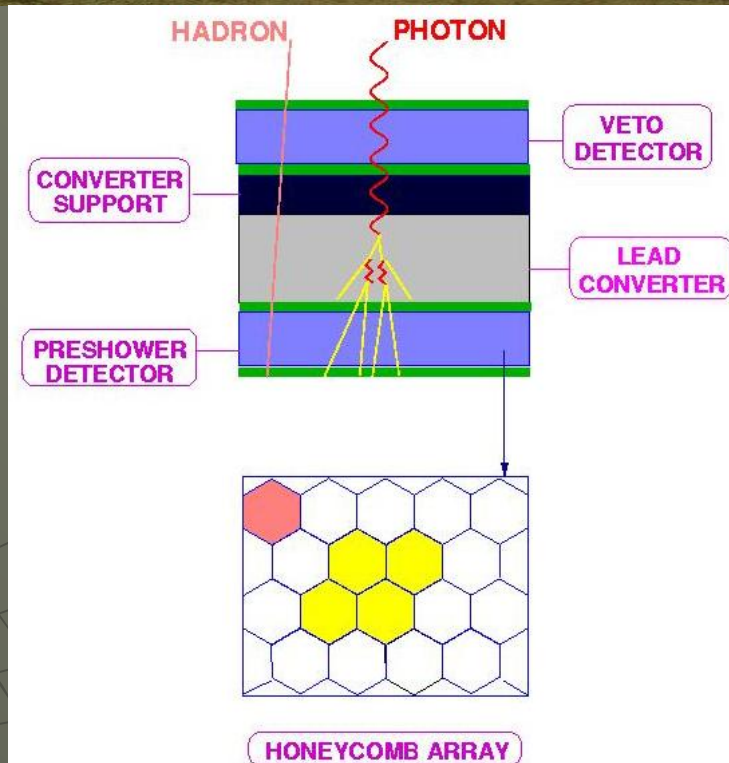

Spin offs and societal applications

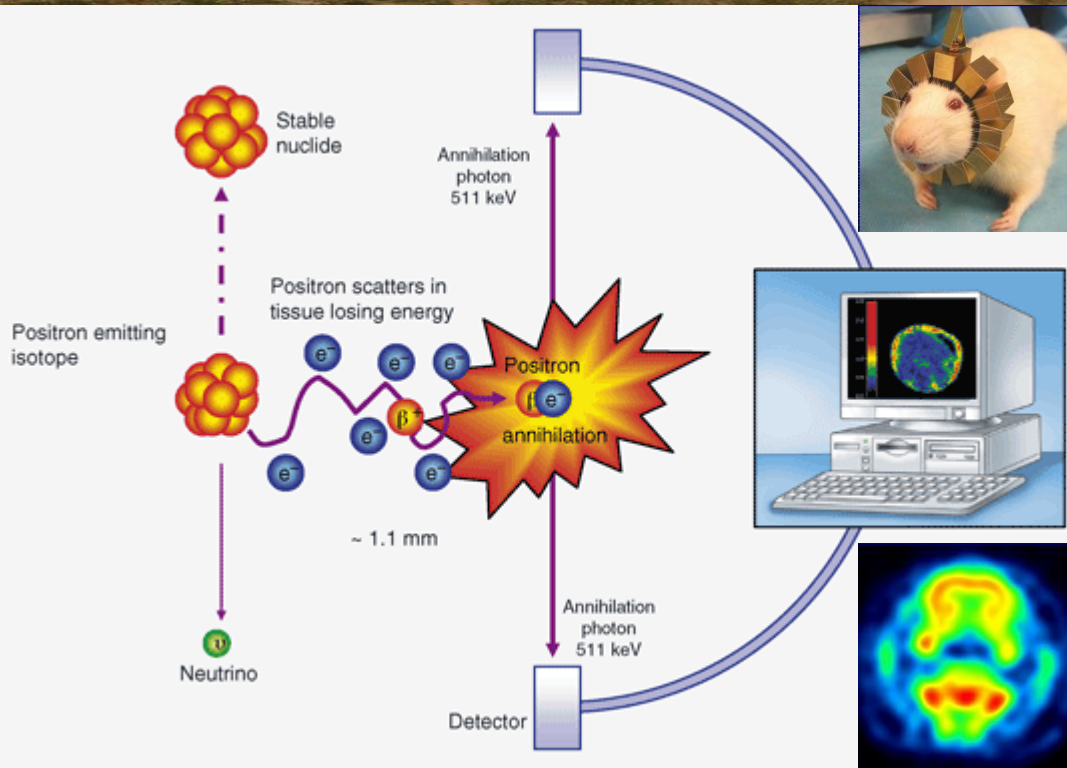

- ◆ Detector with good efficiency, spatial, timing and energy resolutions.
- ◆ Low system dead time (lower dose)
- ◆ Rejection of scattered, random or multiple events.
- ◆ Scintillation crystals (Bismuth Germanium Oxide (BGO), Gadolinium Oxyorthosilicate (GSO), Lutetium Oxyorthosilicate (LSO), etc.) current choices.
- ◆ MRPC is a cheaper, works on direct detection, with higher FOV

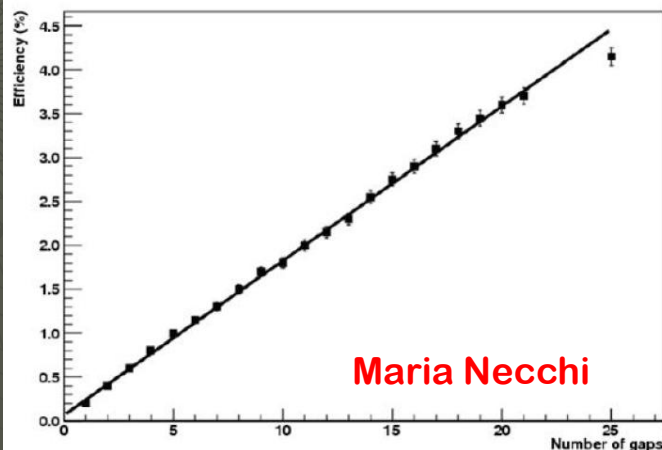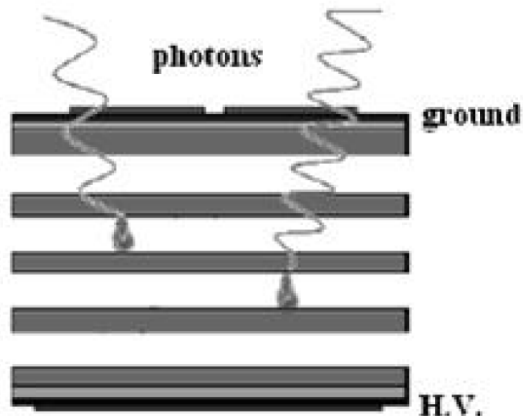

- ◆ Gamma sensitivity saturates at a thickness of 400 μ m for bakelite, 200 μ m common glass and 150 μ m for lead glass.
- ◆ Standard electrodes are coated with high Z material acting as γ -e converter.

Summary




- ◆ Non-accelerator experiments played a long and major role in some of the major discoveries in and development of particle physics.
- ◆ There is a large overlap between detectors used in non-accelerator and accelerator physics experiments.
- ◆ Some of the non-accelerator physics experiments employ contrastingly different detection techniques or instrumentation compared to their counter parts. non-Non-accelerator experiments are usually designed using a single type or at best using a couple of types of detector elements.
- ◆ Even though many of the non-accelerator detector elements are fabricated using commonly available and inexpensive materials, there is also a demand for ultra-pure and exotic materials for building many of the modern non-accelerator detector elements as well.
- ◆ Needless to say that what can be discovered depends on the available detector as well as signal processing technologies.



BACKUP SLIDES

Micro Strip Gas Chamber (MSGC)


- ❖ A pattern of thin anodes and cathode strips on a insulating substrate with a pitch of a few hundred μm .
- ❖ Electric field setup from a drift electrode above.
- ❖ Removes positive ions from the vicinity of avalanches.
- ❖ High rate capability; two orders of magnitude higher than MPWC, $\sim 30\mu\text{m}$ position resolution.
- ❖ Streamer to gliding discharge transition damages strips.
- ❖ Advances in photolithography and application of silicon foundry techniques heralded a new era in the design and fabrication of “Micro-pattern detectors”

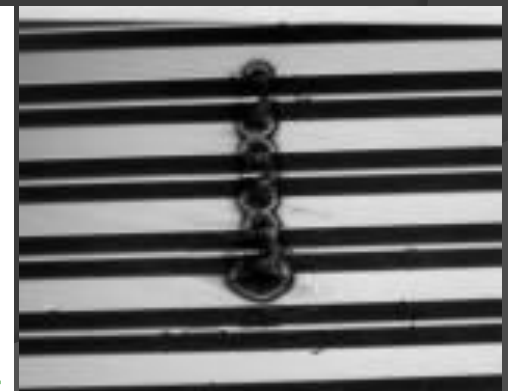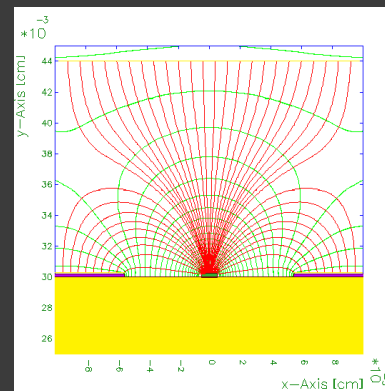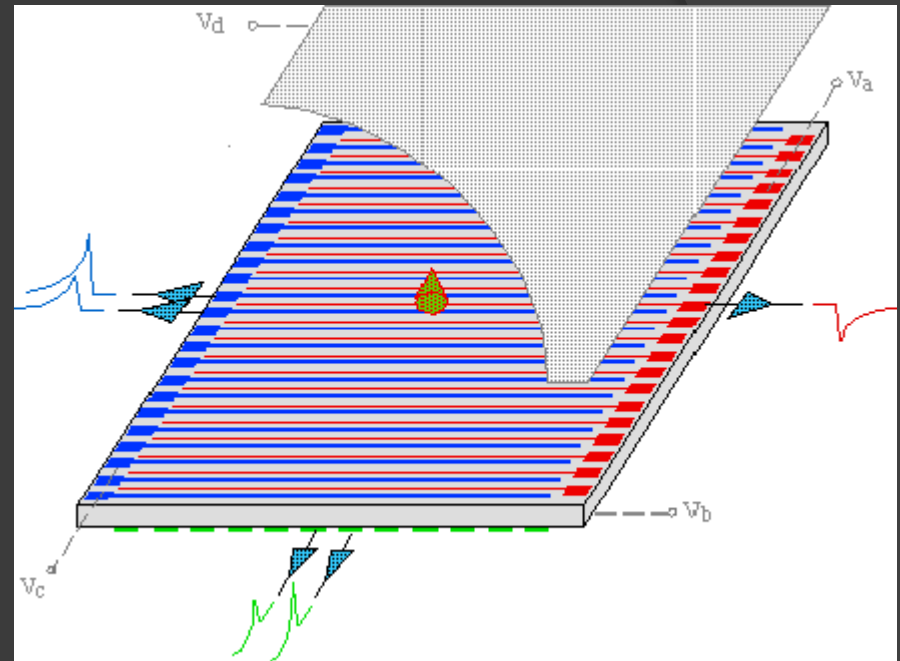

New micro pattern era


Micro-needle chamber

- ❖ Successfully used to emit electrons towards the phosphor screen in high vacuum, for the purpose of creation of the flat TV screens.
- ❖ No observable gas gain due to fine needles ($\ll 1\mu\text{m}$) and small amplification region.

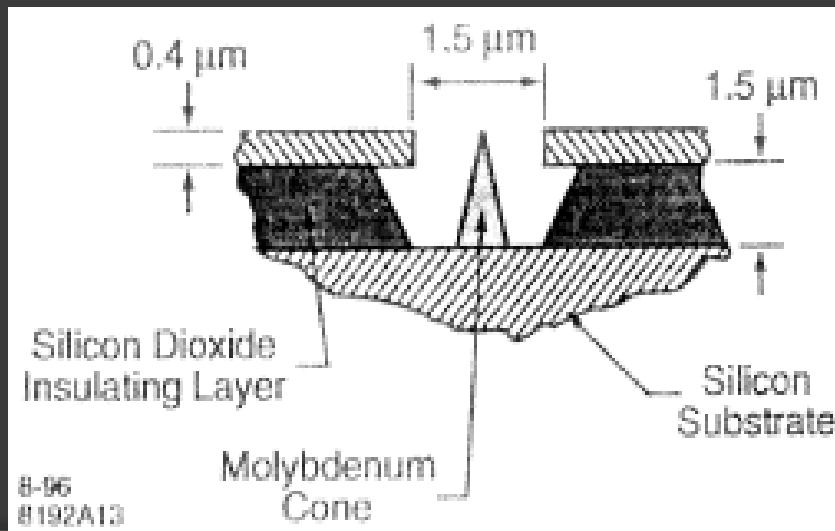

Micro-dot chamber

- ❖ Ultimate gaseous pixel device with anode dots surrounded by cathode rings, on 4" Si wafers.
- ❖ Anode $2 - 20\mu\text{m}$, cathodes $20 - 40\mu\text{m}$. Anode cathode gap is $75\mu\text{m}$.
- ❖ Very high gains ($\sim 10^6$).
- ❖ Does not discharge up to very high gains.

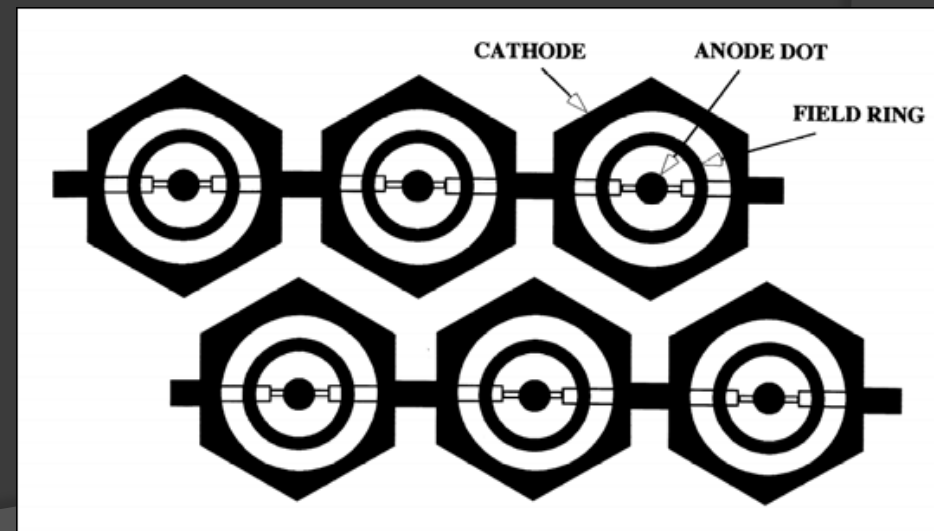


Next generation pattern detectors

Micro-Megas

- ❖ Very asymmetric parallel plate chamber. Uses the semi-saturation of the Townsend coefficient at high fields (100kV/cm) in several gas mixtures, to ensure stability in operation with MIPs.
- ❖ Electrons drifting from the sensitive volume into the amplification volume with an avalanche in the thin multiplying gap.
- ❖ Provides excellent energy resolution.



Compteur a Trous (CAT)

- ❖ A narrow hole micro-machined in an insulator metallised on the surface as the cathode.
- ❖ Anode is the metal at the bottom of the hole.
- ❖ Removing the insulator leaves the cathode as a micro-mesh placed with a thin gap above the readout electrode.
- ❖ Gains of several 10^4 usually obtained.

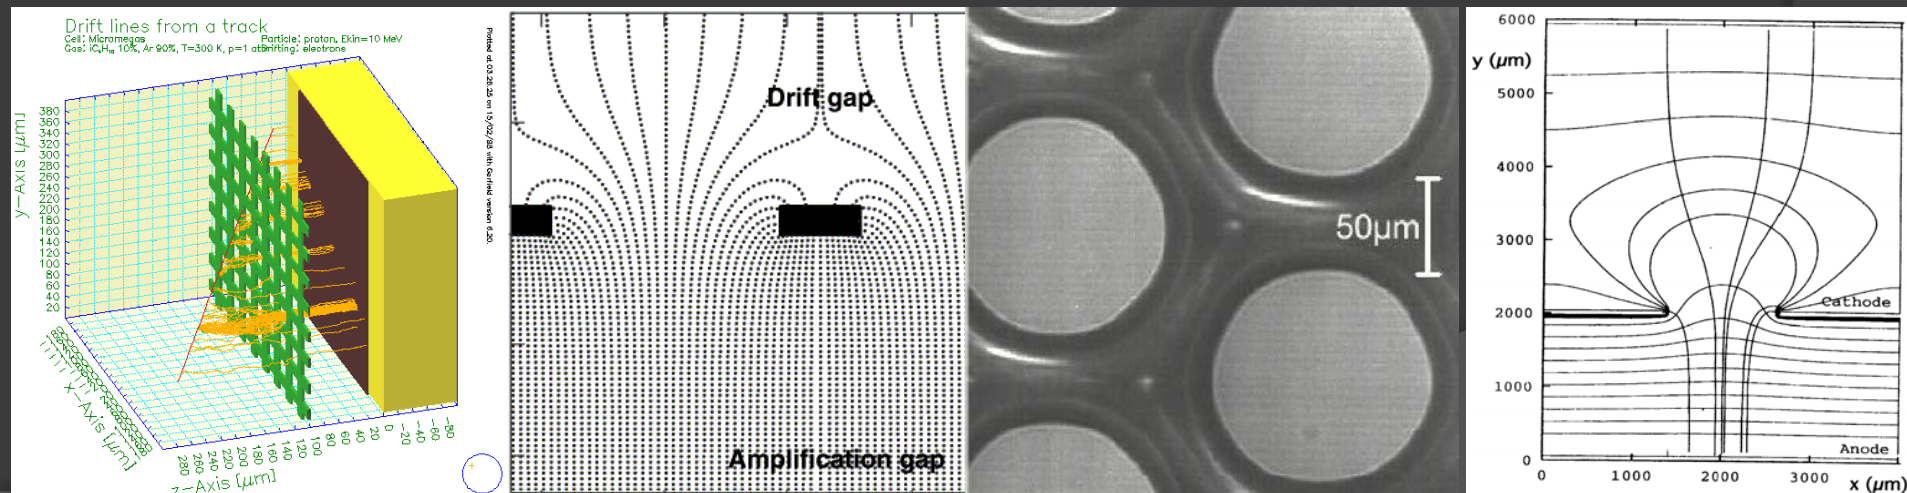

Other micro-pattern detectors

- ❖ Many more detectors were developed using the GEM concept, such as:
 - Micro-Wire (μ DOT in 3-D)
 - Micro-Pin Array (MIPA)
 - Micro-Tube
 - Micro-Well
 - Micro-Trench
 - Micro-Groove
- ❖ Studies have shown that discharges in the presence of highly ionising particles appear in all micro-pattern detectors at gains of a few thousand.
- ❖ Can obtain higher gains with poorly quenched gases (lower operating voltage and higher diffusion)
 - Lowers charge density
 - Lowers photon feedback probability
- ❖ Safe operation of a combination of an MSGC and a GEM has been demonstrated up to gains of ~ 10000 s.

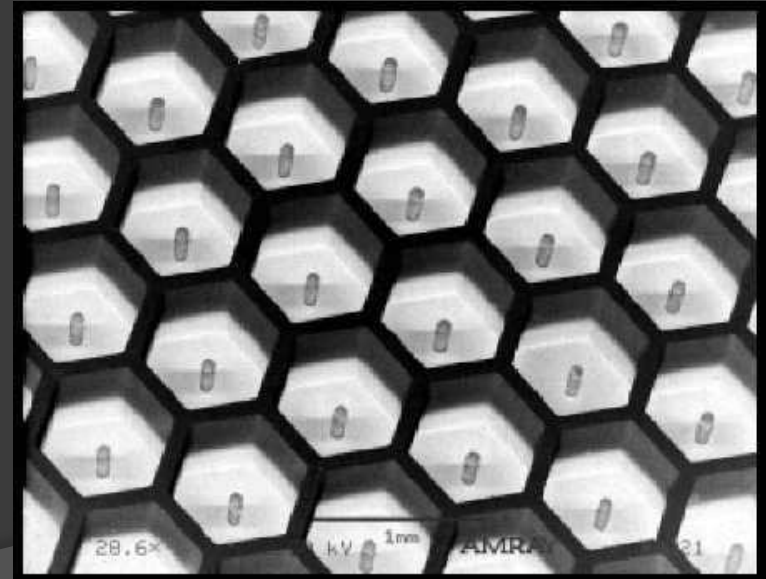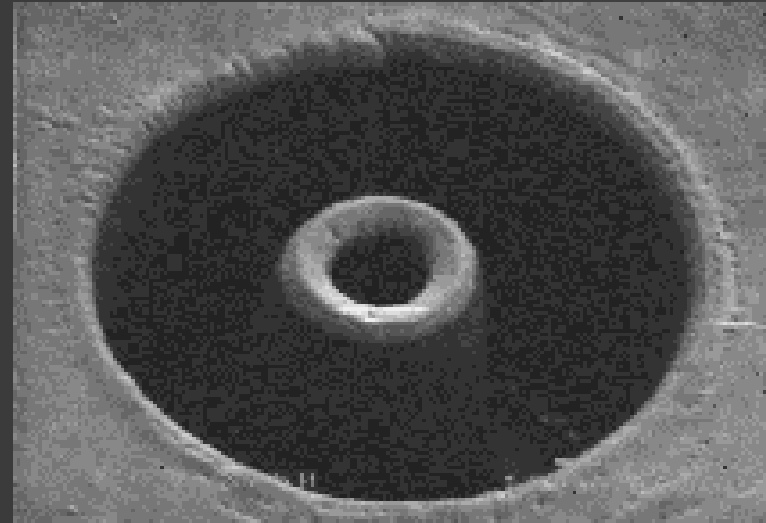

Current trends and directions

Scintillation light imaging

- ❖ A novel application was developed by integrating a MSGC in a gas proportional scintillation counter (GPSC).
- ❖ A reflective CsI photocathode was deposited on the micro-strip plate surface of the MSGC that serves as the VUV photo sensor for the scintillation light from Xenon GPSC.

Čherenkov ring imaging




- ❖ Very high gains observed with cascade of four GEMs and using pure ethane as the operating gas.

Mass production of GEMs

- ❖ 3M Microinterconnect Systems Division Reel-to-reel process, rolls of 16'x16' templates of detachable GEMs in any patterns.



What is a LEM?

- ❖ A large scale GEM (x10) made with ultra-low radioactivity materials (OFHC copper plated on Teflon).
- ❖ In-house fabrication using automatic micro-machining.
- ❖ Modest increase in V yields gain similar to GEM.
- ❖ Self-supporting, easy to mount in multi-layers.
- ❖ Extremely resistant to discharges (lower capacitance).
- ❖ Adequate solution when no spatial info needed.
- ❖ Copper on PEEK under construction (zero out-gassing).

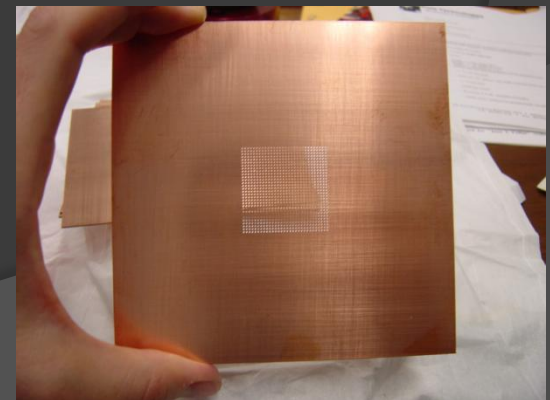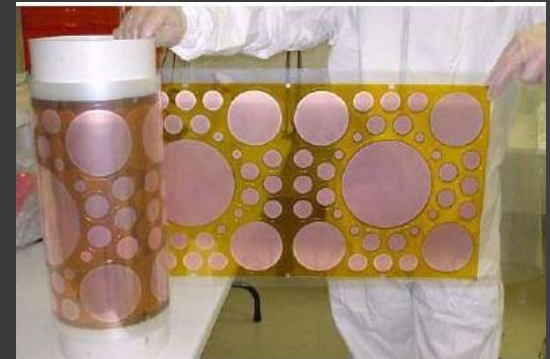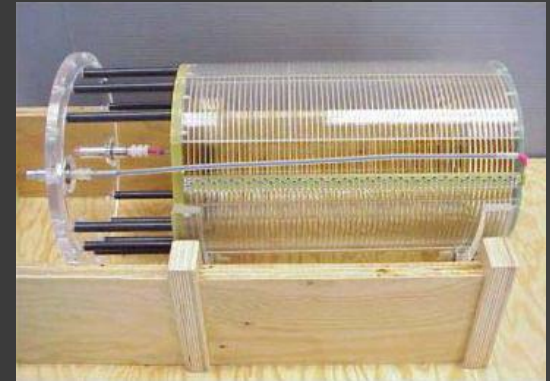


Silicon detectors

Silicon detectors are transforming the way we look at particles

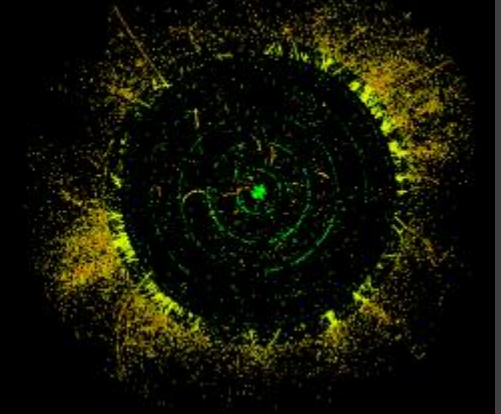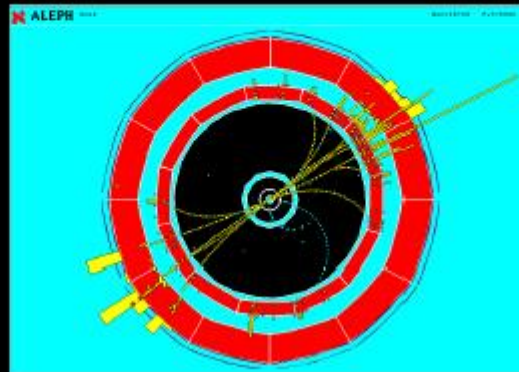


- ❖ Essentially diode with reverse bias.
- ❖ Depleted of free charge carriers.
- ❖ High resistance, only small leakage current.
- ❖ Charge deposition by ionising particle causes current.
- ❖ Use segmented electrodes (strips or pixels).
- ❖ Can localise charge deposition.
- ❖ Much better resolution than strip pitch if taking charge sharing into account.
- ❖ Only few eV per ionisation (gases: factor 10 more).
- ❖ Good amplitude signal.

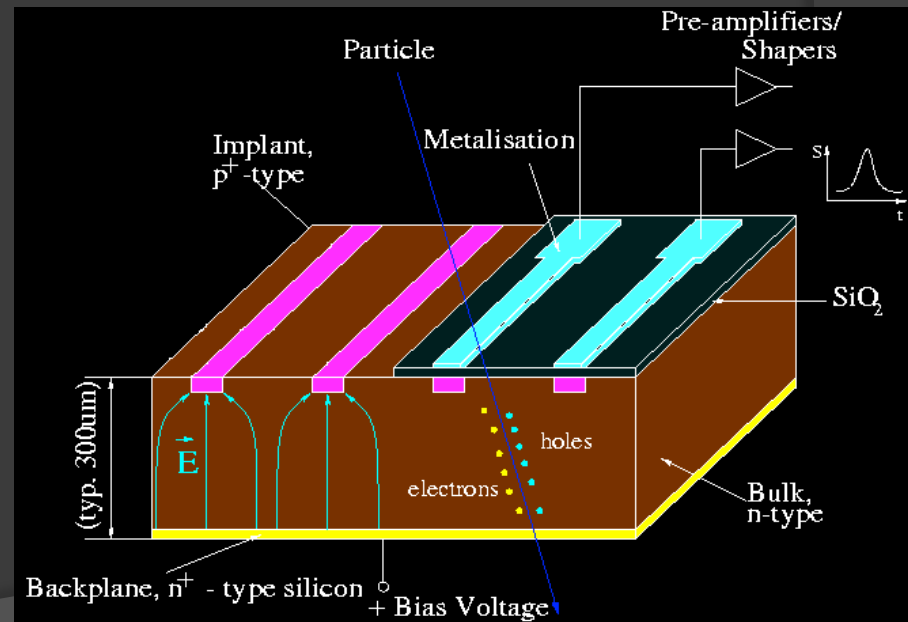



Strip detectors

- ❖ Reading out strips is comparatively easy - just attach chips to the end.
- ❖ Readout of strip sensor, power distribution and control → hybrids.
- ❖ Custom readout chips wire bonded to electrodes on the sensor.
- ❖ Chips have amplifiers, ADCs, zero suppression, cluster finder, storage, digital communication with outside world.
- ❖ Some drawbacks:
- ❖ Strip detectors would often exceed useful occupancy in many modern systems.
- ❖ Strip information can make hit reconstruction ambiguous.

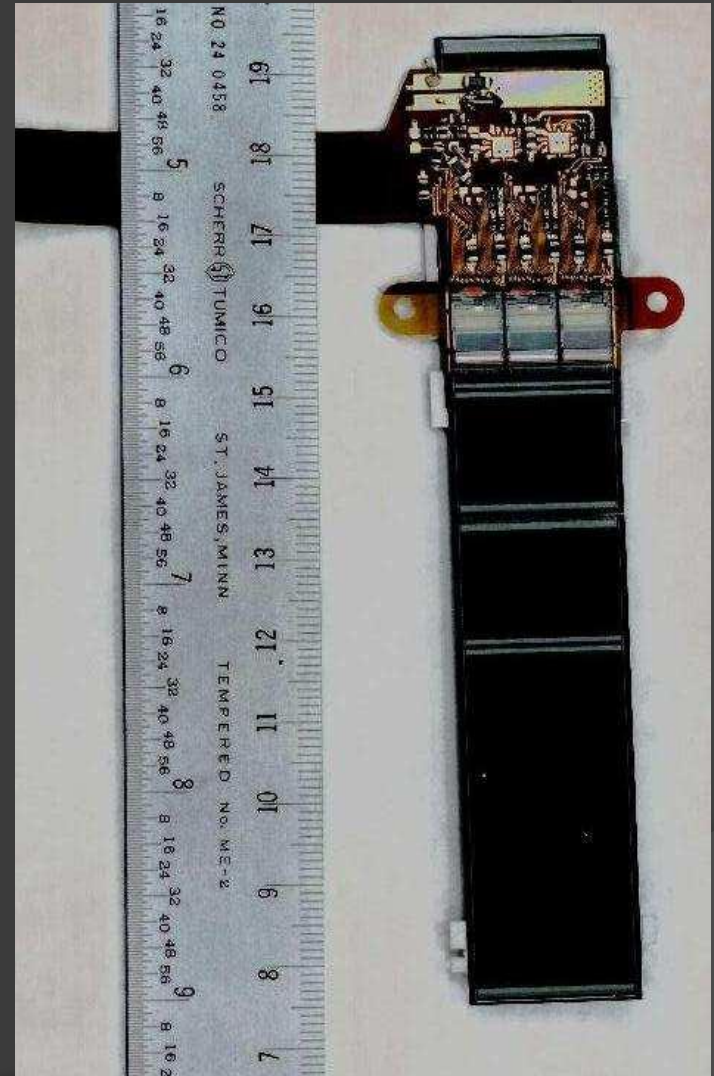

Pixel detectors


- ❖ Silicon pixel detectors do much better on the hit reconstruction problems.
- ❖ However, reading pixel detectors is non-trivial.
- ❖ Options for pixel detector readout:
 - Place readout chips all over the sensors (more material budget).
 - Integrate readout electronics into sensor (larger pixels).
 - Sequentially clock signals through to end of sensor (slower readout).

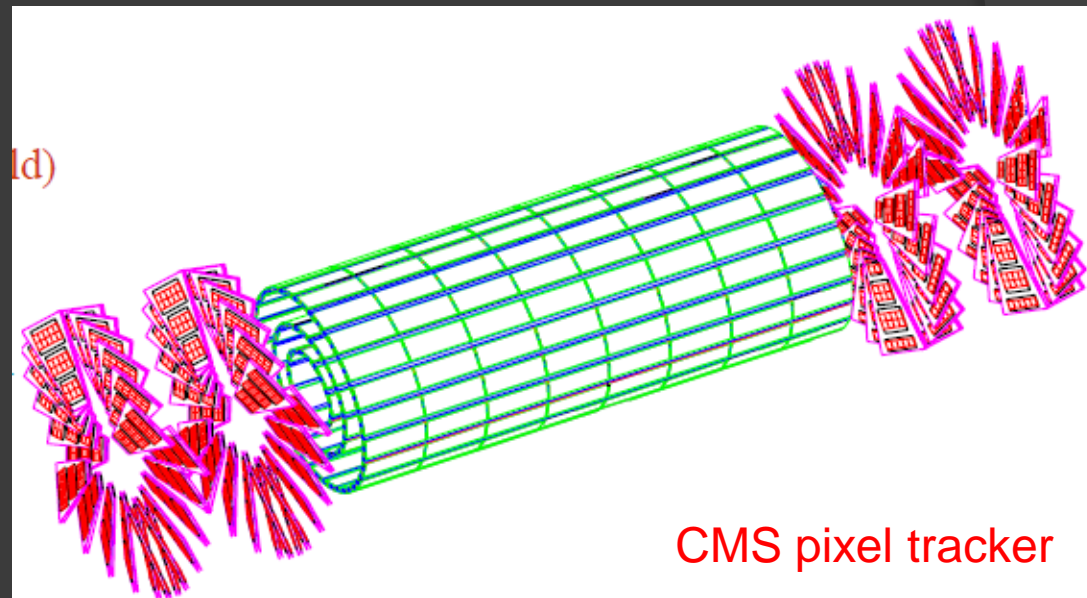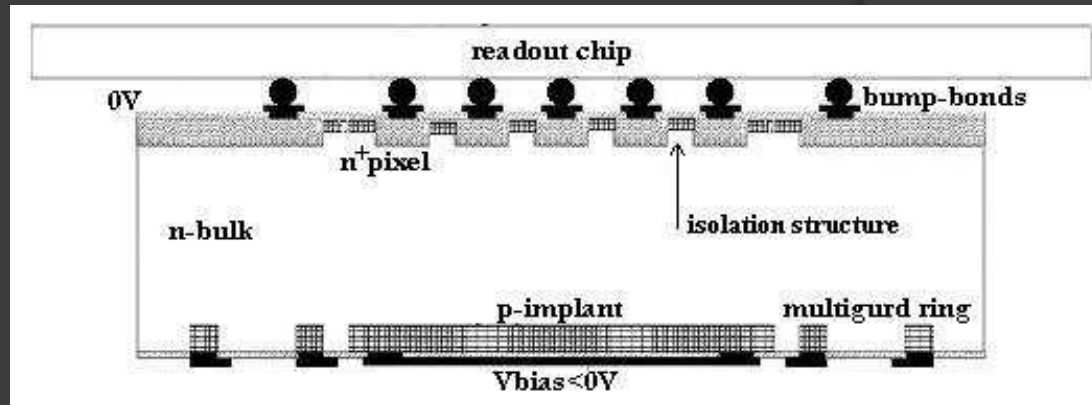

Integration of detectors & readout

- ❖ Compatible integration of detectors and readout electronics on the same silicon substrate is of growing interest.
- ❖ As the methods of microelectronics technology have already been adapted for detector fabrication, a common technology basis for detectors and readout electronics is available.
- ❖ CMOS technology exhibits most attractive features for the compatible realisation of readout electronics where advanced LSI processing steps are combined with detector requirements.
- ❖ The essential requirements for compatible integration are the:
 - availability of high resistivity oriented single crystalline silicon substrate
 - formation of suitably doped areas for MOS circuits
 - isolation of the low voltage circuits from the detector, which is operated at much higher supply voltage.
- ❖ Junction isolation as a first approach based on present production technology and dielectric isolation based on an advanced SOI-LSI technology are the most promising solutions for present and future applications, respectively.
- ❖ Some examples: MAPS (Monolithic Active Pixels), DEPFET, WIPS, SOI sensors.

Integrated silicon detectors

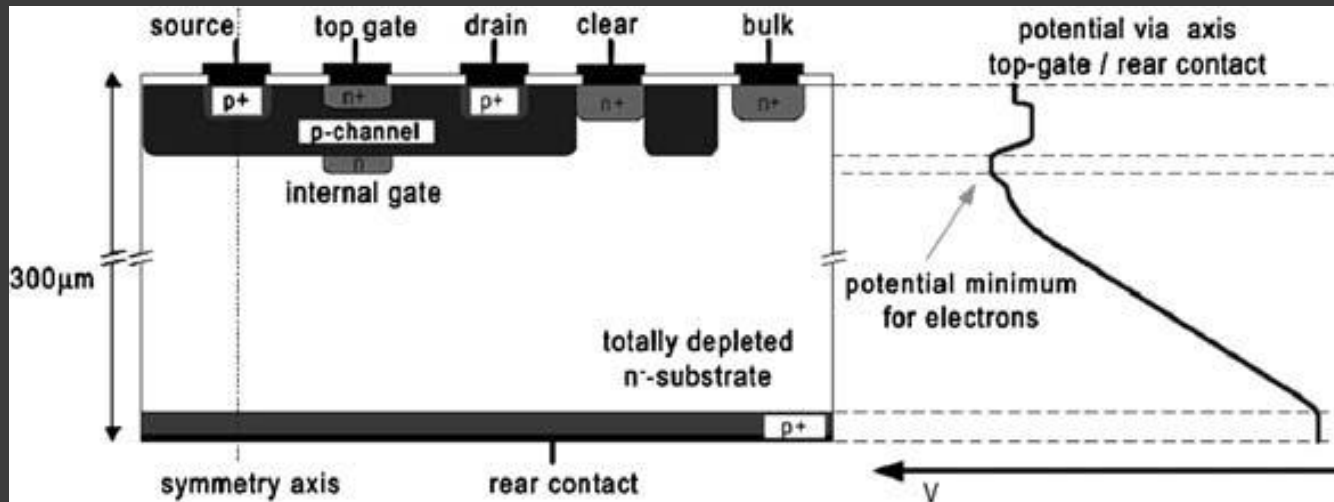

Norbert Wermes

- ❖ **DEPFET was developed for X-ray applications**
 - Consists of high-resistivity silicon substrate fully depleted through an n⁺ contact at the side of the sensor.
 - The first amplifying transistors are integrated directly into the substrate and form the pixel structure.
 - Electrons from ionizing particles are collected in this internal gate and modify the transistor current yielding a signal.
 - A matrix containing 64 × 64 square pixels of 50 μm size achieved a resolution of 9.5 μm and 40 e⁻ noise.
- ❖ **MAPS integrate sensors and readout electronics on the same substrate using a technology similar to the one used in visible light CMOS cameras.**

Challenges facing Si detectors


- ❖ Main issue is radiation damage.
- ❖ Silicon detectors are invariably located in the high dose region (mostly used in trackers).
- ❖ Surface damage: charge build-up, noise
- ❖ Bulk damage: displacements in crystal lattice
 - reduced charge collection efficiency (charge lost in traps).
 - changes dopant levels and distribution (affects bias voltage).
 - increased leakage current (noise).
 - increase in the voltage required for full depletion.
 - increase in capacitance between the detecting elements.

Towards a RPC-based muon tomography system for cargo containers


- Muons undergo multiple coulomb scattering within the detector volume.
- The angular distribution can be assumed to be Gaussian, with σ_0^2 depending on the radiation length X_0 (and ultimately on ρZ^2).
- Muon tracks scattering within the target volume provide information of its content.
- High sensitivity to high-Z, high-density materials.

$$\sigma_0^2 \approx \left(\frac{15 \text{ MeV} }{pc\beta} \right)^2 \frac{T}{X_0}$$

$$X_0 \approx \frac{A \cdot 716.4}{\rho \cdot Z \cdot (Z+1) \ln(287/\sqrt{Z})} [\text{cm}]$$

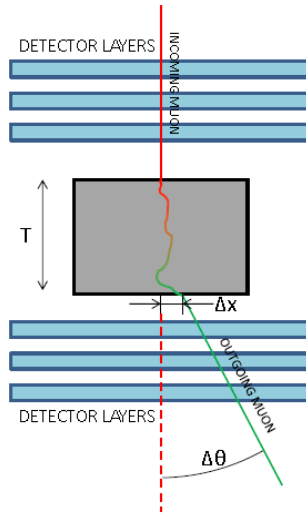



- Simple proof of principle:
 - Plot vertices with scatter angle above 0.03 rad
 - No momentum information
- Plot from prototype data:
 - Metal cubes 5 cm x 5 cm x 5 cm
 - Aluminium, iron, tungsten
- Clear separation between high and low Z materials.

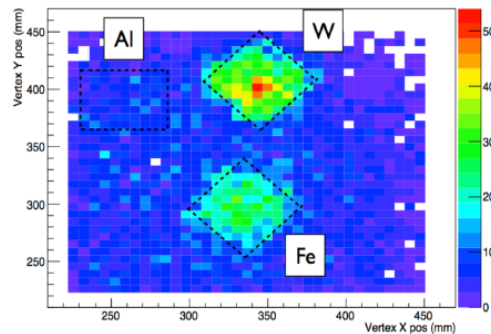

28/02/2014

Clustering algorithms

- Discriminator value is used as binary classifier, based on a pre-defined threshold.
- Evaluate classifier by comparing true positive and false positive rate on 100 sets of 1 minute simulated cosmics.
- Assuming perfect momentum information, 1 minute of data is enough to reliably identify the block of U in most scenarios.

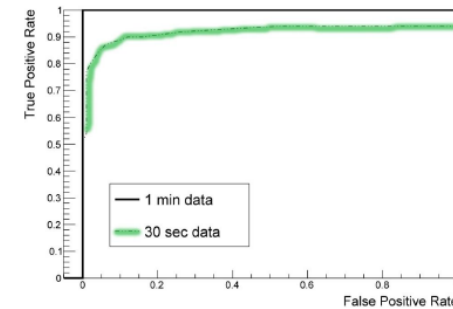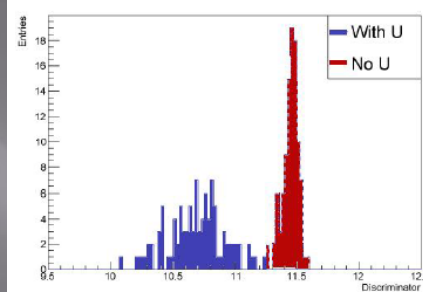

28/02/2014


Cargo container with stone

20

AWE is building a large size test setup in their facilities.

Large unit (1800 mm x 1800 mm) consisting of 6 RPC, in two orthogonal directions.


Modular construction to be used as a “detection tile”.

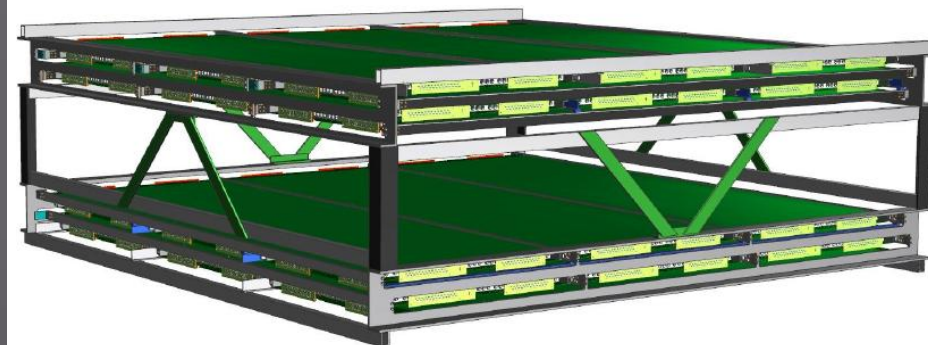

The basic idea for RPC-based TOF-PET

The converter-plate principle

Stacked RPCs



Use the electrode plates as a γ converter, taking advantage of the natural layered construction of the RPCs.


Time resolution for 511 keV photons:
(our routine lab-test tool)
90 ps σ for 1 photon
300 ps FWHM for the photon pair

[Blanco 2002]



A previous work on PET with gaseous detectors
(21 lead plates + 20 MWPCs = 7% efficiency)

“The Rutherford Appleton Laboratory’s Mark I Multiwire Proportional Counter Positron Camera”



J.E. Bateman et al. NIM 225 (1984) 209-231



Full scanner for mice





Expected quantum efficiency and resolution

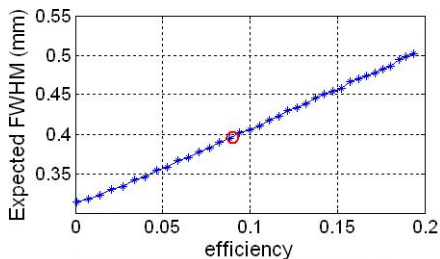

Small animal PET - a first prototype

Aimed at **verifying** the concept and show the **viability** of a **sub-millimetric spatial resolution**.

16 stacked RPCs

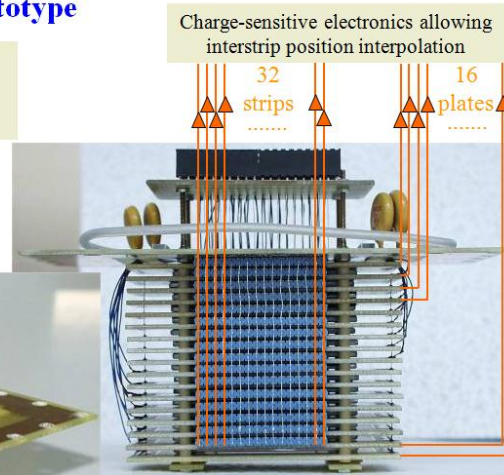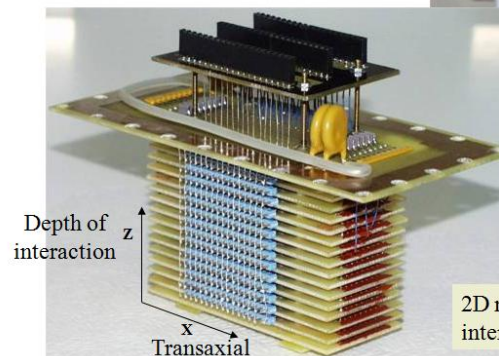

2D measurement of the photon interaction point

Conclusion

- An excellent space resolution of 0.4 mm FWHM was demonstrated in very realistic conditions without software enhancements (commercial tomographs > 1mm)
- A full scanner for mice is in an advanced completion stage, yielding a preliminary resolution of 0.52 mm FWHM
- It seems that the absolute efficiency may approach the simulated one.
- A competitive sensitivity (peakNEC) of 318Kcps has been suggested by simulations
- A very competitive PET scanner for small animals based on RPCs may be at hand, featuring excellent resolution (very much in demand today), reasonable efficiency and low cost.