

# Beam Loss Monitors



When energetic beam particles penetrates matter, secondary particles are emitted:

this can be  $e^-$ ,  $\gamma$ , protons, neutrons, excited nuclei, fragmented nuclei...

⇒ Spontaneous radiation and permanent activation is produced.

⇒ Large variety of Beam Loss Monitors (**BLM**) depending on the application.

**Protection:** Sensitive devices e.g. super-conducting magnets to prevent quenching  
(energy absorption by electronic stopping)

→ **interlock signal for fast beam abortion.**

**Beam diagnostics:** Alignment of the beam to prevent for activation

→ **optimal transmission to the target.**

**Accelerator physics:** **using these sensitive particle detectors.**

- Several devices are used, depending on particle rate and required time resolution
- Some applications for usage

# Secondary Particle Production for Electron Beams



## Processes for interaction of electrons

For  $E_{kin} > 100$  MeV:

Bremsstrahlungs-photon dominated

$\Rightarrow \gamma \rightarrow e^+ + e^-$  or  $\mu^\pm, \pi^\pm$  ....

$\rightarrow$  electro-magnetic showers

$\Rightarrow$  excitation of

nuclear giant resonances  $E_{res} \approx 6$  MeV  
via  $(\gamma, n)$ ,  $(\gamma, p)$  or  $(\gamma, np)$


$\rightarrow$  fast neutrons emitted

$\rightarrow$  neutrons: Long ranges in matter  
due to lack of ele.-mag. interaction.

For  $E_{kin} < 10$  MeV:

$\Rightarrow$  only electronic stopping  
(x-rays, slow  $e^-$ ).


Energy loss for  $e^-$  in copper:

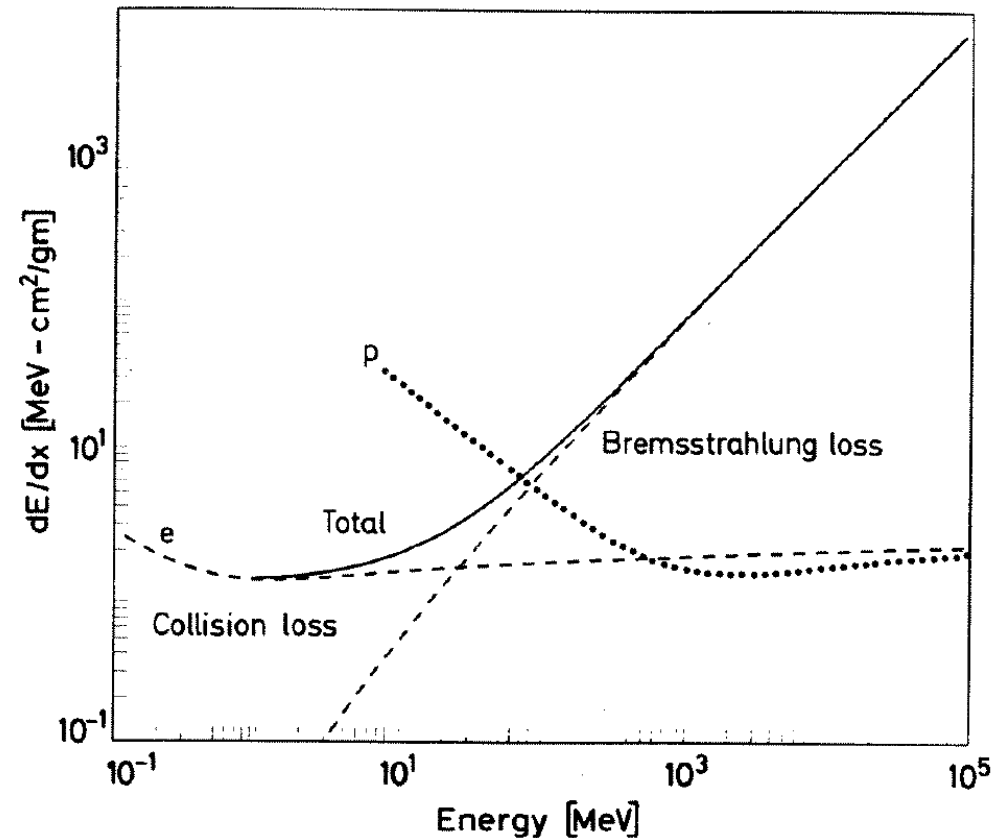


# Secondary Particle Production for Proton Beams



*Nuclear reaction probability:*

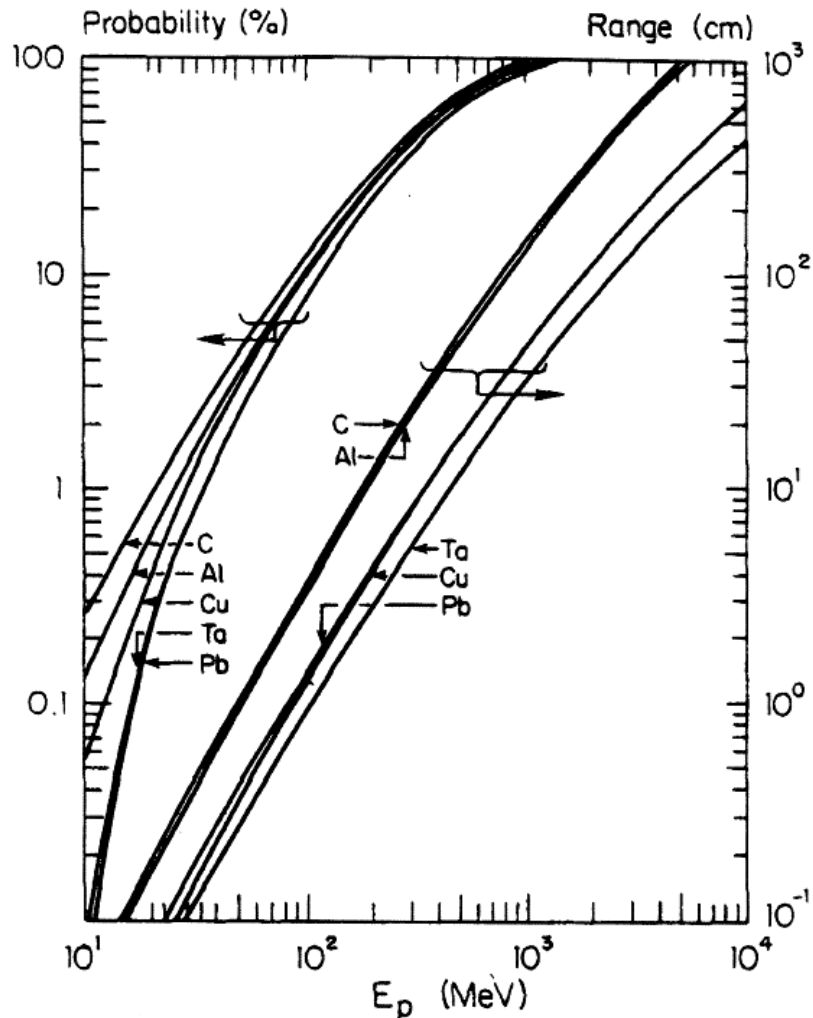

*Neutron yield per proton:*


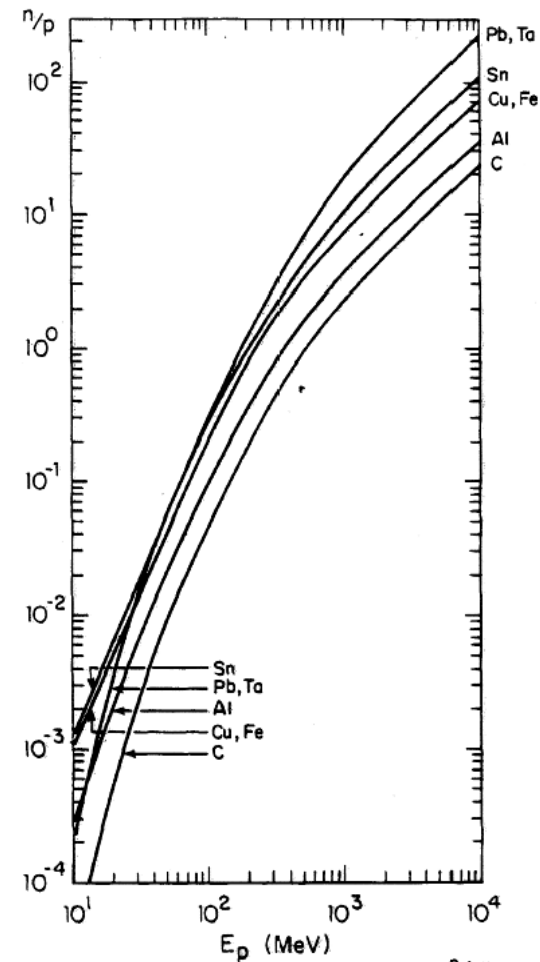


**Thick target:**

Penetration depth  
comparable to range  
→ different types of  
nuclear reaction .

⇒ high rate of neutron with broad energy and angular distribution.

# Various Beam Loss Monitors at the GSI-Synchrotron

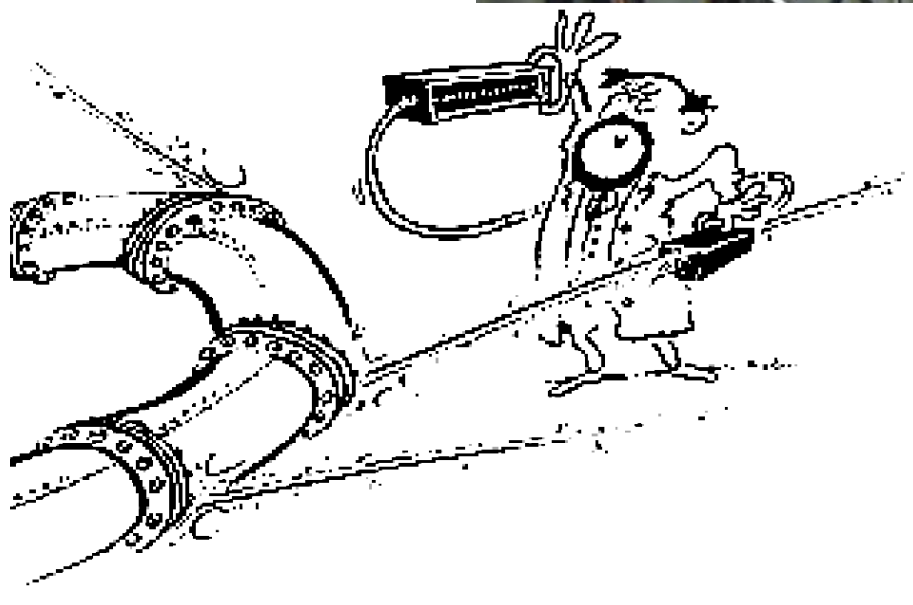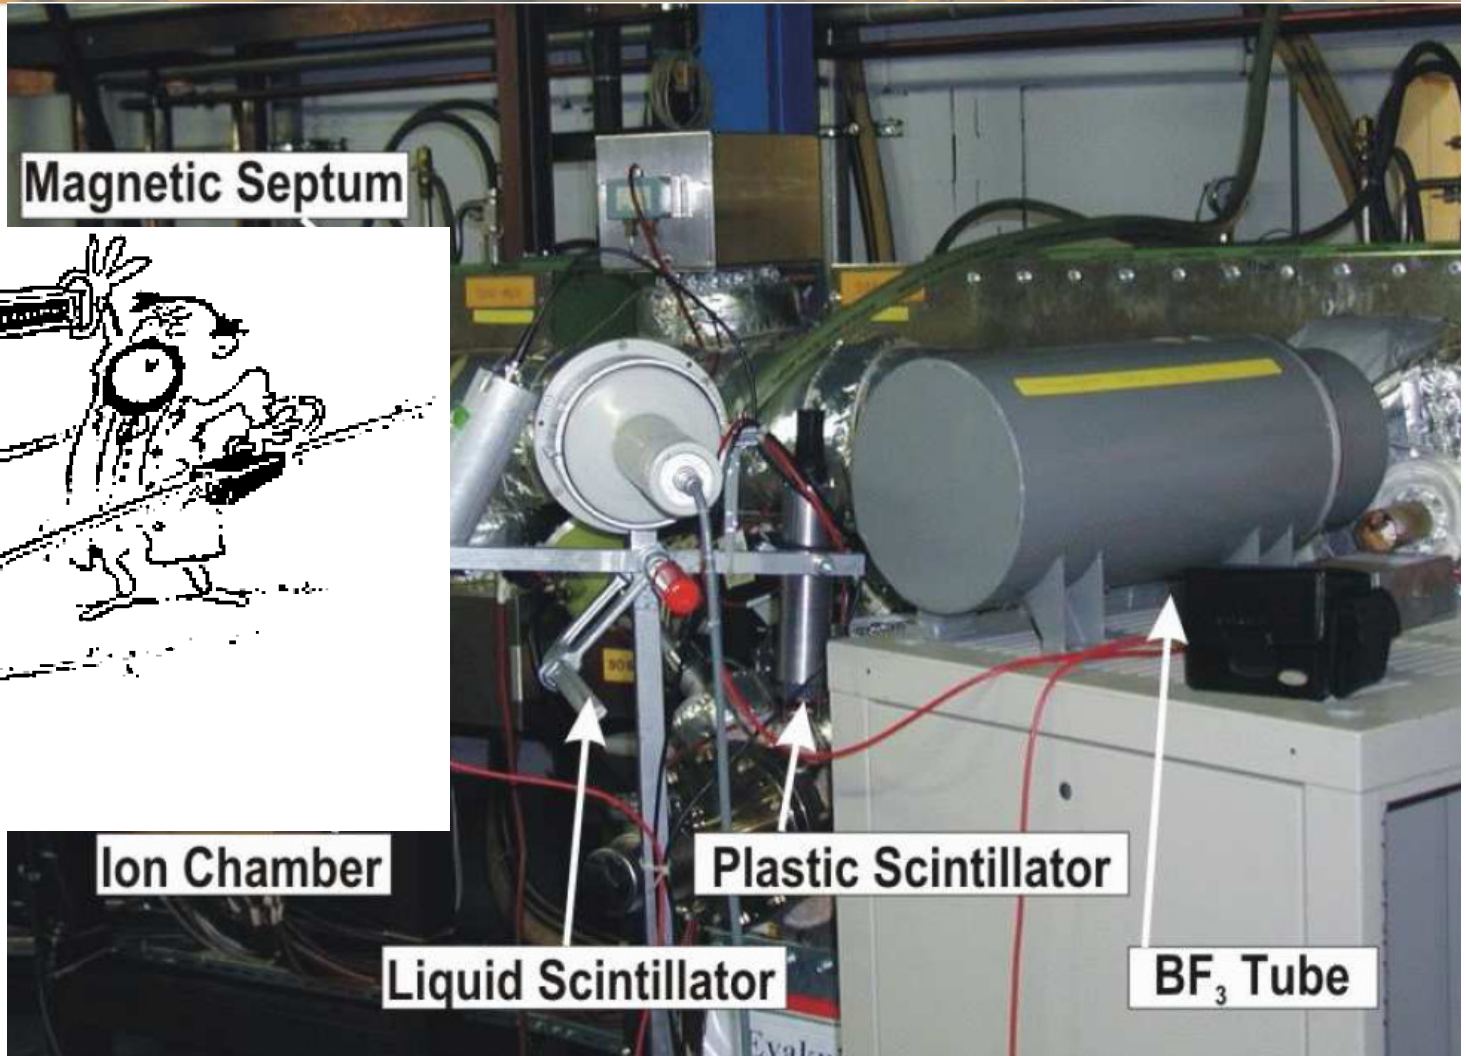



## Outline:

- Physical process from beam-wall interaction
- **Different types of Beam Loss Monitors**  
**different methods for various beam parameters**
- Machine protection using BLMs
- Summary



# Scintillators as Beam Loss Monitors



## Plastics or liquids are used:

- detection of **charged particles**  
by electronic stopping
- detection of **neutrons**  
by elastic collisions n on p in plastics  
and fast p electronic stopping.

## Scintillator + photo-multiplier:




counting (large PMT amplification)  
or analog voltage ADC (low PMT amp.).

Radiation hardness:

plastics 1 Mrad =  $10^4$  Gy

liquid 10 Mrad =  $10^5$  Gy

*Example:* Analog pulses of plastic scintillator:  
⇒ broad energy spectrum  
due to many particle species and energies.

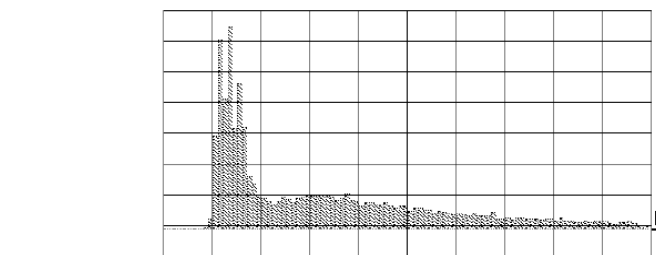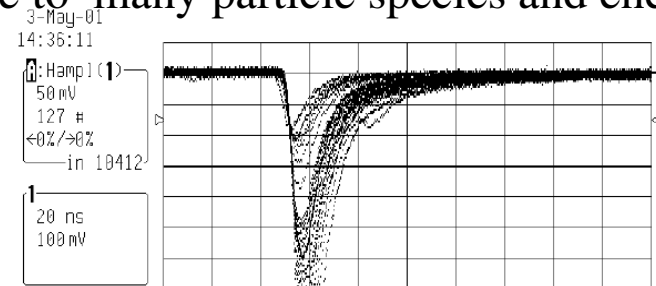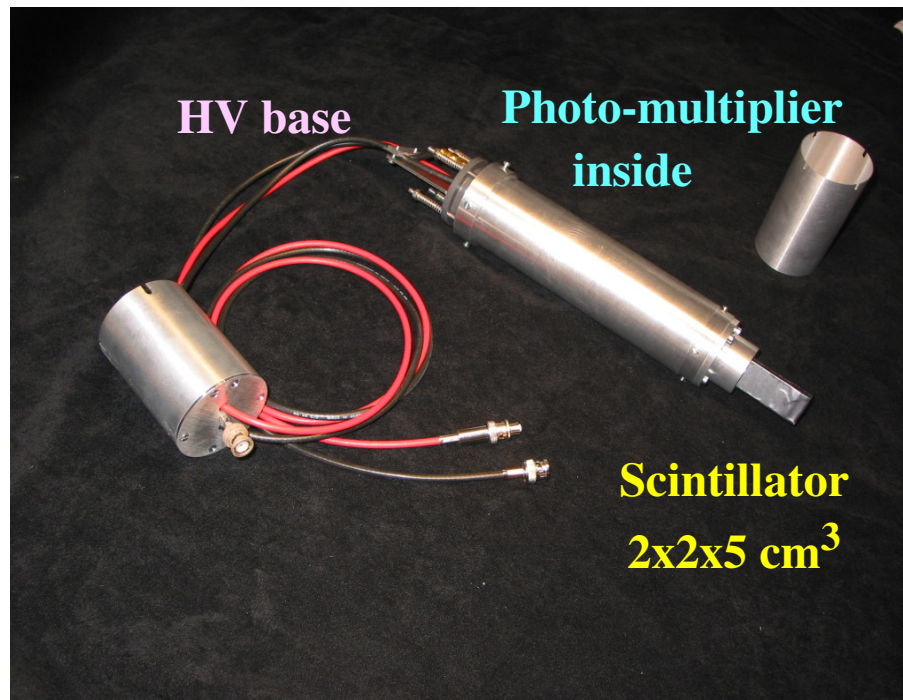

20 ns/div and 100 mV/div



# PIN-Diode (Solid State Detector) as BLM





Solid-state detector: Detection of charged particles.

## Working principle

- About  $10^4$   $e^-$ -hole pairs are created by a Minimum Ionizing Particle (MIP).
- A coincidence of the two PIN reduces the background due to low energy photons.
- A counting module is used with threshold value comparator for alarming.


→ **small and cheap detector.**

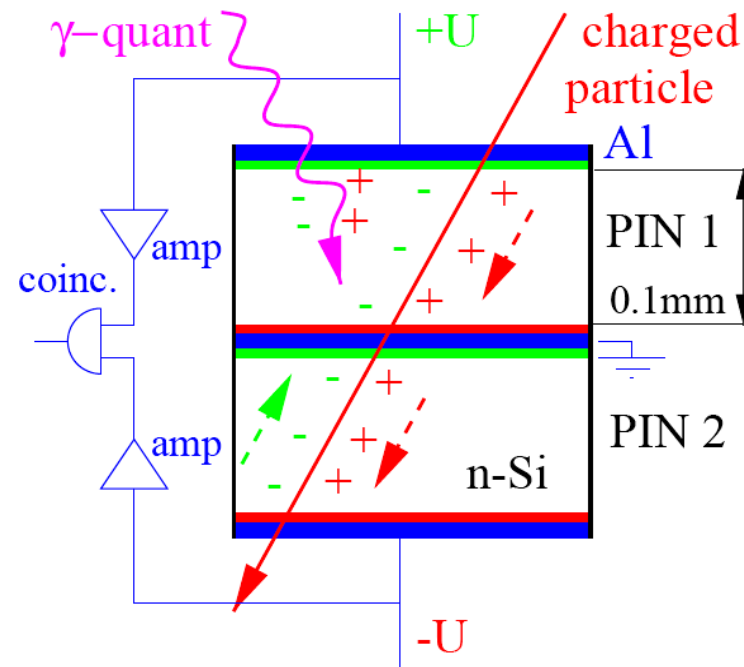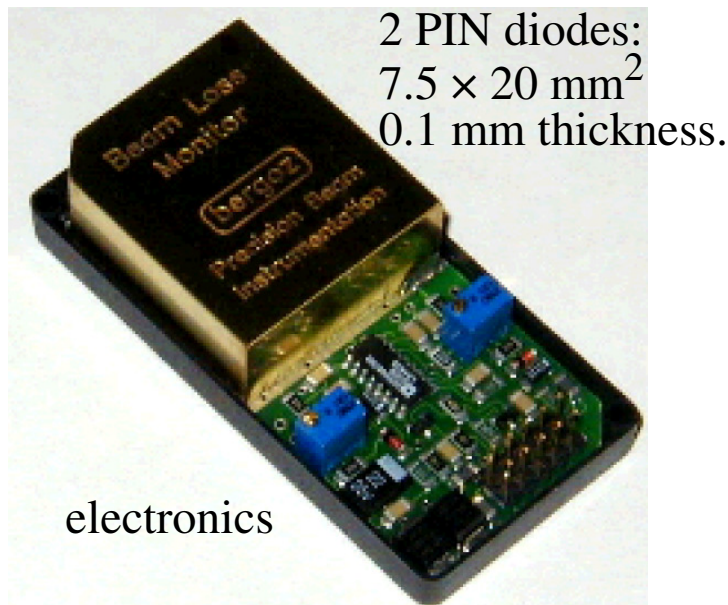

# Ionization Chamber as BLM



Detection of charged particles **only**.

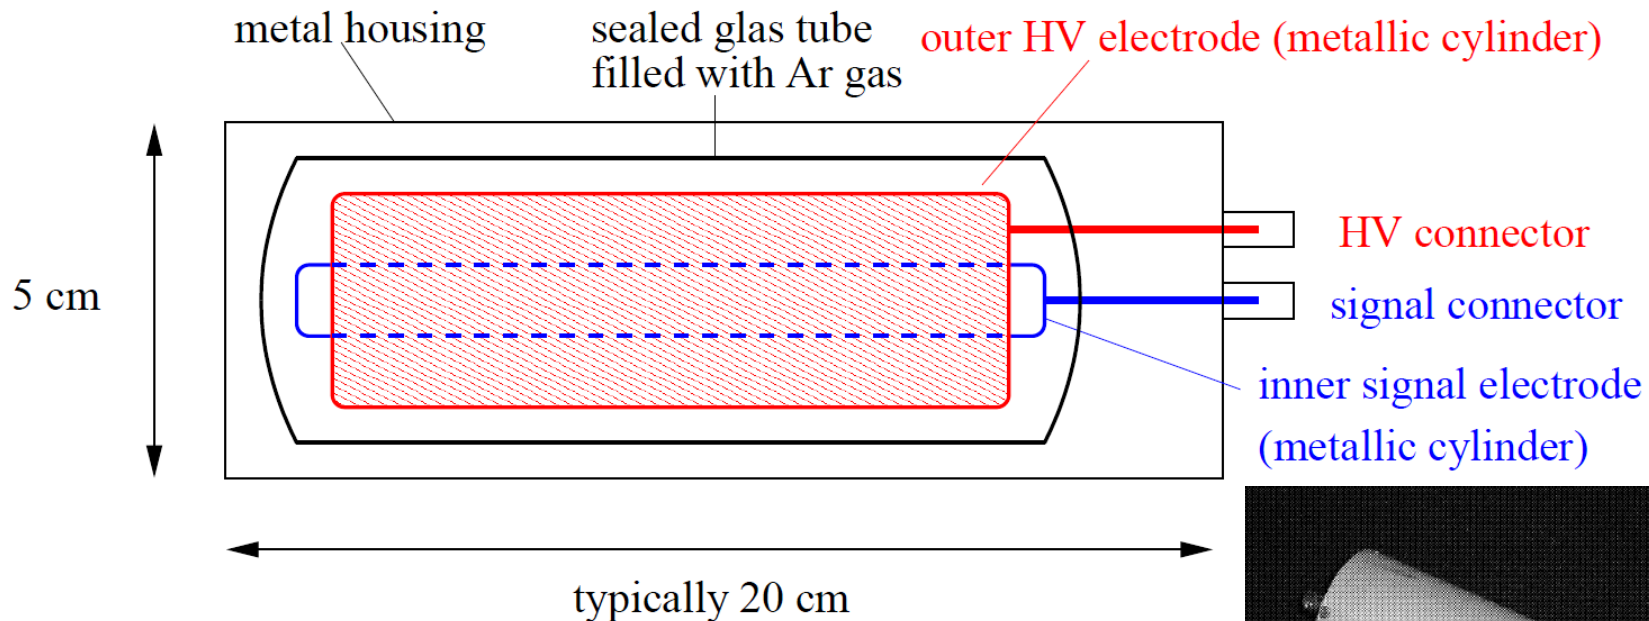

**Sealed tube Filled with Ar or N<sub>2</sub> gas:**

- Creation of Ar<sup>+</sup>-e<sup>-</sup> pairs, average energy  $W=32$  eV/pair
- measurement of this current
- Slow time response due to 100  $\mu$ s drift time of Ar<sup>+</sup>.

**Per definition: direct measurement of dose.**






# BF<sub>3</sub> Proportional Tubes as BLM




## Detection of neutrons **only**.

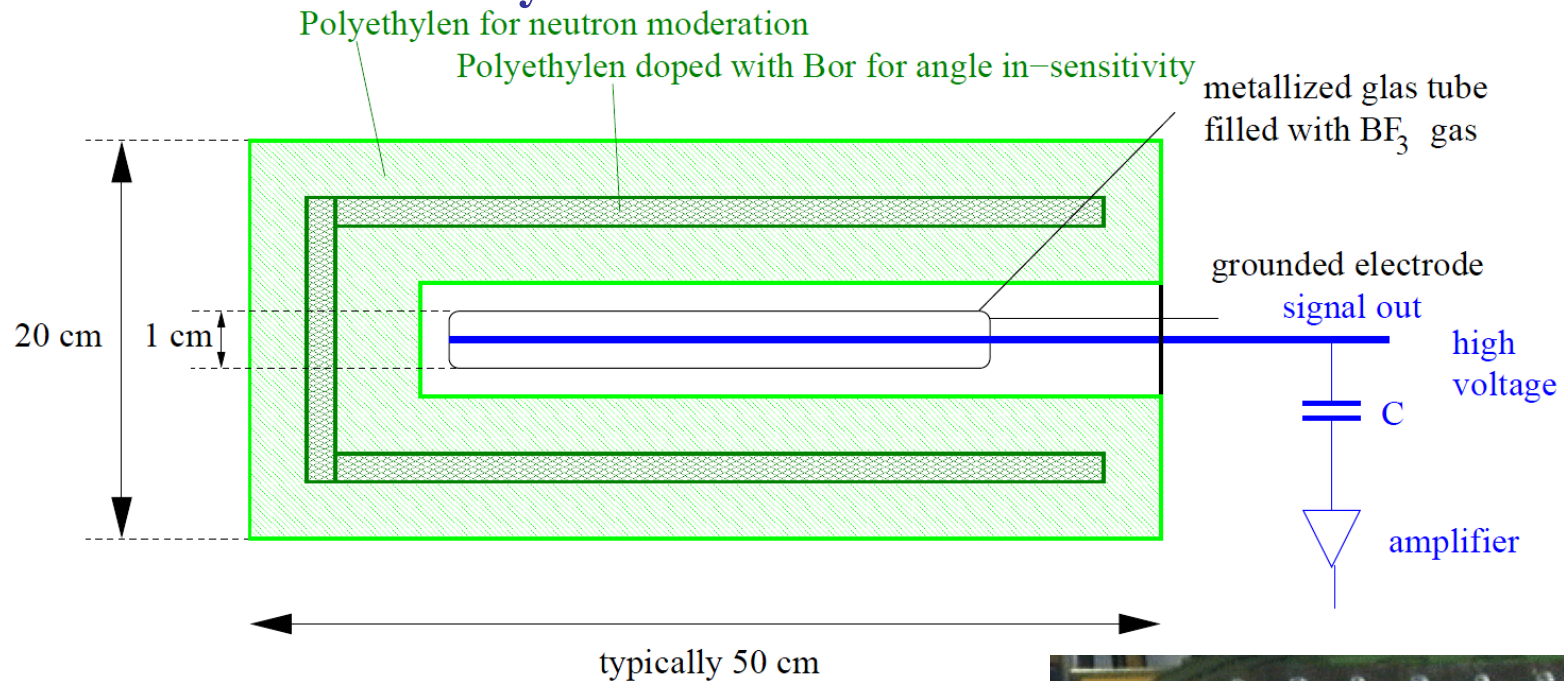


## Physical processes of signal generation:

1. Slow down of fast neutrons by elastic collisions with p
2. Nuclear reaction inside BF<sub>3</sub> gas in tube:  
 $^{10}\text{B} + \text{n} \rightarrow ^7\text{Li} + \alpha$  with  $Q = 2.3$  MeV.
3. Electronic stopping of <sup>7</sup>Li and α leads to signal.

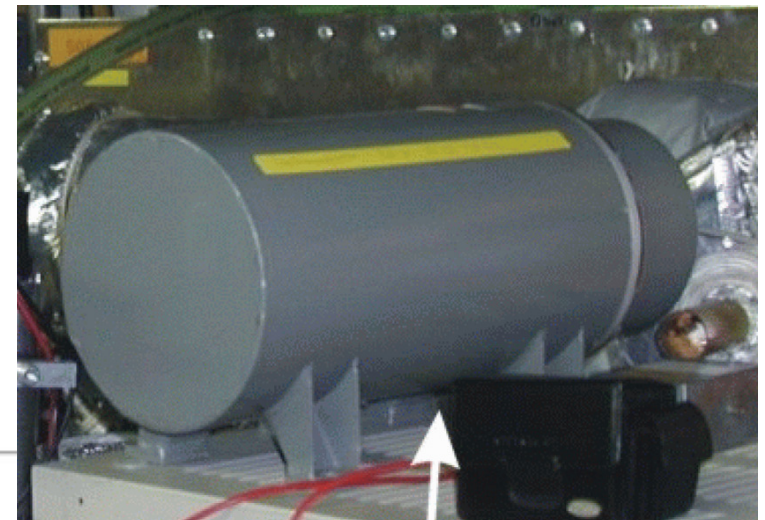

# Optical Fibers as BLM

Modification of fiber material is used as a measure of dose.

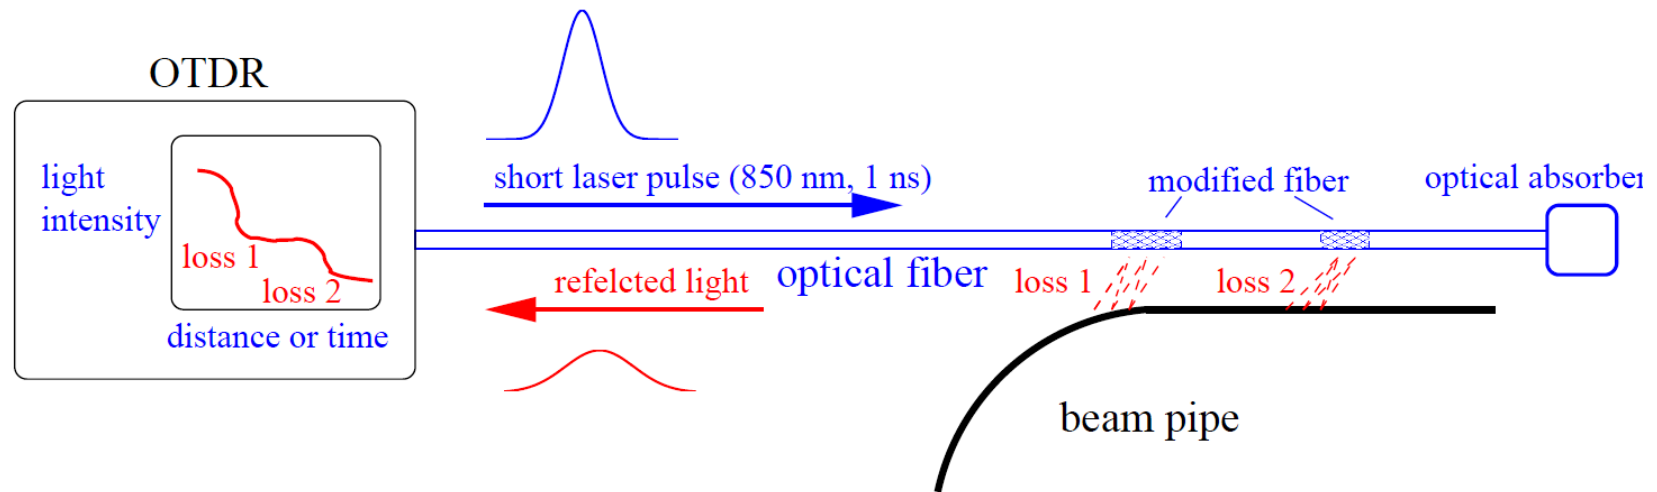


- several km long fibers (cheap due to use in tele-communication)
- 1 ns infra-red laser pulse
- OTDR (optical time domain reflector):  
time and amplitude of reflected light  $\Rightarrow$  location of modification.

# Comparison of different Types of BLMs



Different detectors are sensitive to various physical processes.

**Example:** Beam loss for 800 MeV/u O<sup>8+</sup>  
with different BLMs at GSI-synchr.:

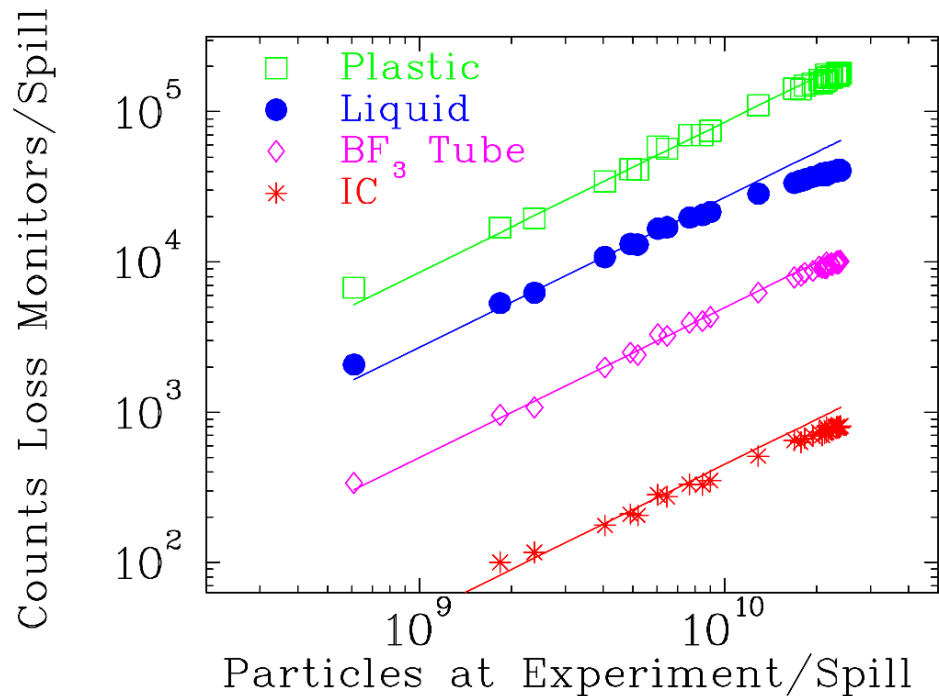

⇒ Linear behavior for all detectors

but quite different count rate:

$$r_{\text{IC}} < r_{\text{BF}_3} < r_{\text{liquid}} < r_{\text{plastic}}$$



## Outline:

- Physical process from beam-wall interaction
- Different types of Beam Loss Monitors  
different methods for various beam parameters
- Machine protection using BLMs  
**interlock generation for beam abort**
- Summary



## Machine Protection Issues for BLM



Losses lead to permanent activation  $\Rightarrow$  maintenance is hampered  
and to material heating (vacuum pipe, super-cond. magnet etc.)  $\Rightarrow$  destruction.

### Types of losses:

- **Irregular** or fast losses by malfunction of devices (magnets, cavities etc.)  
→ BLM as online control of the accelerator functionality and **interlock generation**.
- **Regular** or slow losses e.g. by lifetime limits or due to collimator  
→ BLM used for alignment.

### Demands for BLM:

- **High sensitivity** to detect behavior of beam halo e.g. at collimator
- **Large dynamic range:**
  - low signal during normal operation, but large signal in case of malfunction
  - detectable without changing the full-scale-range  
e.g. scintillators from  $10^2$  1/s up to  $10^7$  1/s in counting mode.

Monitoring of loss rate in control room *and* as interlock signal for beam abortion.

## Application: BLMs for Quench-Protection




Super-conducting magnets can be heated above critical temperature  $T_c$  by the lost beam  
⇒ breakdown of super-conductivity = 'quenching'.

⇒ Interlock within 1 ms for beam abortion generated by BLM.

Position of detector at quadrupoles due to maximal beam size.

High energy particles leads to a shower in forward direction → Monte-Carlo simulation.


*Example:* LHC proton beam at 7 TeV: **shower maximum @ 11560cm**

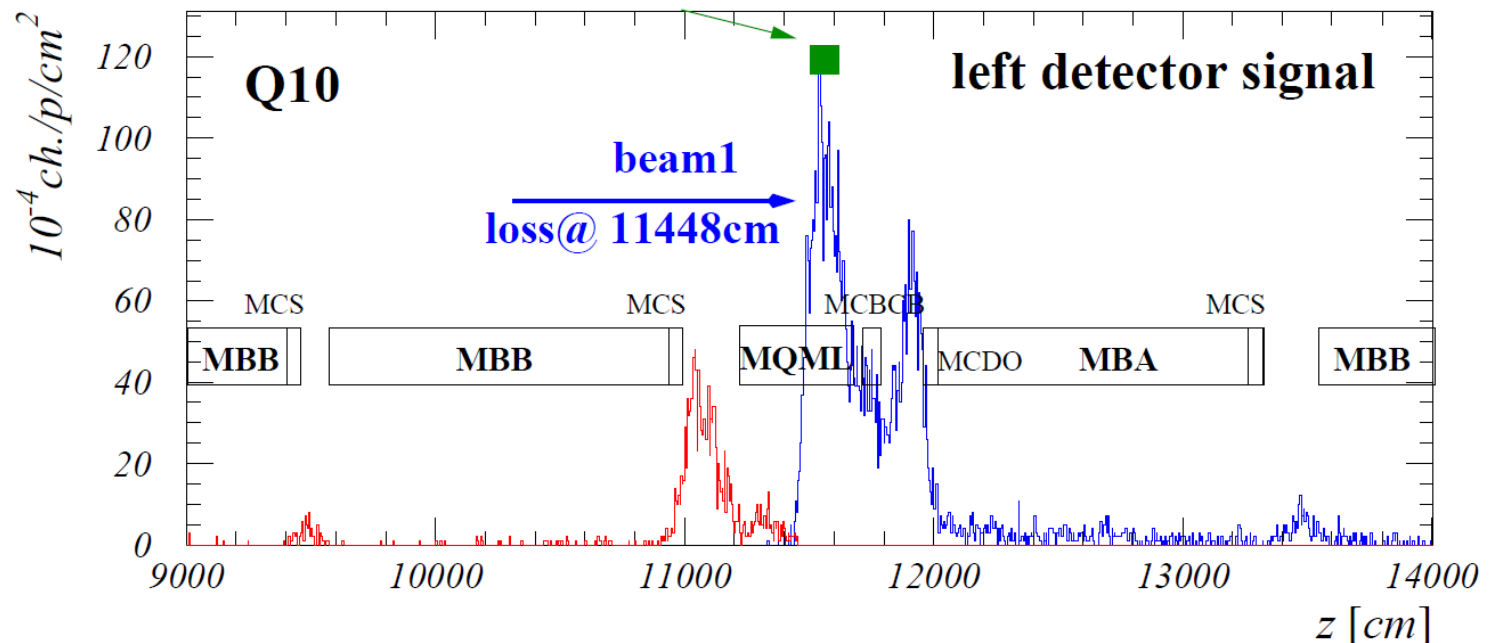

## Application: BLMs for optimal Tune Alignment



**Example:** Loss rate at a scraper inside the synchrotron as a function of the tune (i.e. small changes of quadrupole setting):

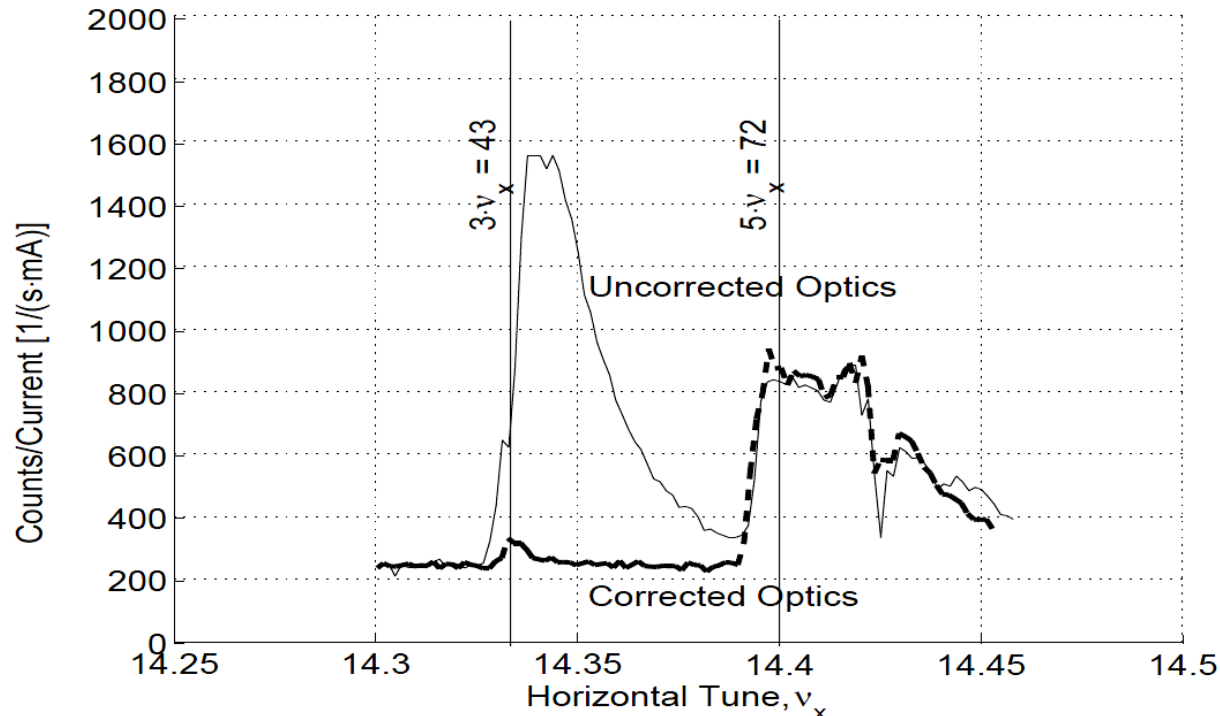

Beam blow-up by weak resonances can be avoided by proper tune value  
→ very sensitive device for optimization.

## Summary Beam Loss Monitors



### Measurement of the lost fraction of the beam:

- detection of secondary products
- sensitive particle detectors are used outside the vacuum
- cheap installations used at many location

**Used as interlock in all high current machines for protection.**

**Additionally used for sensitive ‘loss studies’.**

### Depending on the application different types are used:

- **Scintillators:** sensitive, fast response, largest dynamics, not radiation hard
- **PIN diode:** insensitive, fast response, not radiation hard, cheap
- **Electron Multiplier:** medium sensitive, fast response, radiation hard
- **IC:** medium sensitive, slow response, radiation hard, cheap
- **BF<sub>3</sub> tube:** only neutrons, slow response, radiation hard, expensive
- **Optical fibers:** insensitive, very slow, radiation hard, very high spatial resolution.