


## Lattice Design in Particle Accelerators

Bernhard Holzer, CERN

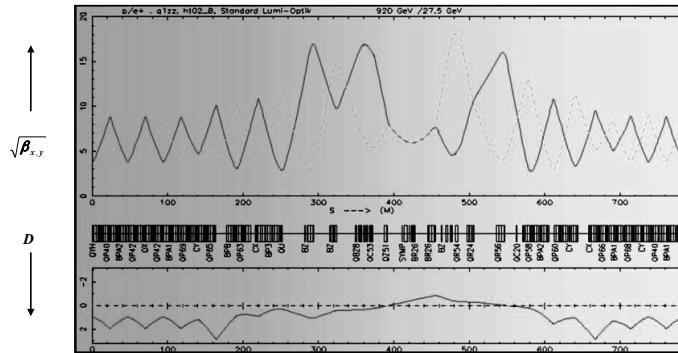

**1952: Courant, Livingston, Snyder:**  
**Theory of strong focusing in particle beams**

Bernhard Holzer, CAS

### Lattice Design: „... how to build a storage ring“

High energy accelerators → circular machines  
 somewhere in the lattice we need a number of dipole magnets,  
 that are bending the design orbit to a closed ring

Geometry of the ring:

centrifugal force = Lorentz force

$$e * v * B = \frac{mv^2}{\rho}$$

$$\rightarrow e * B = \frac{mv}{\rho} = p / \rho$$

$$\rightarrow B * \rho = p / e$$

$p$  = momentum of the particle,  
 $\rho$  = curvature radius

$B\rho$  = beam rigidity

Example: heavy ion storage ring TSR  
 8 dipole magnets of equal bending strength




Bernhard Holzer, CAS

## 1.) Circular Orbit:

„... defining the geometry“

$$\alpha = \frac{ds}{\rho} \approx \frac{dl}{\rho}$$

$$\alpha = \frac{B * dl}{B * \rho}$$

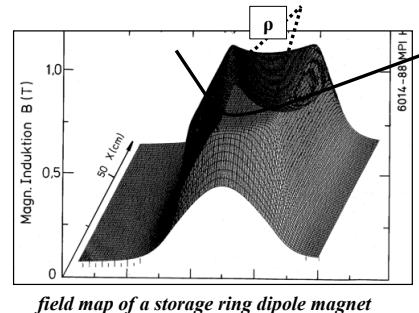

field map of a storage ring dipole magnet

The angle swept out in one revolution must be  $2\pi$ , so

$$\alpha = \frac{\int B dl}{B * \rho} = 2\pi \quad \rightarrow \quad \int B dl = 2\pi * \frac{p}{q} \quad \dots \text{for a full circle}$$

The strength of the dipoles  $B$  and the size of the storage ring  $\rho$  define the maximum momentum (i.e. energy) of the particles that can be carried in the machine.  $B * \rho = p/q$

*Nota bene:  $\frac{\Delta B}{B} \approx 10^{-4}$  is usually required !!*

Bernhard Holzer, CAS

Example LHC:



7000 GeV Proton storage ring  
dipole magnets N = 1232

$$l = 15 \text{ m}$$

$$q = +1 \text{ e}$$

$$\int B dl \approx N l B = 2\pi p / e$$

$$B \approx \frac{2\pi \cdot 7000 \cdot 10^9 \text{ eV}}{1232 \cdot 15 \text{ m} \cdot 3 \cdot 10^8 \frac{\text{m}}{\text{s}} \cdot e} = 8.3 \text{ Tesla}$$


Bernhard Holzer, CAS

## 2.) Focusing Forces: single particle trajectories

$$x'' + K * x = 0$$

$$K = -k + 1/\rho^2 \quad \text{hor. plane}$$

$$K = k \quad \text{vert. plane}$$

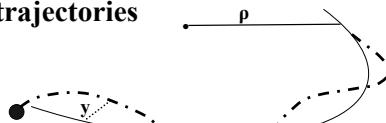

$$\left. \begin{array}{l} \text{dipole magnet} \quad \frac{1}{\rho} = \frac{B}{p/q} \\ \text{quadrupole magnet} \quad k = \frac{g}{p/q} \end{array} \right\}$$

Example: HERA Ring:  
 Bending radius:  $\rho = 580 \text{ m}$   
 Quadrupole Gradient:  $g = 110 \text{ T/m}$

$$k = 33.64 * 10^{-3} / \text{m}^2$$

$$1/\rho^2 = 2.97 * 10^{-6} / \text{m}^2$$

*For first estimates in large accelerators the weak focusing term  $1/\rho^2$  can in general be neglected*

Solution for a focusing magnet

$$y(s) = y_0 * \cos(\sqrt{K} * s) + \frac{y'_0}{\sqrt{K}} * \sin(\sqrt{K} * s)$$

$$y'(s) = -y_0 * \sqrt{K} * \sin(\sqrt{K} * s) + y'_0 * \cos(\sqrt{K} * s)$$

Bernhard Holzer, CAS

Or written more convenient in matrix form:

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = M \begin{pmatrix} x \\ x' \end{pmatrix}_0$$

Hor. focusing Quadrupole Magnet

$$M_{QF} = \begin{pmatrix} \cos(\sqrt{K} * l) & \frac{1}{\sqrt{K}} \sin(\sqrt{K} * l) \\ -\sqrt{K} \sin(\sqrt{K} * l) & \cos(\sqrt{K} * l) \end{pmatrix}$$


Hor. defocusing Quadrupole Magnet

$$M_{QD} = \begin{pmatrix} \cosh(\sqrt{K} * l) & \frac{1}{\sqrt{K}} \sinh(\sqrt{K} * l) \\ \sqrt{K} \sinh(\sqrt{K} * l) & \cosh(\sqrt{K} * l) \end{pmatrix}$$

Drift space

$$M_{Drift} = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix}$$

$$M_{lattice} = M_{QF1} * M_{D1} * M_{QD} * M_{D1} * M_{QF2} \dots$$

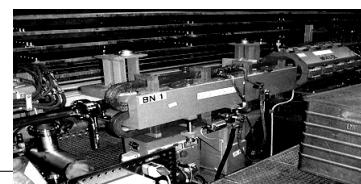

Bernhard Holzer, CAS

### 3.) Transfer Matrix ... yes we had the topic already ... as Function of Twissparameters

general solution of Hill's equation

$$\begin{cases} x(s) = \sqrt{\varepsilon} \sqrt{\beta(s)} \cos \{\psi(s) + \phi\} \\ x'(s) = \frac{-\sqrt{\varepsilon}}{\sqrt{\beta(s)}} [\alpha(s) \cos \{\psi(s) + \phi\} + \sin \{\psi(s) + \phi\}] \end{cases}$$

remember the trigonometrical gymnastics:  $\sin(a + b) = \dots$  etc

$$x(s) = \sqrt{\varepsilon} \sqrt{\beta_s} (\cos \psi_s \cos \phi - \sin \psi_s \sin \phi)$$

$$x'(s) = \frac{-\sqrt{\varepsilon}}{\sqrt{\beta_s}} [\alpha_s \cos \psi_s \cos \phi - \alpha_s \sin \psi_s \sin \phi + \sin \psi_s \cos \phi + \cos \psi_s \sin \phi]$$

starting at a point  $s(0) = s_0$ , where we put  $\Psi(0) = 0$

$$\left. \begin{array}{l} \cos \phi = \frac{x_0}{\sqrt{\varepsilon \beta_0}}, \\ \sin \phi = -\frac{1}{\sqrt{\varepsilon}} (x'_0 \sqrt{\beta_0} + \frac{\alpha_0 x_0}{\sqrt{\beta_0}}) \end{array} \right\} \text{inserting above ...}$$

Bernhard Holzer, CAS

$$x(s) = \sqrt{\frac{\beta_s}{\beta_0}} \{ \cos \psi_s + \alpha_0 \sin \psi_s \} x_0 + \{ \sqrt{\beta_s \beta_0} \sin \psi_s \} x'_0$$

$$x'(s) = \frac{1}{\sqrt{\beta_s \beta_0}} \{ (\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s \} x_0 + \sqrt{\frac{\beta_0}{\beta_s}} \{ \cos \psi_s - \alpha_s \sin \psi_s \} x'_0$$

which can be expressed ... for convenience ... in matrix form

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = M \begin{pmatrix} x \\ x' \end{pmatrix}_0$$


$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$

we can calculate the single particle trajectories between two locations in the ring,  
 \* if we know the  $\alpha \beta \gamma$  at these positions.  
 \* and nothing but the  $\alpha \beta \gamma$  at these positions.  
 \* ... !

Bernhard Holzer, CAS

#### 4.) Periodic Lattices

$$M = \begin{pmatrix} \sqrt{\frac{\beta_s}{\beta_0}} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\frac{\beta_0}{\beta_s}} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$

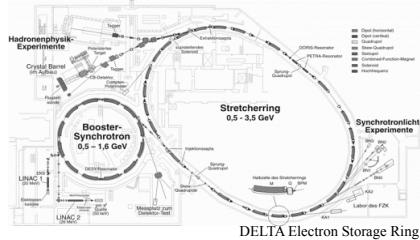

„This rather formidable looking matrix simplifies considerably if we consider one complete revolution ...“  
M. Sands

$$M(s) = \begin{pmatrix} \cos \psi_{turn} + \alpha_s \sin \psi_{turn} & \beta_s \sin \psi_{turn} \\ -\gamma_s \sin \psi_{turn} & \cos \psi_{turn} - \alpha_s \sin \psi_{turn} \end{pmatrix} \quad \psi_{turn} = \int_s^{s+L} \frac{ds}{\beta(s)} \quad \psi_{turn} = \text{phase advance per period}$$

Tune: Phase advance per turn in units of  $2\pi$

$$Q = \frac{1}{2\pi} \oint \frac{ds}{\beta(s)}$$

Bernhard Holzer, CAS

#### Stability Criterion:

Question: what will happen, if we do not make too many mistakes and your particle performs one complete turn ?



#### Matrix for 1 turn:

$$M = \begin{pmatrix} \cos \psi_{turn} + \alpha_s \sin \psi_{turn} & \beta_s \sin \psi_{turn} \\ -\gamma_s \sin \psi_{turn} & \cos \psi_{turn} - \alpha_s \sin \psi_{turn} \end{pmatrix} = \underbrace{\cos \psi}_{\mathbf{I}} \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} + \underbrace{\sin \psi}_{\mathbf{J}} \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix}$$

#### Matrix for N turns:

$$M^N = (1 \cdot \cos \psi + J \cdot \sin \psi)^N = 1 \cdot \cos N\psi + J \cdot \sin N\psi$$

The motion for N turns remains bounded, if the elements of  $M^N$  remain bounded

$$\psi = \text{real} \quad \Leftrightarrow \quad |\cos \psi| \leq 1 \quad \Leftrightarrow \quad \text{Tr}(M) \leq 2$$

Bernhard Holzer, CAS

## 5.) Transformation of $\alpha, \beta, \gamma$

consider two positions in the storage ring:  $s_0, s$

$$\begin{pmatrix} x \\ x' \end{pmatrix}_s = M * \begin{pmatrix} x \\ x' \end{pmatrix}_{s_0}$$

$$M = \begin{pmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{pmatrix}$$

since  $\varepsilon = \text{const}$  (Liouville):

$$\varepsilon = \beta_s x'^2 + 2\alpha_s x x' + \gamma_s x^2$$

$$\varepsilon = \beta_0 x_0'^2 + 2\alpha_0 x_0 x_0' + \gamma_0 x_0^2$$


... remember  $W = CS \cdot SC' = 1$

$$\left. \begin{aligned} \begin{pmatrix} x \\ x' \end{pmatrix}_0 &= M^{-1} * \begin{pmatrix} x \\ x' \end{pmatrix}_s \\ M^{-1} &= \begin{pmatrix} m_{22} & -m_{12} \\ -m_{21} & m_{11} \end{pmatrix} \end{aligned} \right\} \rightarrow \begin{aligned} x_0 &= m_{22}x - m_{12}x' \\ x'_0 &= -m_{21}x + m_{11}x' \end{aligned} \quad \dots \text{inserting into } \varepsilon$$

$$\varepsilon = \beta_0(m_{11}x' - m_{21}x)^2 + 2\alpha_0(m_{22}x - m_{12}x')(m_{11}x' - m_{21}x) + \gamma_0(m_{22}x - m_{12}x')^2$$

sort via  $x, x'$  and compare the coefficients to get ....

Bernhard Holzer, CAS

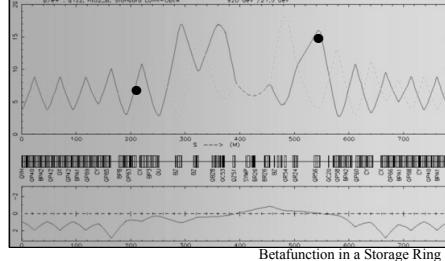

The Twiss parameters  $\alpha, \beta, \gamma$  can be transformed through the lattice via the matrix elements defined above.

$$\beta(s) = m_{11}^2 \beta_0 - 2m_{11}m_{12}\alpha_0 + m_{12}^2\gamma_0$$

$$\alpha(s) = -m_{11}m_{21}\beta_0 + (m_{12}m_{21} + m_{11}m_{22})\alpha_0 - m_{12}m_{22}\gamma_0$$

$$\gamma(s) = m_{21}^2 \beta_0 - 2m_{21}m_{22}\alpha_0 + m_{22}^2\gamma_0$$

in matrix notation:

$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_{s_2} = \begin{pmatrix} m_{11}^2 & -2m_{11}m_{12} & m_{12}^2 \\ -m_{11}m_{21} & m_{12}m_{21} + m_{22}m_{11} & -m_{12}m_{22} \\ m_{12}^2 & -2m_{21}m_{22} & m_{22}^2 \end{pmatrix} * \begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_{s_1}$$



1.) this expression is important

2.) given the twiss parameters  $\alpha, \beta, \gamma$  at any point in the lattice we can transform them and calculate their values at any other point in the ring.

3.) the transfer matrix is given by the focusing properties of the lattice elements, the elements of  $M$  are just those that we used to calculate single particle trajectories.

... and here starts the lattice design !!!

Bernhard Holzer, CAS

### Most simple example: drift space

$$M_{drift} = \begin{pmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{pmatrix} = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix}$$

particle coordinates

$$\begin{pmatrix} x \\ x' \end{pmatrix}_l = \begin{pmatrix} 1 & l \\ 0 & 1 \end{pmatrix} * \begin{pmatrix} x \\ x' \end{pmatrix}_0 \rightarrow \begin{array}{l} x(l) = x_0 + l * x_0' \\ x'(l) = x_0' \end{array}$$

transformation of twiss parameters:


$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_l = \begin{pmatrix} 1 & -2l & l^2 \\ 0 & 1 & -l \\ 0 & 0 & 1 \end{pmatrix} * \begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_0 \quad \boxed{\beta(s) = \beta_0 - 2l * \alpha_0 + l^2 * \gamma_0}$$

Stability ...?

$$\text{trace}(M) = 1 + 1 = 2$$

*→ A periodic solution doesn't exist in a lattice built exclusively out of drift spaces.*

Bernhard Holzer, CAS

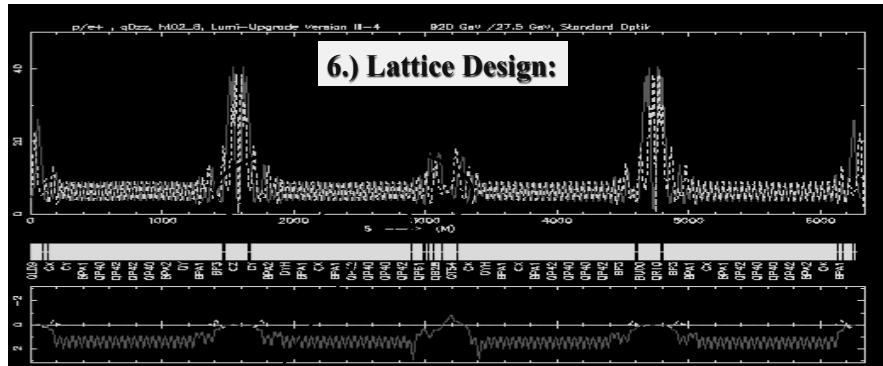

Arc: regular (periodic) magnet structure:

bending magnets → define the energy of the ring  
main focusing & tune control, chromaticity correction,  
multipoles for higher order corrections

Straight sections: drift spaces for injection, dispersion suppressors,

low beta insertions, RF cavities, etc....



... and the high energy experiments if they cannot be avoided

Bernhard Holzer, CAS

### Periodic Solution of a FoDo Cell

A magnet structure consisting of focusing and defocusing quadrupole lenses in alternating order with nothing in between.

(Nothing = elements that can be neglected on first sight: drift, bending magnets, RF structures ... and especially experiments...)

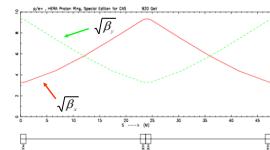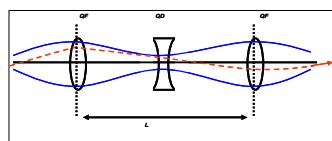

#### Output of the optics program:

Starting point for the calculation: in the middle of a focusing quadrupole, Phase advance per cell  $\mu = 45^\circ$ ,  $\rightarrow$  calculate the twiss parameters for a periodic solution

Nr	Type	Length m	Strength 1/m <sup>2</sup>	$\beta_x$	$\alpha_x$	$\varphi_x$ 1/2π	$\beta_z$	$\alpha_z$	$\varphi_z$ 1/2π
				m	1/m <sup>2</sup>	1/2π	m	1/2π	
0	IP	0,000	0,000	11,611	0,000	0,000	5,295	0,000	0,000
1	QFH	0,250	-0,541	11,228	1,514	0,004	5,488	-0,781	0,007
2	QD	3,251	0,541	5,488	-0,781	0,070	11,228	1,514	0,066
3	QFH	6,002	-0,541	11,611	0,000	0,125	5,295	0,000	0,125
4	IP	6,002	0,000	11,611	0,000	0,125	5,295	0,000	0,125

$$QX = 0,125 \quad QZ = 0,125 \quad \longrightarrow \quad 0,125 * 2\pi = 45^\circ$$

Bernhard Holzer, CAS

#### Can we understand what the optics code is doing ?

matrices

$$M_{QF} = \begin{pmatrix} \cos(\sqrt{K} * l_q) & \frac{1}{\sqrt{K}} \sin(\sqrt{K} * l_q) \\ -\sqrt{K} \sin(\sqrt{K} * l_q) & \cos(\sqrt{K} * l_q) \end{pmatrix}, \quad M_{Drift} = \begin{pmatrix} 1 & l \\ 0 & 1_d \end{pmatrix}$$

strength and length of the FoDo elements

$$K = +/- 0.54102 \text{ m}^{-2}$$

$$lq = 0.5 \text{ m}$$

$$ld = 2.5 \text{ m}$$

The matrix for the complete cell is obtained by multiplication of the element matrices

$$M_{FoDo} = M_{qfh} * M_{ld} * M_{qd} * M_{ld} * M_{qfh}$$

Putting the numbers in and multiplying out ...

$$M_{FoDo} = \begin{pmatrix} 0.707 & 8.206 \\ -0.061 & 0.707 \end{pmatrix}$$

Bernhard Holzer, CAS

The transfer matrix for 1 period gives us all the information that we need !

1.) is the motion stable?

$$\text{trace}(M_{F_0 D_0}) = 1.415 \rightarrow$$

< 2

2.) Phase advance per cell

$$M(s) = \begin{pmatrix} \cos\psi_{cell} + \alpha_s \sin\psi_{cell} & \beta_s \sin\psi_{cell} \\ -\gamma_s \sin\psi_{cell} & \cos\psi_{cell} - \alpha_s \sin\psi_{cell} \end{pmatrix}$$

$$\cos\psi_{cell} = \frac{1}{2} \text{trace}(M) = 0.707$$

$$\psi_{cell} = \cos^{-1}\left(\frac{1}{2} \text{trace}(M)\right) = 45^\circ$$

3.) hor  $\beta$ -function

$$\beta = \frac{m_{12}}{\sin\psi_{cell}} = 11.611 \text{ m}$$

4.) hor  $\alpha$ -function

$$\alpha = \frac{m_{11} - \cos\psi_{cell}}{\sin\psi_{cell}} = 0$$

Bernhard Holzer, CAS

Can we do a bit easier ?

We can ... in thin lens approximation !

Matrix of a focusing quadrupole magnet:

$$M_{QF} = \begin{pmatrix} \cos(\sqrt{K} * l) & \frac{1}{\sqrt{K}} \sin(\sqrt{K} * l) \\ -\sqrt{K} \sin(\sqrt{K} * l) & \cos(\sqrt{K} * l) \end{pmatrix}$$

If the focal length  $f$  is much larger than the length of the quadrupole magnet,

$$f = \frac{1}{kl_q} \gg l_q$$


the transfer matrix can be approximated using ↪

$$kl_q = \text{const}, \quad l_q \rightarrow 0$$

$$M = \begin{pmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{pmatrix}$$

Bernhard Holzer, CAS

## 7.) FoDo in thin lens approximation

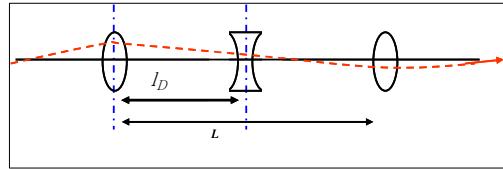

$$l_D = L/2$$

$$\tilde{f} = 2f$$

Calculate the matrix for a half cell, starting in the middle of a foc. quadrupole:

$$M_{halfCell} = M_{QD/2} * M_{ID} * M_{QF/2}$$

$$M_{halfCell} = \begin{pmatrix} 1 & 0 \\ 1/\tilde{f} & 1 \end{pmatrix} * \begin{pmatrix} 1 & l_D \\ 0 & 1 \end{pmatrix} * \begin{pmatrix} 1 & 0 \\ -1/\tilde{f} & 1 \end{pmatrix} \quad \text{note: } \tilde{f} \text{ denotes the focusing strength of half a quadrupole, so } \tilde{f} = 2f$$

$$M_{halfCell} = \begin{pmatrix} 1 - l_D/\tilde{f} & l_D \\ -l_D/\tilde{f}^2 & 1 + l_D/\tilde{f} \end{pmatrix} \quad \text{for the second half cell set } f \rightarrow -f$$

Bernhard Holzer, CAS

## FoDo in thin lens approximation

**Matrix for the complete FoDo cell**

$$M = \begin{pmatrix} 1 + l_D/\tilde{f} & l_D \\ -l_D/\tilde{f}^2 & 1 - l_D/\tilde{f} \end{pmatrix} * \begin{pmatrix} 1 - l_D/\tilde{f} & l_D \\ -l_D/\tilde{f}^2 & 1 + l_D/\tilde{f} \end{pmatrix}$$

$$M = \begin{pmatrix} 1 - \frac{2l_D^2}{\tilde{f}^2} & 2l_D(1 + \frac{l_D}{\tilde{f}}) \\ 2(\frac{l_D^2}{\tilde{f}^3} - \frac{l_D}{\tilde{f}^2}) & 1 - 2\frac{l_D^2}{\tilde{f}^2} \end{pmatrix}$$

Now we know, that the phase advance is related to the transfer matrix by

$$\cos \psi_{cell} = \frac{1}{2} \operatorname{trace}(M) = \frac{1}{2} * (2 - \frac{4l_D^2}{\tilde{f}^2}) = 1 - \frac{2l_D^2}{\tilde{f}^2}$$

After some beer and with a little bit of trigonometric gymnastics

$$\cos(x) = \cos^2(\frac{x}{2}) - \sin^2(\frac{x}{2}) = 1 - 2\sin^2(\frac{x}{2})$$

Bernhard Holzer, CAS

*we can calculate the phase advance as a function of the FoDo parameter ...*

$$\cos\psi_{cell} = 1 - 2\sin^2(\psi_{cell}/2) = 1 - \frac{2l_d^2}{f^2}$$

$$\sin(\psi_{cell}/2) = l_d/f = \frac{L_{cell}}{2f}$$

$$\sin(\psi_{cell}/2) = \frac{L_{cell}}{4f}$$

*The ratio between cell length  $L_{cell}$  and focal length of the quadrupoles  $f$  determines the phase advance  $\psi_{cell}$*

*Example:*                     $L_{cell} = l_{QF} + l_D + l_{QD} + l_D = 0.5m + 2.5m + 0.5m + 2.5m = 6m$   
*45-degree Cell*             $1/f = k * l_Q = 0.5m * 0.541 m^{-2} = 0.27 m^{-1}$

$$\sin(\psi_{cell}/2) = \frac{L_{cell}}{4f} = 0.405$$

$$\begin{aligned} \rightarrow \psi_{cell} &= 47.8^\circ \\ \rightarrow \beta &= 11.4 \text{ m} \end{aligned}$$

*Remember:  
Exact calculation yields:*

$$\begin{aligned} \rightarrow \psi_{cell} &= 45^\circ \\ \rightarrow \beta &= 11.6 \text{ m} \end{aligned}$$

Bernhard Holzer, CAS

## 8.) Stability in a FoDo structure



SPS Lattice

$$M_{FoDo} = \begin{pmatrix} 1 - \frac{2l_d^2}{f^2} & 2l_d(1 + \frac{l_d}{f}) \\ 2(\frac{l_d^2}{f^3} - \frac{l_d}{f^2}) & 1 - 2\frac{l_d^2}{f^2} \end{pmatrix}$$

*Stability requires:*

$$|\text{Trace}(M)| < 2$$

$$|\text{Trace}(M)| = \left| 2 - \frac{4l_d^2}{f^2} \right| < 2$$

$$\rightarrow f > \frac{L_{cell}}{4}$$


*For stability the focal length has to be larger than a quarter of the cell length ... don't focus too strong!*

Bernhard Holzer, CAS

### Transformation Matrix in Terms of the Twiss Parameters

Transformation of the coordinate vector ( $x, x'$ ) in a lattice

$$\begin{pmatrix} x(s) \\ x'(s) \end{pmatrix} = M_{s_1, s_2} \begin{pmatrix} x_0 \\ x'_0 \end{pmatrix}$$

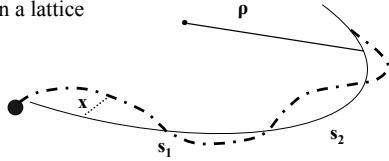

General solution of the equation of motion

$$x(s) = \sqrt{\epsilon * \beta(s)} * \cos(\psi(s) + \varphi)$$

$$x'(s) = \sqrt{\frac{\epsilon}{\beta(s)}} * \{ \alpha(s) \cos(\psi(s) + \varphi) + \sin(\psi(s) + \varphi) \}$$


Transformation of the coordinate vector ( $x, x'$ ) expressed as a function of the twiss parameters

$$M_{1 \rightarrow 2} = \begin{pmatrix} \sqrt{\frac{\beta_2}{\beta_1}} (\cos \psi_{12} + \alpha_1 \sin \psi_{12}) & \sqrt{\beta_1 \beta_2} \sin \psi_{12} \\ \frac{(\alpha_1 - \alpha_2) \cos \psi_{12} - (1 + \alpha_1 \alpha_2) \sin \psi_{12}}{\sqrt{\beta_1 \beta_2}} & \sqrt{\frac{\beta_1}{\beta_2}} (\cos \psi_{12} - \alpha_2 \sin \psi_{12}) \end{pmatrix}$$

Bernhard Holzer, CAS

### Transfer Matrix for half a FoDo cell:

$$M_{halfcell} = \begin{pmatrix} 1 - \frac{I_D}{\tilde{f}} & I_D \\ -\frac{I_D}{\tilde{f}^2} & 1 + \frac{I_D}{\tilde{f}} \end{pmatrix}$$

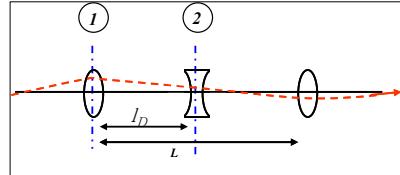

Compare to the twiss parameter form of M

$$M_{1 \rightarrow 2} = \begin{pmatrix} \sqrt{\frac{\beta_2}{\beta_1}} (\cos \psi_{12} + \alpha_1 \sin \psi_{12}) & \sqrt{\beta_1 \beta_2} \sin \psi_{12} \\ \frac{(\alpha_1 - \alpha_2) \cos \psi_{12} - (1 + \alpha_1 \alpha_2) \sin \psi_{12}}{\sqrt{\beta_1 \beta_2}} & \sqrt{\frac{\beta_1}{\beta_2}} (\cos \psi_{12} - \alpha_2 \sin \psi_{12}) \end{pmatrix}$$

In the middle of a foc (defoc) quadrupole of the FoDo we always have  $\alpha = 0$ , and the half cell will lead us from  $\beta_{max}$  to  $\beta_{min}$


$$M = \begin{pmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{pmatrix} = \begin{pmatrix} \sqrt{\frac{\beta}{\beta'}} \cos \frac{\psi_{cell}}{2} & \sqrt{\beta \beta'} \sin \frac{\psi_{cell}}{2} \\ \frac{-1}{\sqrt{\beta \beta'}} \sin \frac{\psi_{cell}}{2} & \sqrt{\frac{\beta}{\beta'}} \cos \frac{\psi_{cell}}{2} \end{pmatrix}$$

Bernhard Holzer, CAS

Solving for  $\beta_{\max}$  and  $\beta_{\min}$  and remembering that ....

$$\sin \frac{\psi_{cell}}{2} = \frac{l_d}{f} = \frac{L}{4f}$$

$$\left. \begin{aligned} m_{22} &= \frac{\hat{\beta}}{\bar{\beta}} = \frac{1 + l_d/\tilde{f}}{1 - l_d/\tilde{f}} = \frac{1 + \sin(\psi_{cell}/2)}{1 - \sin(\psi_{cell}/2)} \\ m_{12} &= \hat{\beta}\bar{\beta} = \tilde{f}^2 = \frac{l_d^2}{\sin^2(\psi_{cell}/2)} \end{aligned} \right\} \rightarrow \begin{aligned} \hat{\beta} &= \frac{(1 + \sin \frac{\psi_{cell}}{2})L}{\sin \psi_{cell}} ! \\ \bar{\beta} &= \frac{(1 - \sin \frac{\psi_{cell}}{2})L}{\sin \psi_{cell}} ! \end{aligned}$$

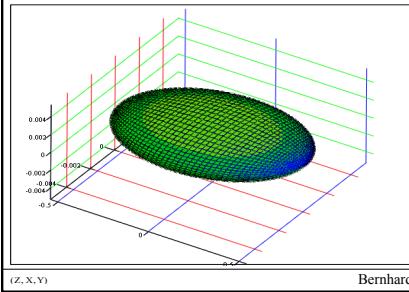

Bernhard Holzer, CAS

The maximum and minimum values of the  $\beta$ -function are solely determined by the phase advance and the length of the cell.

Longer cells lead to larger  $\beta$

typical shape of a proton bunch in a FoDo Cell


## 9.) Beam dimension:

Optimisation of the FoDo Phase advance

In both planes a gaussian particle distribution is assumed, given by the beam emittance  $\epsilon$  and the  $\beta$ -function

$$\sigma = \sqrt{\epsilon \beta}$$

HERA beam size

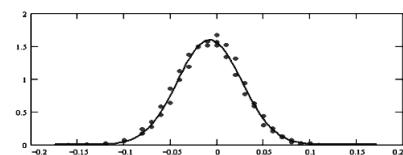


In general proton beams are „round“ in the sense that

$$\epsilon_x \approx \epsilon_y$$

So for highest aperture we have to minimise the  $\beta$ -function in both planes:

$$r^2 = \epsilon_x \beta_x + \epsilon_y \beta_y$$

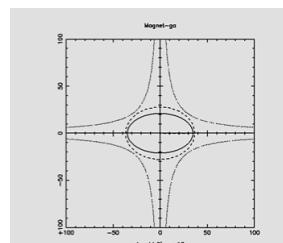

typical beam envelope, vacuum chamber and pole shape in a foc. Quadrupole lens in HERA

Bernhard Holzer, CAS


### 9.) Optimisation of the FoDo Phase advance

$$r^2 = \varepsilon_x \beta_x + \varepsilon_y \beta_y$$

search for the phase advance  $\mu$  that results in a minimum of the sum of the beta's

$$\hat{\beta} + \bar{\beta} = \frac{(1 + \sin \frac{\psi_{cell}}{2})L}{\sin \psi_{cell}} + \frac{(1 - \sin \frac{\psi_{cell}}{2})L}{\sin \psi_{cell}}$$

$$\hat{\beta} + \bar{\beta} = \frac{2L}{\sin \psi_{cell}} \quad \frac{d}{d\psi_{cell}} (2L / \sin \psi_{cell}) = 0$$

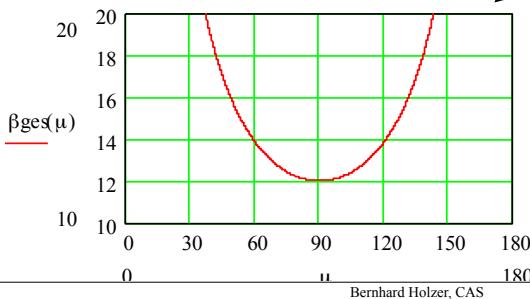


$$\frac{L}{\sin^2 \psi_{cell}} * \cos \psi_{cell} = 0 \rightarrow \psi_{cell} = 90^\circ$$

### Electrons are different

electron beams are usually flat,  $\varepsilon_y \approx 2 - 10 \% \varepsilon_x$   
 → optimise only  $\beta_{hor}$

$$\frac{d}{d\psi_{cell}} (\hat{\beta}) = \frac{d}{d\psi_{cell}} \frac{L(1 + \sin \frac{\psi_{cell}}{2})}{\sin \psi_{cell}} = 0 \rightarrow \psi_{cell} = 76^\circ$$

red curve:  $\beta_{max}$   
 blue curve:  $\beta_{min}$   
 as a function of the phase advance  $\psi$

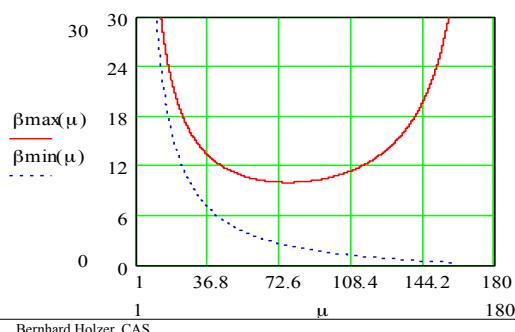

The „not so ideal world“

### 13.) The „ $\Delta p / p \neq 0$ “ Problem

*ideal accelerator: all particles will see the same accelerating voltage.  
 $\rightarrow \Delta p / p = 0$*

„nearly ideal“ accelerator: Cockcroft Walton or van de Graaf

$$\Delta p / p \approx 10^{-5}$$



Vivitron, Straßbourg, inner structure of the acc. section



MP Tandem van de Graaf Accelerator  
at MPI for Nucl. Phys. Heidelberg

Bernhard Holzer, CAS

### RF Acceleration $\leftrightarrow$ AC voltage

**Problem: panta rheo !!!**  
(Heraklit: 540-480 v. Chr.)

Example:

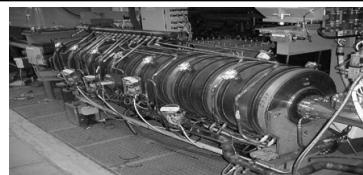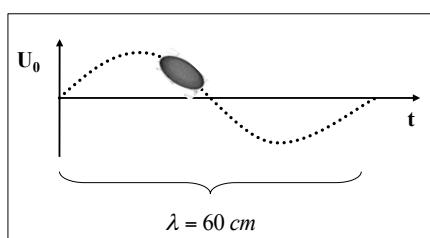

RF cavities of an electron ring

$$\left. \begin{aligned} \nu &= 500 \text{ MHz} \\ c &= \lambda \nu \end{aligned} \right\} \lambda = 60 \text{ cm}$$

$$\sin(90^\circ) = 1$$

$$\sin(84^\circ) = 0.994$$

$$\frac{\Delta U}{U} = 6.0 \cdot 10^{-3}$$

typical momentum spread of an electron bunch  $\Delta p/p \approx 1 \cdot 10^{-3}$

*By definition, the RF systems installed for the quest of higher beam energies, lead unavoidable to a considerable momentum spread in the beam.*

Bernhard Holzer, CAS

## Dispersive and Chromatic Effects: $\Delta p/p \neq 0$



*Are there any Problems ???  
Sure there are !!!*

*... font colors for  
pedagogical reasons*

Bernhard Holzer, CAS


### 14.) Dispersion: trajectories for $\Delta p/p \neq 0$

Question: do you remember last session, page 12 ? ... sure you do

Force acting on the particle

$$F = m \frac{d^2}{dt^2}(\mathbf{x} + \boldsymbol{\rho}) - \frac{mv^2}{x + \rho} = e B_y v$$

remember:  $x \approx mm$ ,  $\rho \approx m$  ...  $\rightarrow$  develop for small  $x$

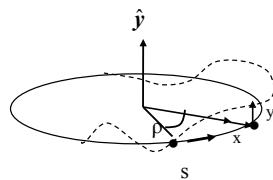

$$m \frac{d^2x}{dt^2} - \frac{mv^2}{\rho} \left(1 - \frac{x}{\rho}\right) = eB_y v$$

consider only linear fields, and change independent variable:  $t \rightarrow s$      $B_y = B_0 + x \frac{\partial B_y}{\partial x}$

$$x'' - \frac{1}{\rho} \left(1 - \frac{x}{\rho}\right) = \underbrace{\frac{e B_0}{mv}}_{\text{p}=\text{p}_0+\Delta p} + \underbrace{\frac{e x g}{mv}}_{\text{p}=\text{p}_0+\Delta p}$$

... but now take a small momentum error into account !!!

Bernhard Holzer, CAS

### Dispersion:

develop for small momentum error  $\Delta p \ll p_0 \Rightarrow \frac{1}{p_0 + \Delta p} \approx \frac{1}{p_0} - \frac{\Delta p}{p_0^2}$

$$x'' - \frac{1}{\rho^2} + \frac{x}{\rho^2} \approx \underbrace{\frac{eB_0}{p_0}}_{-\frac{1}{\rho}} - \frac{\Delta p}{p_0^2} eB_0 + \underbrace{\frac{xeg}{p_0}}_{k * x} + \underbrace{\frac{xeg \Delta p}{p_0^2}}_{\approx 0}$$

$$x'' + \frac{x}{\rho^2} \approx \underbrace{\frac{\Delta p}{p_0} * \frac{(-eB_0)}{p_0}}_{\frac{1}{\rho}} + k * x = \frac{\Delta p}{p_0} * \frac{1}{\rho} + k * x$$

$$x'' + \frac{x}{\rho^2} - kx = \frac{\Delta p}{p_0} \frac{1}{\rho} \quad \longrightarrow \quad x'' + x(\frac{1}{\rho^2} - k) = \frac{\Delta p}{p_0} \frac{1}{\rho}$$

Momentum spread of the beam adds a term on the r.h.s. of the equation of motion.  
 → inhomogeneous differential equation.

Bernhard Holzer, CAS

### Dispersion:

$$x'' + x(\frac{1}{\rho^2} - k) = \frac{\Delta p}{p} \cdot \frac{1}{\rho}$$

general solution:

$$x(s) = x_h(s) + x_i(s)$$

$$\begin{cases} x_h''(s) + K(s) \cdot x_h(s) = 0 \\ x_i''(s) + K(s) \cdot x_i(s) = \frac{1}{\rho} \cdot \frac{\Delta p}{p} \end{cases}$$

Normalise with respect to  $\Delta p/p$ :

$$D(s) = \frac{x_i(s)}{\frac{\Delta p}{p}}$$

### Dispersion function D(s)

\* is that special orbit, an ideal particle would have for  $\Delta p/p = 1$


\* the orbit of any particle is the sum of the well known  $x_h$  and the dispersion

\* as  $D(s)$  is just another orbit it will be subject to the focusing properties of the lattice

Bernhard Holzer, CAS

## Dispersion

Example: homogeneous dipole field

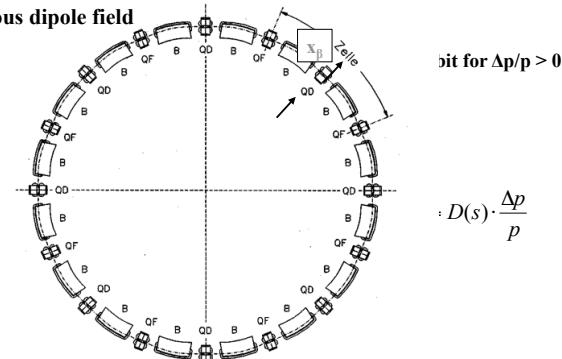


**Matrix formalism:**

$$\left. \begin{array}{l} x(s) = x_\beta(s) + D(s) \cdot \frac{\Delta p}{p} \\ x(s) = C(s) \cdot x_0 + S(s) \cdot x'_0 + D(s) \cdot \frac{\Delta p}{p} \end{array} \right\} \quad \begin{aligned} \begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_s &= \begin{pmatrix} C & S & D \\ C' & S' & D' \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_0 + \frac{\Delta p}{p} \begin{pmatrix} D \\ D' \\ 0 \end{pmatrix} \\ C &= \cos(\sqrt{|k|}s) \quad S = \frac{1}{\sqrt{|k|}} \sin(\sqrt{|k|}s) \\ C' &= \frac{dC}{ds} \quad S' = \frac{dS}{ds} \end{aligned}$$

Bernhard Holzer, CAS

or expressed as 3x3 matrix

$$\begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_s = \begin{pmatrix} C & S & D \\ C' & S' & D' \\ 0 & 0 & 1 \end{pmatrix} \cdot \begin{pmatrix} x \\ x' \\ \Delta p/p \end{pmatrix}_0$$

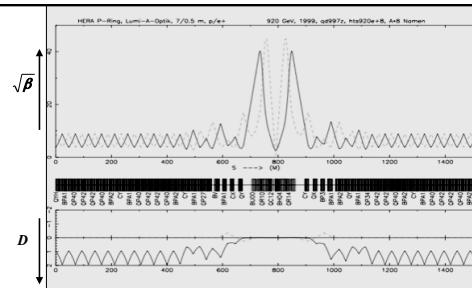

Example

$$\left. \begin{array}{l} x_\beta = 1 \dots 2 \text{ mm} \\ D(s) \approx 1 \dots 2 \text{ m} \\ \Delta p/p \approx 1 \cdot 10^{-3} \end{array} \right\}$$

Amplitude of Orbit oscillation gets additional contribution  
→ overall beam size :

$$\sigma = \sqrt{\epsilon \beta + D^2 \left( \frac{\Delta p}{p} \right)^2}$$



Whenever we want to get smallest beam sizes  
the dispersion must vanish (e.g. at the IP)

Calculate D, D': ... takes a couple of sunny Sunday evenings !

$$D(s) = S(s) \int_{s_0}^{s_1} \frac{1}{\rho} C(\tilde{s}) d\tilde{s} - C(s) \int_{s_0}^{s_1} \frac{1}{\rho} S(\tilde{s}) d\tilde{s}$$

Bernhard Holzer, CAS

## 11.) Résumé

1.) Dipole strength:

$$\int B ds = N * B_0 * l_{\text{eff}} = 2\pi \frac{p}{q}$$

2.) Transfer Matrix in Twiss form:

$$M = \begin{pmatrix} \sqrt{\beta_s} (\cos \psi_s + \alpha_0 \sin \psi_s) & \sqrt{\beta_s \beta_0} \sin \psi_s \\ \frac{(\alpha_0 - \alpha_s) \cos \psi_s - (1 + \alpha_0 \alpha_s) \sin \psi_s}{\sqrt{\beta_s \beta_0}} & \sqrt{\beta_0} (\cos \psi_s - \alpha_s \sin \psi_s) \end{pmatrix}$$

for periodic structures:

$$M(s) = \begin{pmatrix} \cos \psi_{\text{turn}} + \alpha_s \sin \psi_{\text{turn}} & \beta_s \sin \psi_{\text{turn}} \\ -\gamma_s \sin \psi_{\text{turn}} & \cos \psi_{\text{turn}} - \alpha_s \sin \psi_{\text{turn}} \end{pmatrix}$$

3.) Stability condition

$$\text{Trace}(M) < 2$$

4.) Transformation of Twiss parameters

$$\begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_{s2} = \begin{pmatrix} m_{11}^2 & -2m_{11}m_{12} & m_{12}^2 \\ -m_{11}m_{21} & m_{12}m_{21} + m_{22}m_{11} & -m_{12}m_{22} \\ m_{12}^2 & -2m_{22}m_{21} & m_{22}^2 \end{pmatrix} * \begin{pmatrix} \beta \\ \alpha \\ \gamma \end{pmatrix}_{s1}$$

5.) Thin lens approximation

$$M_{QF} = \begin{pmatrix} 1 & 0 \\ \frac{1}{f_Q} & 1 \end{pmatrix}, \quad f_Q = \frac{1}{k_Q l_Q}$$

Bernhard Holzer, CAS

6.) Phase advance per cell:

$$\sin(\psi_{\text{cell}}/2) = \frac{L_{\text{cell}}}{4f} \quad (\text{thin lens approx})$$

7.) Beta-function in a FoDo cell

$$\hat{\beta} = \frac{(1 + \sin \frac{\psi_{\text{cell}}}{2})L}{\sin \psi_{\text{cell}}} \quad (\text{thin lens approx})$$

$$\check{\beta} = \frac{(1 - \sin \frac{\psi_{\text{cell}}}{2})L}{\sin \psi_{\text{cell}}}$$

8.) Dispersion:

$$D(s) = \frac{x_i(s)}{\frac{\Delta p}{p}}$$

9.) Overall beam size:

$$\sigma = \sqrt{\varepsilon \beta + D^2 \left( \frac{\Delta p}{p} \right)^2}$$

10.) Tune (rough estimate)

$$Q = N * \frac{\psi_{\text{period}}}{2\pi} = \frac{1}{2\pi} * \oint \frac{ds}{\beta(s)} \approx \frac{1}{2\pi} * \frac{2\pi \bar{R}}{\bar{\beta}} = \frac{\bar{R}}{\bar{\beta}}$$

$$Q \approx \frac{\bar{R}}{\bar{\beta}} \quad = \text{average radius / average } \beta\text{-function}$$

11.) Stability in a FoDo cell

$$f_Q > \frac{L_{\text{cell}}}{4} \quad (\text{thin lens approx})$$

Bernhard Holzer, CAS

**Appendix I:**  
**Stability criterion .... proof for the disbelieving colleagues !!**

**Matrix for 1 turn:**  $M = \begin{pmatrix} \cos\psi_{turn} + \alpha_s \sin\psi_{turn} & \beta_s \sin\psi_{turn} \\ -\gamma_s \sin\psi_{turn} & \cos\psi_{turn} - \alpha_s \sin\psi_{turn} \end{pmatrix} = \underbrace{\cos\psi \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}}_I + \underbrace{\sin\psi \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix}}_J$

**Matrix for 2 turns:**

$$\begin{aligned} M^2 &= (I \cos\psi_1 + J \sin\psi_1)(I \cos\psi_2 + J \sin\psi_2) \\ &= I^2 \cos\psi_1 \cos\psi_2 + IJ \cos\psi_1 \sin\psi_2 + JI \sin\psi_1 \cos\psi_2 + J^2 \sin\psi_1 \sin\psi_2 \end{aligned}$$

now ...

$$\left. \begin{array}{l} I^2 = I \\ IJ = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} * \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} \\ JI = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} * \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} \\ J^2 = \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} * \begin{pmatrix} \alpha & \beta \\ -\gamma & -\alpha \end{pmatrix} = \begin{pmatrix} \alpha^2 - \gamma\beta & \alpha\beta - \beta\alpha \\ -\gamma\alpha + \alpha\gamma & \alpha^2 - \gamma\beta \end{pmatrix} = \begin{pmatrix} -1 & 0 \\ 0 & -1 \end{pmatrix} = -I \end{array} \right\} IJ = JI$$

$$M^2 = I \cos(2\psi) + J \sin(2\psi)$$

Bernhard Holzer, CAS

## Appendix II: Dipole Errors / Quadrupole Misalignment

The Design Orbit is defined by the strength and arrangement of the dipoles.


Under the influence of dipole imperfections and quadrupole misalignments we obtain a "Closed Orbit" which is hopefully still closed and not too far away from the design.

$$\text{Dipole field error: } \theta = \frac{dl}{\rho} = \frac{\int B dl}{B\rho}$$

$$\text{Quadrupole offset: } g = \frac{dB}{dx} \rightarrow \Delta x \cdot g = \Delta x \frac{dB}{dx} = \Delta B$$

misaligned quadrupoles (or orbit offsets in quadrupoles) create dipole effects that lead to a distorted "closed orbit"

$$\text{normalised to p/e: } \Delta x \cdot k = \Delta x \cdot \frac{g}{B\rho} = \frac{1}{\rho} \quad \begin{pmatrix} x \\ x' \end{pmatrix}_i = \begin{pmatrix} 0 \\ 0 \end{pmatrix} \rightarrow \begin{pmatrix} 0 \\ x' \end{pmatrix}_f = \begin{pmatrix} 0 \\ l \\ o \end{pmatrix}$$

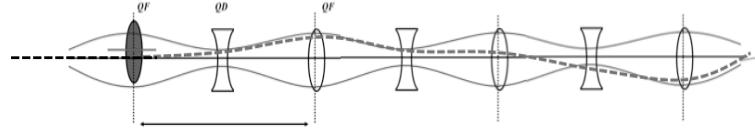

In a Linac – starting with a perfect orbit – the misaligned quadrupole creates an oscillation that is transformed from now on downstream via


$$\begin{pmatrix} x \\ x' \end{pmatrix}_f = M \begin{pmatrix} x \\ x' \end{pmatrix}_i$$

Bernhard Holzer, CAS

... and in a circular machine ??

we have to obey the periodicity condition.

The orbit is closed !! ... even under the influence of a orbit kick.




Calculation of the new closed orbit:

the general orbit will always be a solution of Hill, so ...

$$x(s) = a \cdot \sqrt{\beta} \cos(\psi(s) + \varphi)$$

We set at the location of the error  $s=0$ ,  $\Psi(s)=0$   
and require as 1<sup>st</sup> boundary condition:  
periodic amplitude



$$x(s+L) = x(s)$$

$$a \cdot \sqrt{\beta(s+L)} \cdot \cos(\psi(s+2\pi Q) - \varphi) = a \cdot \sqrt{\beta(s)} \cdot \cos(\psi(s) - \varphi)$$

$$\cos(2\pi Q - \varphi) = \cos(-\varphi) = \cos(\varphi)$$

$$\rightarrow \varphi = \pi Q$$

$$\beta(s+L) = \beta(s)$$


$$\psi(s=0) = 0$$

$$\psi(s+L) = 2\pi Q$$

Bernhard Holzer, CAS

### Misalignment error in a circular machine

2<sup>nd</sup> boundary condition:  $x'(s+L) + \delta x' = x'(s)$   
we have to close the orbit



$$x(s) = a \cdot \sqrt{\beta} \cos(\psi(s) - \varphi)$$

$$x'(s) = a \cdot \sqrt{\beta} (-\sin(\psi(s) - \varphi)) \psi' + \frac{\beta'(s)}{2\sqrt{\beta}} a \cdot \cos(\psi(s) - \varphi)$$

$$x'(s) = -a \cdot \frac{1}{\sqrt{\beta}} (\sin(\psi(s) - \varphi) + \frac{\beta'(s)}{2\sqrt{\beta}} a \cdot \cos(\psi(s) - \varphi))$$

$$\left| \begin{array}{l} \psi(s) = \int \frac{1}{\beta(s)} ds \\ \psi'(s) = \frac{1}{\beta(s)} \end{array} \right.$$

boundary condition:  $x'(s+L) + \delta x' = x'(s)$

$$\begin{aligned} -a \cdot \frac{1}{\sqrt{\beta(\tilde{s}+L)}} (\sin(2\pi Q - \varphi) + \frac{\beta'(\tilde{s}+L)}{2\beta(\tilde{s}+L)} \sqrt{\beta(\tilde{s}+L)} a \cdot \cos(2\pi Q - \varphi) + \frac{\Delta \tilde{s}}{\rho} = \\ = -a \cdot \frac{1}{\sqrt{\beta(\tilde{s})}} (\sin(-\varphi) + \frac{\beta'(\tilde{s})}{2\beta(\tilde{s})} \sqrt{\beta(\tilde{s})} a \cdot \cos(-\varphi)) \end{aligned}$$

Nota bene:  $\tilde{s}$  refers to the location of the kick

Bernhard Holzer, CAS

### Misalignment error in a circular machine

Now we use:  $\beta(s+L) = \beta(s)$ ,  $\varphi = \pi Q$

$$\frac{-a}{\sqrt{\beta(\tilde{s})}} (\sin(\pi Q) + \frac{\beta'(\tilde{s})}{2\beta(\tilde{s})} \sqrt{\beta(\tilde{s})} a \cdot \cos(\pi Q) + \frac{\Delta \tilde{s}}{\rho} = \frac{a}{\sqrt{\beta(\tilde{s})}} (\sin(\pi Q) + \frac{\beta'(\tilde{s})}{2\beta(\tilde{s})} \sqrt{\beta(\tilde{s})} a \cdot \cos(\pi Q))$$

$$\Rightarrow 2a \cdot \frac{\sin(\pi Q)}{\sqrt{\beta(\tilde{s})}} = \frac{\Delta \tilde{s}}{\rho} \Rightarrow a = \frac{\Delta \tilde{s}}{\rho} \cdot \sqrt{\beta(\tilde{s})} \frac{1}{2\sin(\pi Q)} \quad ! \text{ this is the amplitude of the orbit oscillation resulting from a single kick}$$

inserting in the equation of motion

$$x(s) = a \cdot \sqrt{\beta} \cos(\psi(s) + \varphi)$$

$$x(s) = \frac{\Delta \tilde{s}}{\rho} \cdot \frac{\sqrt{\beta(\tilde{s})} \sqrt{\beta(s)} \cos(\psi(s) - \varphi)}{2\sin(\pi Q)}$$

! the distorted orbit depends on the kick strength,  
! the local  $\beta$  function  
! the  $\beta$  function at the observation point

!!! there is a resonance denominator  
→ watch your tune !!!

Bernhard Holzer, CAS

## Misalignment error in a circular machine



For completeness:

if we do not set  $\psi(s=0) = 0$  we have to write a bit more but finally we get:

$$x(s) = \frac{\sqrt{\beta(s)}}{2\sin(\pi Q)} * \int \sqrt{\beta(\tilde{s})} \frac{1}{\rho(\tilde{s})} \cos(|\psi(\tilde{s}) - \psi(s)| - \pi Q) d\tilde{s}$$

Reminder: LHC  
Tune:  $Q_x = 64.31$ ,  $Q_y = 59.32$

Relevant for beam stability:  
non integer part  
avoid integer tunes

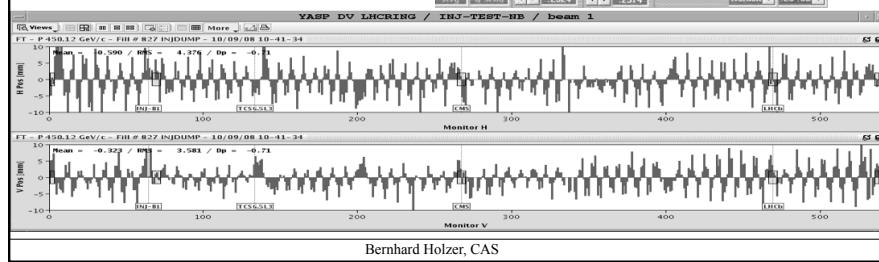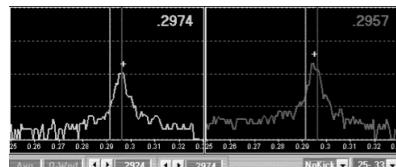


Bernhard Holzer, CAS

## Orbit distortions in a periodic lattice

field error of a dipole/distorted quadrupole

$$\rightarrow \delta(mrad) = \frac{ds}{\rho/e} = \frac{\int B ds}{p/e}$$

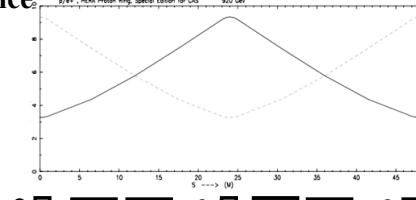

the particle will follow a new closed trajectory, the distorted orbit:


$$x(s) = \frac{\sqrt{\beta(s)}}{2\sin(\pi Q)} * \int \sqrt{\beta(\tilde{s})} \frac{1}{\rho(\tilde{s})} \cos(|\psi(\tilde{s}) - \psi(s)| - \pi Q) d\tilde{s}$$

\* the orbit amplitude will be large if the  $\beta$  function at the location of the kick is large  
 $\beta(\tilde{s})$  indicates the sensitivity of the beam  $\rightarrow$  here orbit correctors should be placed in the lattice

\* the orbit amplitude will be large at places where in the lattice  $\beta(s)$  is large  $\rightarrow$  here beam position monitors should be installed

Bernhard Holzer, CAS

**Orbit Correctors and Beam Instrumentation in a Storage Ring**

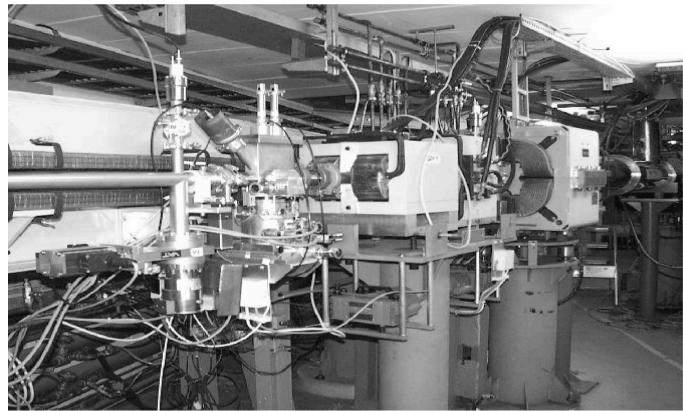

*Elsa ring, Bonn*

\*

Bernhard Holzer, CAS