




ISOTD AQ

X

... mathematical problems. But you would have to proceed step by step. I think electricity would be the best thing to rely on.

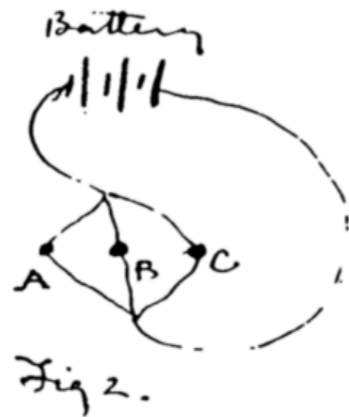

Let A, B, C be three keys or other points where the circuit may be open or closed. As in Fig. 1, there is a circuit only if all are closed; in Fig. 2 there is a circuit if any one is closed. This is like multiplication & addition in logic. (Peirce 1886, using his hand-drawn figures)

Introduction to detectors
and detector readout

Gökhan ÜNEL / UCI

a bit of nostalgia

2010 - Ankara



Livio Mapelli

Inbox...P Account 3 July, 2009 at 16:21



Your DAQ workshop

[Details](#)

To: Gökhan N. ÜNEL, Cc: Robert Andrew McLaren, Seamus Hegarty

Dear Gokhan,

following from our discussion this morning on the possibility of having some financial support from EU funds, please refer to Robert and Seamus for the follow up.

I fully support your initiative.

Cheers Livio

last bit of nostalgia

IEEE TRANSACTIONS ON NUCLEAR SCIENCE, VOL. 47, NO. 2, APRIL 2000

Using Linux PCs in DAQ applications

G.Unel^b, G. Ambrosini^b, HP.Beck^a, S.Cetin^d, T.Conka^d, G. Crone^c, A. Fernandes^b, D.Francis^b, M.Joos^b, G.Lehmann^{a,b}, J.Lopez^b, A.Mailov^d, L.Mapelli^b, G.Mornacchi^b, M.Niculescu^{b,c}, J.Petersen^b, L.Tremblet^b, S.Veneziano^b, T.Wildish^b, Y.Yasu^f.

^aLaboratory for High Energy Physics, University of Bern, Switzerland.


^bCERN, Geneva, Switzerland.

^cInstitute of Atomic Physics, Bucharest, Romania.

^dBogazici University, Istanbul, Turkey.

^eUniversity College London, London, England.

^fKEK, Tsukuba, Japan.

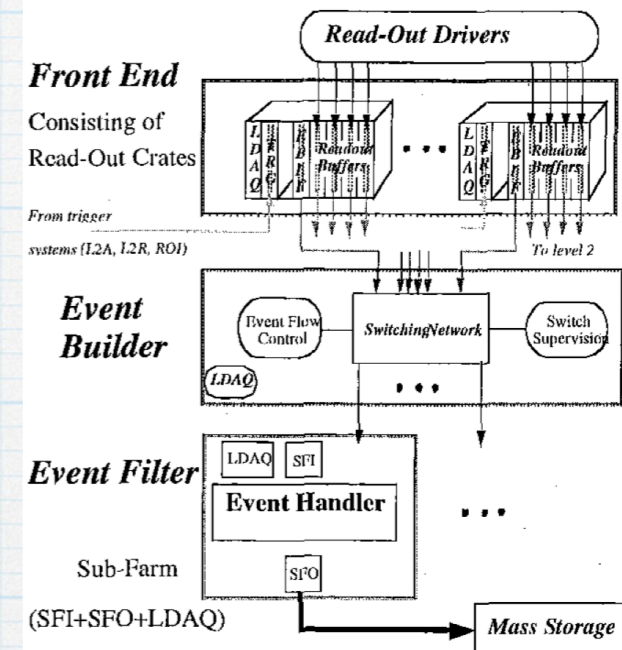

The Linux Lab Project whitepapers 1996

DAQ with GPIB under LINUX

by Arif Mailov and Gökhan Ünel
(arif@caju.phys.boun.edu.tr
gokhan@caju.phys.boun.edu.tr)

on behalf of
BU-HEP Research Group¹
Boğaziçi University, Physics Department,
Istanbul, Turkey

Abstract

After explaining some basics of HEP and HEP Instrumentation, we report about our experience using CAMAC crate with GPIB under Linux. We propose Linux-GPIB, as an alternative to expensive Workstation-Crate Controller approach.

What do we detect & why

* Measure time


- * position, beam profile — tracking
- * Particle momentum, charge — spectrometer

* Measure charge

- * Faraday Cup
- * Energy — calorimetry

* Without forgetting

- * reading & routing signals
- * buffer, digitize, multiplex
- * Care for infrastructure
- * HV/LV PS, Gas and cables!

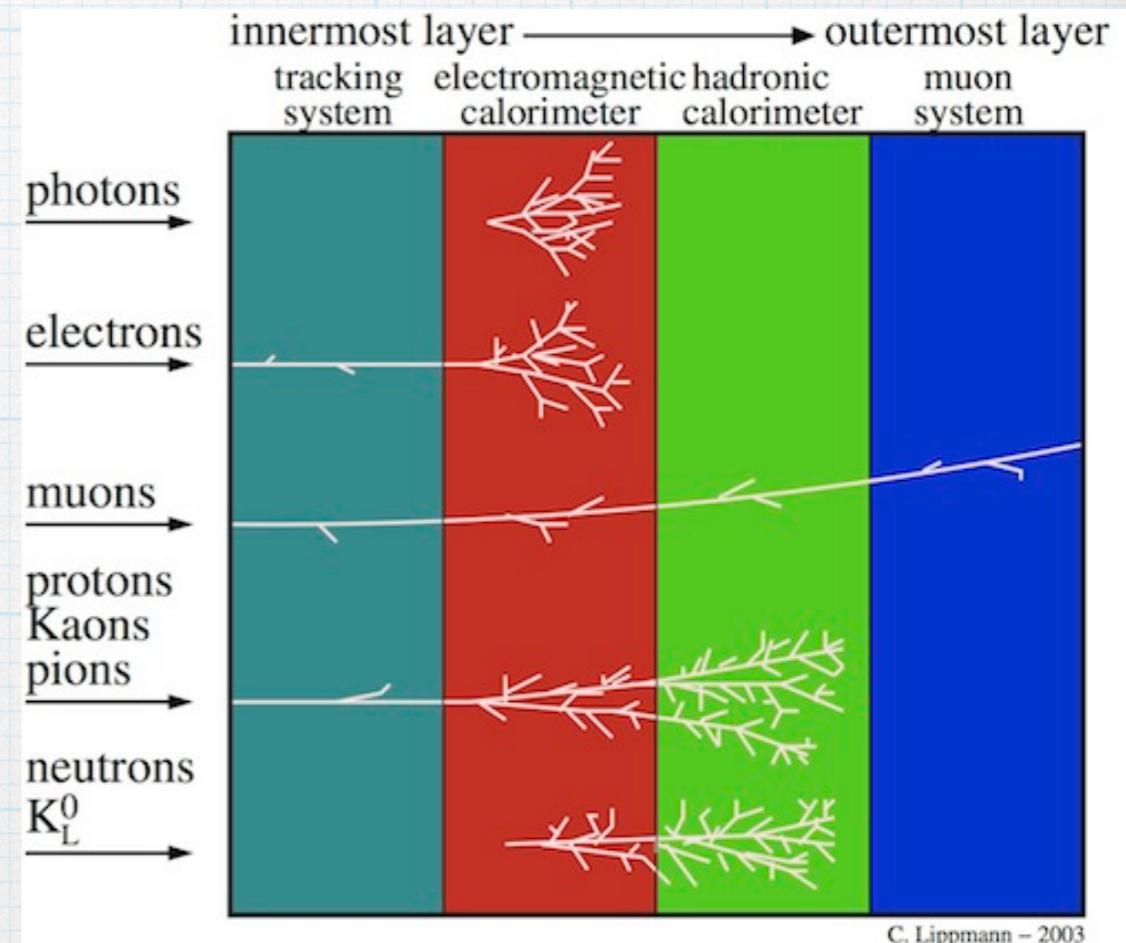

- Mostly electromagnetic interactions
- A bit of strong interactions
- Very little weak interactions


Particle Tracking

* What happens?

- * Ionisation of a medium by a traversing particle.
 - * medium: gas, semiconductor
- * HV (electric field) to transport charges to electrodes (few kV)
 - * electrons move faster wrt ions (30-40 times)
- * Electrons accumulate on the electrodes


* How to read it out?

- * acquire signal from the segmented electrode to read position

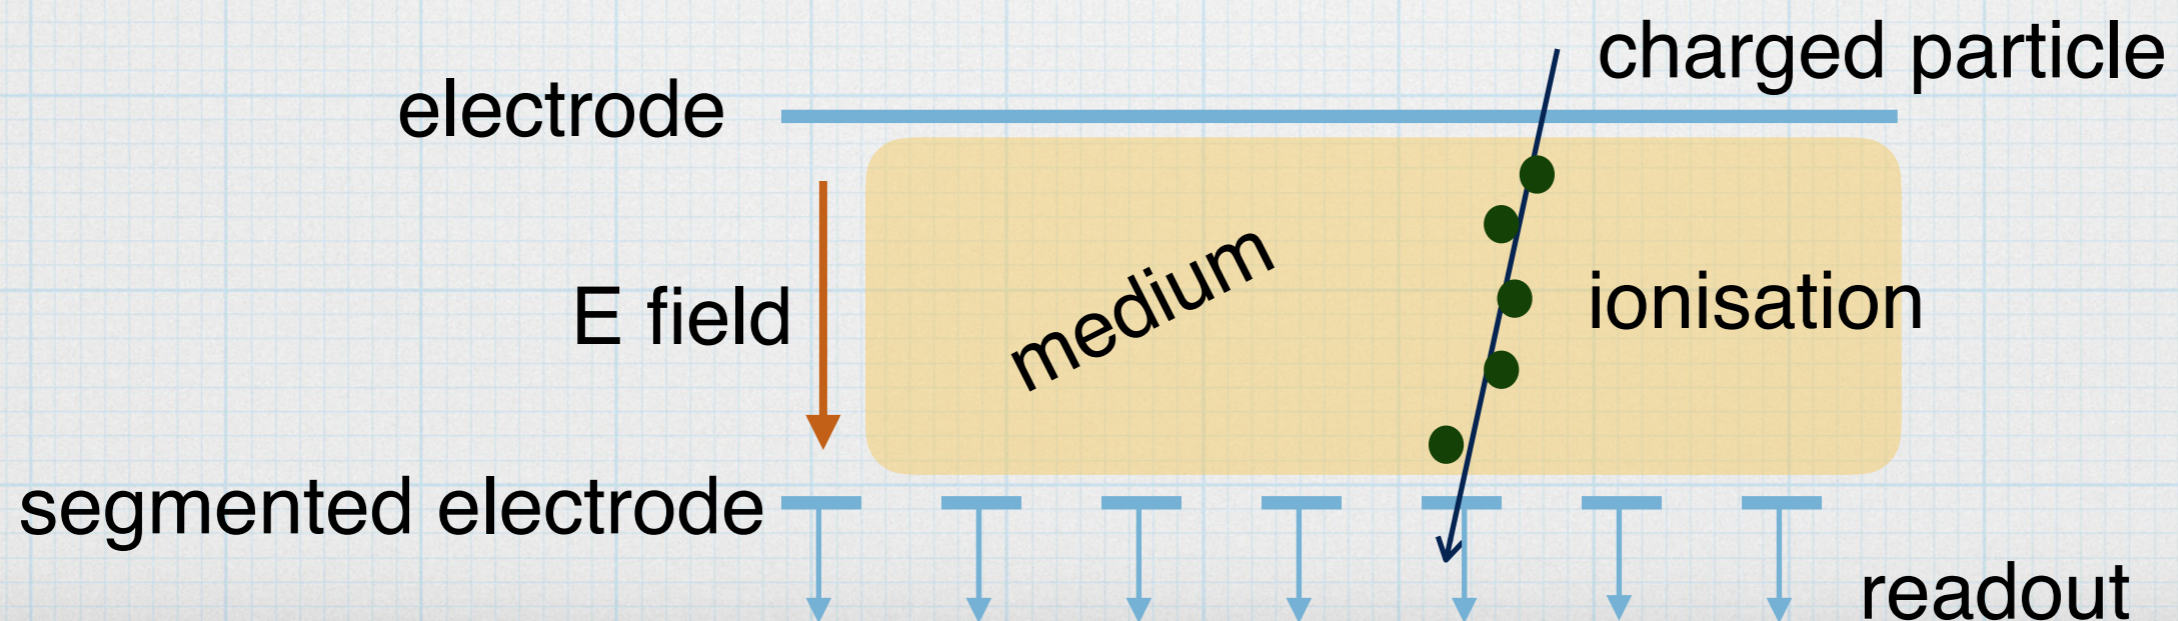

wire chamber as a tracker


- Better positioning: electrode perpendicular to particle track
 - ➔ position: $x = c_0 + c_1\Delta t + c_2\Delta t^2 \dots$
 - ➔ Δt : drift time of electrons to anode wire (under positive HV)
 - ➔ We need a Time to Digital Converter: TDC
- Space resolution: 80 – 200 μm (small is good)
- “Low mass” (guess?) detectors, can be big: 4m x 2m

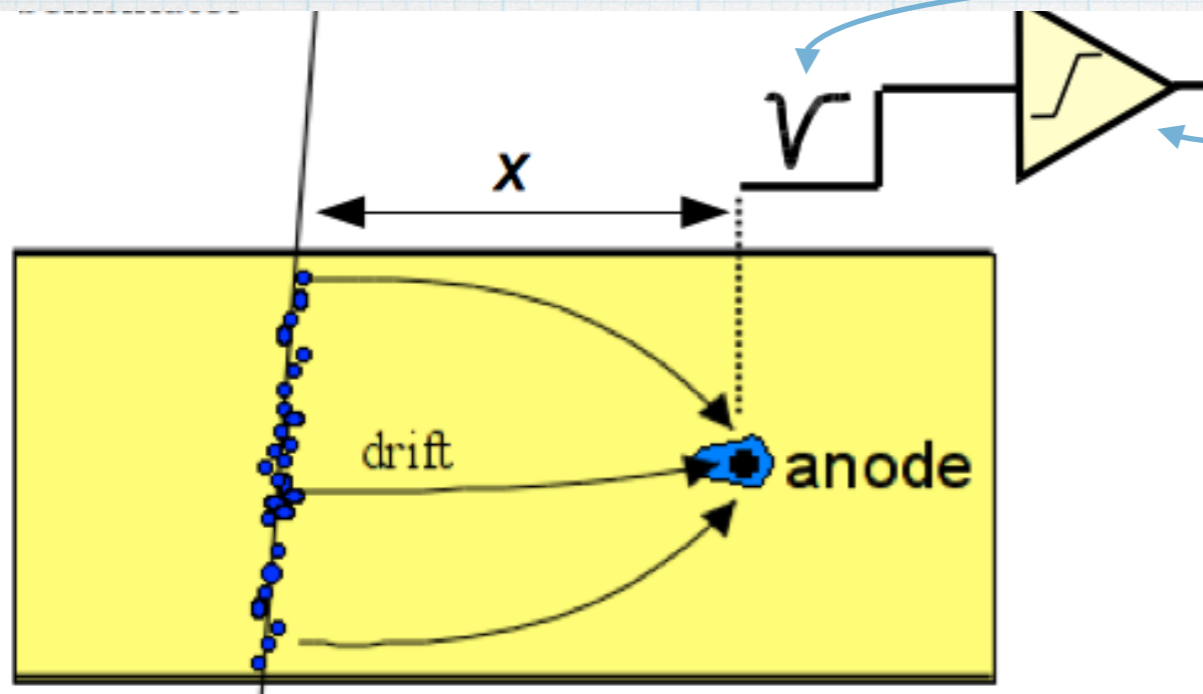

a “wire” chamber stationed at z (typically beam direction) with x-y planes to measure a point in space. u-v planes are often used for redundancy

typical signal shape.

need a discriminator to eliminate noise

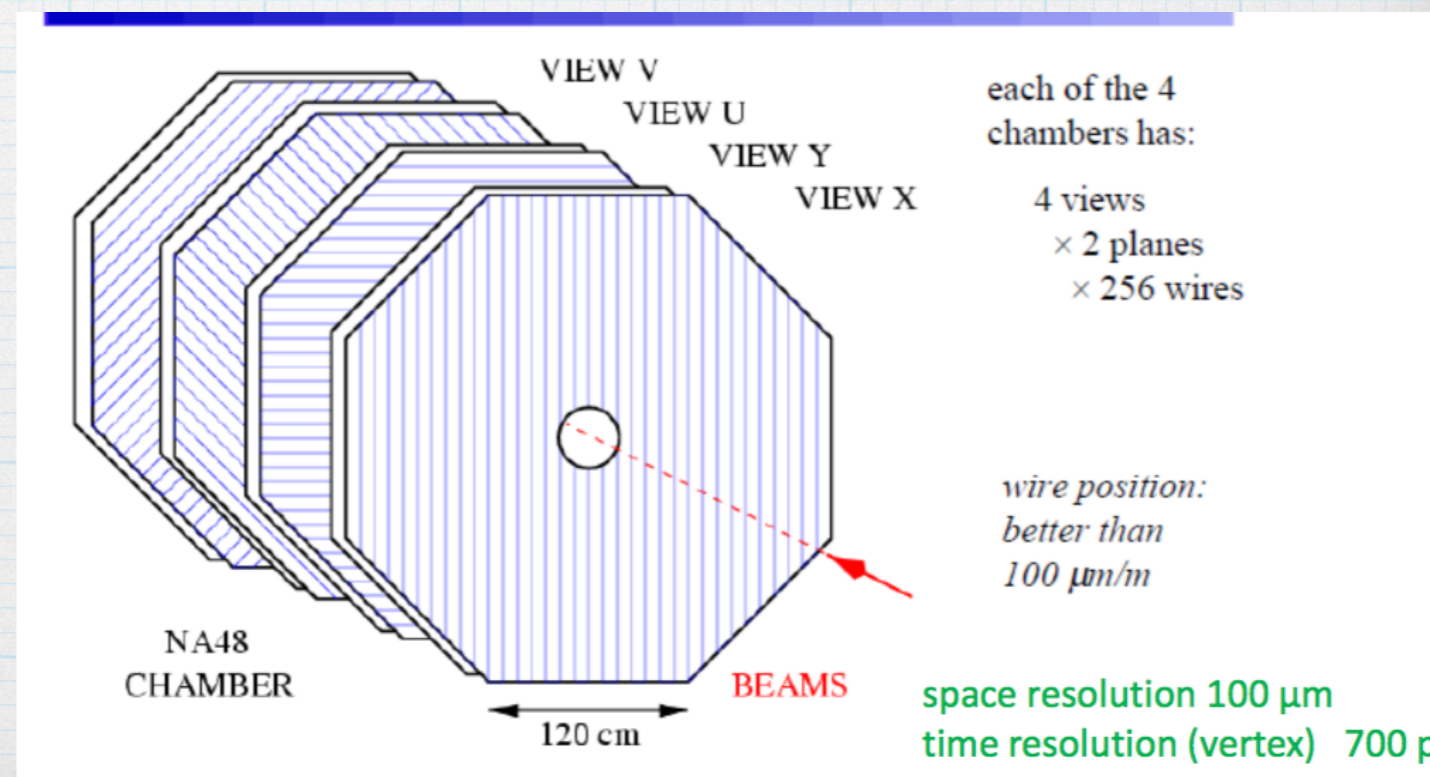



other "wire" chambers

* MWPC/ DCh

- * #signal wires = #readout chs
- * precision chamber 80um


* DWC - only 2 ch/plane

- * analog signal delayed & compared - position only
- * resolution about 200um

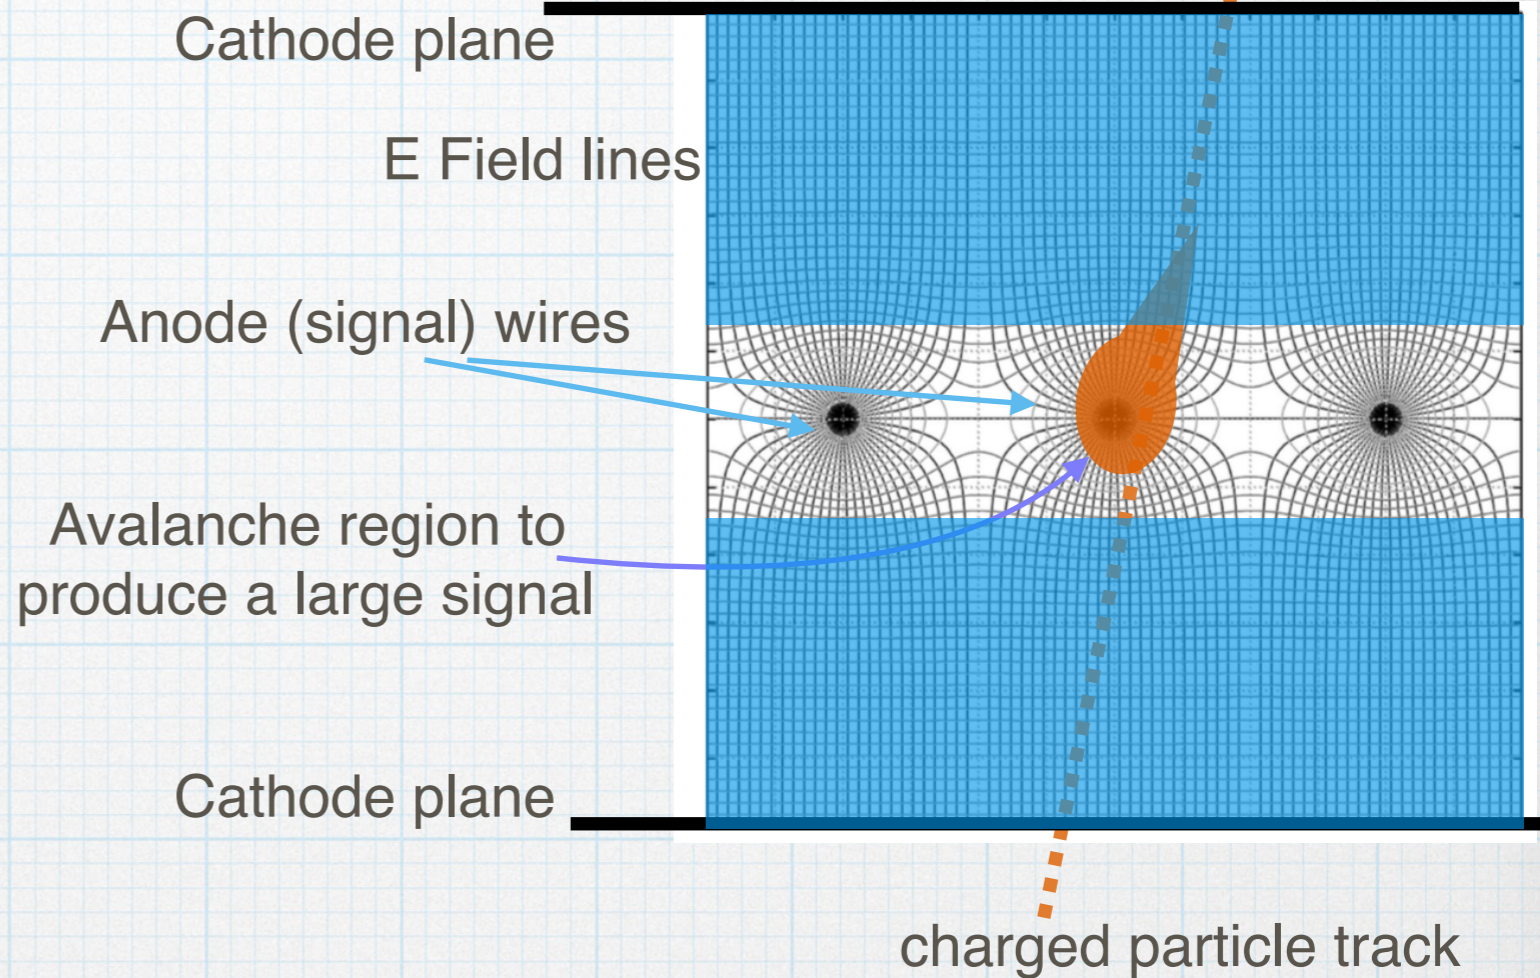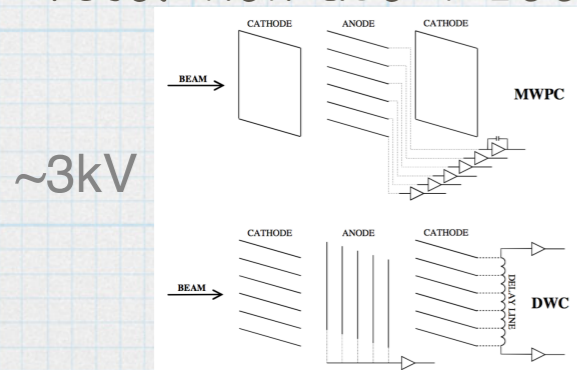

* Resistive Plate Ch - Thin Gap Ch $d(a-c) < d(w-w)$

- * supports a very high rate of 1 - 20 kHz/cm²
- * Trigger chambers with 1cm resolution
 - * RPC: C₂F₄H₂(97%) - i-C₄H₁₀
 - * TGC: CO₂(55%) - i-C₅H₁₂


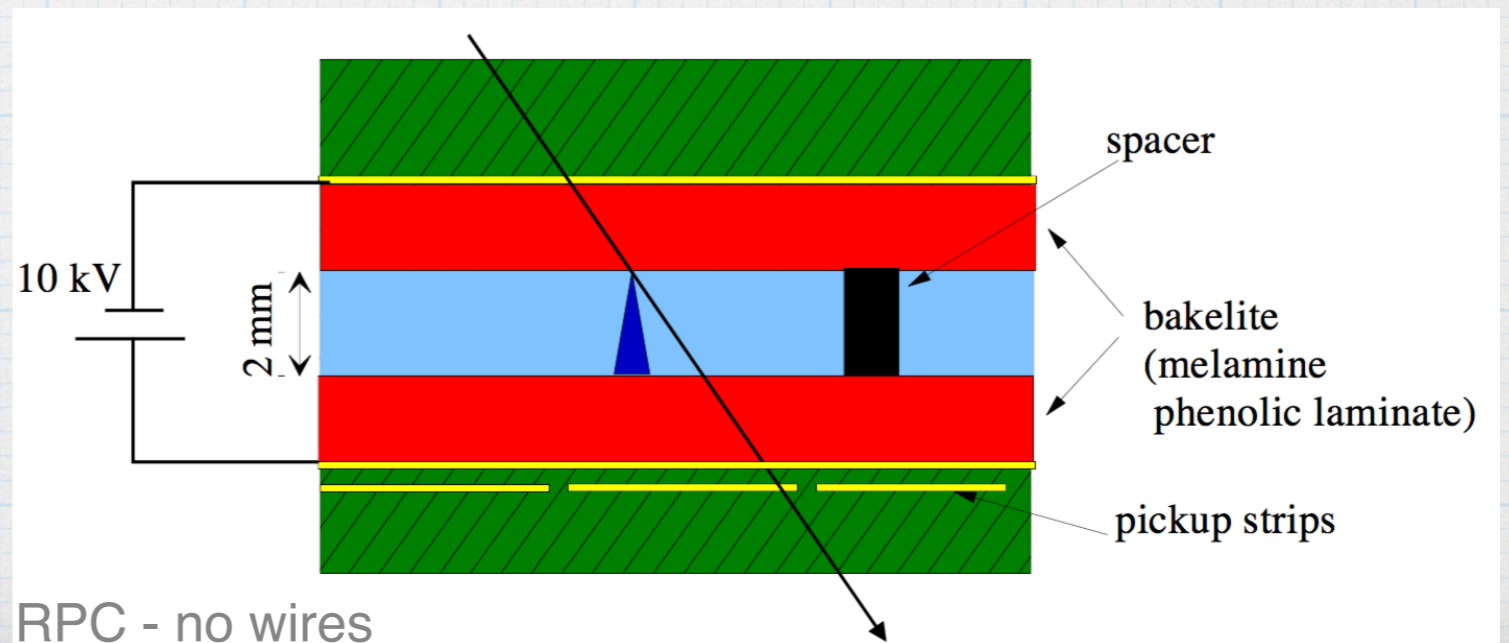


* Time Projection Ch

- * 3D tracking + Energy

magnet + few DCW = spectrometer

- * The principle: make the charged particle's track curve in a known magnetic field to find its
 - * charge
 - * momentum
- * In a fixed target experiment typically a dipole magnet is used. Bending power must be well known.

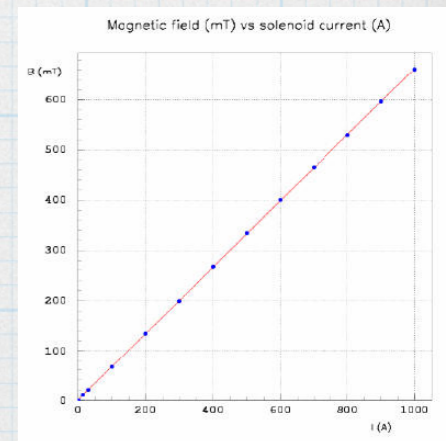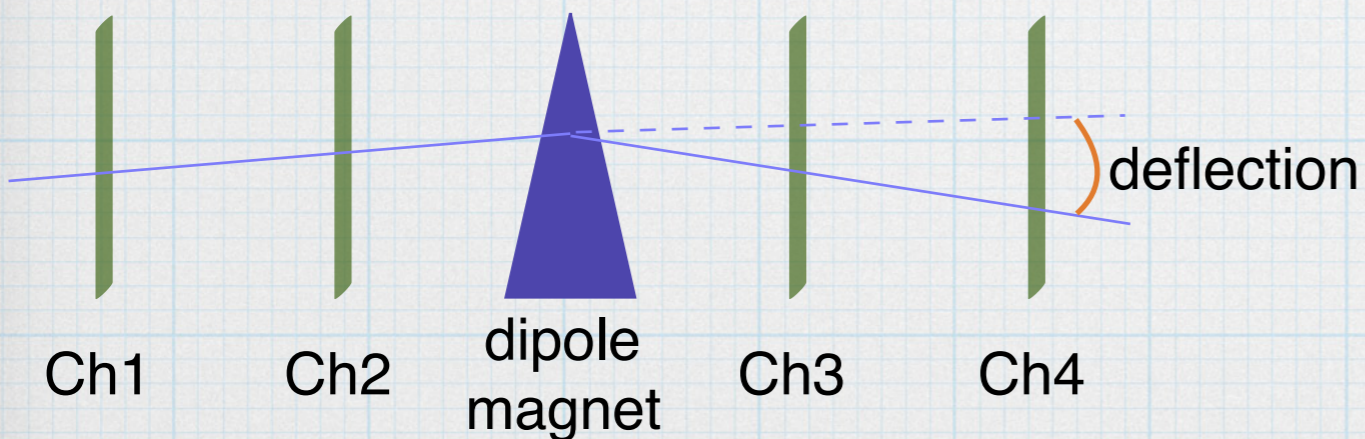

for a constant B field

* measure deflection to find the momentum p perpendicular to the field

* $p(\text{GeV}) = 0.3 Z B(\text{T}) R(\text{m})$

* $p(\text{GeV}) = 0.3 Z B(\text{T}) d(\text{m}) / [2 \sin(\theta/2)]$



* where

* Z: Particle Charge

* d: Field length


* θ : Deflection angle

* R: Curvature Radius

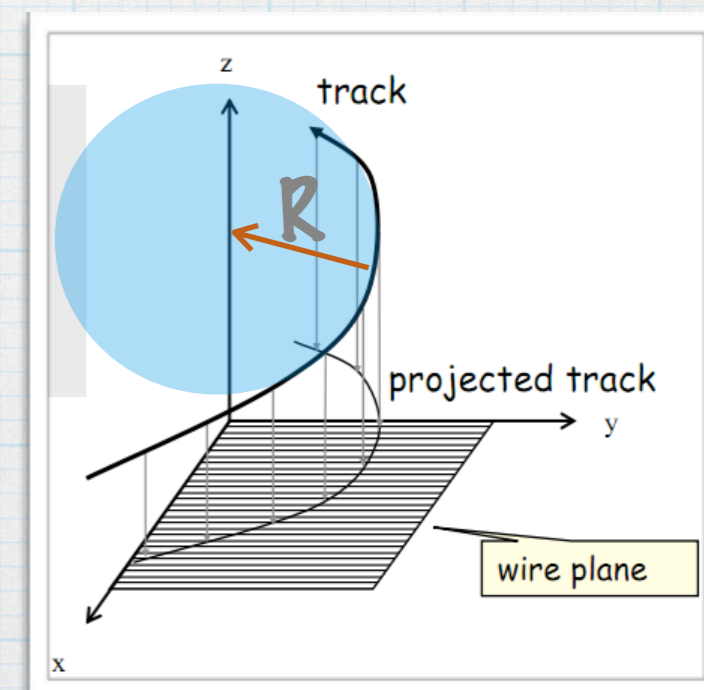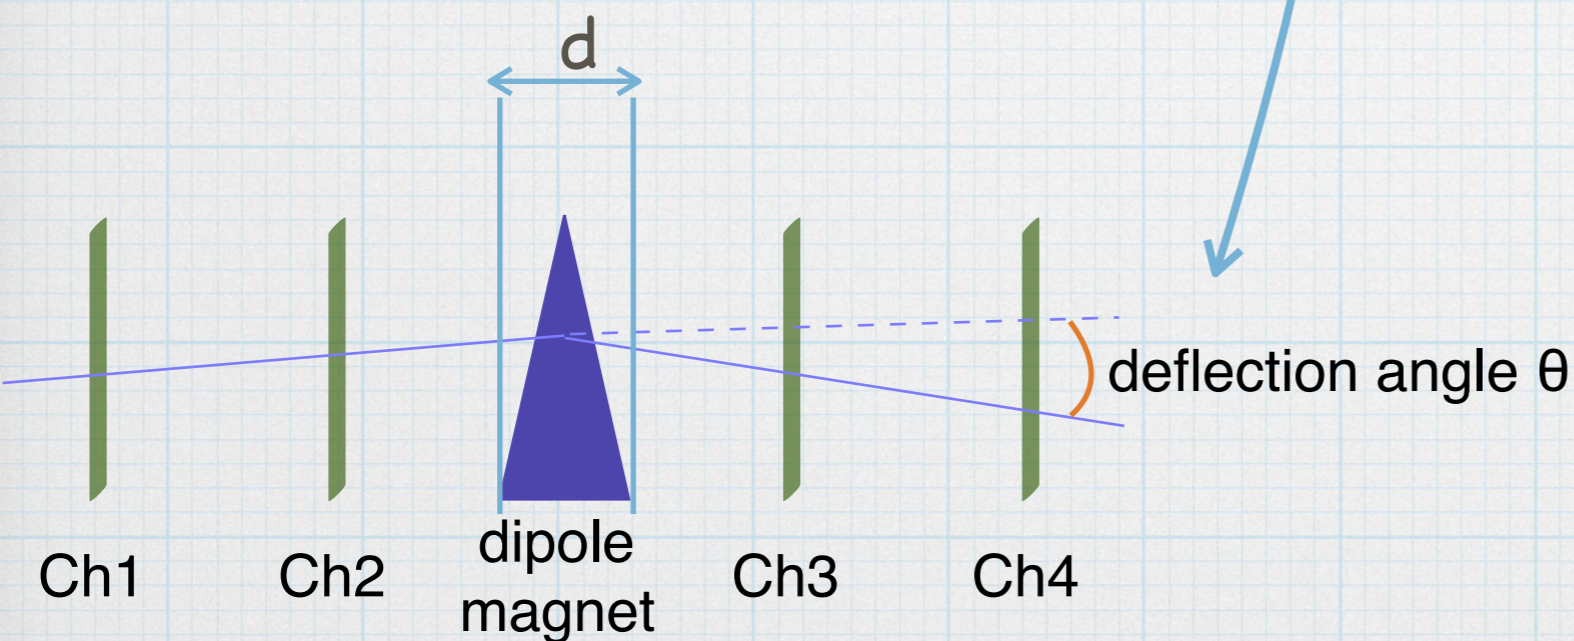


what about signal height


- * mean Energy loss / unit length by ionisation was studied by Bethe, it depends on
 - beam charge Z_1 and speed $\beta(=v/c)$
 - medium's atomic number Z and atomic mass A

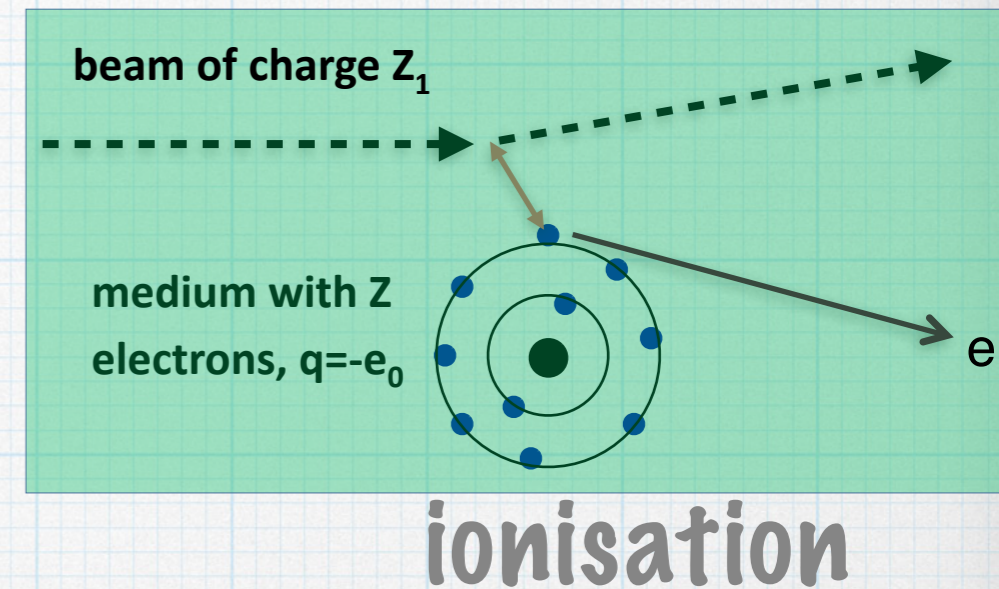

- * After Bethe, Landau figured out most probable pulse height function
 - This is what we try to measure to find particle E energy by integrating the signal (measure charge)
 - find E and $p \rightarrow$ You identify particle!

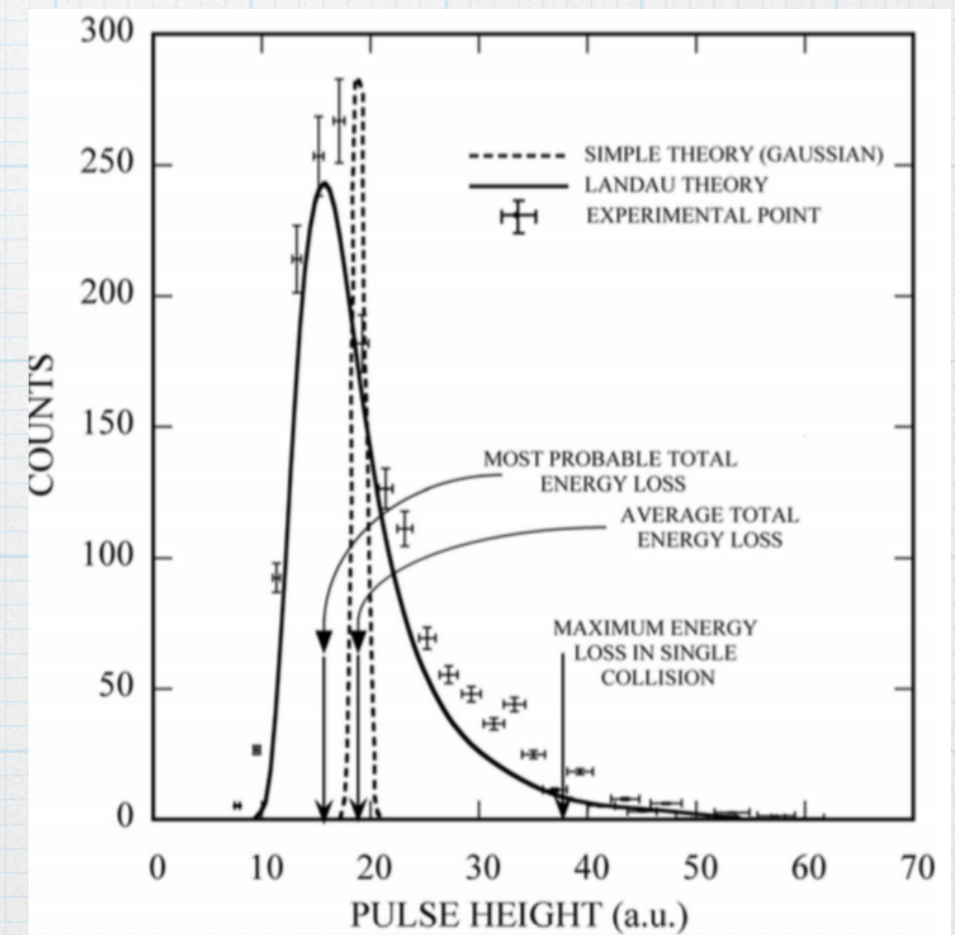




Time Projection Ch

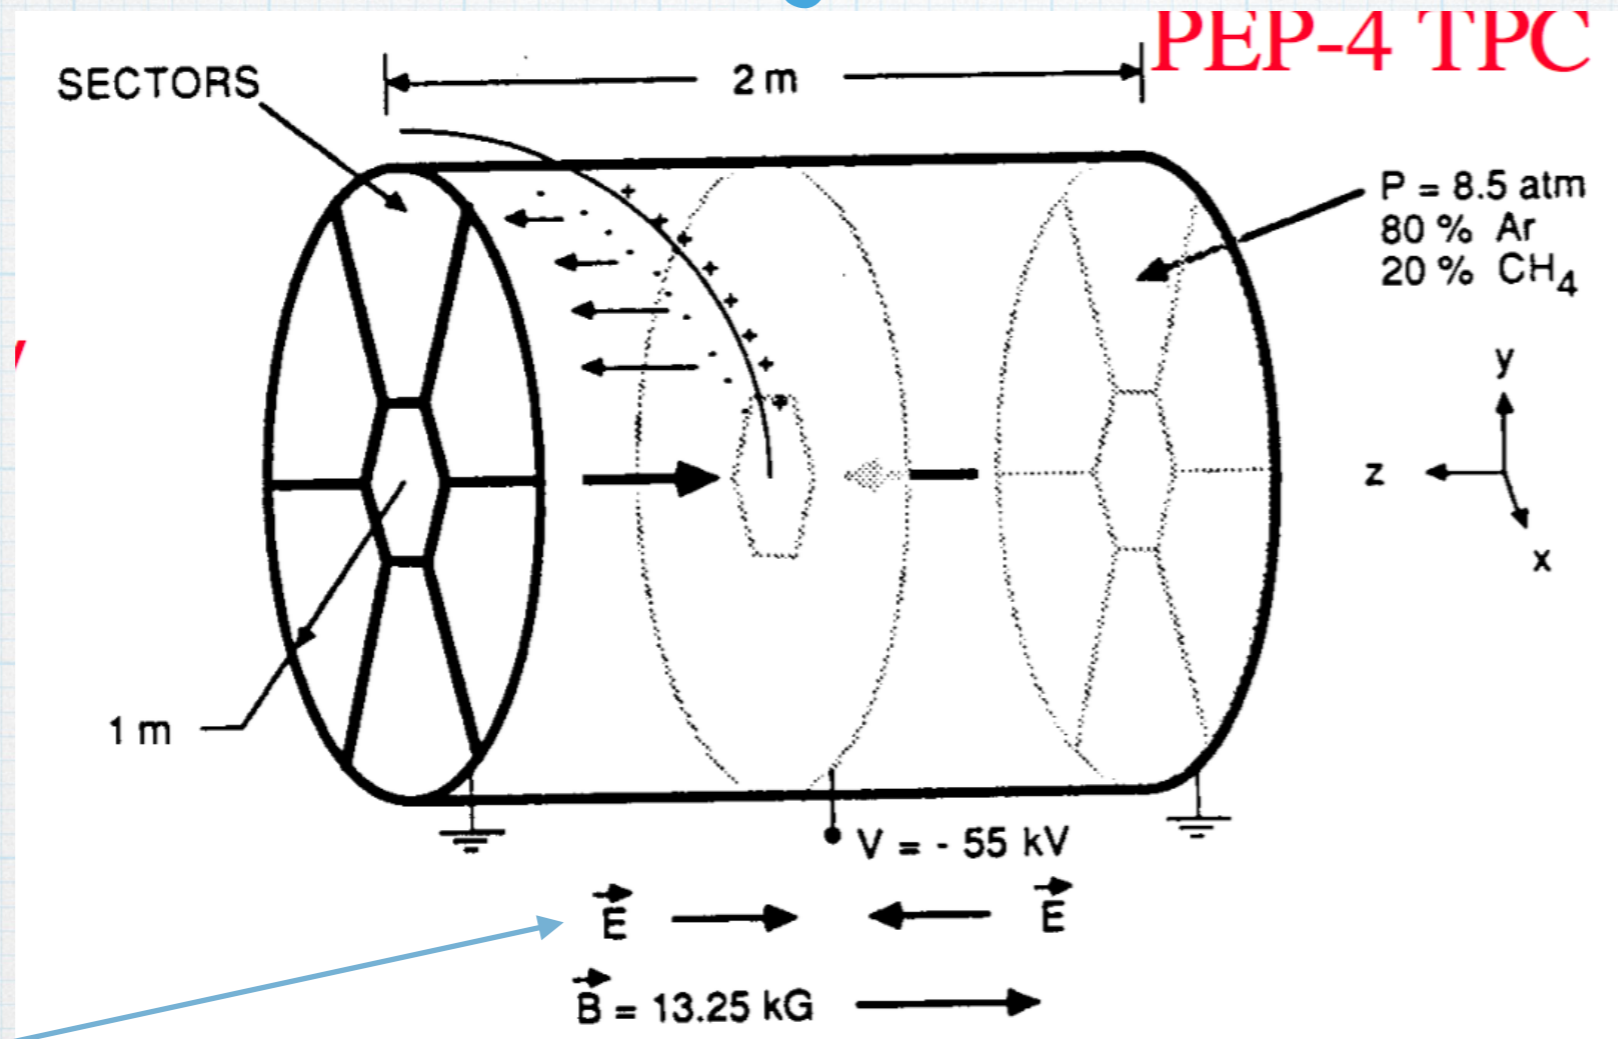


downside of TPC?

- E field to drift electrons towards the MWPCs at the both ends of the cylindrical volume.
 - wire coordinates give x-y positions of the track
 - signal timing gives z position of the track
 - signal amplitude gives $dE/dx \rightarrow$ energy information
- B field parallel to E field curves the ionization track
 - momentum information can be extracted



particle
identification

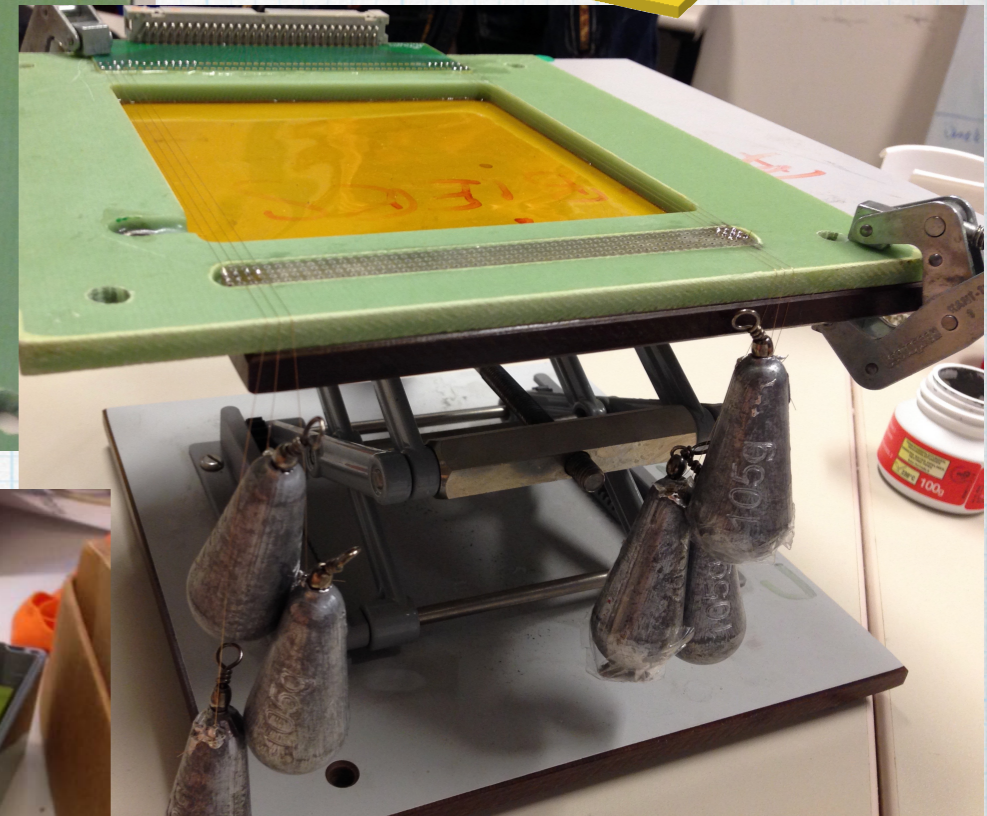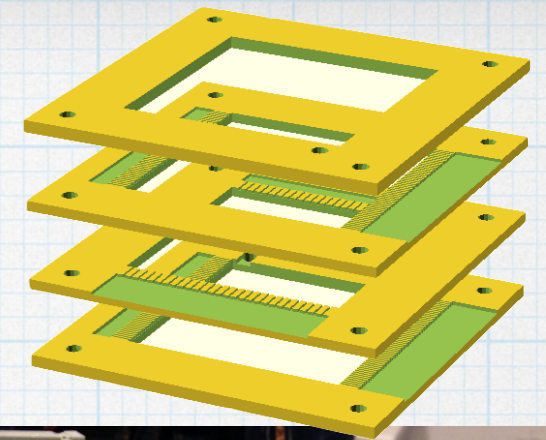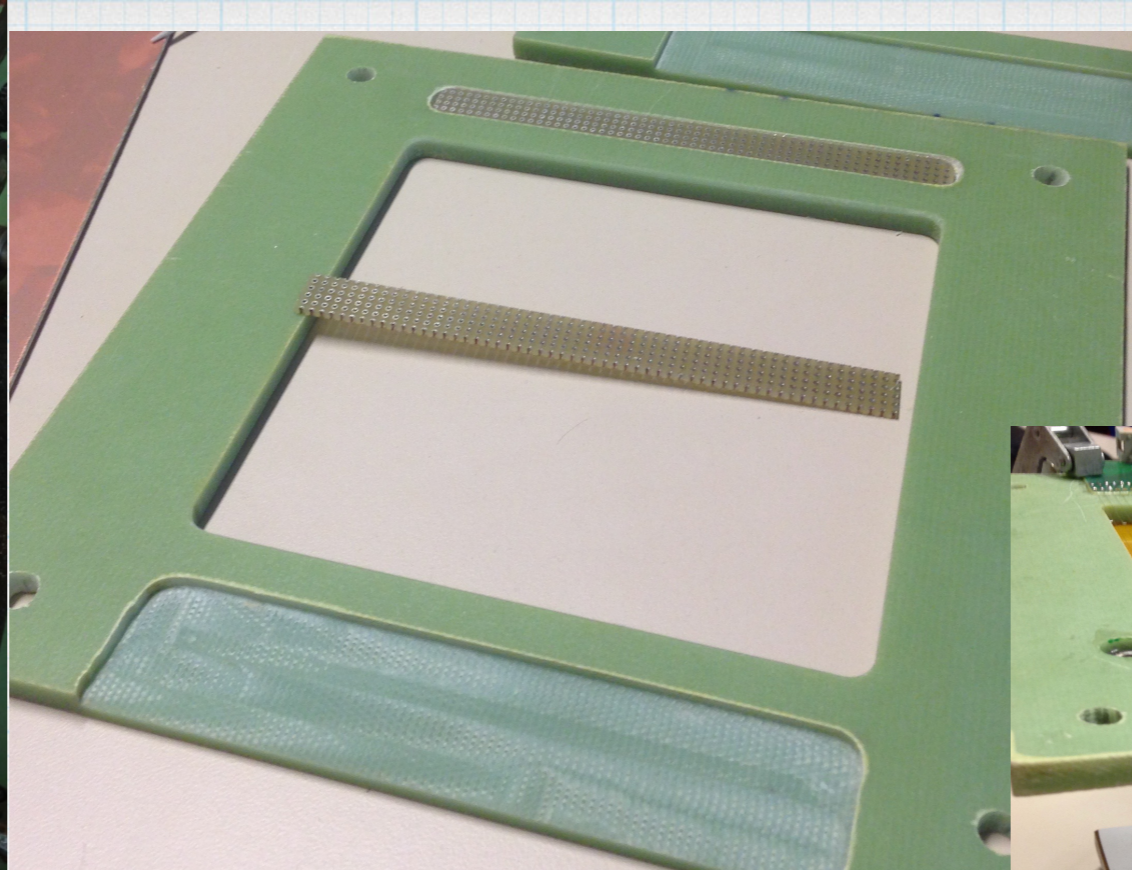

build your own DWC



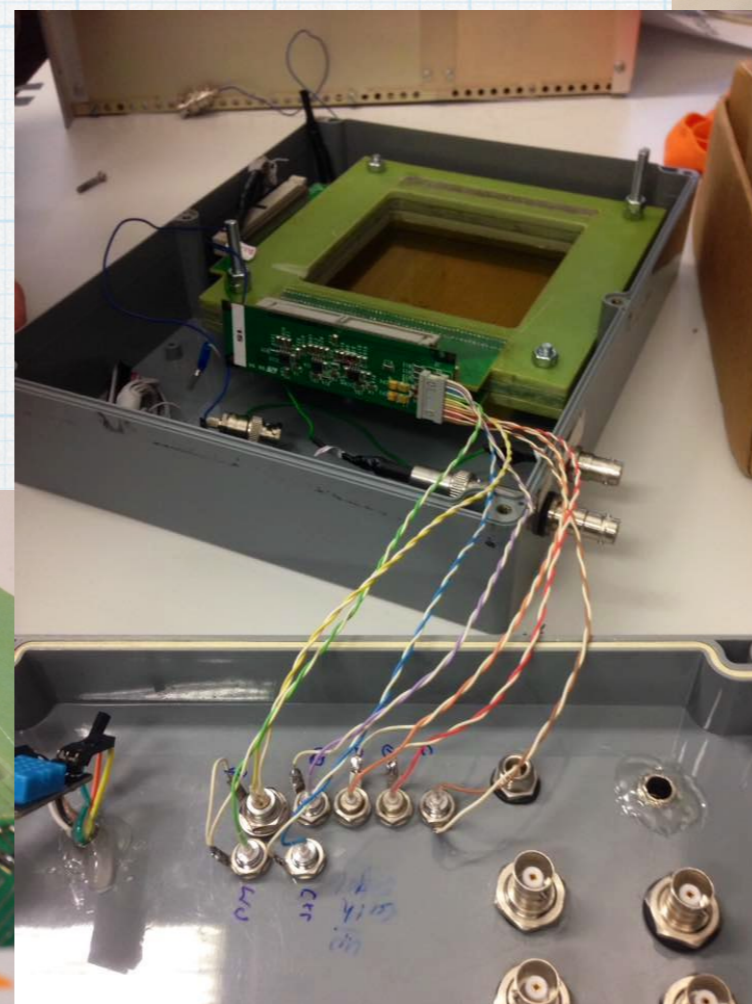


with Sr90 β source

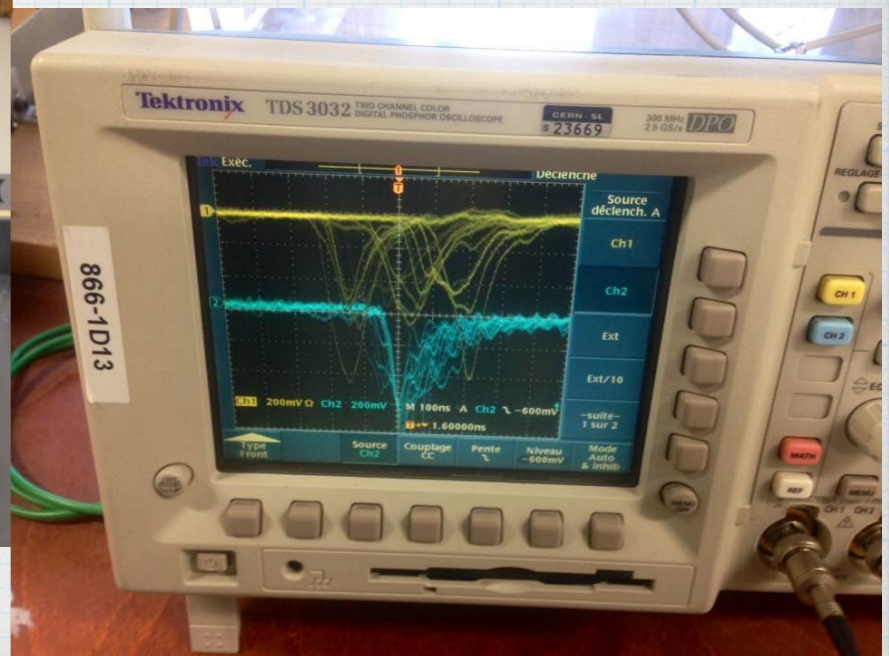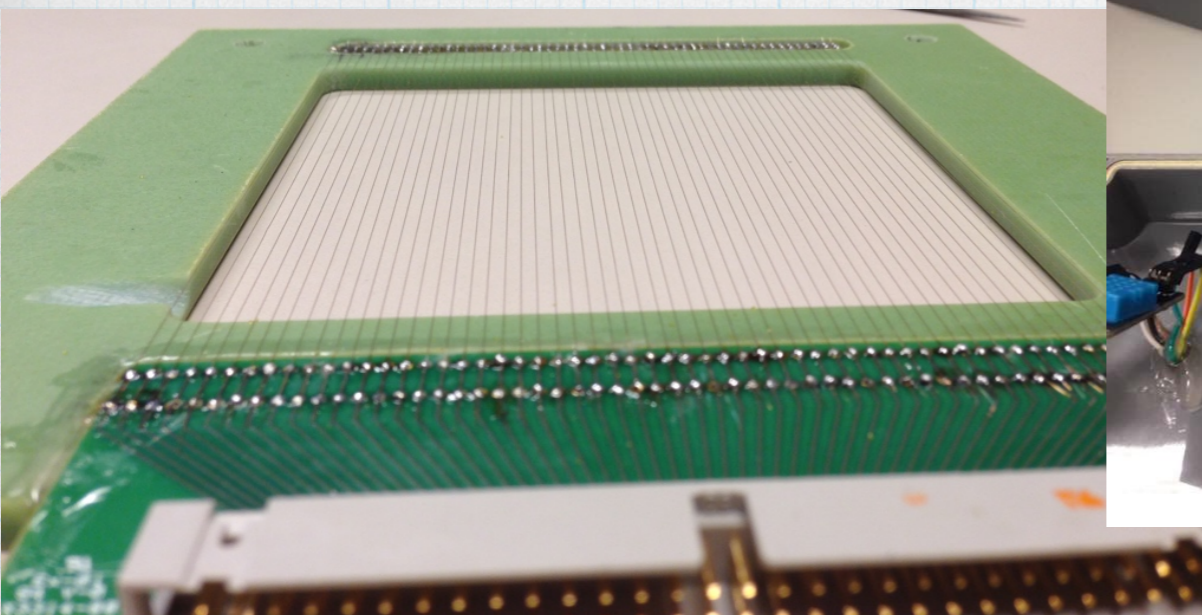

Read out electronics

- * Signals directly from the active sensors are seldom fit for reading out by generic (modular) electronics: We need to shape, (pre)amplify, invert the original signal.
- * Items to consider for a good circuit
 - * Input impedance, Output typically 50Ω
 - * fast, low power, low noise components
 - * grounding faraday-cage, twisted cable, ground plane etc. for noise reduction
 - * multilayer PCB vs cost issues, SMD components
 - * buy spares! (safety)
 - * always prototpye
 - * always simulate
 - * learn spice, eagle,...

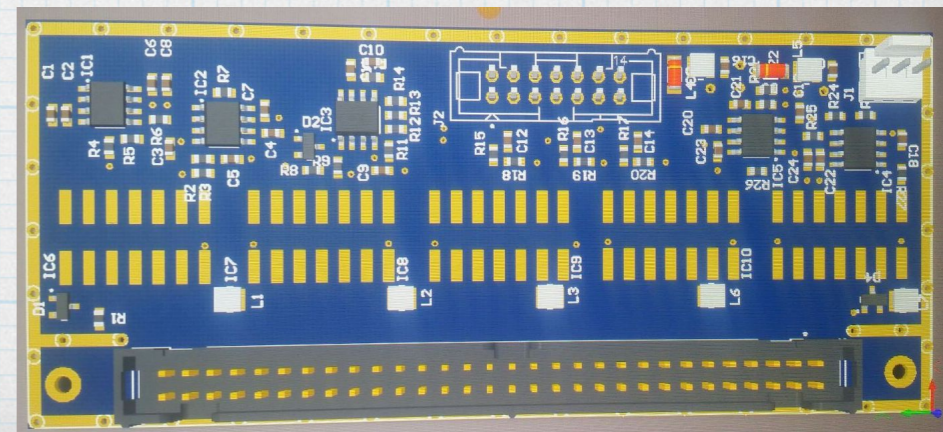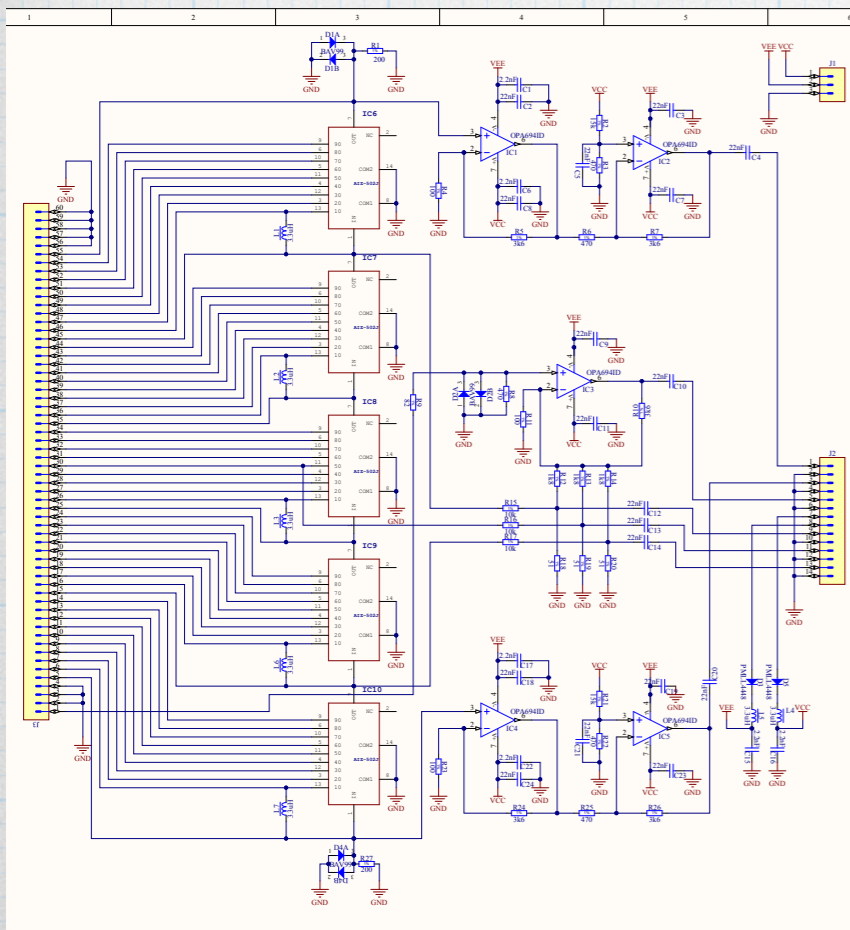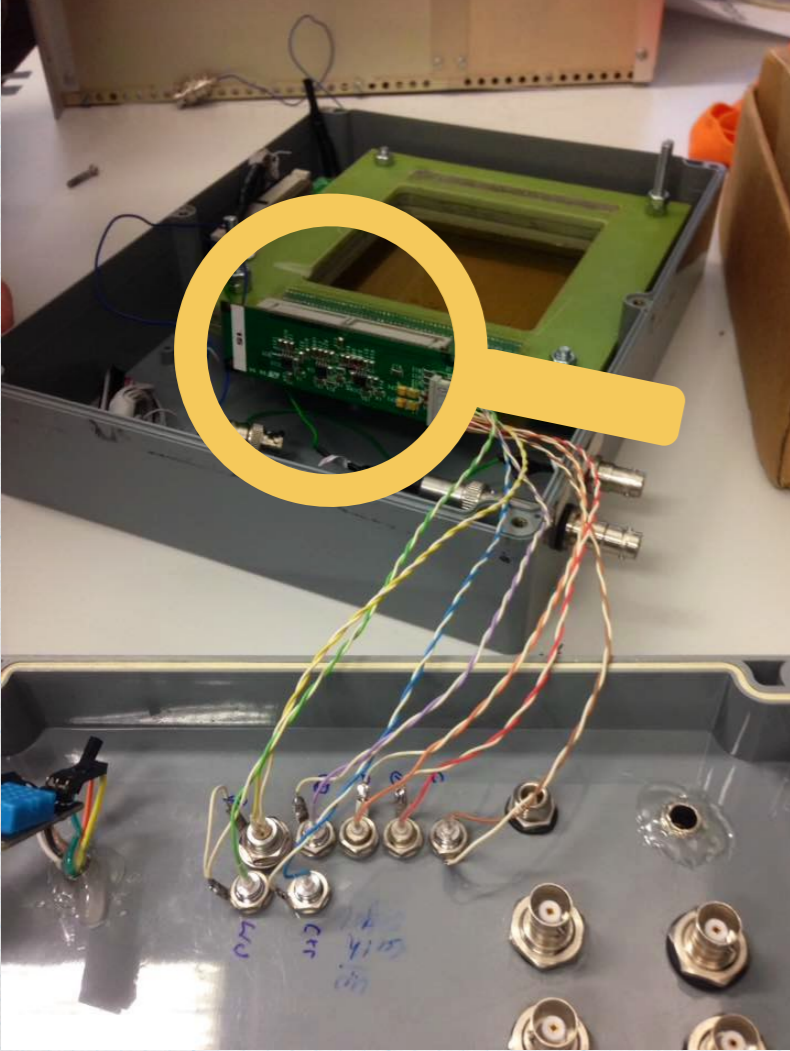

Silicon as the ionisation medium

- * Same working principle as the gaseous chamber

- * Advantages


- * much smaller areas can be instrumented
- * smaller bias voltage needed (LV: 100V)
- * better resolution: about $10\mu\text{m}$

- * Disadvantages

- * Thermal noise can give fake signal
- * Cooling is necessary
- * Expensive detector
- * Many (100k) readout channels


- * Typical utilisation

- * Pixel: x,y information
 - * Many channels, expensive
- * Strip: only x or y information
 - * But I can use two or more strips at an angle to get x-y information.

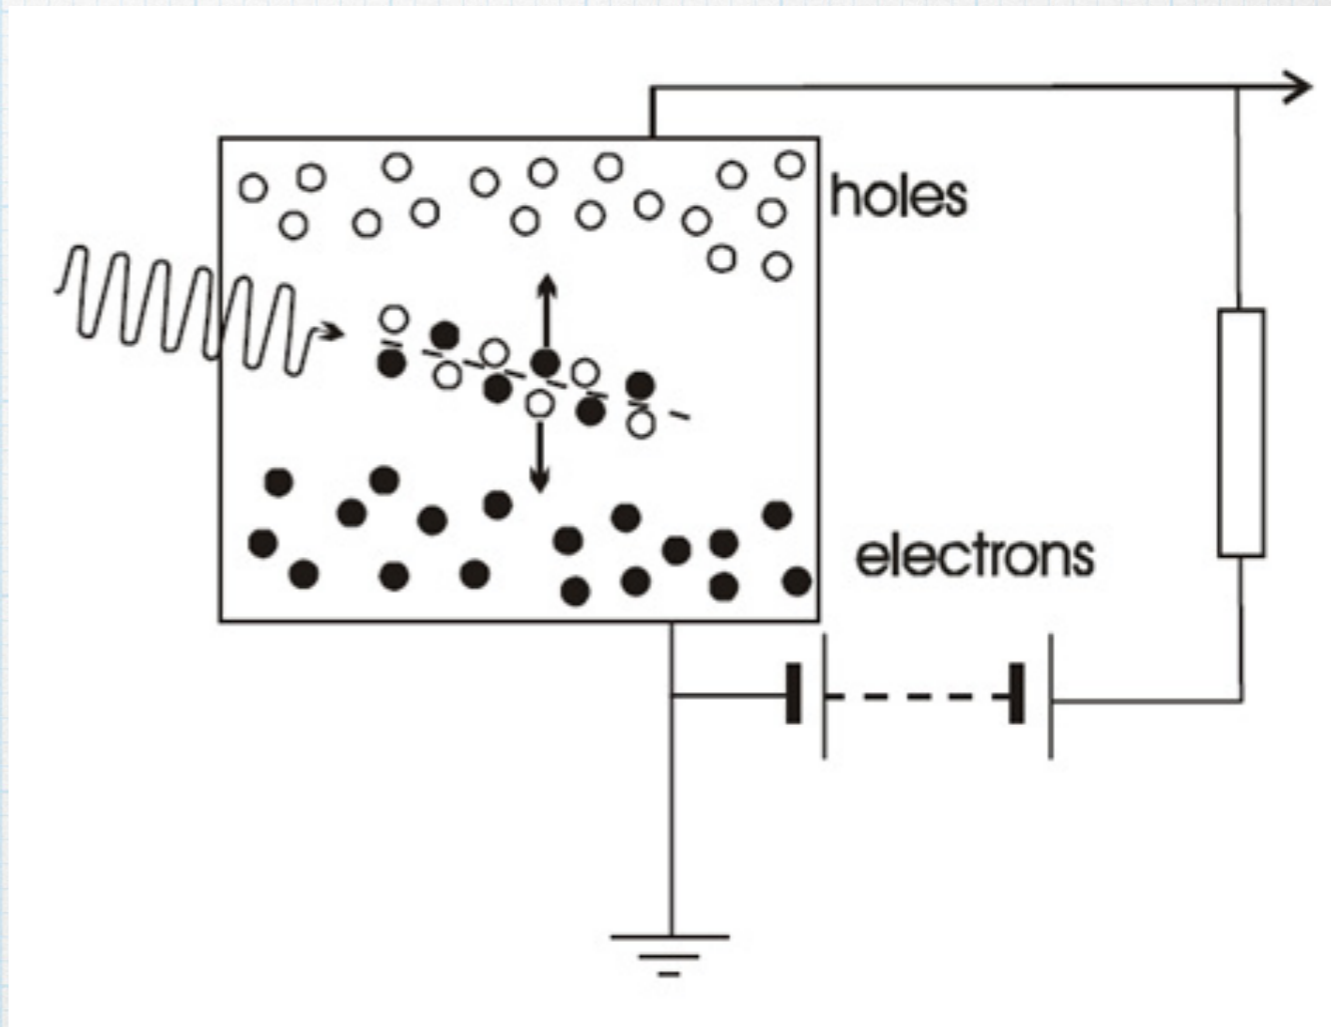

Scintillators

W. Crookes 1903, ZnS screen

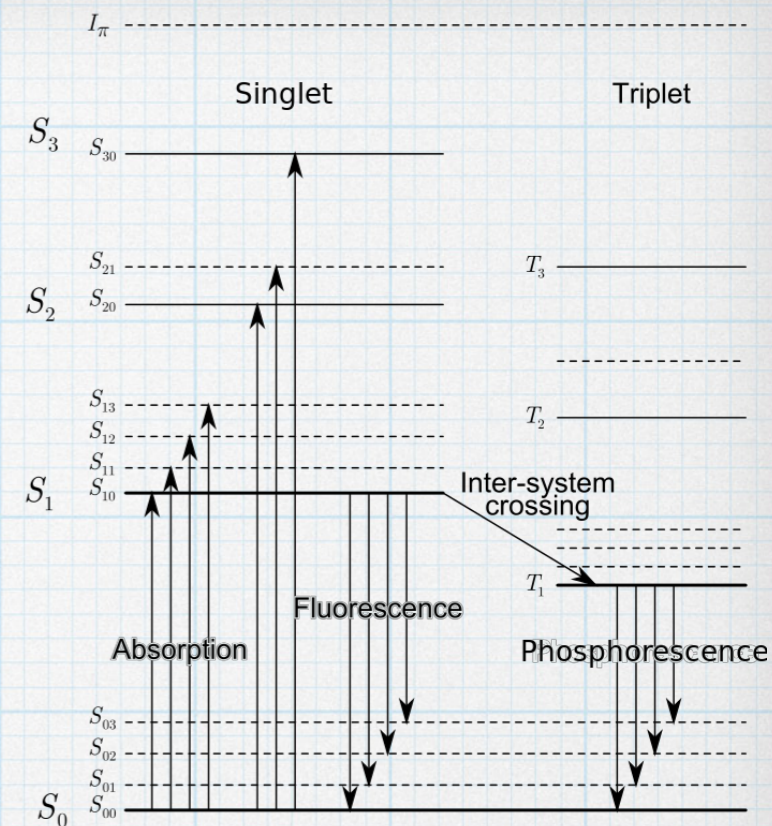

* Scintillation principle

* energy absorbed by the atoms, and emitted as light "later on".

* fast (fluorescence) and slow (phosphorescence) components.

* Converts the energy deposited by traversing particles into light: scintillation mechanism

* ≈ 40 photons/keV NaI(Tl),

* ≈ 10 photons/keV plastic scintillator,

* ≈ 4 photons/keV BGO

* Transparent to its own light.



* Plastic or Crystal Scintillator



scintillator detector components

Polystyrene

- PbWO4 Crystal
- LYSO(Ce) Crystal
- BGO Crystal
- CsI Crystal
- NaI(Tl) Crystal
- CdWO4 Crystal
- YSO(Ce) Crystal

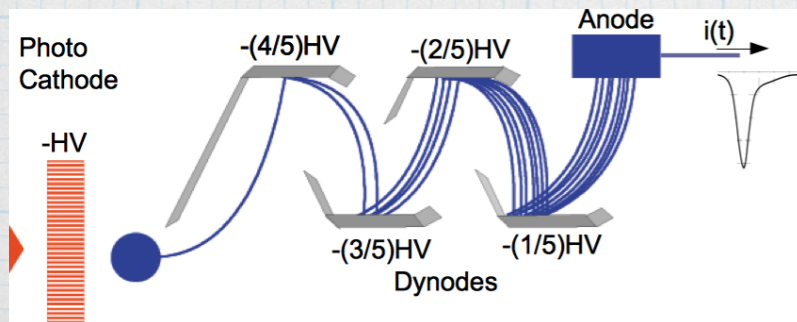
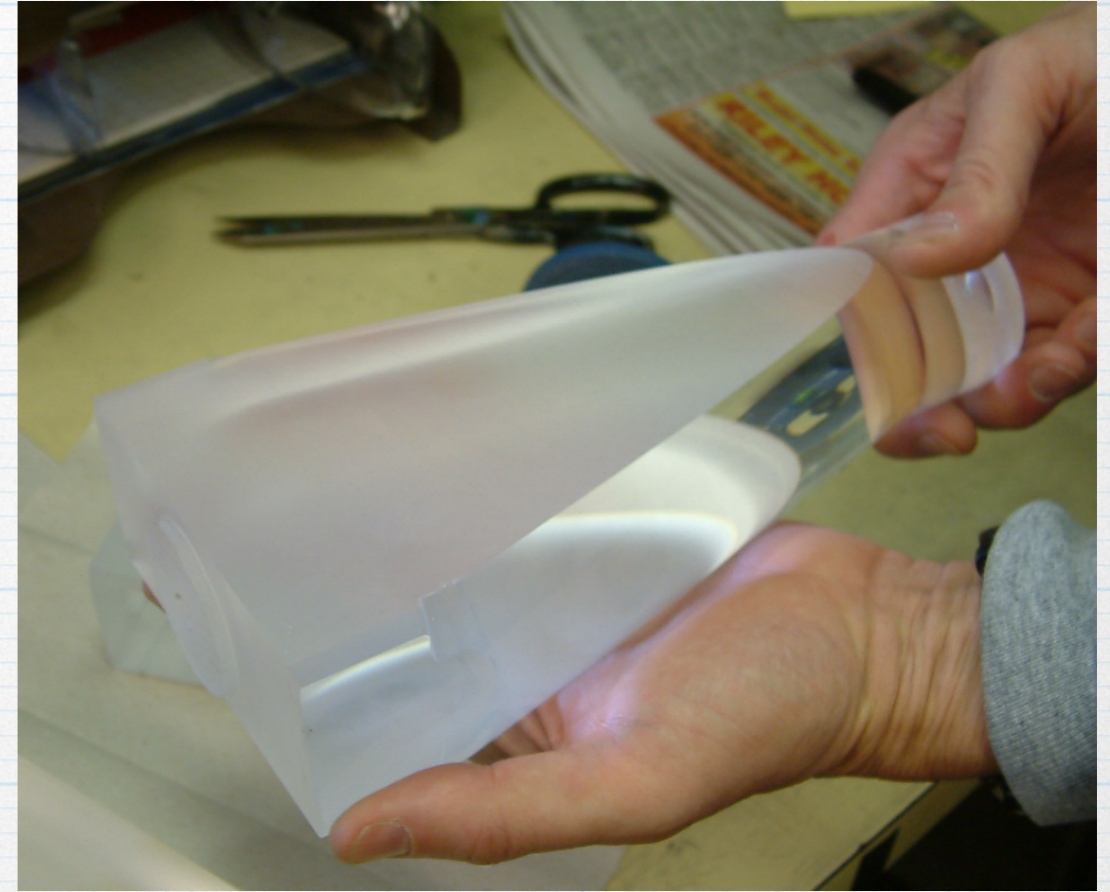


PMT





light guide

Using bigger PMTs for Čerenkov Radiation

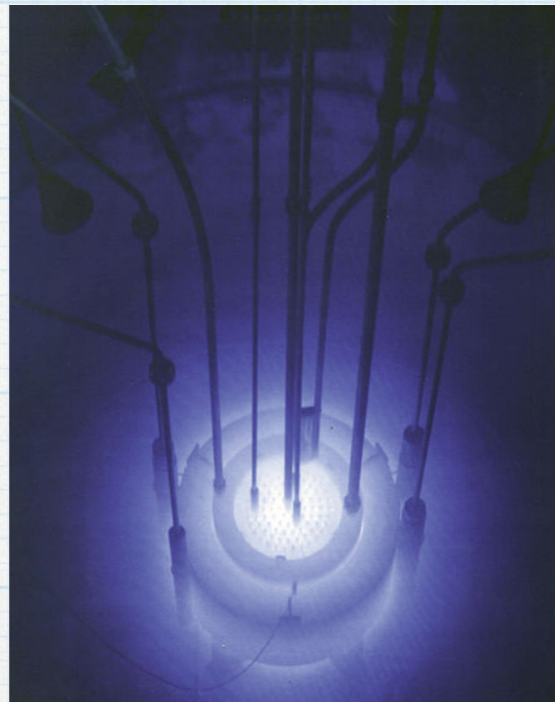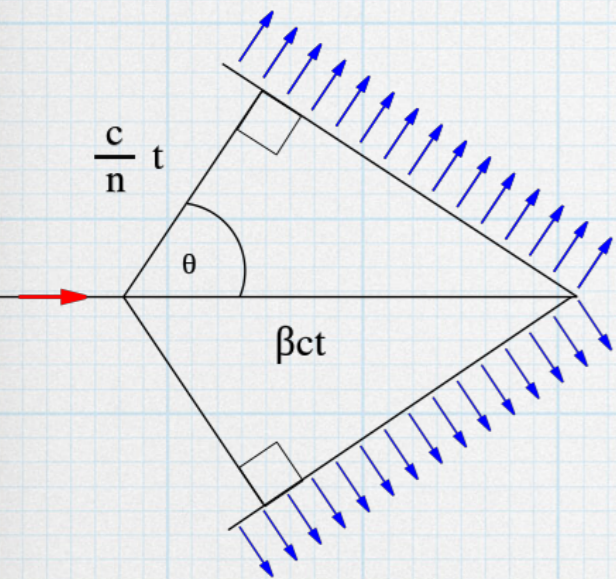

hamamatsu 50cm PMT

- ◆ If a charged particle's speed inside a medium ($\beta=v/c$), is greater than the speed of light in that medium ($\beta_{\text{thr}}=1/n$, $n \equiv$ medium's refractive index, $n \geq 1$), the particle emits EM radiation at an angle $\cos\theta_c = 1/(n\beta)$
- ◆ This light read by large PMTs can be used for particle identification if momentum can be independently measured.

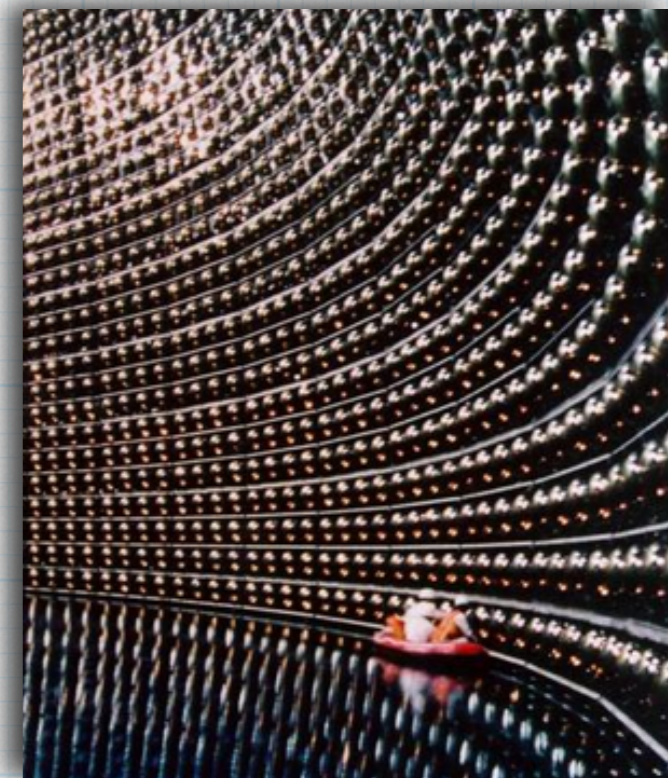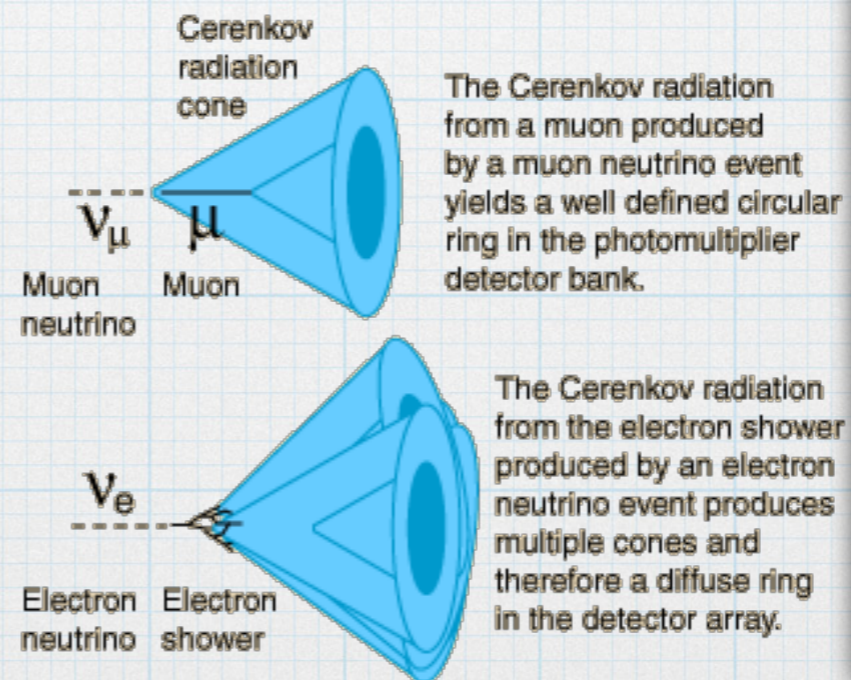

reading out a scintillator


- Digitizing the scintillation light

- Converting light to charge: photoelectric effect

- Photomultiplier tube does the job (with ~2kV)


- An electric signal is readout → need to convert analog to digital: **ADC**

- ▶ Total charge: $Q = k E (+k'E^2)$

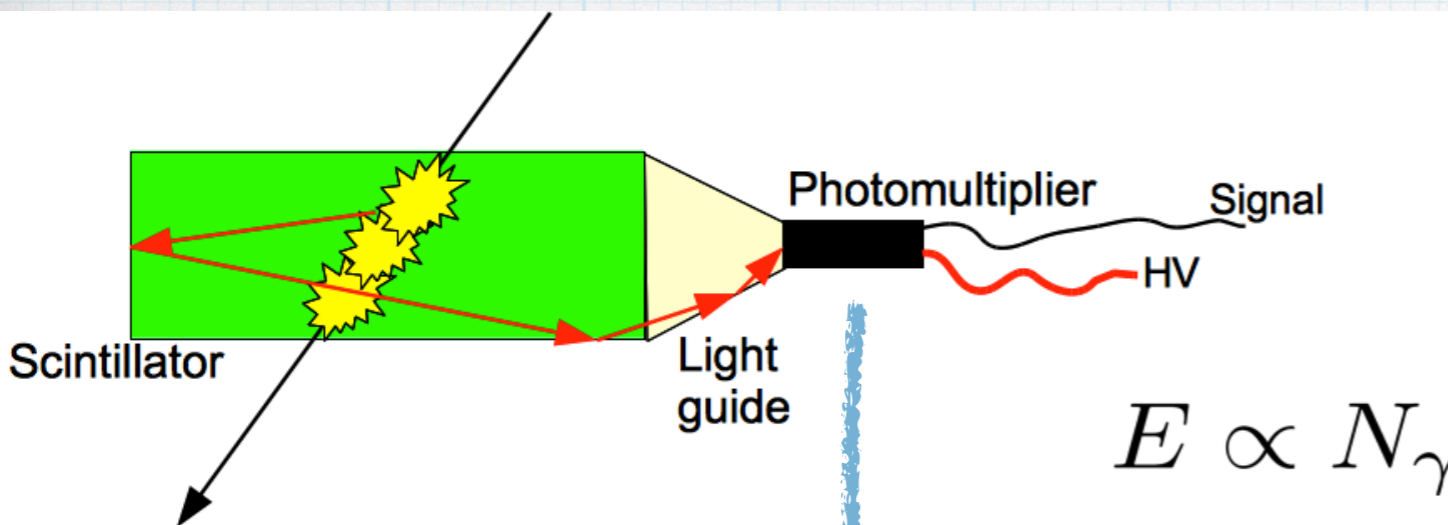

- there are position sensitive PMTs (x-wire AND padded types)

- SiPM are “a la mode”
small sensitive area
uses silicon photodiode
bias voltage small (<100V)
can work under B field

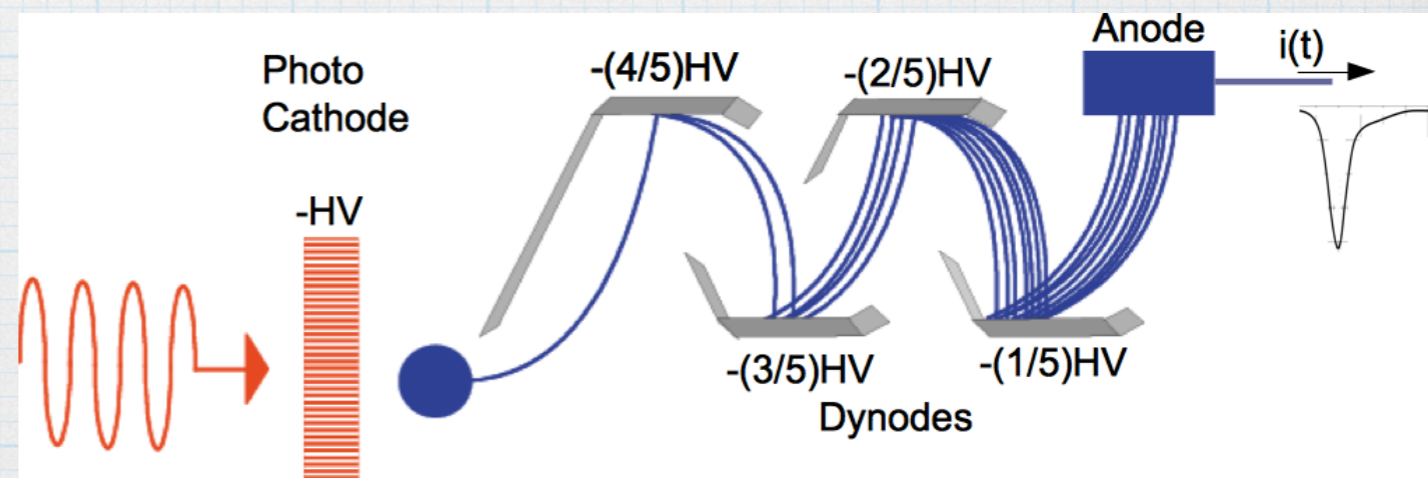

if signal is received without scintillation light: dark current

High gain: ~1M times

Using scintillators in a beamline

- * As veto
 - * reject events from beam halo
- * As trigger
 - * simple way to count event types
 - * $N1 = s1.s2.\overline{s3}$
 - * $N2 = N1.(T1 \parallel T2)$
- * As a crude tracker: hodoscope
 - * read a long scintillator from both ends and compare the arrival times of signals to PMTs. Time difference can be converted to positron information.



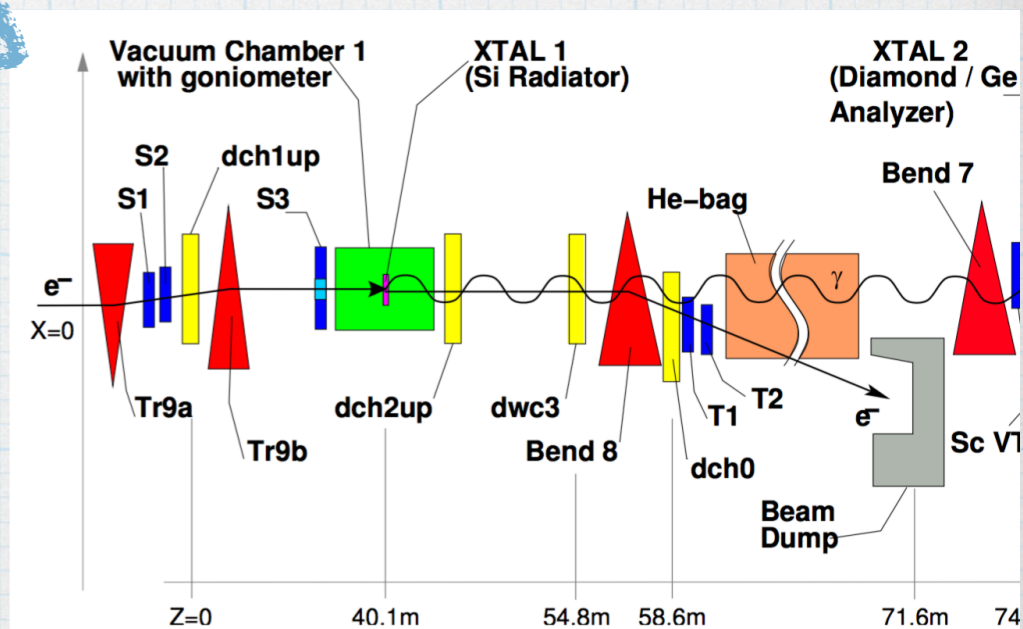


Fig. 1. Setup of the Na59 Experiment


Na48 Hodoscope

Front view

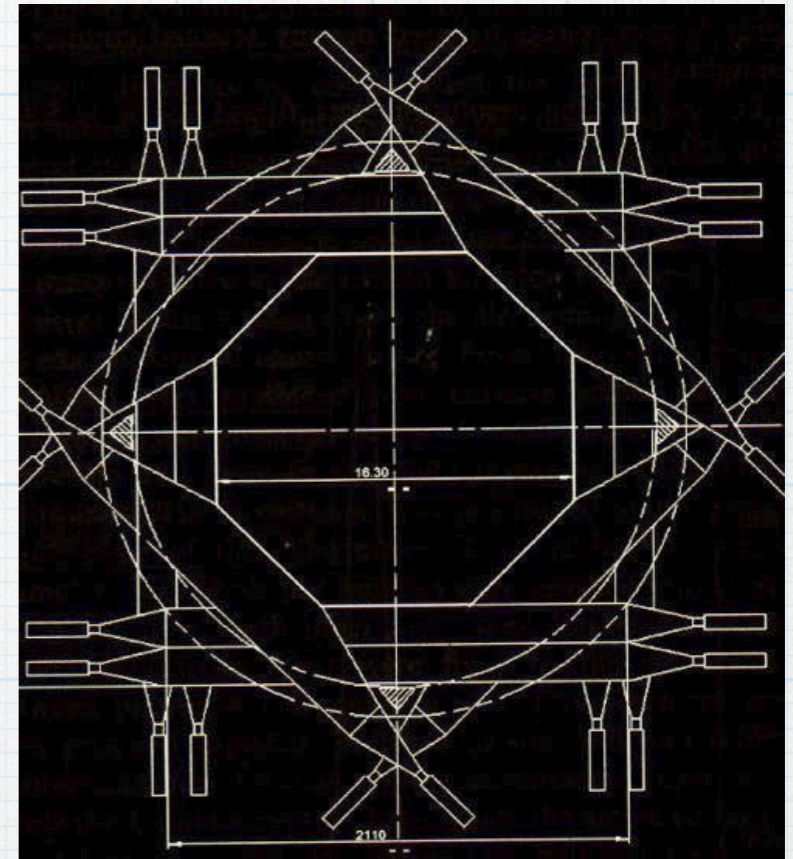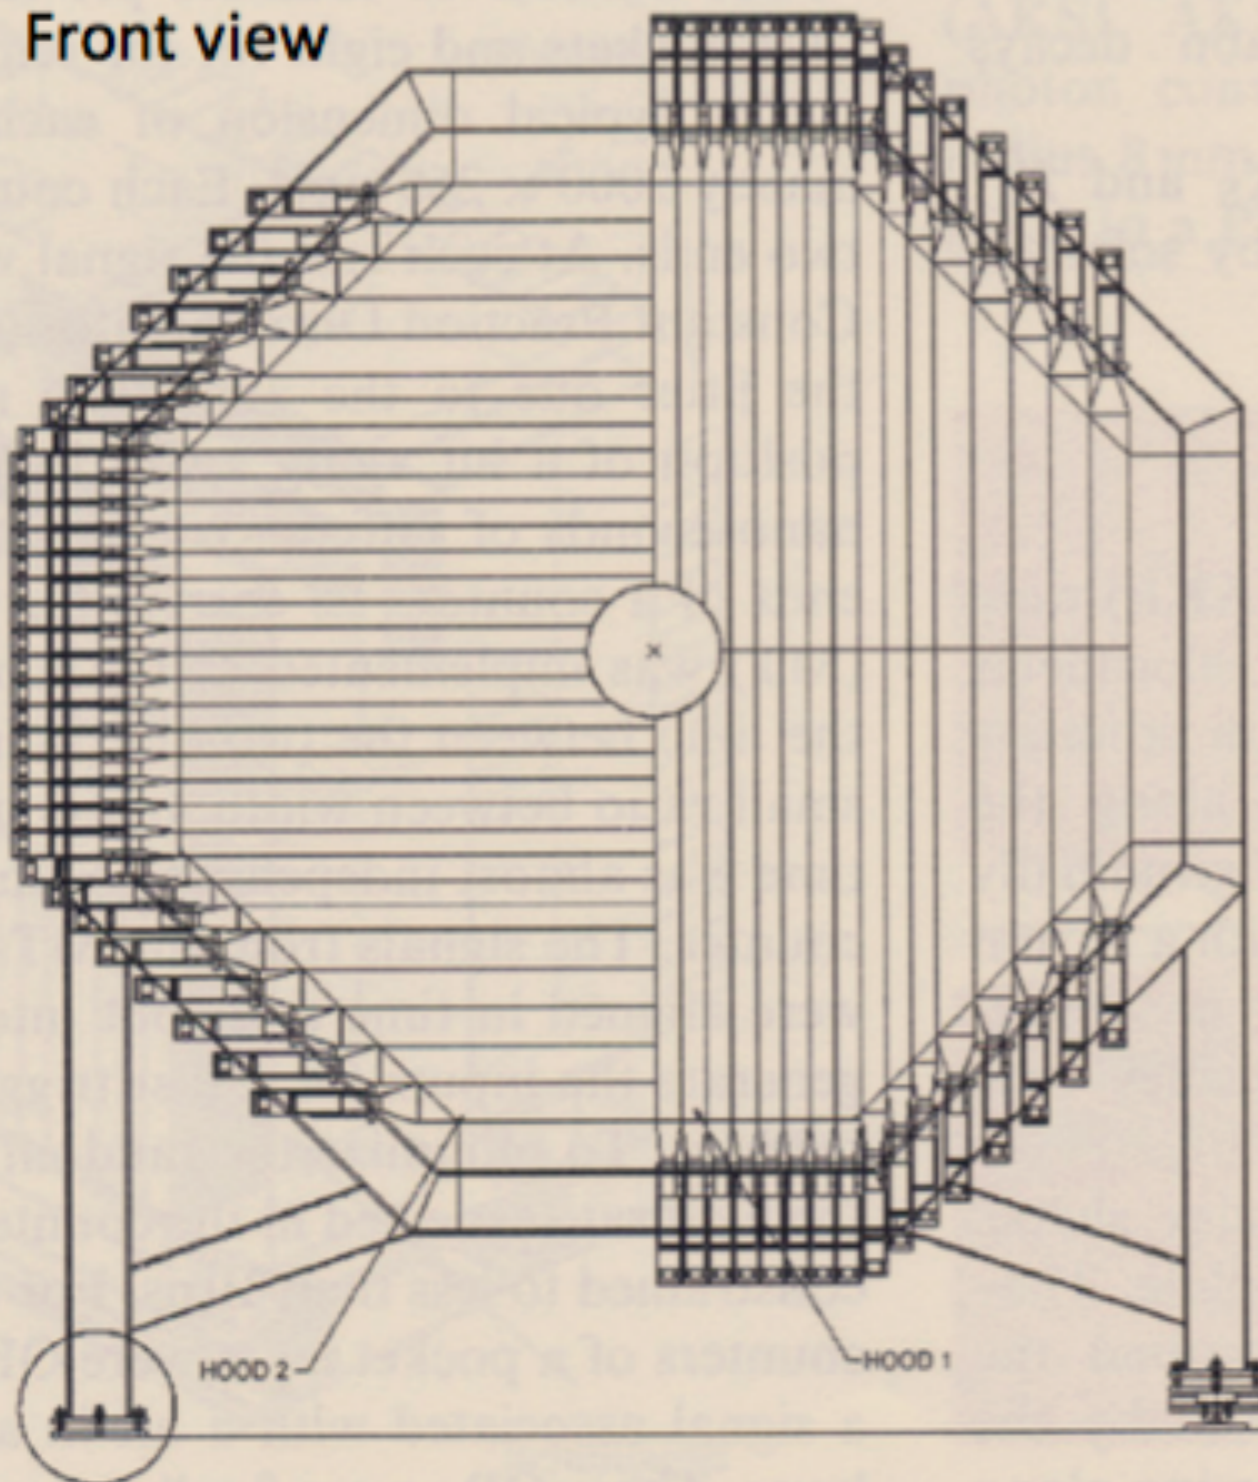

Charged hodoscope


- 2 planes of scintillation counters
- 2 orientations
- Time resolution 260 ps
- In front of Kr calorimeter
- Time difference between planes gives direction of particles

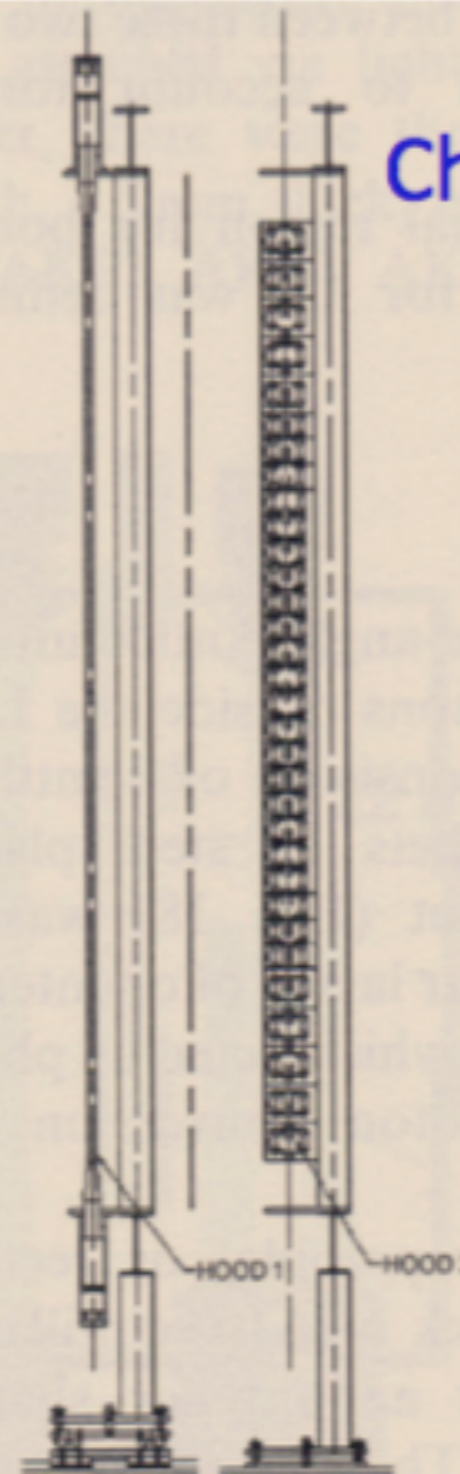

Side view

Build your own scintillator

to see a particle beam

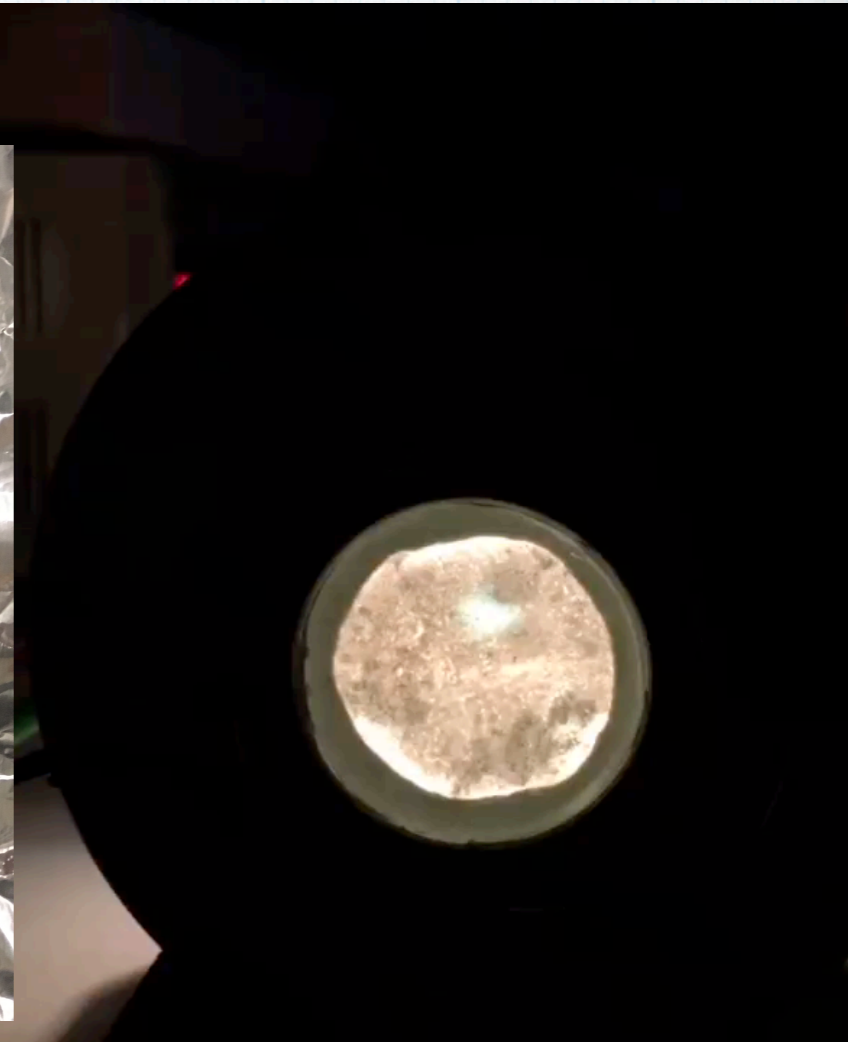

To use as a trigger


N₂

Dow Styron
634 PS pellet +
PPO + POPOP



heater

extruder

final shape

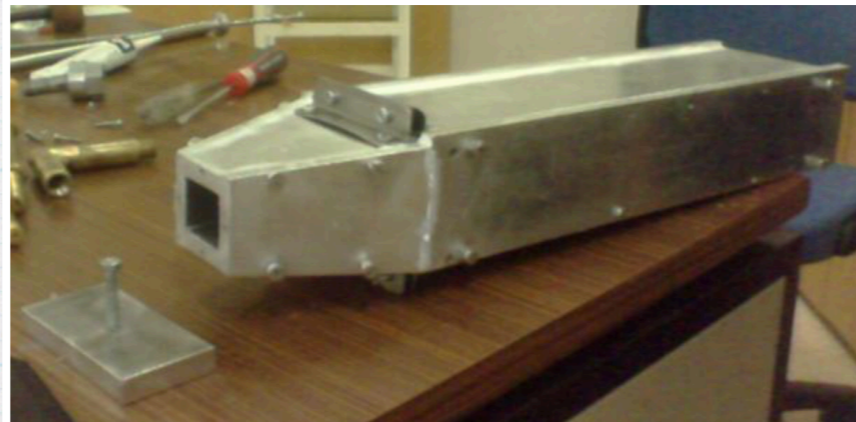


triggering a delay wire chamber by a scintillator

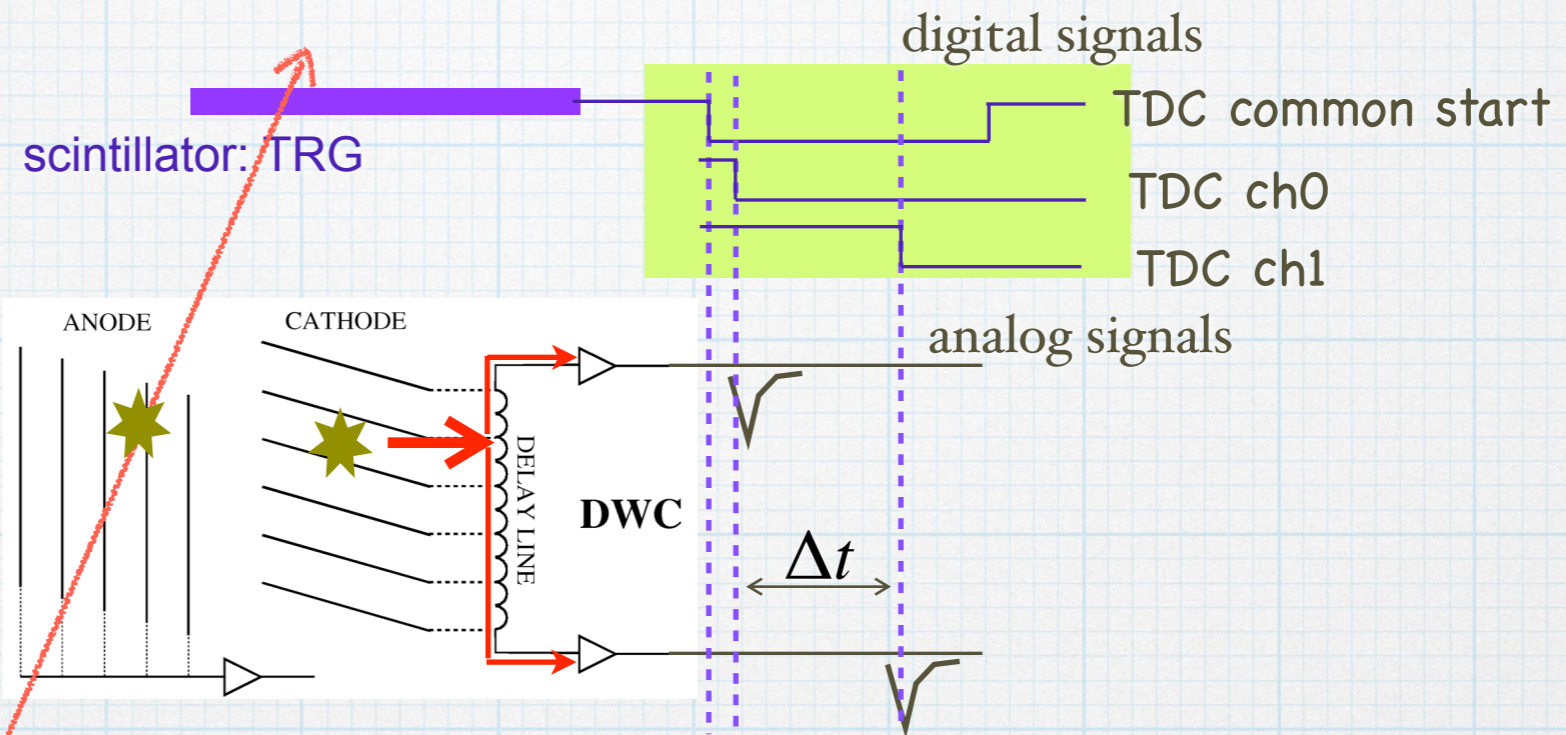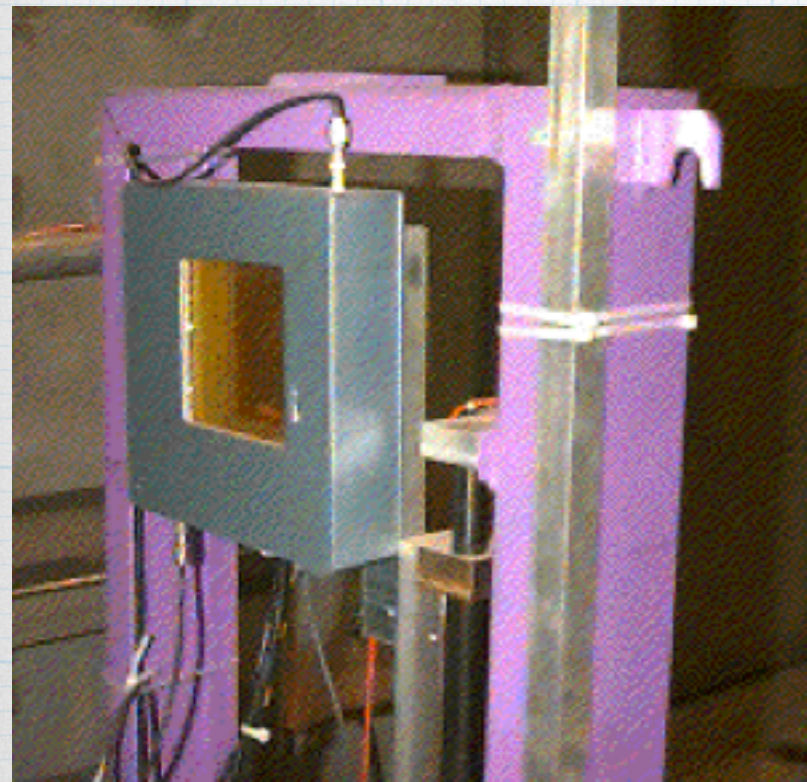

$$y = \alpha \cdot \Delta t + \beta = \alpha \cdot (t_{top} - t_{bottom}) + \beta$$

RUN997 - Y_DW vs X_DW

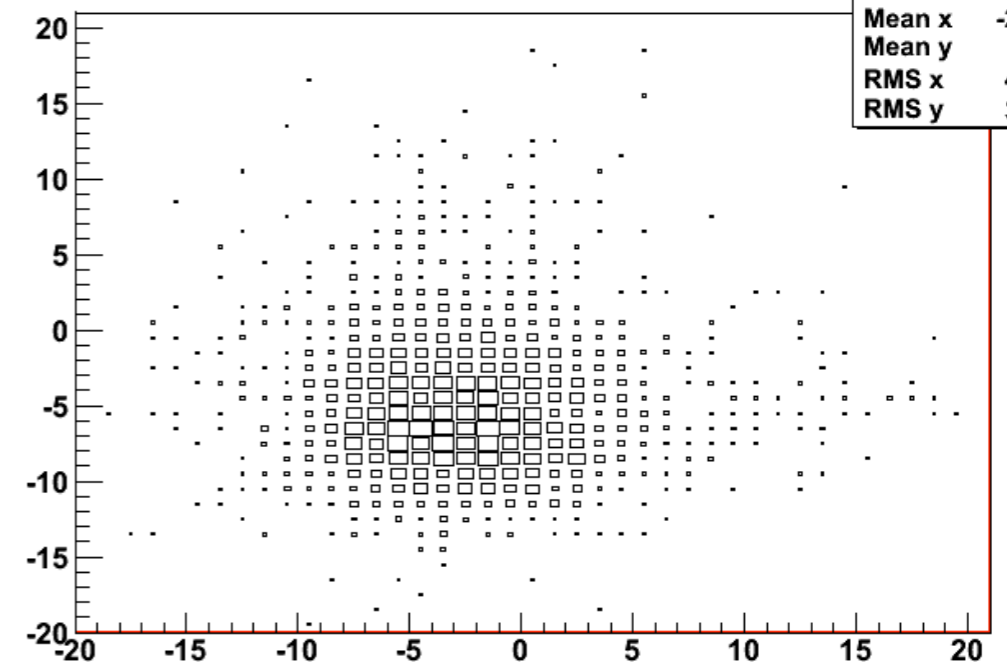

● DWC: Delay Wire Chamber





- ➔ Simple detector to typically measure the beam profile on fixed target experiments.
- ➔ gaseous & multiwire
- ➔ TDC readout: 2CH /plane.

few words about triggers

- * Select interesting events
 - * Do it as early as possible
 - * Do it as efficiently as possible
 - * Do it as rapidly as possible
 - * Use all the available information
- * May have to trigger in stages
 - * low level: use hardware, be quick and crude
 - * high level: use software, be thorough

Calorimetry

- * The name calorimeter was made up by Antoine Lavoisier. In 1780, he used a guinea pig in his experiments with this device to measure heat production. The heat from the guinea pig's respiration melted snow surrounding the calorimeter, showing that respiratory gas exchange is a combustion, similar to a candle burning.
- * calorimeters are "destructive" energy measurement devices.
- * the particle beam to be measured has to be absorbed.
- * calorimeters benefit from many additional interactions:

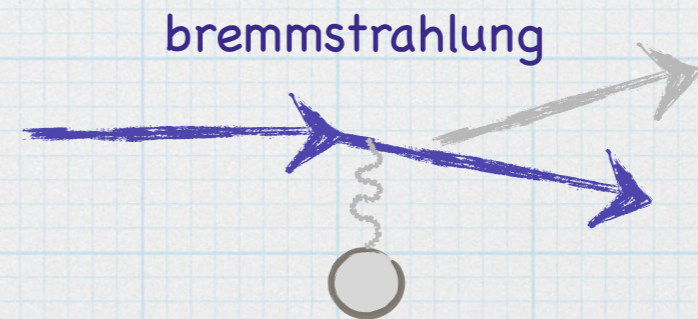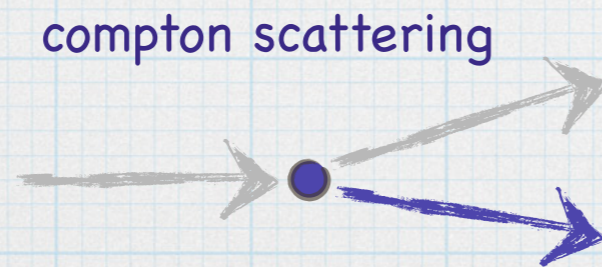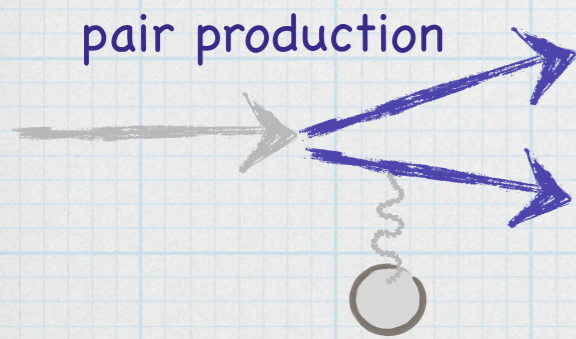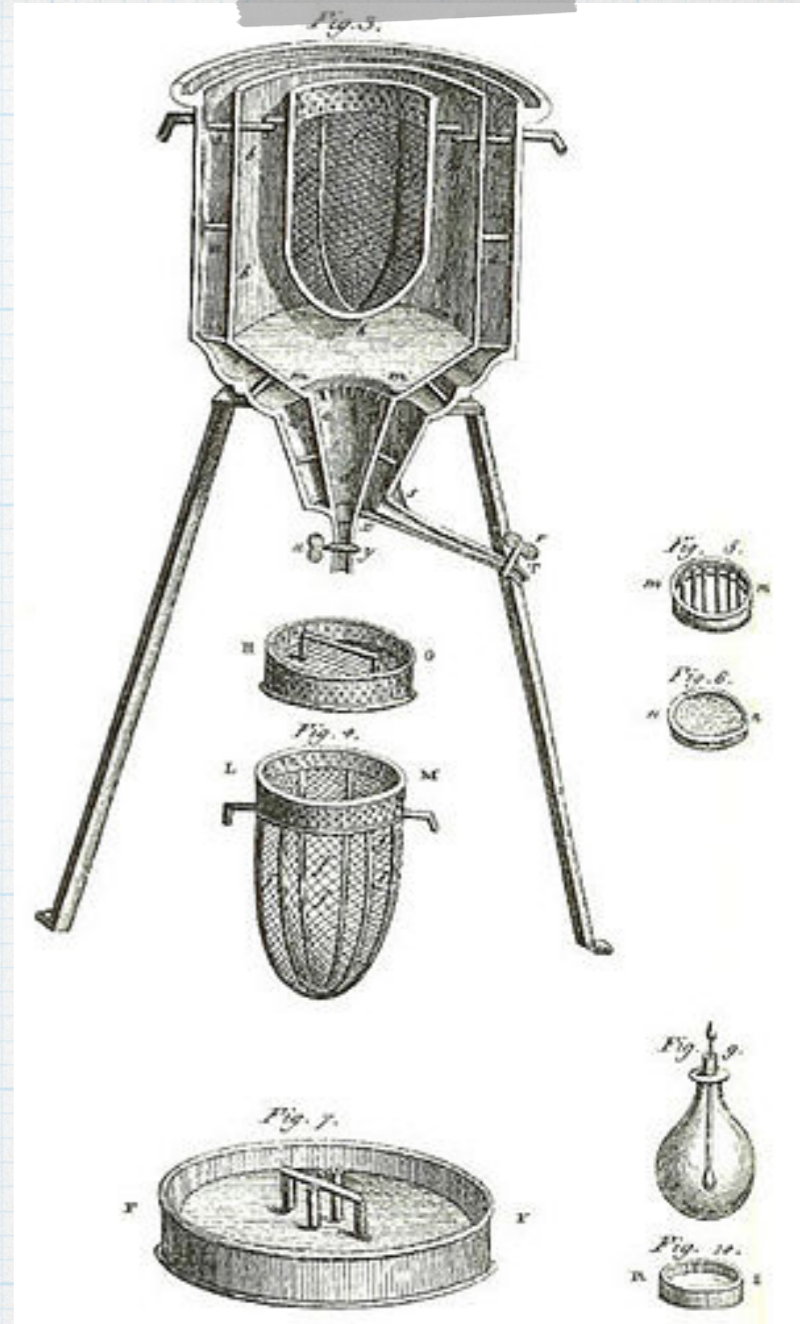

calorimeters in particle physics

- * Particle interactions determine calorimeter type
 - * material choice, size
- * Incoming particle interacts with calorimeter material
 - * it generates a "shower" of secondary particles
 - * These particles excite, ionize the material of the calorimeter
 - * Incoming particle can be neutral or charged



* Two flavors

* Electromagnetic (photons, electrons)

- * Radiation length (electron loses 1/e of its energy)

* Hadronic (strongly interacting particles)

- * Nuclear interaction length $\lambda \approx 35 \text{ g}^* \text{cm}^{-2} A^{1/3}$ (# rel. particles drops to 1/e of its initial value)

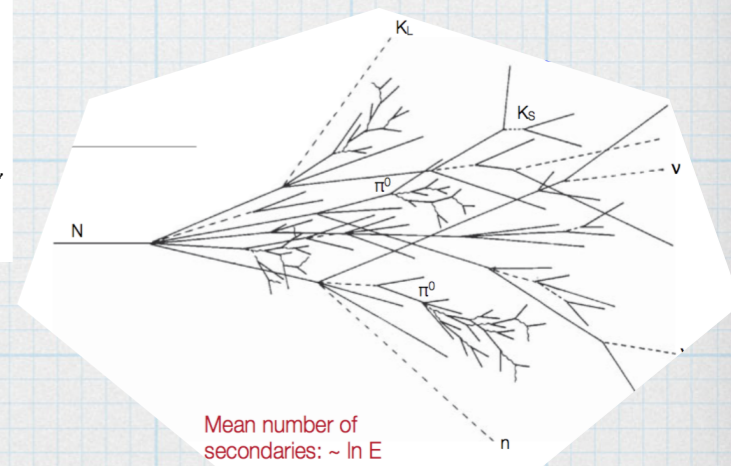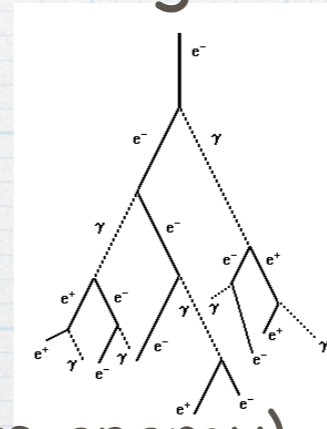

EM calorimeters

- * Radiation length, X_0 : the distance at which the particle energy drops down to $1/e$ of its initial

value: $E(x) = E_0 e^{-x/X_0}$ $X_0 = \frac{716.4 \text{ cm}^{-2} A}{Z(Z+1) \ln(287/\sqrt{Z})}$ ATLAS EMcalo: $22X_0$


- * Critical Energy, E_c : The energy at which losses due to Bremsstrahlung and ionisation are equal.

$$E_c = \frac{580 \text{ MeV}}{Z}$$


- * Moliere Radius, R_m : The radius of a cylinder containing on average 90% of the shower's energy deposition.

- $R_m = 0.0265 X_0 (Z + 1.2)$

- $R_m = 21X_0 / E_c$

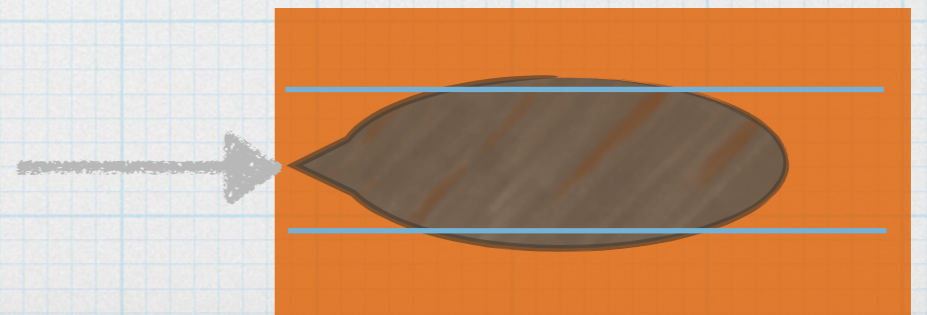

Homogeneous vs Sampling Calorimeters

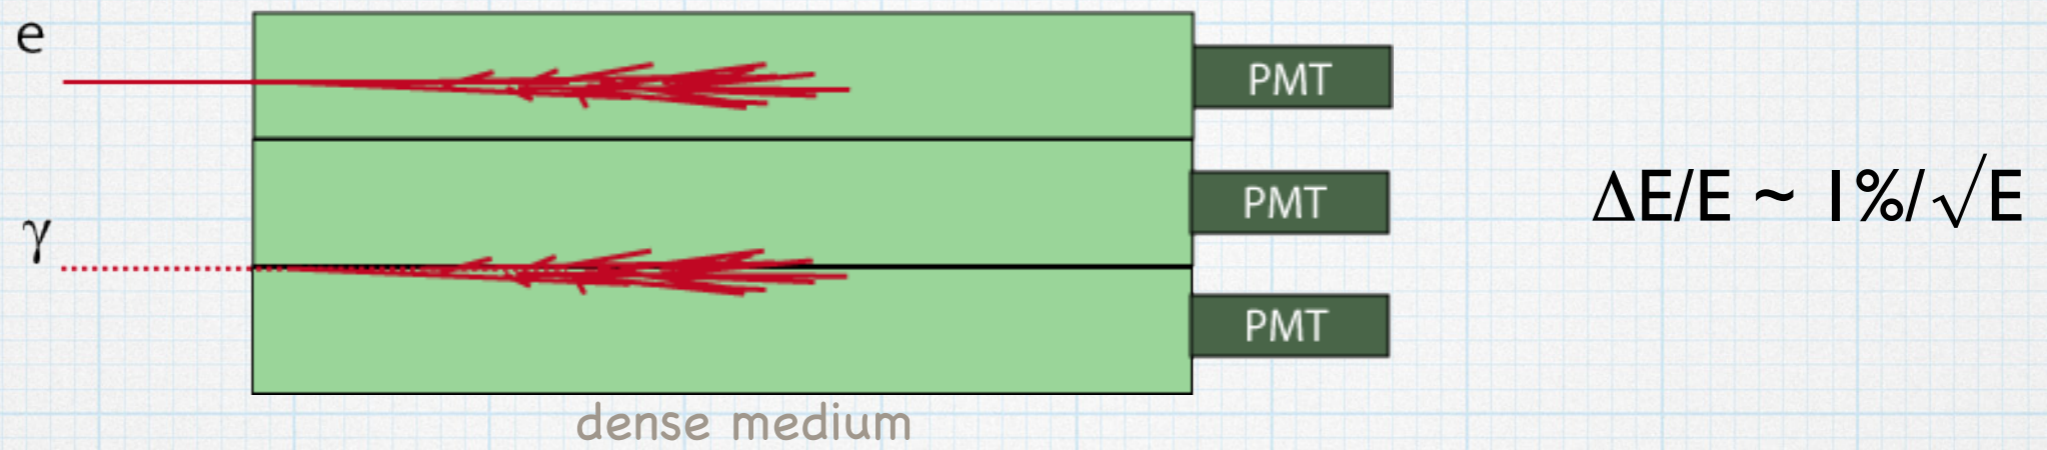


The dense medium may be "active" or "passive" :

- Homogeneous calorimeters: CsI(Tl), BGO, Pb-glass, PWO, Xe(liq)...
- Sampling calorimeters: Pb-scintillator, Fe-scintillator, Pb-Ar(liq)...



High Z passive material
e.g. Pb, Cu,...

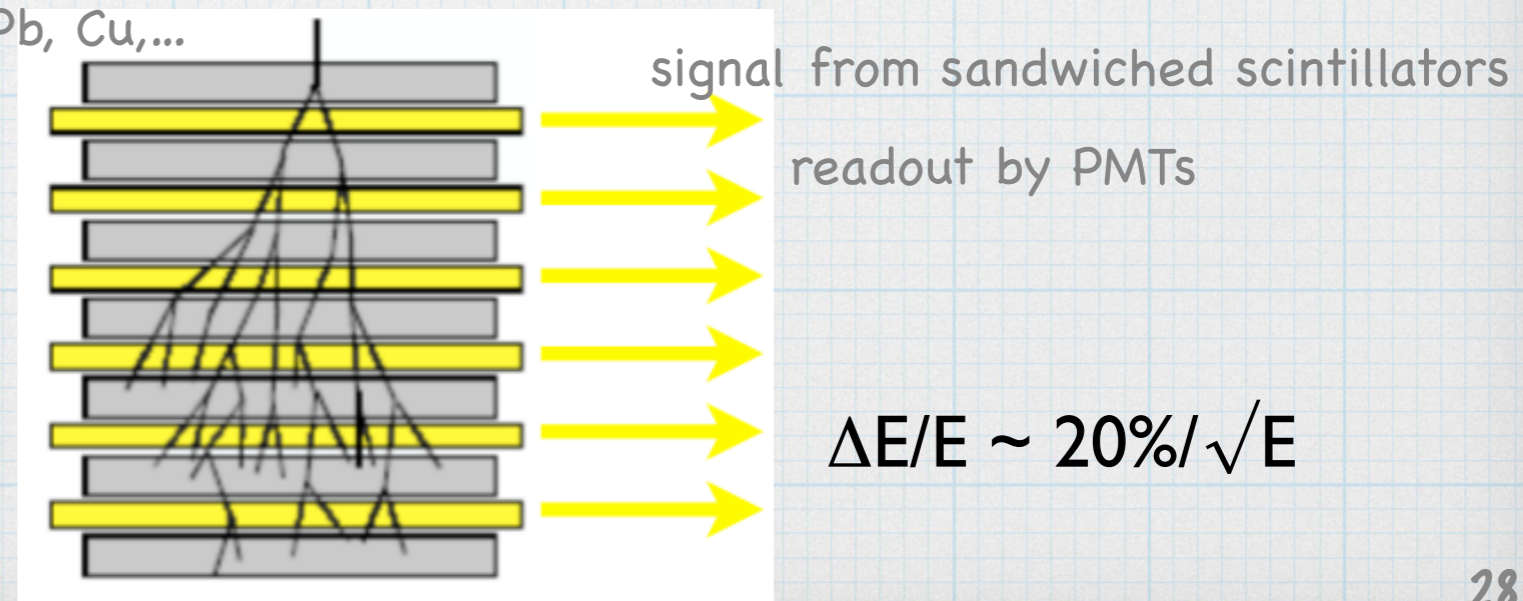

Calorimeter Materials

- * Crystal calorimeter

- * Measure produced light
- * Full containment in depth difficult
- * Response stability limited



- * Semiconductors (Ge)

- * Only small devices feasible ($\sim \$1\text{k}/\text{cm}^3$)

- * Liquid noble gas calorimeter

- * Intrinsically stable
- * Easy calibration
- * Complication of cryogenics
- * Slow collection time

Hadronic Calorimeters

- * High Energy strongly interacting particles, interact with the nucleons of the medium.
- * A hadronic shower: cascades of mesons ($K, \pi \dots$) and hadrons ($p, n \dots$) similar to EM case
- * Absorption length, λ : Scale at which secondary, tertiary particles are produced.
 - * Typically $9-10\lambda$ are needed for longitudinal containment and 1λ for lateral. Hcal depth $>$ EMcal.
- * Most common type: Sampling Calorimeter
 - * High Z material (Fe, Pb,..) and Sensor (Scintillator, LAr)

particle ID revisited


$$E^2 = p^2 + m^2$$

Measure E and p independently

- Energy from calorimeter
- p from magnetic spectrometer

Calculate E/p:

-E/p \approx 1 for electrons, \ll 1 for π

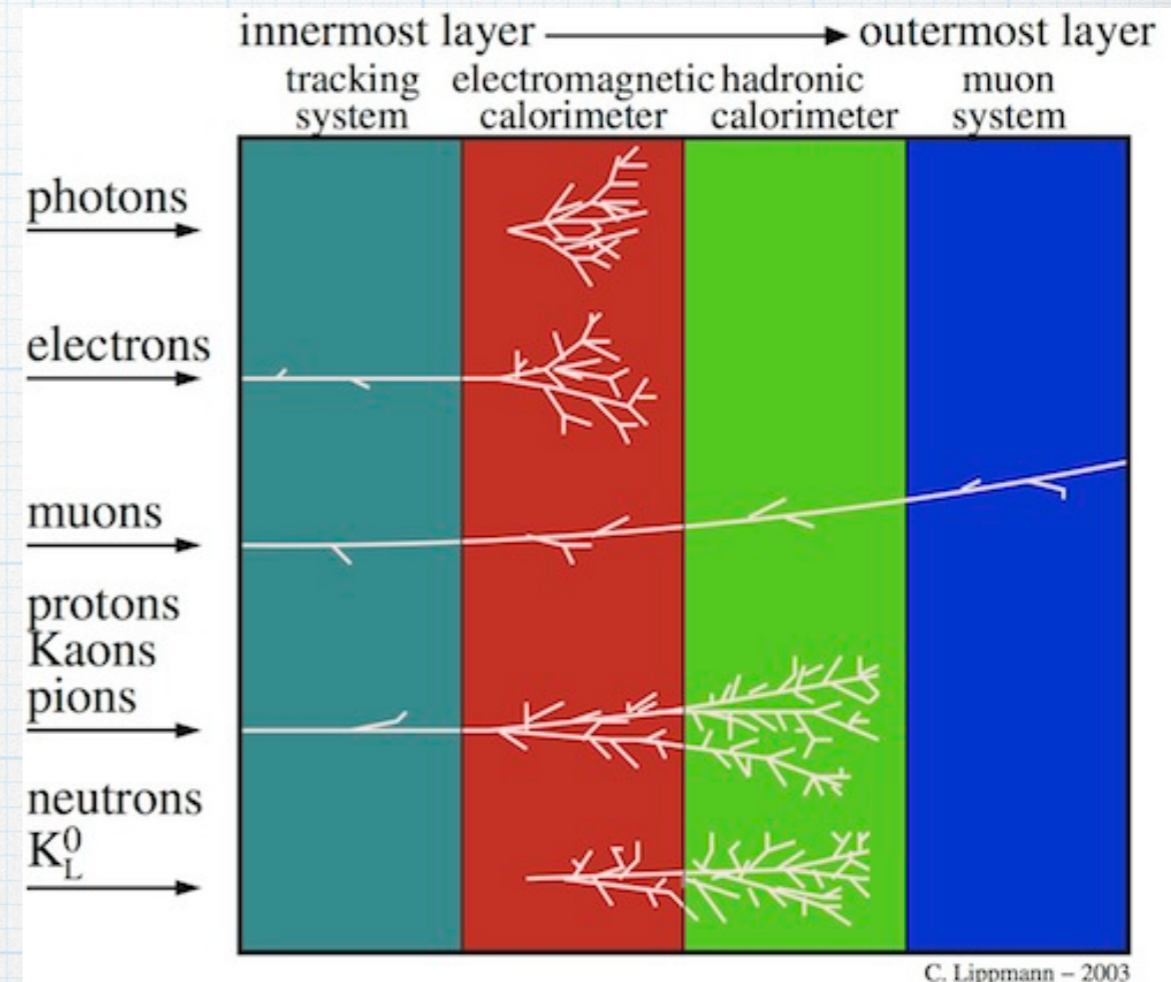


Only muons will be able to traverse the calorimeters

Balance the momentum in the transverse plane to find hints for neutrino(s). Denoted as MET.

Segmentation

magnet and calorimeters

UA1
experiment

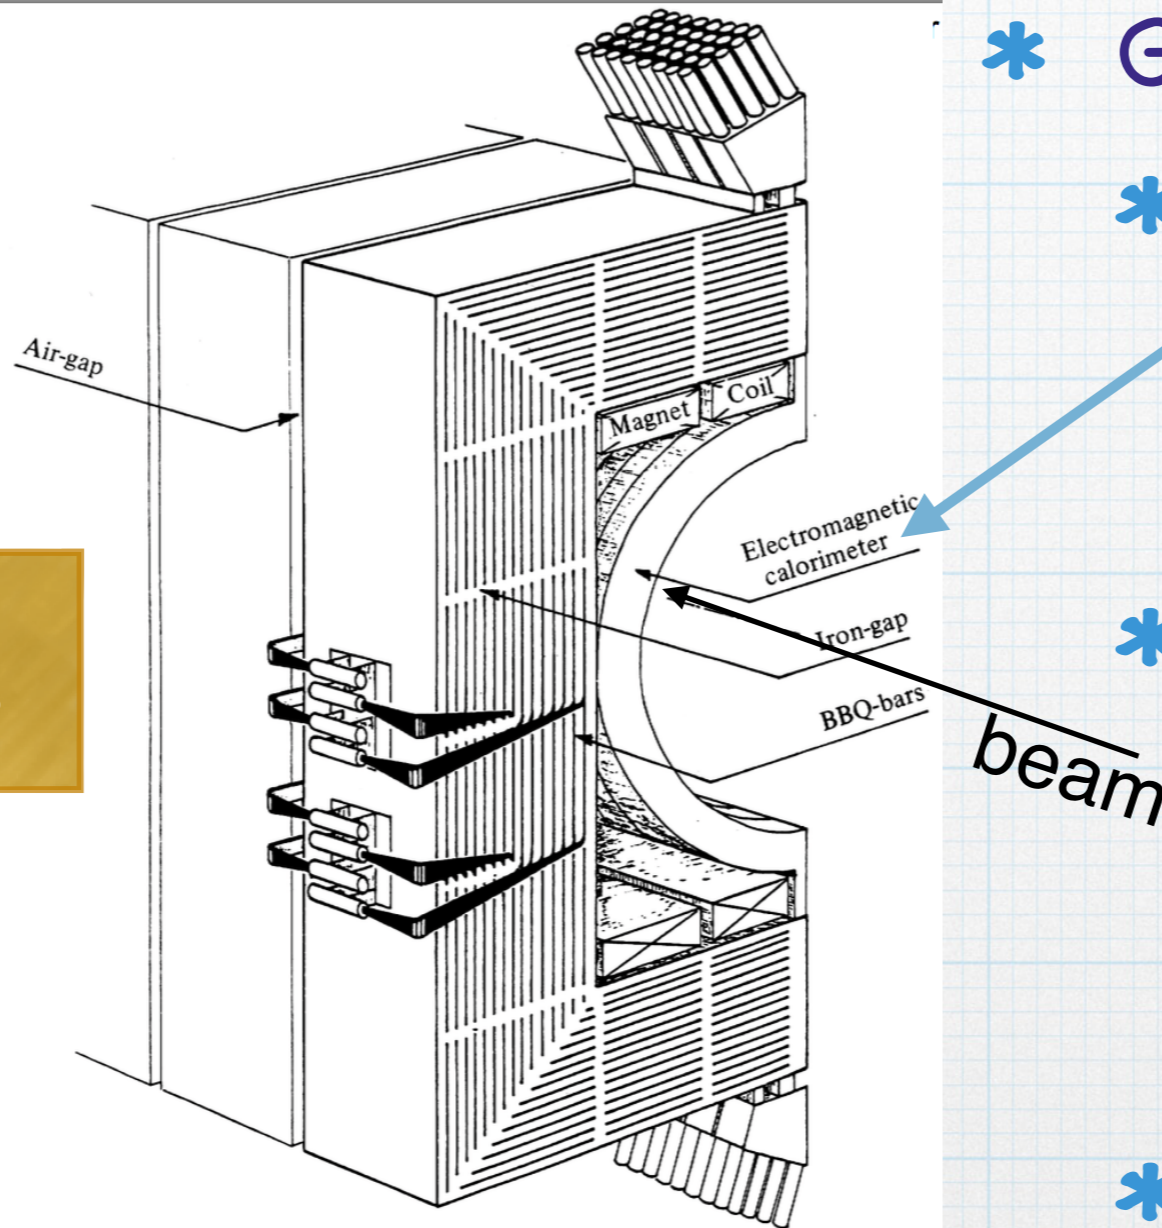


* Gondola Calorimeters

* What is the problem here?


* No radial segments!
momentum balance
in x-y not possible.

* A good calorimeter
should do some
crude tracking!..

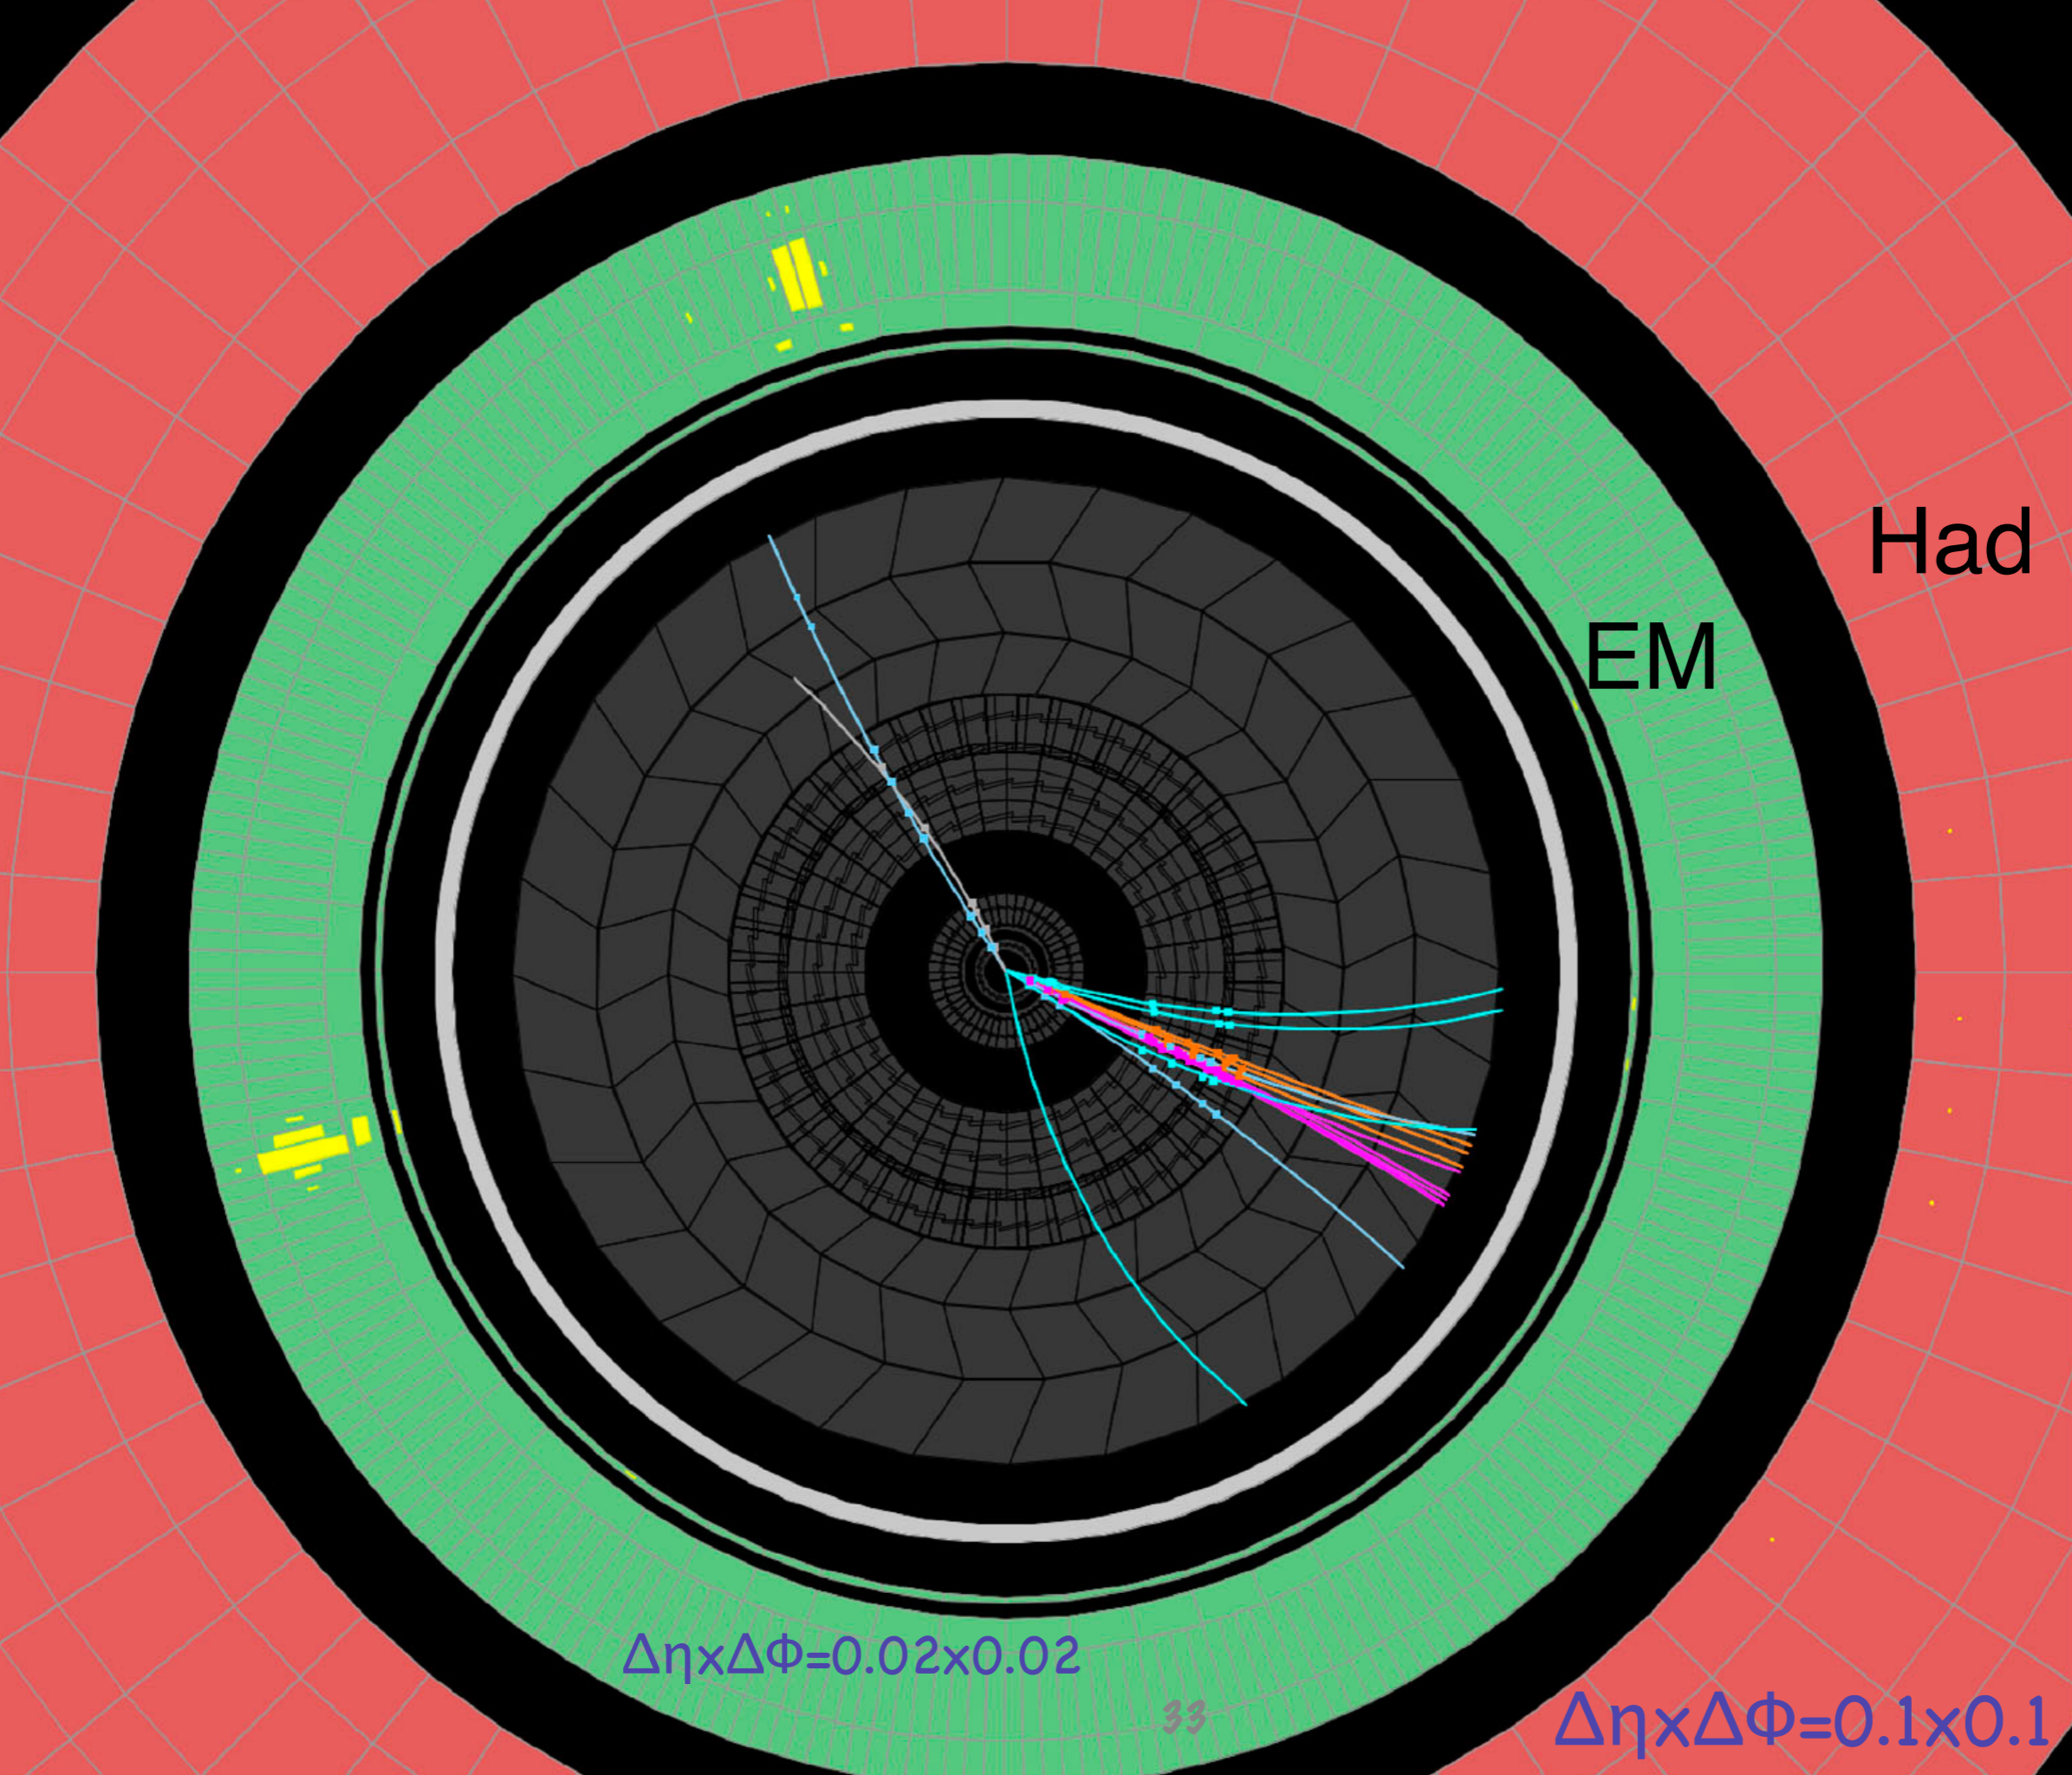

Run Number

Date

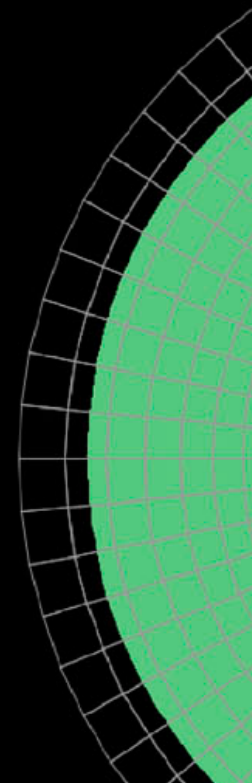


build your own beam monitor


Measure Charge q

collect q in a Faraday Cup

measure q with an ampermeter

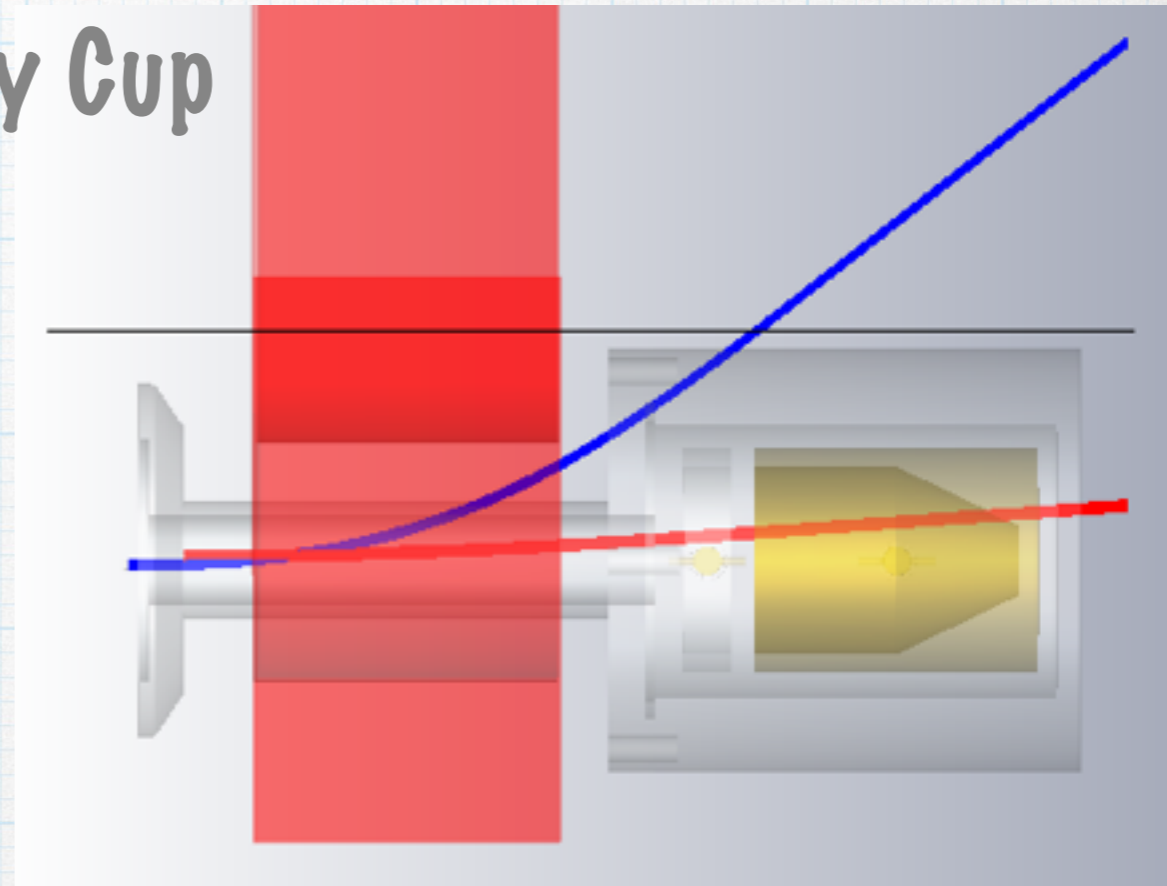


pick up passing q with a Current Transformer

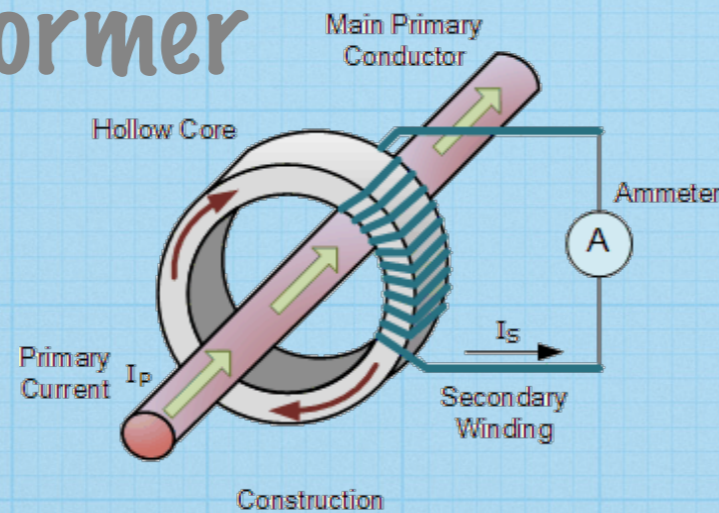

q measured with a scope



you can also have 2 such devices and do a time of flight (TOF) measurement to determine beam momentum

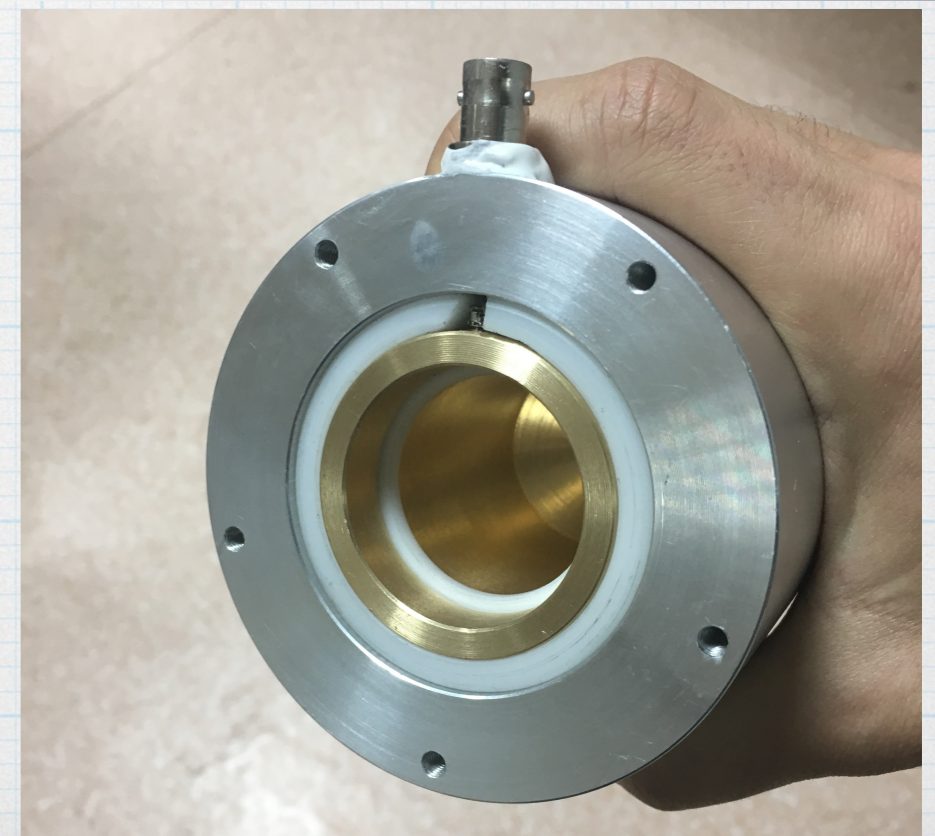

ReadOut Chain

1. pre-amplifier

Strengthen the initial signal to a measureable level

2. discriminator - filter

Reduce noise.

3. buffer (analog)

Used when ADC is not fast enough or an ADC should be shared across channels. Reduces the readout electronics dead-time.

4. digitiser

Convert analog info to digital using standard electronics

5. zero-suppression and digital buffering

No need to send channels with 0, but event format should contain channel ID. Alternative: data compression algorithms. Buffering can also be done in RAM.

6. multiplexer

single data path can be shared (in time) between multiple senders and receivers. Beware of synchronization issues.

7. network

Gigabit to infiniband many network solutions are available.


8. storage

Disk servers, tape robots, custom solutions... many choices...

In practice achieved using ASICs made by and for HEP expts: low level Front End design.


Infrastructure

- Cables (fibers) for power, data, controls
- Pipes for gases, cooling
- Access to the detector
- Mounting tools
- Control room
- Storage of supplies for gas, cooling, electronics spares

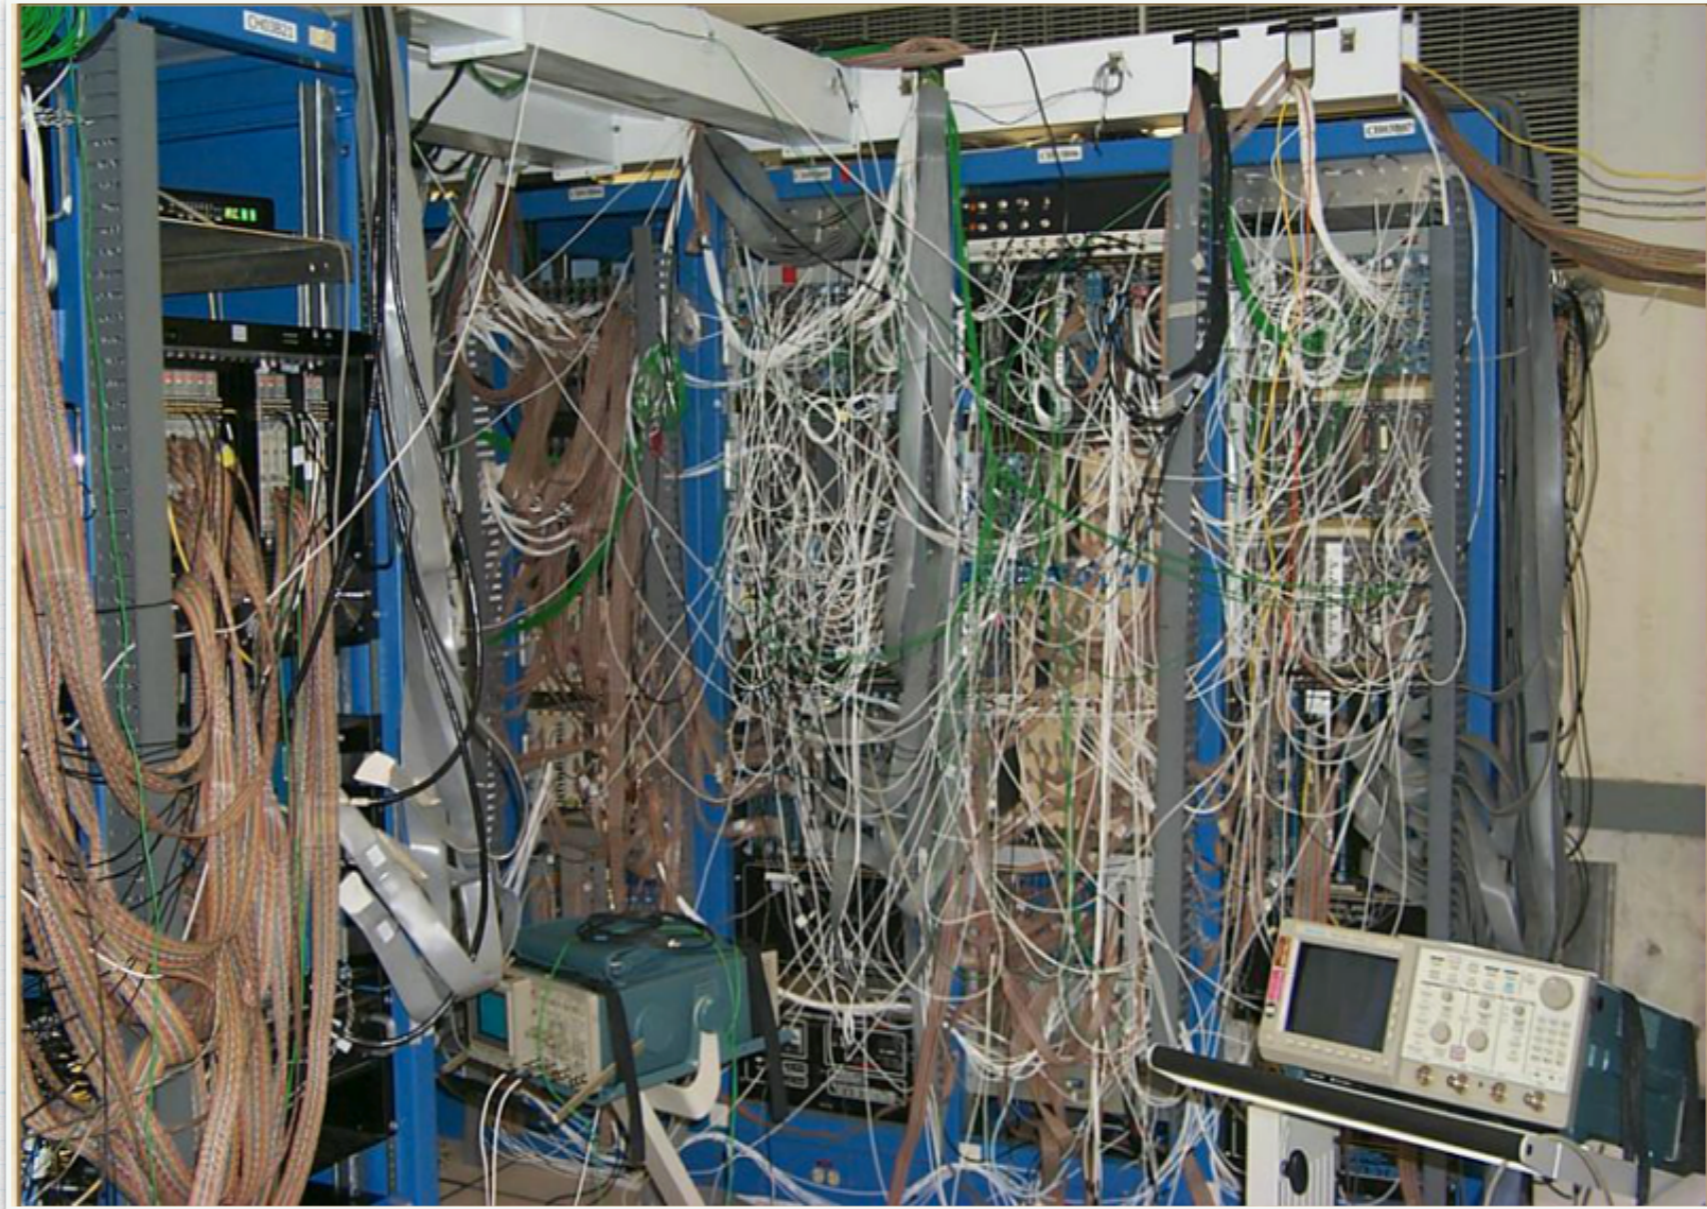

outlook

- * Building an experiment requires very diverse competences: Physics, detectors, computing, networking, infrastructure, management,...
- * These requirements are technically challenging.
- * Exp. physics needs a broad knowledge in many areas.
- * To become a TDAQ person means talking to various experts: one needs at least to know the jargon.

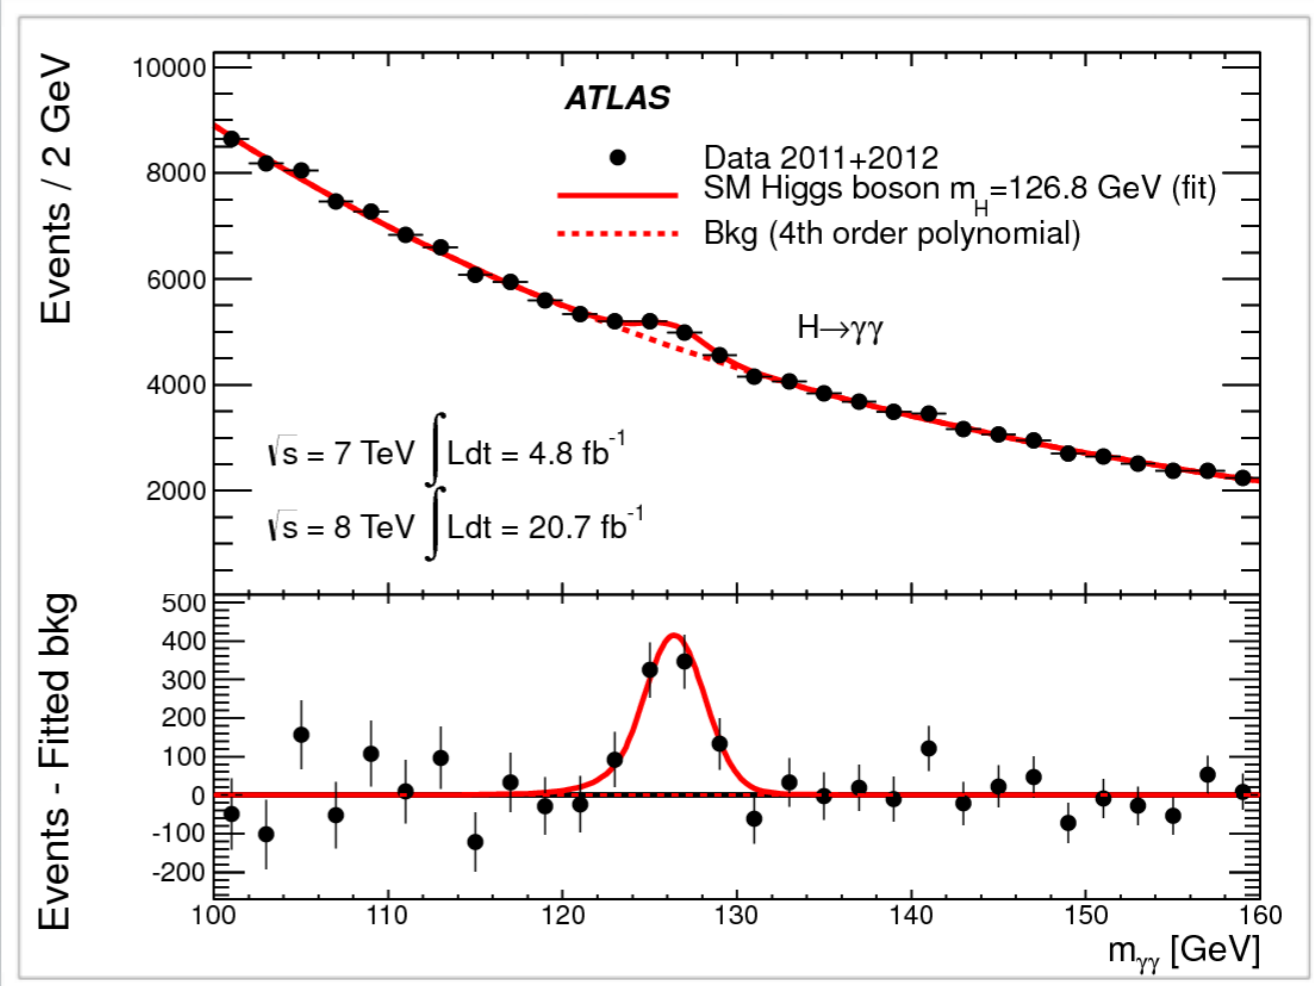

your work as a TDAQ expert is **indispensible** for such successful results




Thank you for your attention

further reading & references

1. W. R. Leo, “Techniques For Nuclear And Particle Physics Experiments”, Springer-Verlag, 1994
2. F. Sauli “Gaseous Radiation Detectors” Cambridge Univ. Press, 2014
3. C. Grupen & B. Shwartz “Particle Detectors” Cambridge Univ. Press, 2008
4. R Wigmans “Calorimetry: Energy Measurement in Particle Physics”, Clarendon Press, 2000
5. ATLAS, CMS, BaBar, LHCb, D0 etc. TDR reports (various dates)
6. CERN Summer Student Lectures on Particle Detectors 2002



Transition Radiation

- * A charged high energy particle travelling between two media with different dielectric constants emits EM radiation.
 - * $E_r \propto \gamma$ and $\theta_r \propto 1/\gamma$
- * ATLAS TR Tracker uses 370k tubes of $L=144\text{cm}$ & $d=4\text{mm}$ filled with gas mixture ionized by TR x-rays. This improves $e-\pi$ separation.

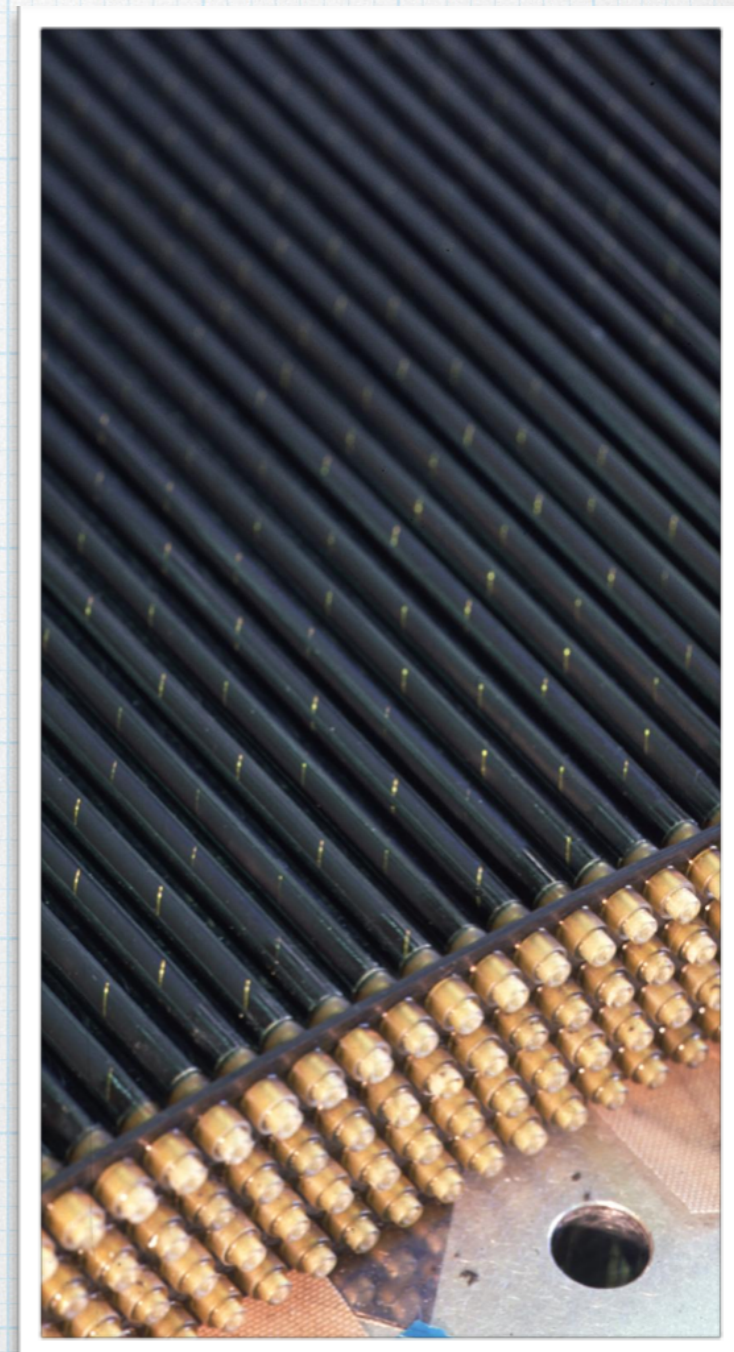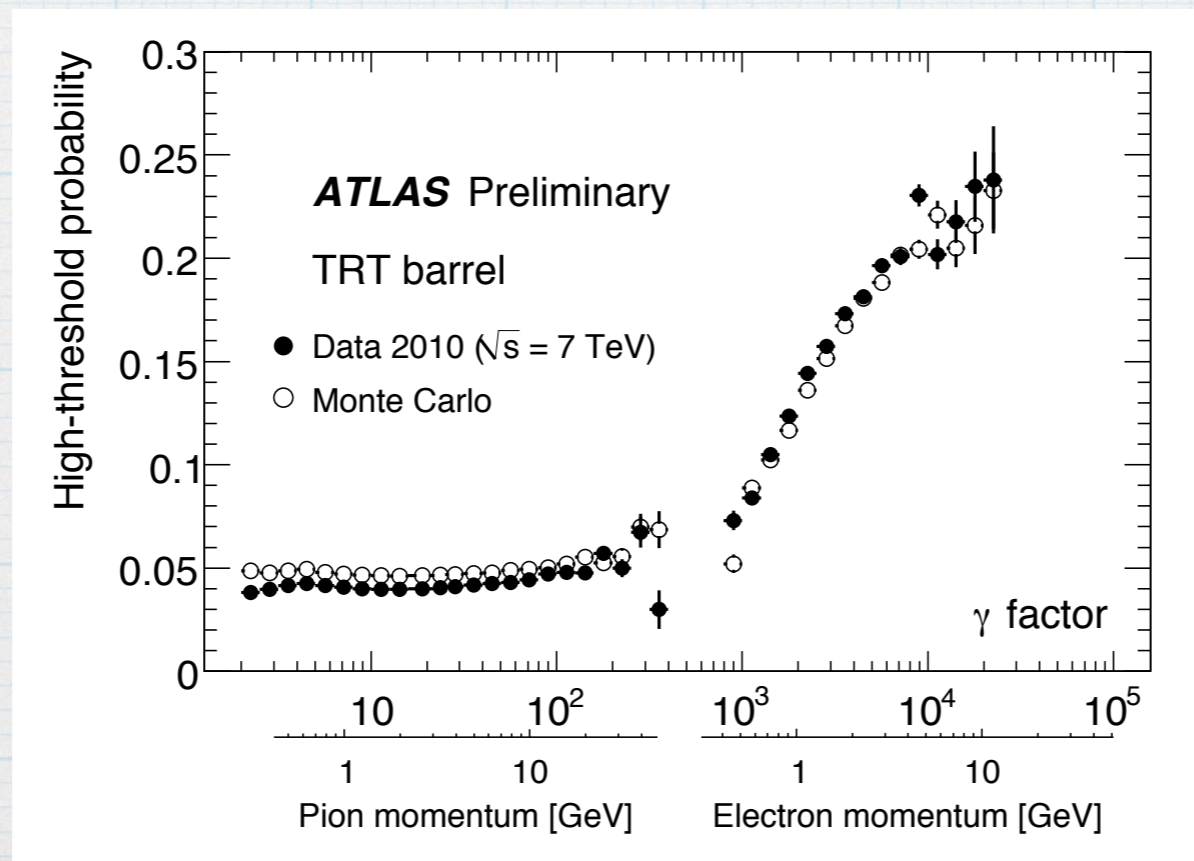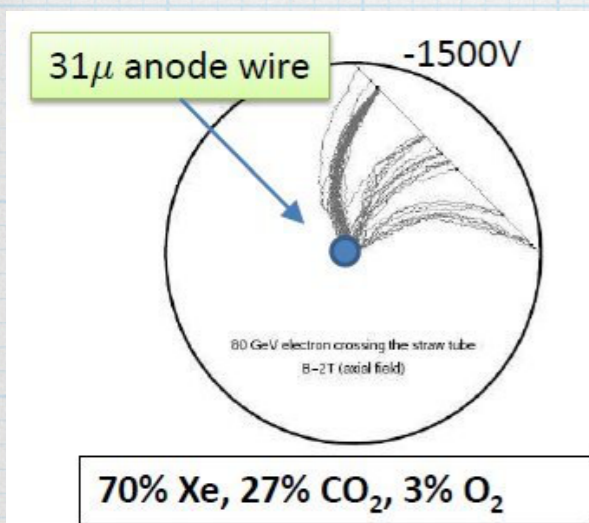

spectrometer for colliding beams

We use solenoid (CMS) and/or toroid (ATLAS) magnets

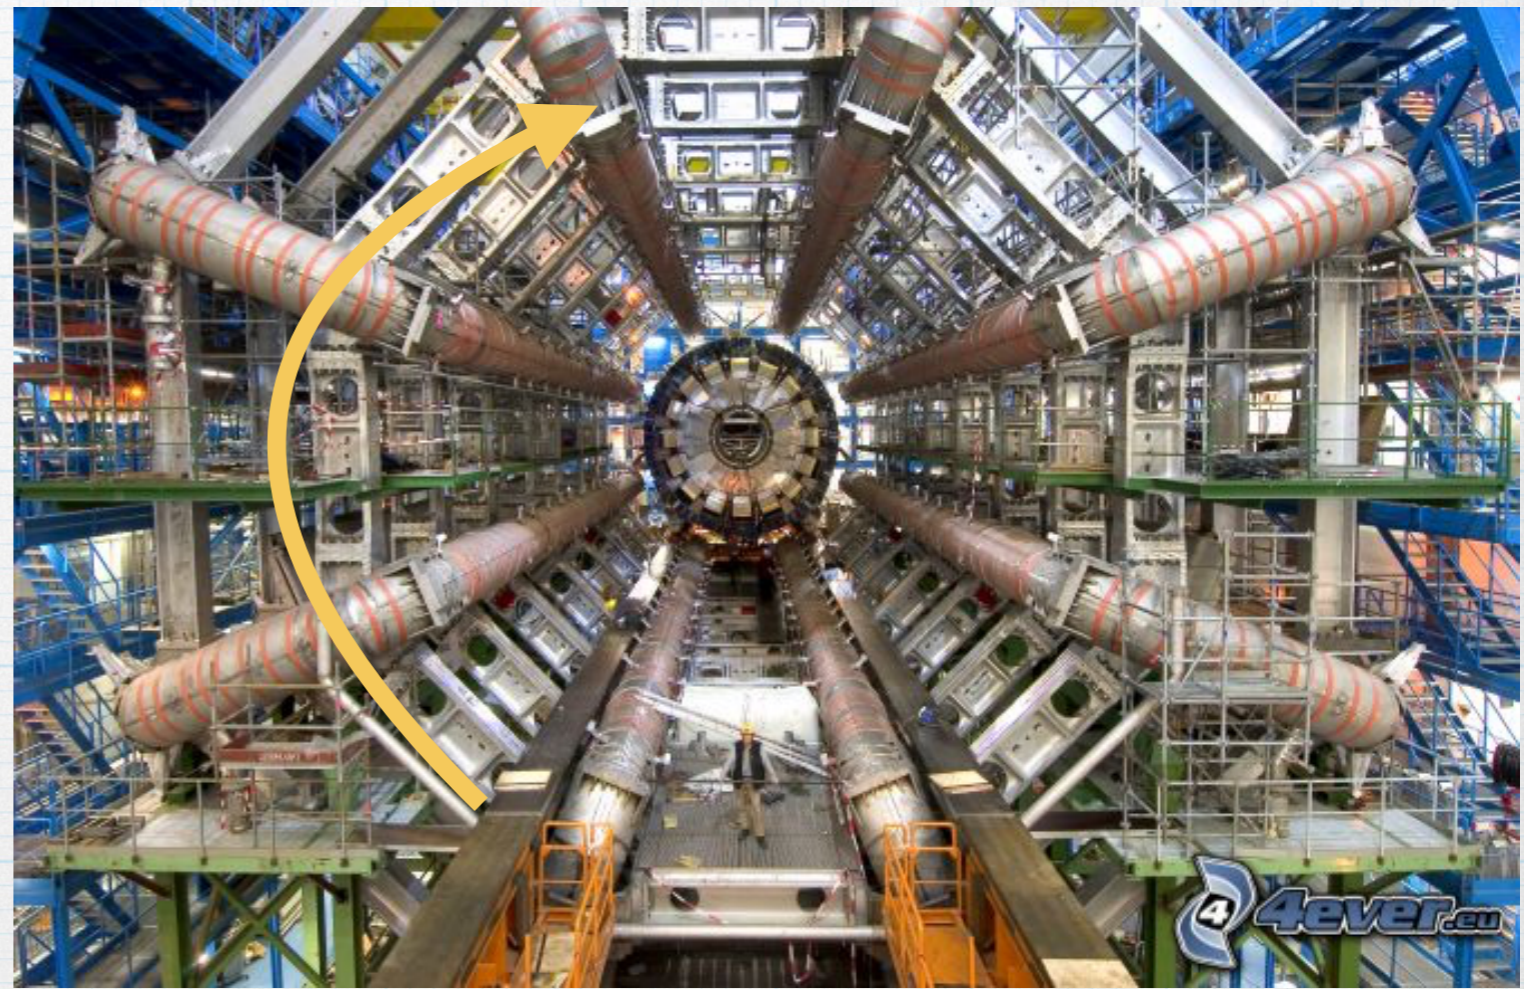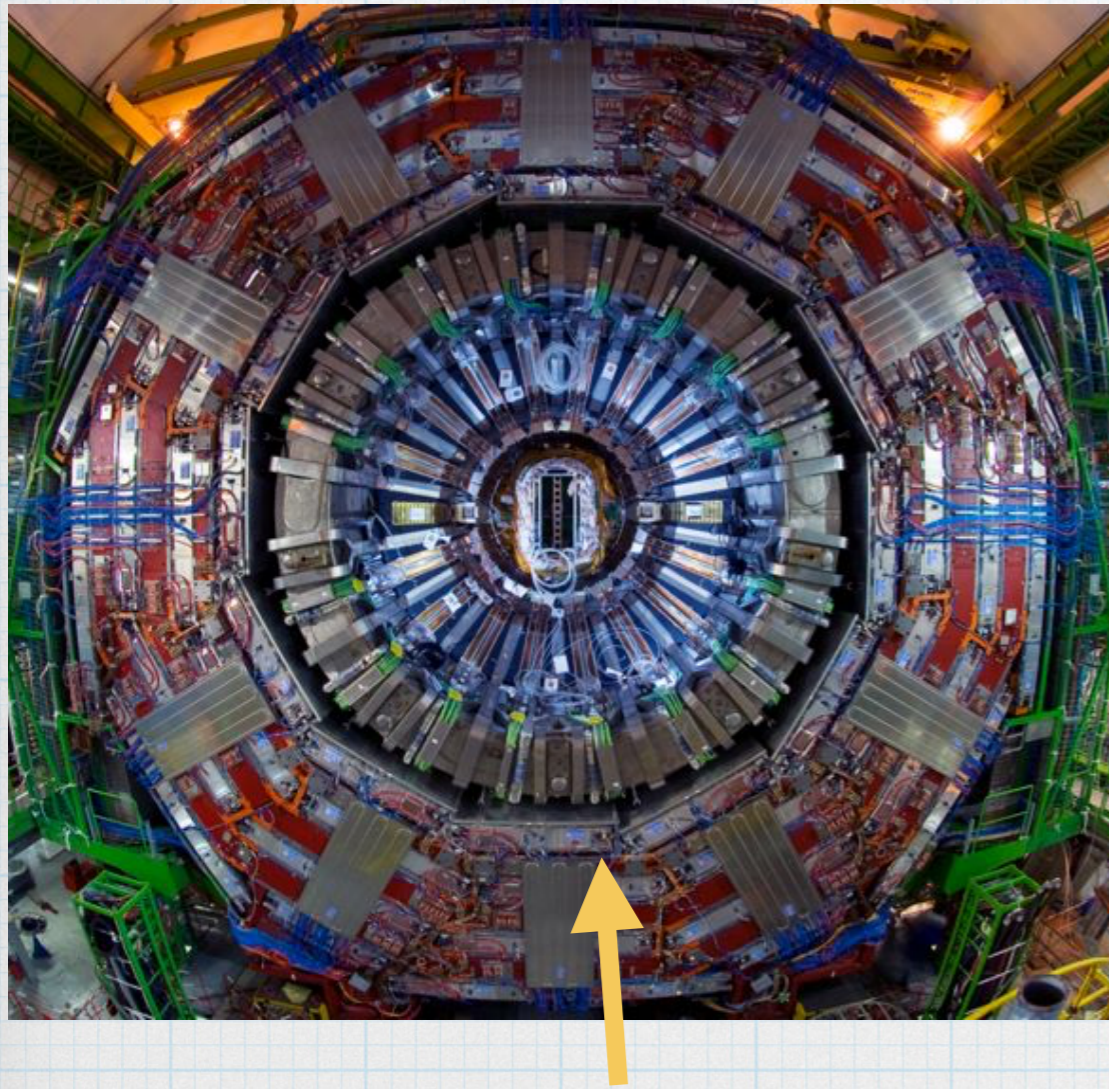

momentum resolution decreases with increasing particle momentum

why?