


# MWPC Based Muon Trigger At GIF++

Giuseppe Pezzullo (CERN), Helio Nogima (UERJ),  
Nikolaos Zaganidis (Ghent U.)



# Motivation

- Provide a reliable, flexible cosmic muons trigger for RPC tests in GIF++.
- LHCb MWPC chambers available.
- Low sensitivity for gamma radiation.


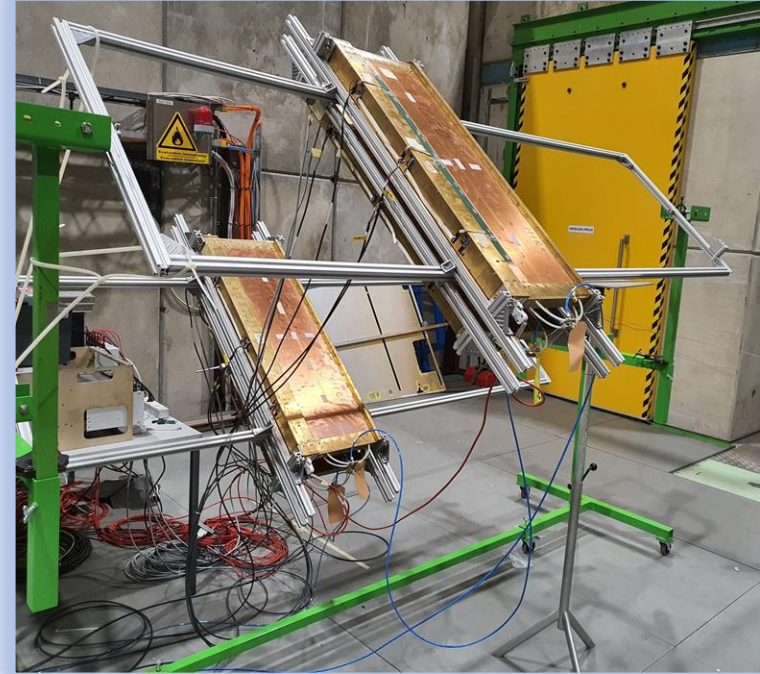




- **Two gaps (top/bottom) in one chamber.**
- Gas gap: 5 mm
- Wire: Gold-plated Tungsten, 30  $\mu\text{m}$  dia.
- Wire spacing: 2 mm
- Wire length: 210 mm
- Wire mechanical tension: 60 gf
- Charge/mip:  $\approx 0.8$  pC @ HV  $\approx 2.55 - 2.75$  kV
- Field on wires:  $\sim 262$  kV/cm, on cathodes  $\sim 6.2$  kV/cm
- Gap efficiency:  $\geq 95\%$  in 20 ns window (  $\text{st} \approx 3.9$  ns)
- **Rate/channel: max 1 MHz**
- Max. operating voltage: 2.75 kV, most of chambers tested up to 2.85kV
- **Typical HV 2650V**
- **LV 3.5V**, 1.5 A per chamber. Build-in chamber LV-regulator, tolerance  $\pm 100\text{mV}$
- **Signal output - LVDS.** Readout from anode wires groups.



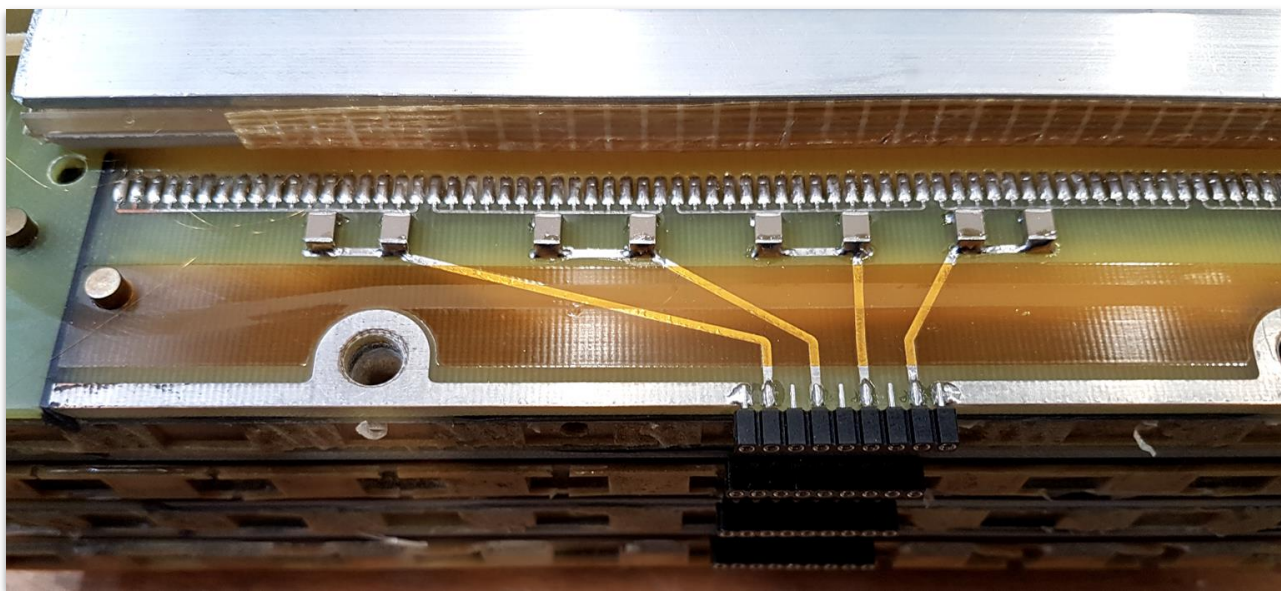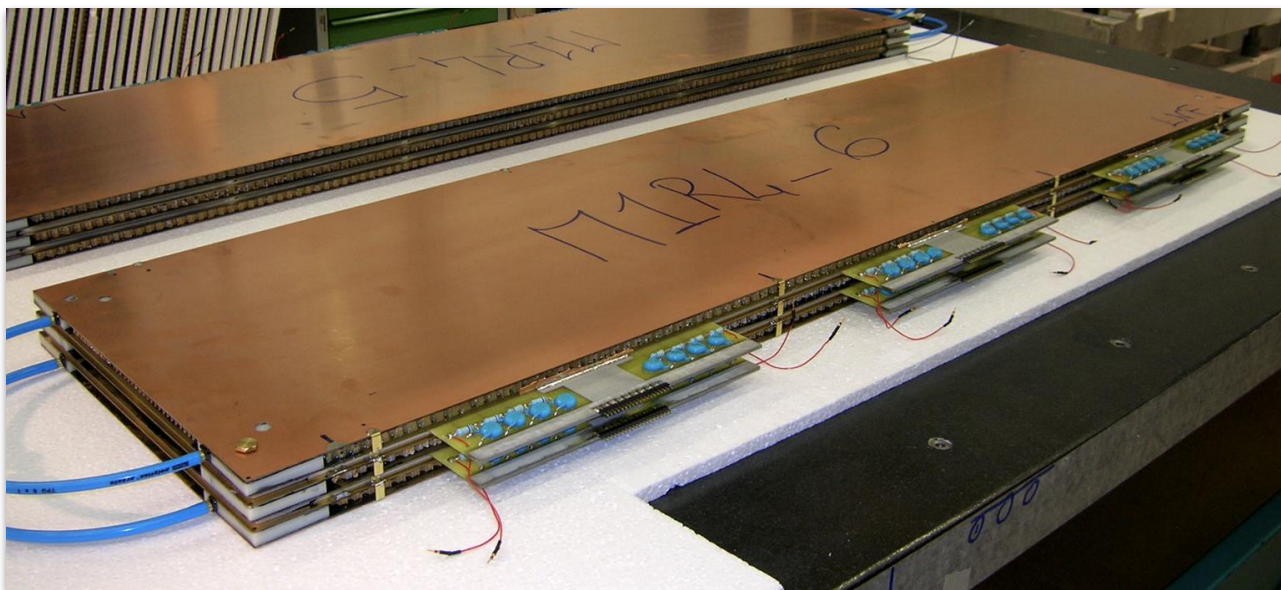


**Gas:**

- **Gas mixture: Ar/CO<sub>2</sub>/CF<sub>4</sub> (40:55:5)**
- CMS CSC gas (40:50:10) is okay for a first test.
- Gas gain:  $G \approx 10^5$
- **Gas flow: 2-4 l/h,**
- **Max. overpressure 2 mbar, could be 5-10 chambers in gas chain (max 10)**


**Wire groups:**

- A logical combination of 2 groups (from top and bottom gap) is the minimal readout channel.
- Groups are merged by construction.
- **Granularity: 40x200mm**
- **Active area is 968 x 200 mm per chamber**


### AND2

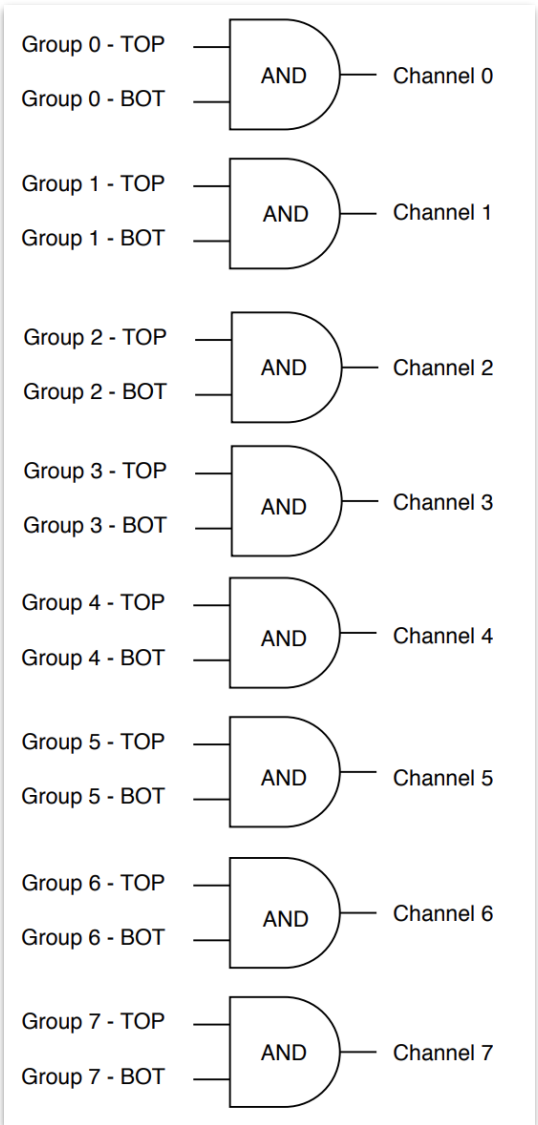


### OR2

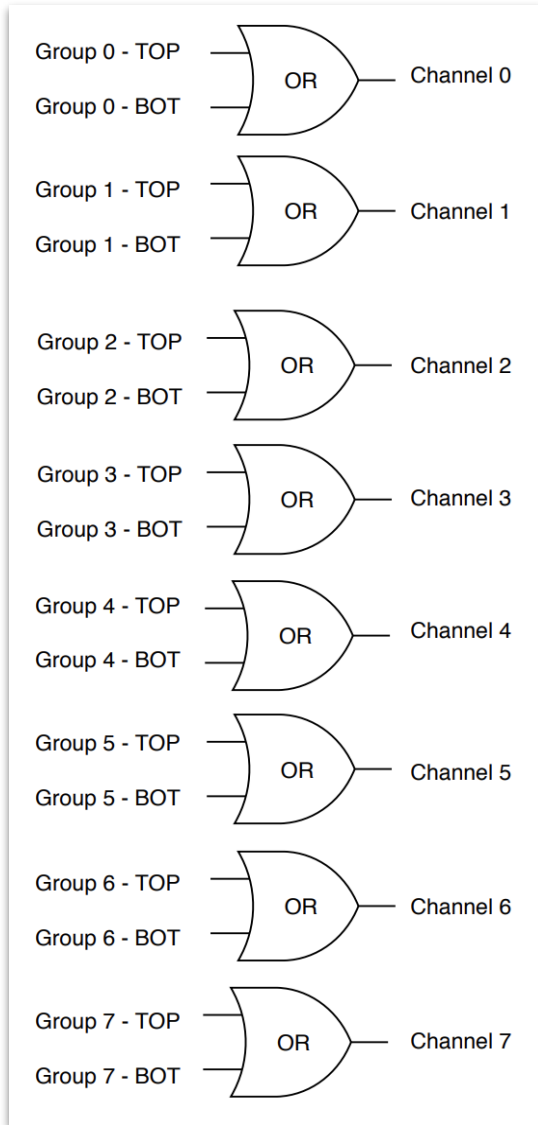

- Each chamber has 3 FEEs
- 8 channels per FEE
- Each channel is composed by a logical combination of Wire Groups.
- The logical combination is configured from control software.
- **Relevant logical combinations:**
  - **AND2:** 8 output channels
  - **OR2:** 8 output channels
  - **OR4AND2:** 2 output channels
  - **OR8:** 2 output channels

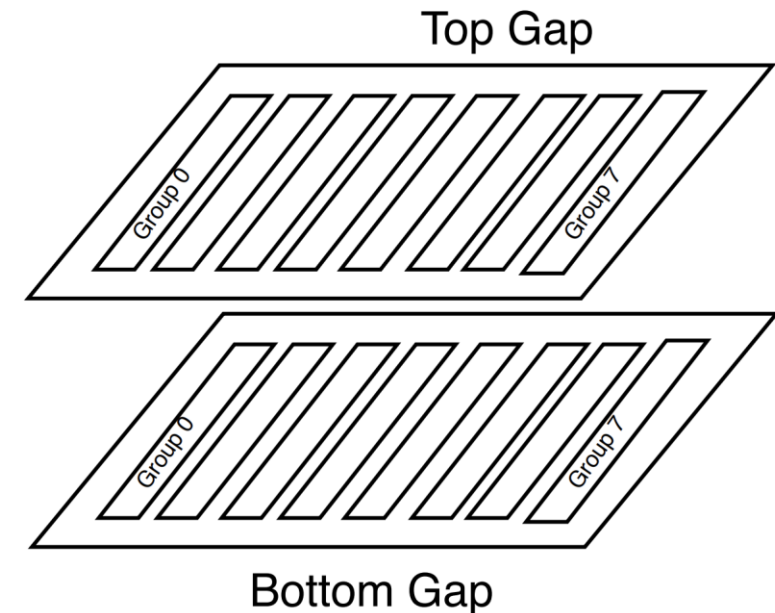




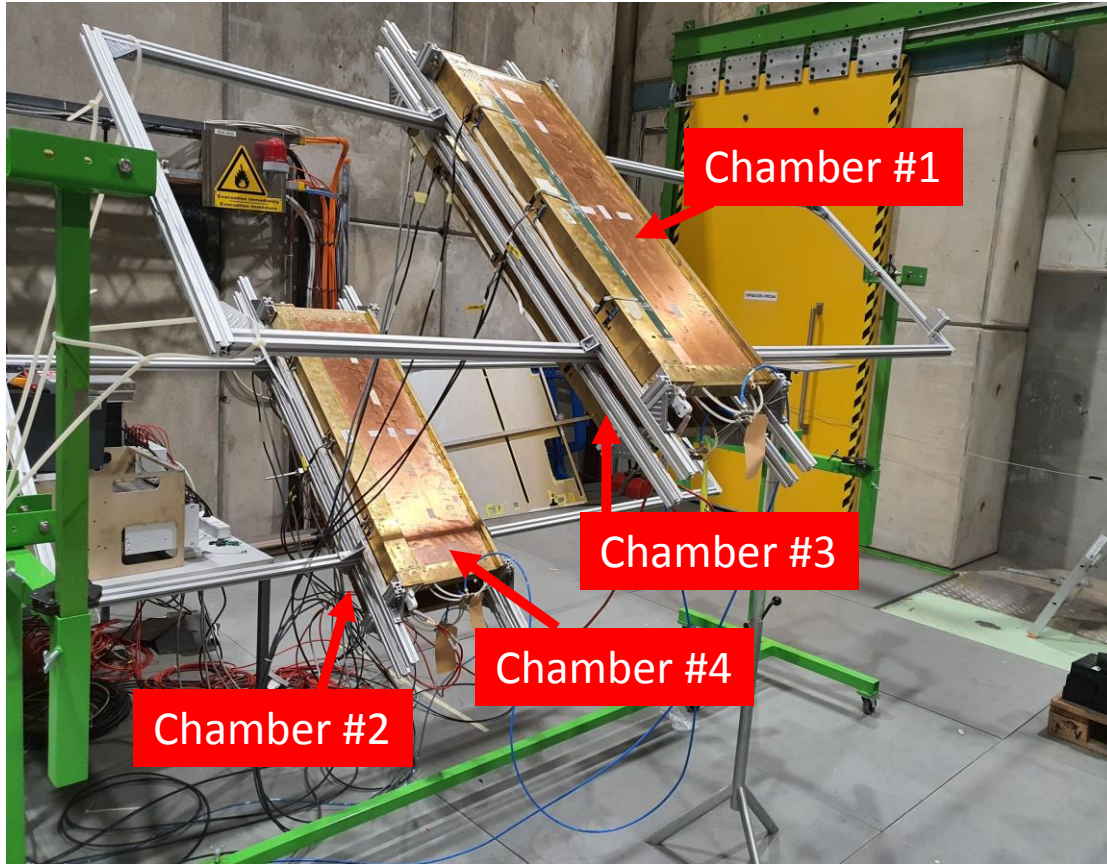


# Setup

- **Two layers.**
- **Two chambers/layer.**
- **Each chamber:**
  - 2 gaps (top/bottom)
  - 3 FEBs (Partitions A, B, C)
  - 16 channels/FEB – internal
  - Readout of 8 channels/FEB (top/bottom channels combined in And/Or logic)
  - Single channel:  $40 \times 200 \text{ mm}^2$
  - Active area is  $968 \times 200 \text{ mm}^2/\text{chamber}$

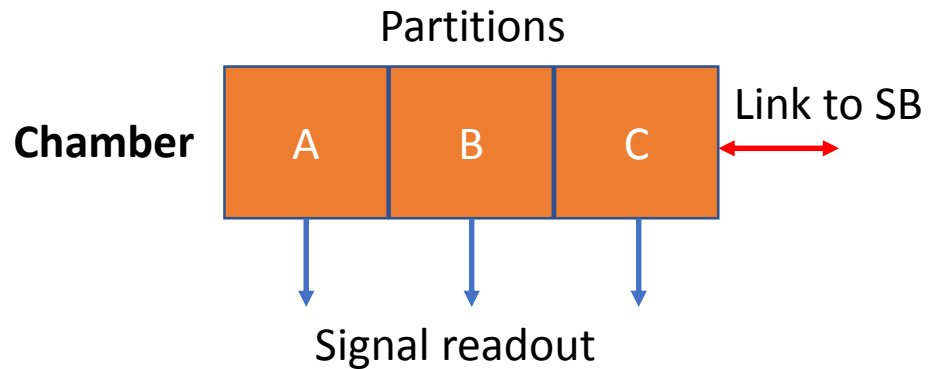

# Electronics

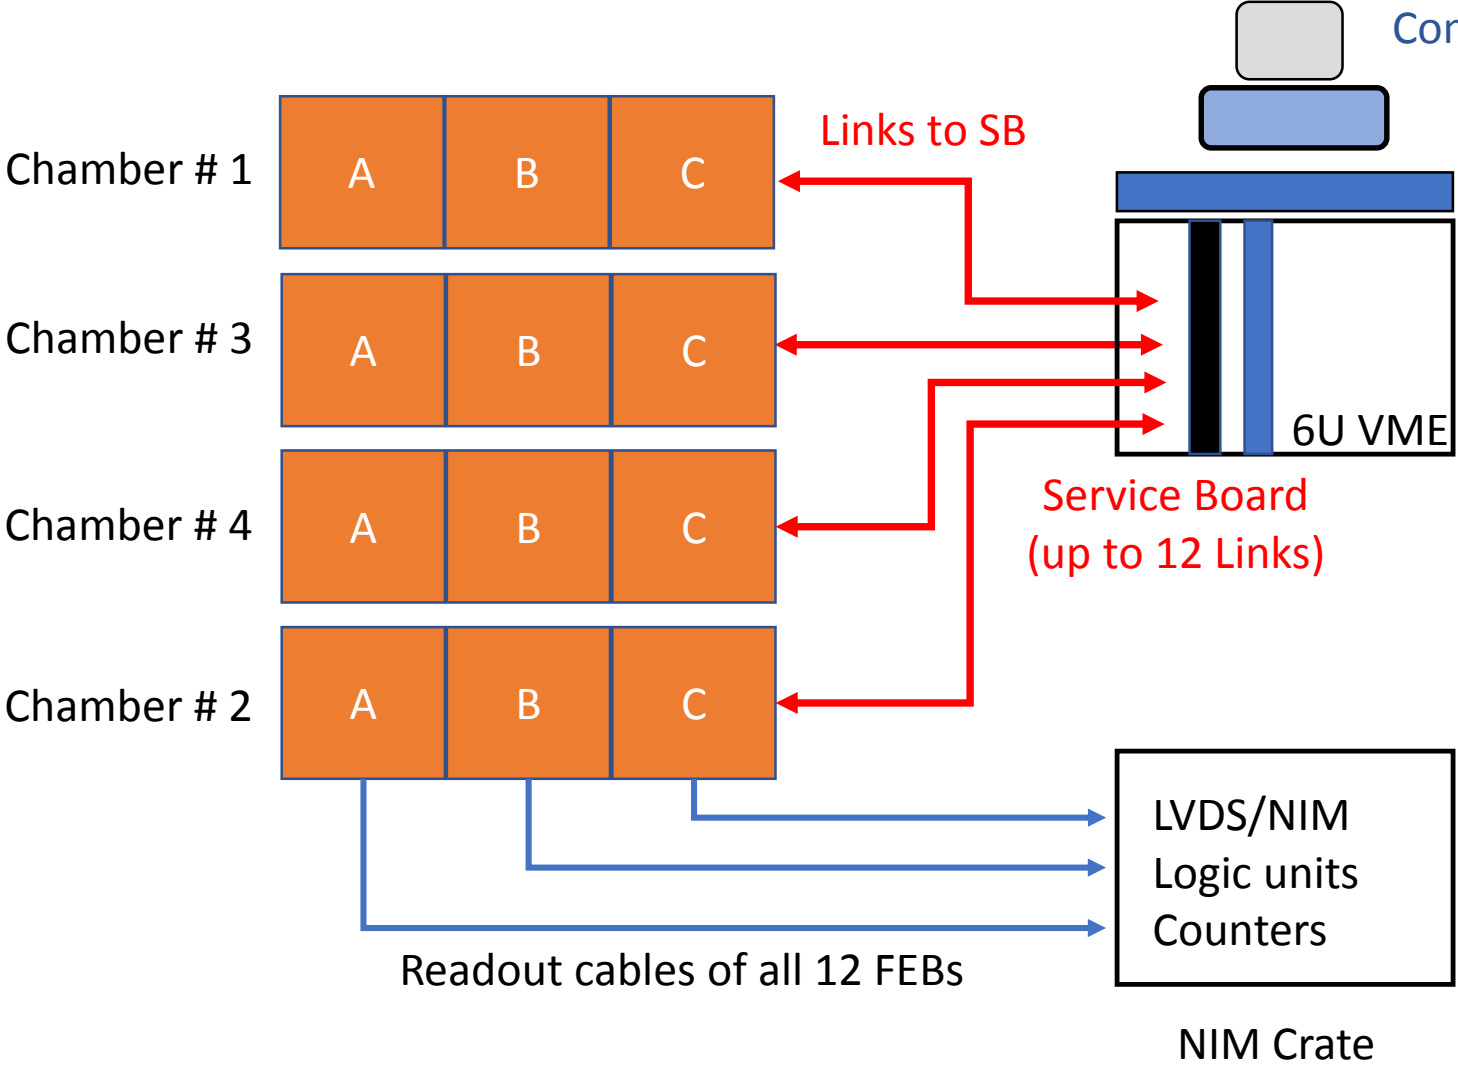

To configure discriminators and read internal counters of the FEBS.



# Rates Measurements

Inside the bunker, two angles were tested: 45° and 0° wrt horizontal. The last one is more attractive due to the better acceptance to cosmic muons.


- Intensity of muons at sea level  $I \approx 1 \text{ cm}^{-2} \text{ min}^{-1} = 0.017 \text{ Hz/cm}^2$ .
- Muons angular distribution  $I(\theta) \propto \cos^2 \theta$ .

Partition	Rate (Hz)	Stat Error	Fakes (Hz)	Stat Error
A1	6.975	0.026		
C2	7.784	0.028		
A3	7.393	0.027		
C4	6.447	0.025		
A1&A3&C2	0.148	0.004	6.77369E-12	4.32189E-14
A1&C4&C2	0.121	0.003	5.90731E-12	4.42594E-14
A1&C2	0.214	0.005	8.14451E-06	3.19947E-09
A3&C4	0.333	0.006	7.14943E-06	2.80856E-09

A3 eff	0.69	0.02
C4 eff	0.56	0.02
A3&A4 eff	0.39	0.02

$$A3 \rightarrow 10.71 \pm 0.04 \frac{\text{Hz}}{640 \text{ cm}^2} =$$

$$0.01674 \pm 0.00006 \text{ Hz/cm}^2$$

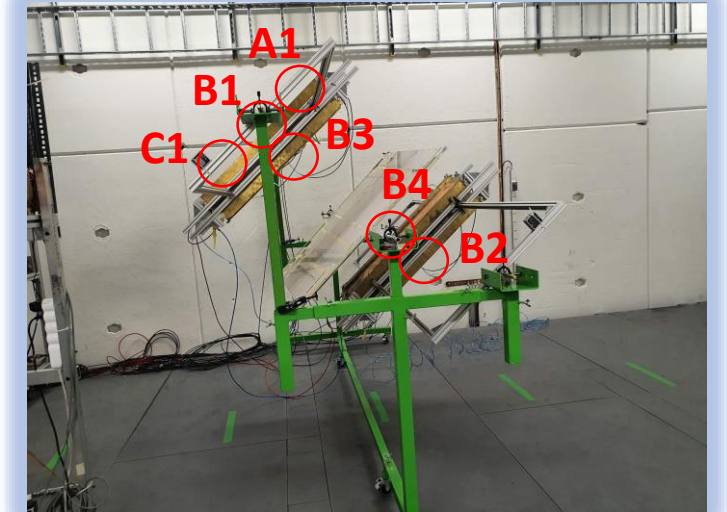

45°





0°




# Partition Rates as a Function of the Absorption Factor

- Partitions A1, A3, C2, C4.
- Absorption Factors: 1.0, 1.5, 2.2, 3.3, 4.6, 6.9, 46000.
- Rates differences are due to the obstacles in front of the measuring partitions.
- AND logic between the “top/bot” gaps.
  - Lower probability to have gamma signals.
  - Most coincidences are statistical (“fakes”).

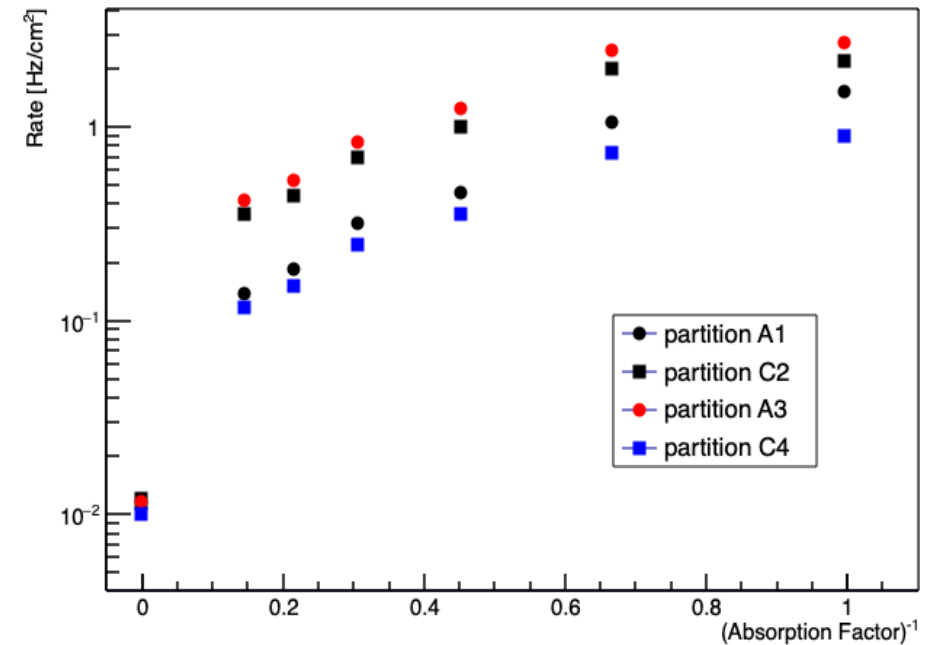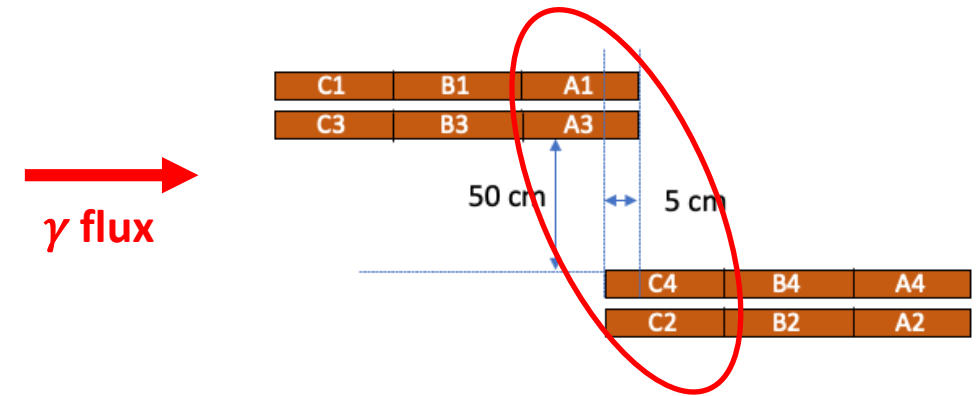


# Detection Efficiency

Only internal partitions were evaluated.

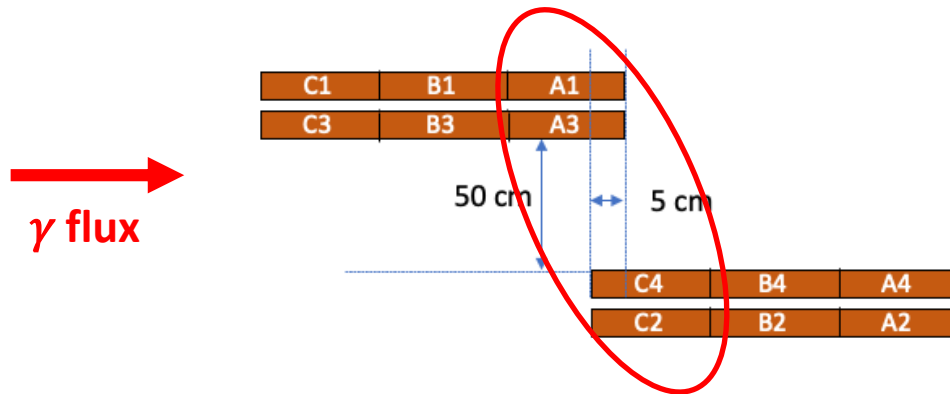

$$\epsilon_{A3} = \frac{N_{A1 \wedge A3 \wedge C2}}{N_{A1 \wedge C2}}$$

$$\epsilon_{C4} = \frac{N_{A1 \wedge C4 \wedge C2}}{N_{A1 \wedge C2}}$$

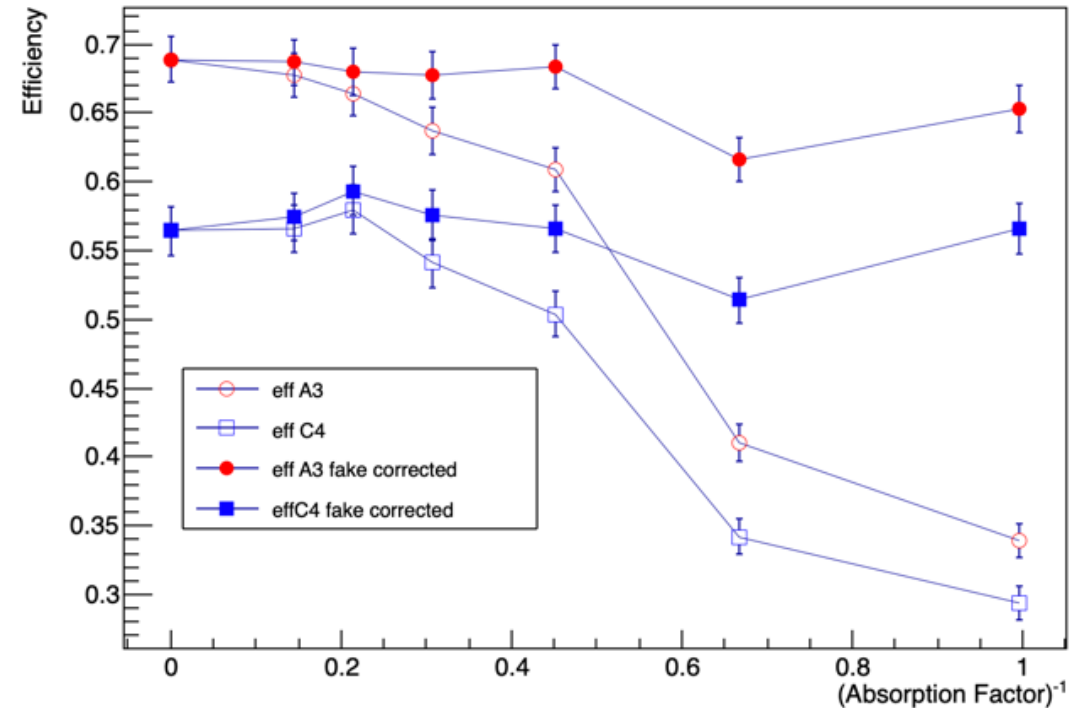


Statistical coincidences (fakes)

$$N_{A1 \wedge C2}^f = 2N_{A1}N_{C2}\tau$$

# Muon Trigger Rates Estimation

- Better acceptance using the coincidence of partitions A3 and C4 as trigger.
- For the  $4 \times 20 \text{ cm}^2$  MWPC cell, the trigger rate is **> 2 muons/min** for the current topology and partition efficiency.
- If partitions efficiency gets to 100 %, the rate goes up to 6 muons/min.

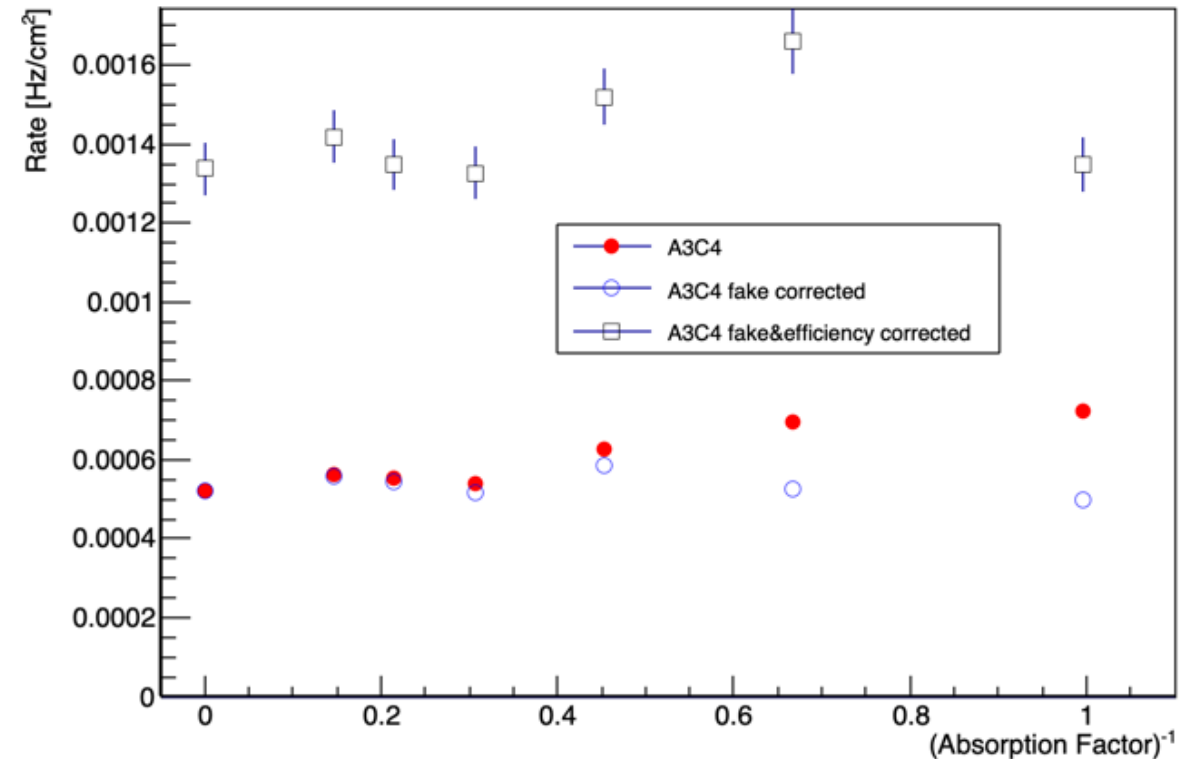



# Next Steps


- The mechanic frame was modified, allowing larger separation between the layers and better alignment. New measurements have to be done with the new configuration.
- The setup has to be moved and tested closer to the source, at higher gamma rates.

# Backups

# LHCb - MWPC Based Cosmic Trigger

8 m from the source

45°

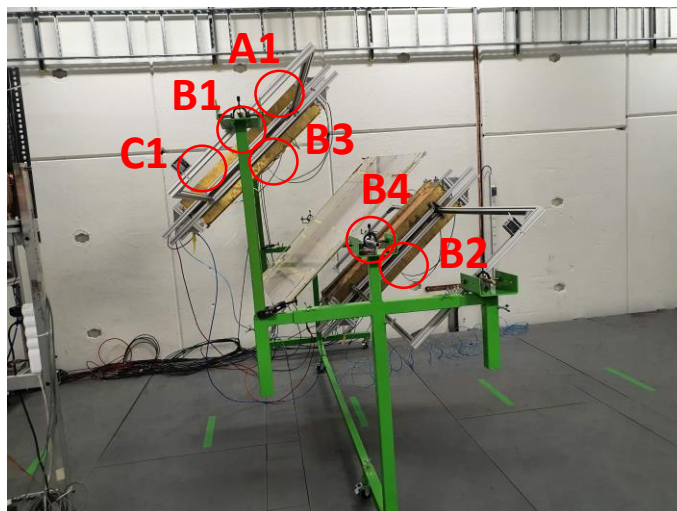

Bunker (Source On – Att: 6.9)

Partition	Average (Hz)	Stat. Error (Hz)
B1	228.916	0.366
B2	110.690	0.100
B3	430.068	0.357
B4	328.314	0.229
B1&B3	6.128	1.301
B2&B4	7.442	1.619
B1&B2	0.090	0.004
B3&B4	0.152	0.007

0°



Bunker (Source On – Att: 4.6)



Partition	Average (Hz)	Stat. Error (Hz)
B1	147.186	0.199
B2	132.574	0.164
B3	438.984	0.804
B4	401.294	0.932
A3	386.398	0.475
C4	93.232	0.104
A3&C4	0.328	0.012
B1&B3	2.430	0.041
B2&B4	2.606	0.027

17/06/2020








# Status

- Configuration software ok.
- Just one dead channel.
- Link cables (slow control) for configuration of the chambers ok.
- Signal cables with wrong connectors. (Should be ready today.)
- Trigger tests with 4 (shorter) cables, 4 partitions.
- Using the same NIM crate used in 904 LHCb setup.

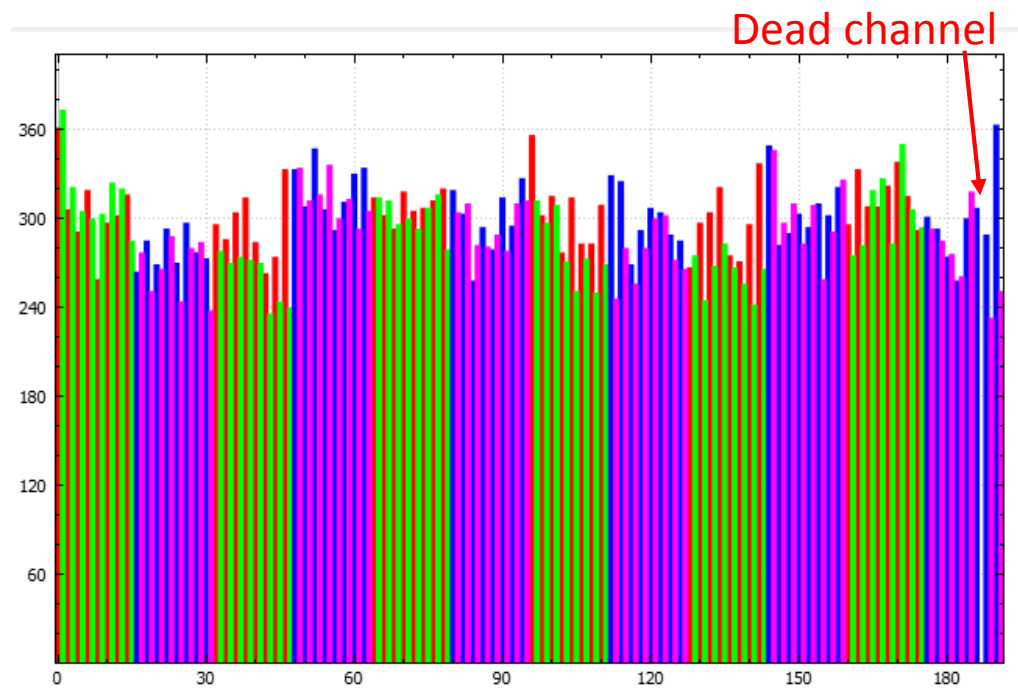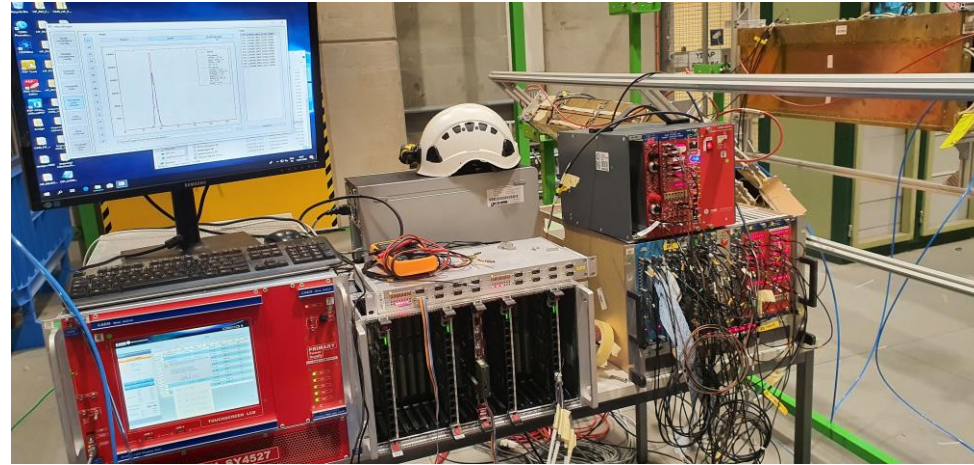

# Spatial Resolution

- MC evaluation of the hit area of the triggered muons in the central horizontal plane.

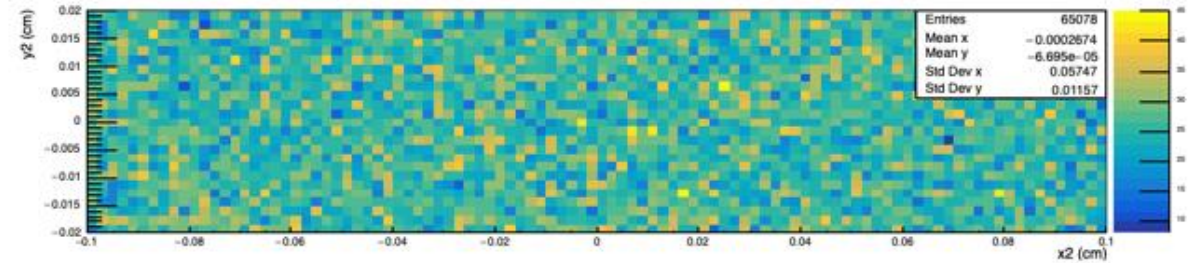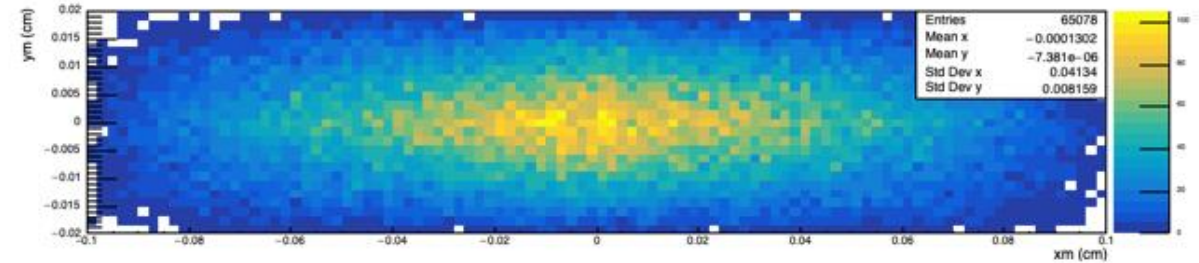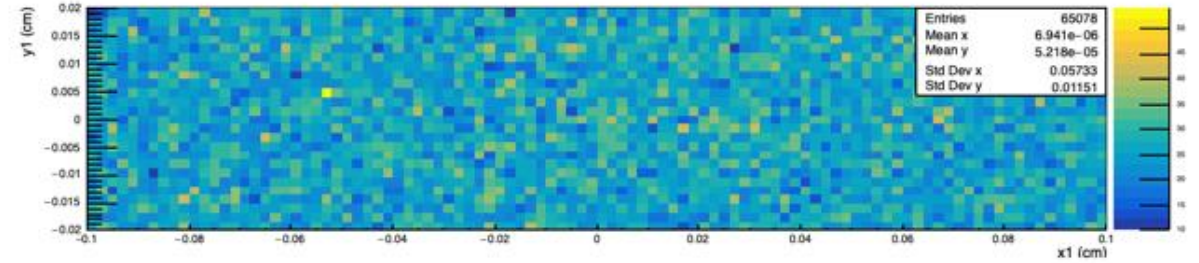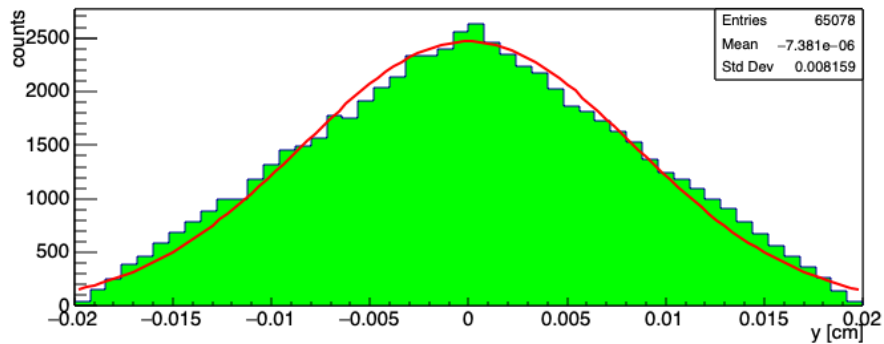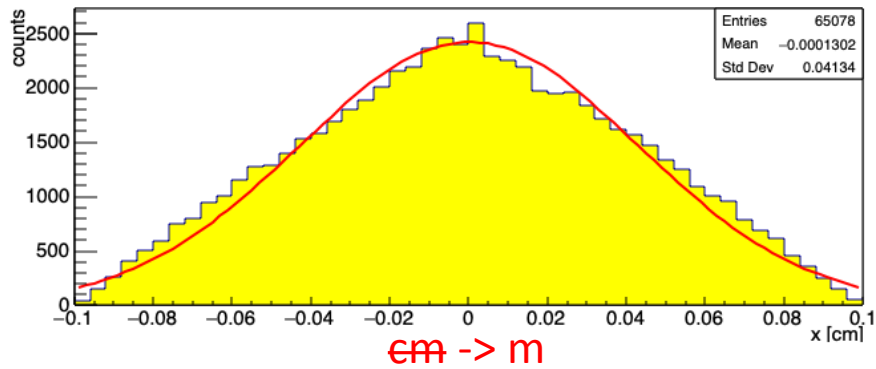

$\epsilon m \rightarrow m$

About 65% of the muons hit an area of  $1,6 \times 8,2 \text{ cm}^2$ , 1/6 of the MWPC cell.